How-To Library

Informatica

Installing Secure@Source 2.5 for Secure@Source Repositories on Microsoft SQL Server

© Copyright Informatica LLC 2015, 2021. Informatica LLC. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC. All other company and product names may be trade names or trademarks of their respective owners and/or copyrighted materials of such owners.

Abstract

This article shows how to install Secure@Source 2.5 for Secure@Source repositories on Microsoft SQL Server.

Supported Versions

- Secure@Source 2.5

Table of Contents

Overview. 2
Pre-requisites. 2
Steps to Install Secure@Source. 2
Verify the Installation. 6

Overview

If you plan to set up the Secure@Source repositories on Microsoft SQL Server, you cannot use the Secure@Source installer. Instead, install and configure each service independently.

Pre-requisites

Complete the following pre-requisites:

- Verify that the Microsoft SQL Server database that you plan to use for the Secure@Source repositories is case insensitive.
- Verify the database requirements and set up the database and database user account for the repositories.

For more information, see the *Informatica Secure@Source 2.5 Installation Guide*.

Steps to Install Secure@Source

Complete the following steps to install Secure@Source 2.5 when the database for the Secure@Source repositories is Microsoft SQL Server.

1. Log in to the machine with a system user account.
2. Extract the installation files to the installation directory.
3. For the repository to support multibyte characters, replace the existing `sats_repo.xml` file with the updated `sats_repo.xml` file.


   By default, the `sats_repo.xml` is located in the following directory:

   ```
   <INFA_HOME>/SecureAtSourceService/schema
   ```
4. Install Live Data Map.
   a. Go to the directory where the `install.sh` file for Live Data Map is located.

      By default, the `install.sh` file is located in the following directory:

      ```
      <Informatica installation directory>/Server/LDM
      ```

b. Run the `install.sh` file.

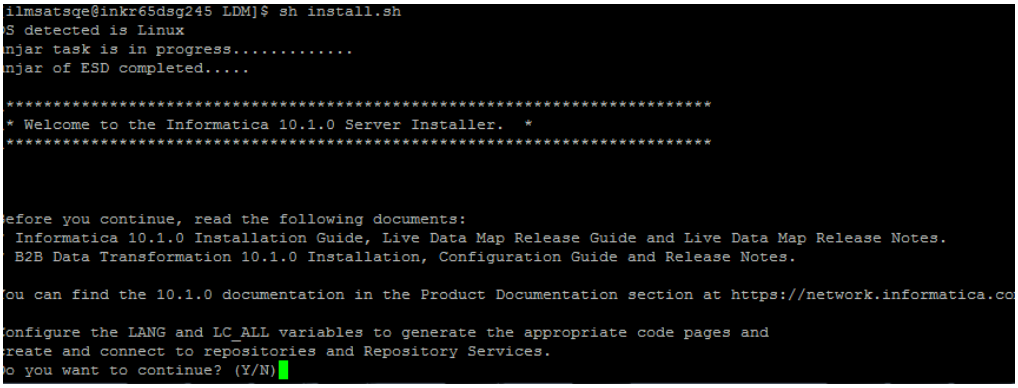

c. Select the Microsoft SQL Server for the repository.

d. Do not configure the service.

e. Configure the remaining steps to complete the installation.

5. Shut down the Informatica domain.

a. Go to the directory where `infaservice.sh` is located.

By default, `infaservice.sh` is installed in the following directory:

`<Informatica installation directory>/tomcat/bin/`

b. At the command prompt, enter the following command to shut down the domain:

```
infaservice.sh shutdown
```


6. Install Secure@Source.

a. Go to the directory where the `install.sh` file for Secure@Source is located.

By default, the `install.sh` file is located in the following directory:

`<Informatica installation directory>/Server/SATS`

b. Run the `install.sh` file.

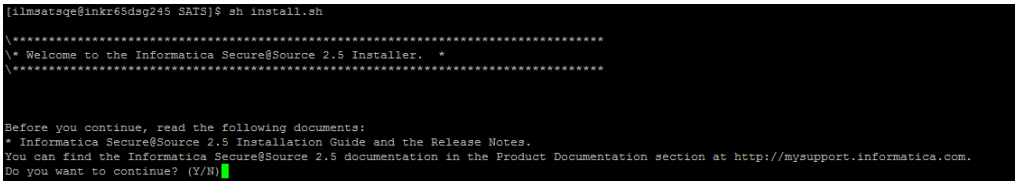

c. Configure the steps to complete the installation.


7. Install Vibe Data Stream.

a. Go to the directory where the `install.sh` file for Vibe Data Stream is located.

By default, the `install.sh` file is located in the following directory:

`<Informatica installation directory>/Server/VDS`

b. Run the `install.sh` file.

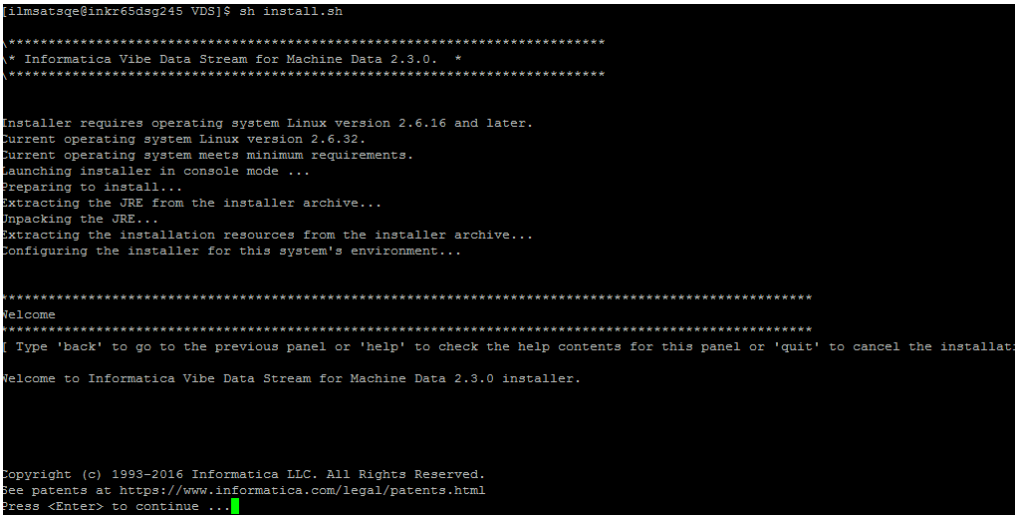

c. Configure the steps to complete the installation.

8. Configure ODBC connectivity. You can specify whether you want to enable DSN.

If you set Use DSN to Yes:

- Set **Provider Type** to ODBC.
- Set **ODBCHOME** to the location where the DataDirect ODBC binaries are installed.
  For example: `<INFA_HOME>/ODBC7.1`
- Set **ODBCINI** to the location where the `odbc.ini` file is located.
  For example: `<INFA_HOME>/odbc.ini`
- Create the ODBC entry with the Microsoft SQL Server connection.

If you set Use DSN to No:

- Set **Provider Type** to ODBC.
- Set **ODBCHOME** to the location where the DataDirect ODBC binaries are installed.
  For example: `<INFA_HOME>/ODBC7.1`
- Set **ODBCINST** to the location where the `odbcinst.ini` file is located.
  For example: `<INFA_HOME>/odbcinst.ini`

9. To secure the Informatica domain, provide information about the SSL certificates.

a. Export the SSL certificate from `Default.keystore`.

Use the following command:

```
$INFA_HOME/java/jre/bin/keytool -export -file infa_dflt.cert -keystore $INFA_HOME/
tomcat/conf/Default.keystore -storepass changeit -alias infa_dflt
```

b. Import the SSL certificate to `infa_truststore.jks`.

Use the following command:

```
$INFA_HOME/java/jre/bin/keytool -import -file infa_dflt.cert -keystore $INFA_HOME/
services/shared/security/infa_truststore.jks -storepass pass2038@infaSSL -alias
infa_dflt
```

c. Copy the certificate to each Hadoop node.

10. Update the `version.txt` file.

a. Locate the `version.txt` in the `$INFA_HOME` directory.

b. Open the `version.txt` file.

c. Replace the existing value for the **Version** property to the following value: `10.0.0`

d. Save and close the file.

11. Start the Informatica domain.

a. Go to the directory where `infaservice.sh` is located.

By default, `infaservice.sh` is installed in the following directory:

```
<Informatica installation directory>/tomcat/bin/
```

b. At the command prompt, enter the following command to start the domain:

```
infaservice.sh startup
```

12. Log in to the Administrator tool.

The URL for the Administrator tool appears at the end of the installation process.

13. Create the following Microsoft SQL Server connections:

- ProfilingWarehouseConnection
- StagingDBConnection

Set the **Use DSN** property to the setting you specified when you configured ODBC connectivity in step 8.

14. Create the Model Repository Service.

15. Create the Data Integration Service.

Select **ProfilingWarehouseConnection** as the connection.

16. Create the Content Management Service.

Select **StagingDBConnection** as the connection.

17. Import the default data domains.

From the command line, enter the following command:

```
$INFA_HOME/isp/bin/infacmd.sh  oie importobjects -dn <Domain name> -un <Domain user> -pd
<Domain password> -rs <Model Repository Service name> -fp <data domain file directory> -
sc true -scv true -cp <control file directory> -oo
rtm:codePage=UTF-8,refDataFile=<reference data file directory>
```

The following list shows the default directory path and file names for the -fp, -cp, and -refDataFile parameters:

-fp <data domain file file path>

```
-fp <Informatica installation directory>/Server/LDM/properties/CMS/
Informatica_IDE_DataDomain.xml
```

-cp <control file directory>

```
-cp <Informatica installation directory>/Server/LDM/properties/CMS/
Import_Profile_DATA_DOMAIN.xml
```

refDataFile=<reference data file directory>

```
-refDataFile <Informatica installation directory>/Server/LDM/properties/CMS/
Informatica_IDE_DataDomain.zip
```

18. Create the remaining services in the following sequence:

a. Informatica Cluster Service

b. Catalog Service

c. Vibe Data Stream Service

d. Secure@Source Service

Verify the Installation

Log in to the Secure@Source web application. If the UI opens without an error, the installation and configuration were successful.

Author

Gourav Agarwal