How-To Library

Informatica

# Prerequisites to Scanning PowerCenter Resources that are on an SSL-Enabled Domain

© Copyright Informatica LLC 2017, 2021. Informatica, the Informatica logo, and PowerExchange are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

# Abstract

This article outlines the prerequisites to scan PowerCenter resources that are on an SSL-enabled domain with Secure@Source configured on an embedded Hadoop cluster.

# Supported Versions

- Secure@Source 3.0 or later

# Table of Contents

Overview. . . . . 2
Prerequisites Tasks. . . . . 2

# Overview

If your Secure@Source instance is on an embedded Hadoop cluster and the PowerCenter resources that you want to scan are on an SSL-enabled Informatica domain, you must complete the following tasks before you can scan:

- Import keystore and truststore certificates from the target domain to the domain hosting Secure@Source and to the Hadoop cluster.
- Set properties on the Hadoop ResourceManager to enable Secure@Source to connect to the SSL-enabled domains.

This document shows you how to perform these tasks.

# Prerequisites Tasks

Perform the following steps before you scan PowerCenter resources that are on an SSL-enabled domain with an instance of Secure@Source on an embedded Hadoop cluster.

1. Export the Informatica domain certificate from the domain that hosts the PowerCenter resource.

   Use the following command to export the certificate if you used the default truststore when you installed Secure@Source:

   ```
   $INFA_HOME/java/jre/bin/keytool -export -noprompt -file <path_to_domain_certificate> -
   alias <domain_cert> -keystore $INFA_HOME/services/shared/security/infa_truststore.jks -
   storepass changeit
   ```

2. Copy the Informatica domain certificate you exported in step 1 to a folder on the Secure@Source domain.
3. Import the Informatica domain certificate from the folder on the Secure@Source domain to the following locations:

   - The truststore on the Secure@Source domain.
     Use the following command:

     ```
     $INFA_HOME/java/jre/bin/keytool -import -noprompt -file
     <path_to_domain_certificate_on_S@S_domain> -alias <domain_cert> -keystore <INFA_HOME>/
     services/shared/security/infa_truststore.jks -storepass pass2038@infaSSL
     ```

   - The truststore on all the Hadoop nodes.
     Use the following command:

```
keytool -import -noprompt -file <path_to_domain_certificate_on_S@S_domain> -alias
<domain_cert> -keystore /opt/SecureAtSource/infa_truststore.jks -storepass
pass2038@infaSSL
```

**Note:** The truststore on the Hadoop nodes is located in the `/opt/SecureAtSource` directory by default for embedded cluster deployments. If your truststore is not in the default location, get the correct location in the following way:

1. Go to the Administrator Tool.
2. Click the Informatica Cluster Service.
3. Locate the Domain TrustStore File Location property. The value of this property is the file path of the truststore file.

4. Encrypt your truststore password to use during the scan process.

   You must encrypt the truststore password with the pmpasswd utility.
   Use the following command:

   ```
   <INFA_HOME>/server/bin/pmpasswd <password_for_infa_truststore> -e CRYPT_SYSTEM
   ```

   For the default truststore, use the password `pass2038@infaSSL` in the `<password_for_infa_truststore>` placeholder.

5. Set the INFA_TRUSTSTORE and INFA_TRUSTSTORE_PASSWORD properties in Yarn.

   a. Go to the Ambari UI.

      The Ambari UI is by default located at `https://<ambari_host>:8080/`.


   b. Navigate to **YARN** > **Configs** > **Advanced** > **Advanced yarn-env** > **yarn-env template**.

   c. Enter the following lines:

      ```
      export INFA_TRUSTSTORE=<path_to_INFA_TRUSTSTORE>
      export INFA_TRUSTSTORE_PASSWORD=<ENCRYPTED_INFA_TRUSTSTORE_PASSWORD>
      ```

      Enter the path to the Informatica truststore file in the `<path_to_INFA_TRUSTSTORE>` placeholder. See the Note in step 3 for instructions on how to determine the fie path.

      Enter the encrypted password that you generated in step 4 in the `<ENCRYPTED_INFA_TRUSTSTORE_PASSWORD>` placeholder.

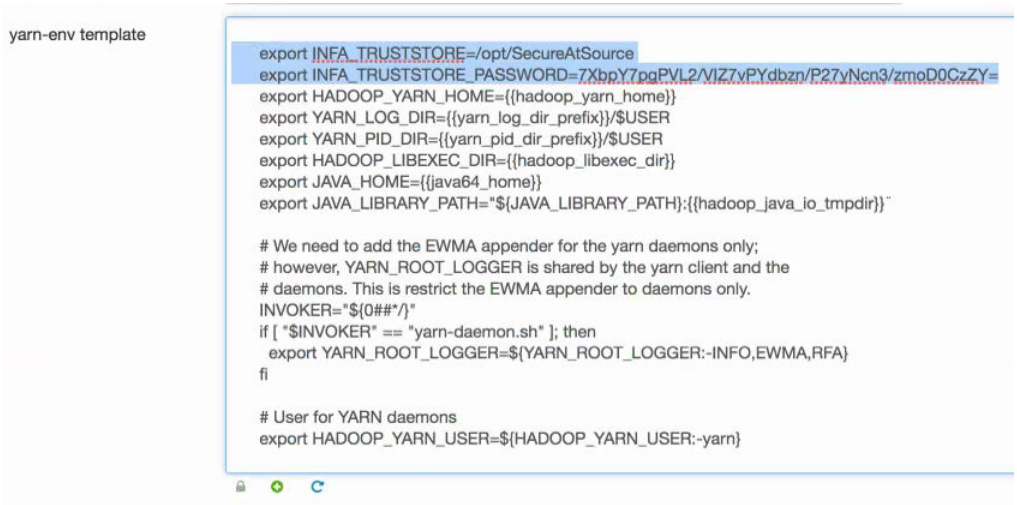


6. Restart Yarn.

# Author