How-To Library

Informatica

How to Capture MicroStrategy User Context through Secure@Source

© Copyright Informatica LLC 2019, 2021. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

MicroStrategy is a business intelligence tool that includes performance management, dashboards, analysis, and reporting capabilities. This article describes how to capture MicroStrategy user context through Secure@Source.

Supported Versions

- Secure@Source 5.0 or later

Table of Contents

Overview. 2
Configuring MicroStrategy. 2
Step 1. Enabling User Context for MicroStrategy. 2
Step 2. Clearing the Report Cache for the MicroStrategy Project. 4

Overview

To capture MicroStrategy user context through Secure@Source, you must configure MicroStrategy. You configure MicroStrategy so that Secure@Source captures the LDAP user context in the following scenarios:

- Users who create remote agent connections can associate the remote agents only to data stores the users can access.
- Secure@Source protects data in use based on the user context.

Configuring MicroStrategy

To configure MicroStrategy, perform the following steps:

1. Enable User Context for MicroStrategy.
2. Clear the Report Cache for the MicroStrategy Project.


Step 1. Enabling User Context for MicroStrategy

To enable user context for MicroStrategy, configure the Database Instance **SQL_HINT** property.

Important: To capture the user context in Secure@Source, the MicroStrategy users must be configured for LDAP authentication.


1. Log in to MicroStrategy.
2. Navigate to **MicroStrategy Secure Enterprise** > **Administration** > **Configuration Managers** > **Database Instances**.

The following image shows this view:

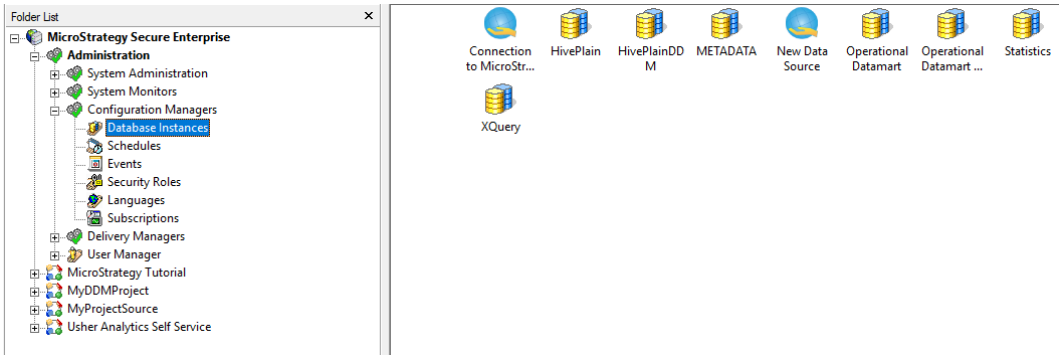


3. Select the Database Instance, and then right-click the instance name.
4. Select **VLDB Properties**.

   The following image shows this view:

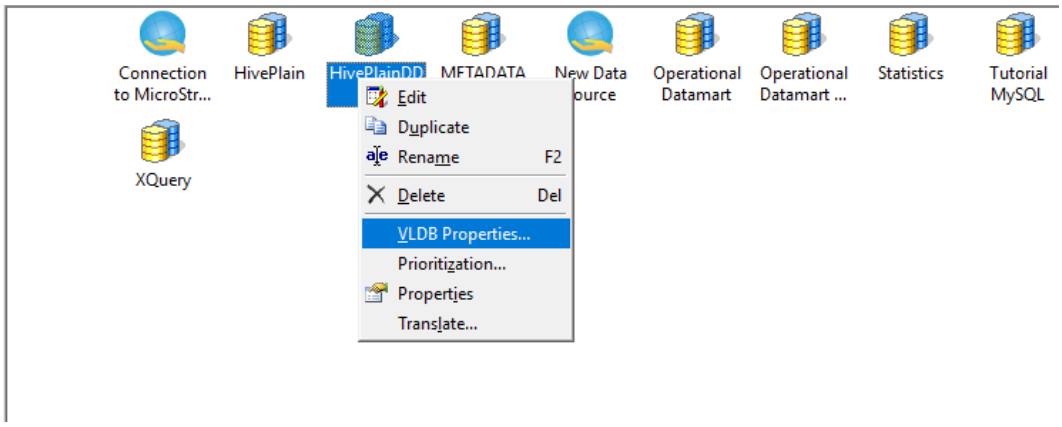

   The **VLDB Settings** window appears.

5. Navigate to **Select/Insert** > **SQL Hint**.

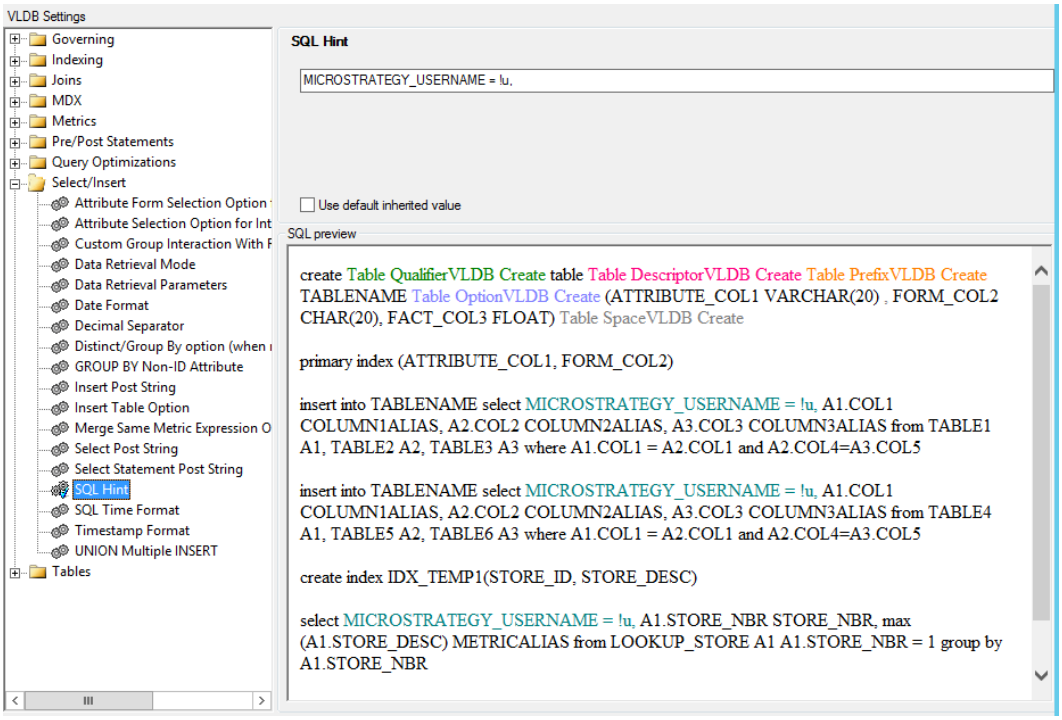

6. In the **SQL Hint** field, enter: `MICROSTRATEGY_USERNAME = !u,`.
7. Clear the **Use default inherited value** check box.


MicroStrategy replaces **!u,** with the MicroStrategy LDAP user name.

Step 2. Clearing the Report Cache for the MicroStrategy Project

MicroStrategy caches the results of the report. Clear the cache so that MicroStrategy sends the SQL query to the database each time a report runs.


1. Log in to MicroStrategy.
2. Select the project.

The following image shows this view:

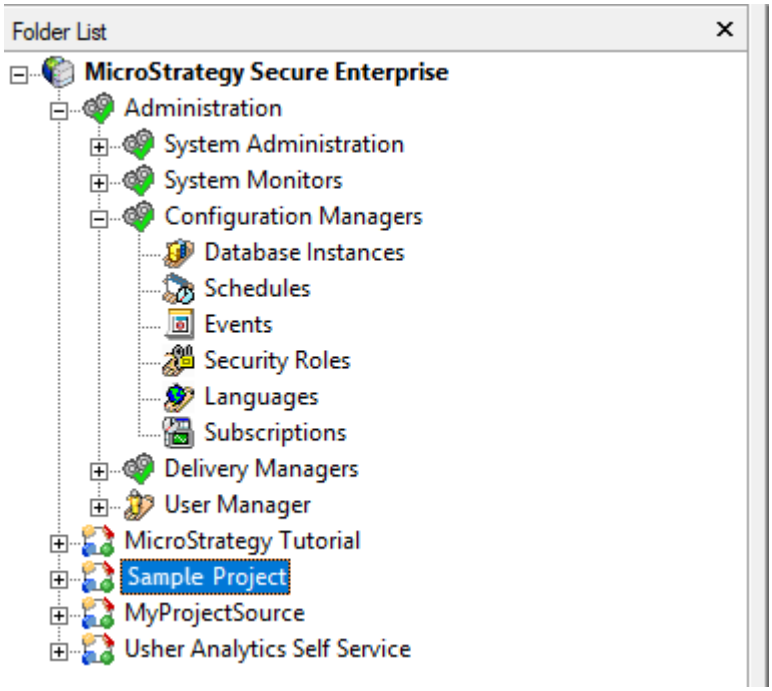

3. Right-click the project and select **Project Configuration**.


The following image shows this view:

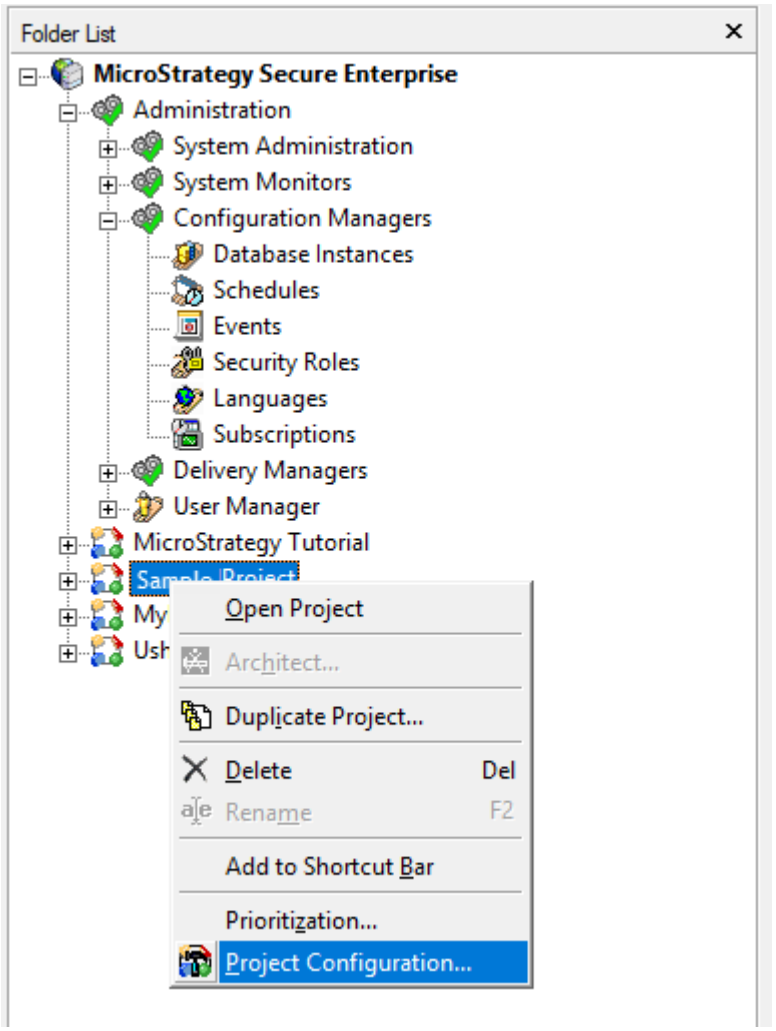

The **Project Configuration** window appears.

4. Navigate to **Caching** > **Caching Results** > **Creation**.

5. Clear the **Enable report server caching** check box.

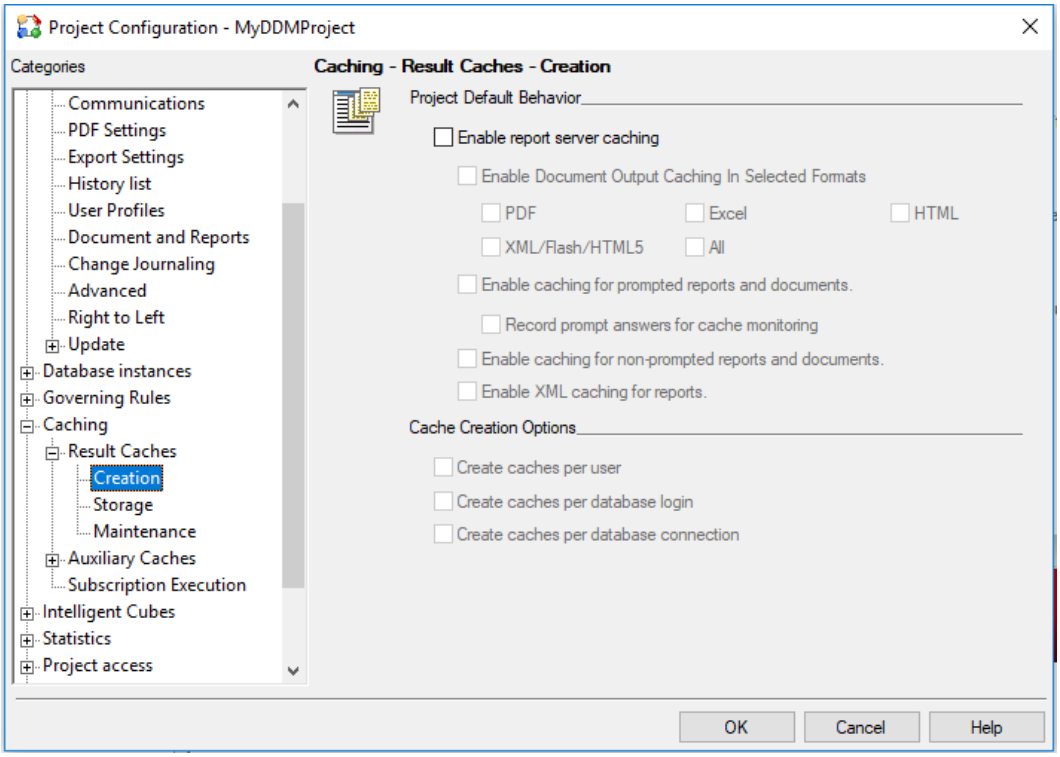

Authors

Vamsi Krishna Brahmadevara

Siva Krapa

Virginia Manders