How-To Library

Informatica

Viewing Unstructured File Metadata in Scanned Cloud Sources

© Copyright Informatica LLC 2020, 2021. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

This article explains how Data Privacy Management processes file metadata when you scan an unstructured Cloud data store type with a remote agent.

Supported Versions

- Data Privacy Management 10.4.1.1

Table of Contents

Overview. 2
Viewing File Metadata on the Sensitive Fields Page. 3
Detailed Properties for Amazon S3 Source Files. 4
Detailed Properties for Microsoft Azure Blob Storage Source Files. 5
Detailed Properties for Microsoft Azure Data Lake Source Files. 6

Overview

When you scan an Amazon S3, Microsoft Azure Blob Storage, or Microsoft Azure Data Lake data store with a remote agent, Data Privacy Management retrieves metadata for the sensitive files in the data store.

The metadata that appears on the **Sensitve Fields** page depends on the file type.

You can include the following file types in an Amazon S3, Microsoft Azure Blob Storage, or Microsoft Azure Data Lake scan:

- Compressed files
- CSV
- JSON
- Microsoft Excel
- Microsoft PowerPoint
- Microsoft Word
- PDF
- Rich text format (RTF)
- TXT
- Web files - .chm
- Web files - .htm, .html, .mhtml, .xht, .xhtml
- Web files - other
- XML

Viewing File Metadata on the Sensitive Fields Page

To view the detailed properties for sensitive files in an Amazon S3, Microsoft Azure Blob Storage, or Microsoft Azure Data Lake data store, access the **Sensitive Fields** page from the Security Dashboard.

1. Log in to Data Privacy Management.

   The **Overview** workspace appears.

2. If the workspace displays the Security Dashboard, go to step 4. If the workspace displays the Privacy Dashboard, click the **Settings** icon in the header.


   The **Settings** workspace appears.

3. In the **Defaults** pane, select the **Security** dashboard and then click **Save**.

   The Security Dashboard appears on the **Overview** workspace.


4. In the **Top Data Stores** indicator, locate the Cloud data store and click the number in the **Fields/Files** column.

   The **Sensitive Fields** page appears.

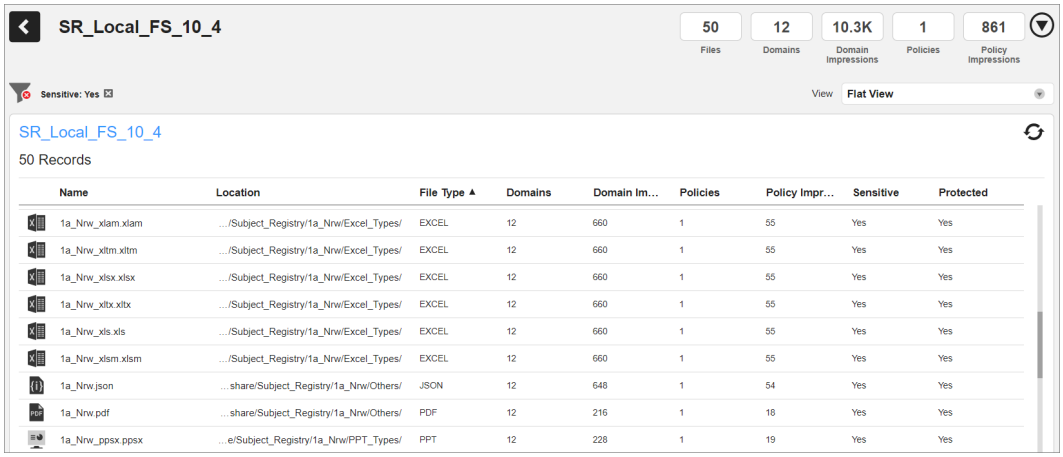


5. Click the row for a file to view the detailed properties.

   The **Properties** pane appears on the right side of the list.

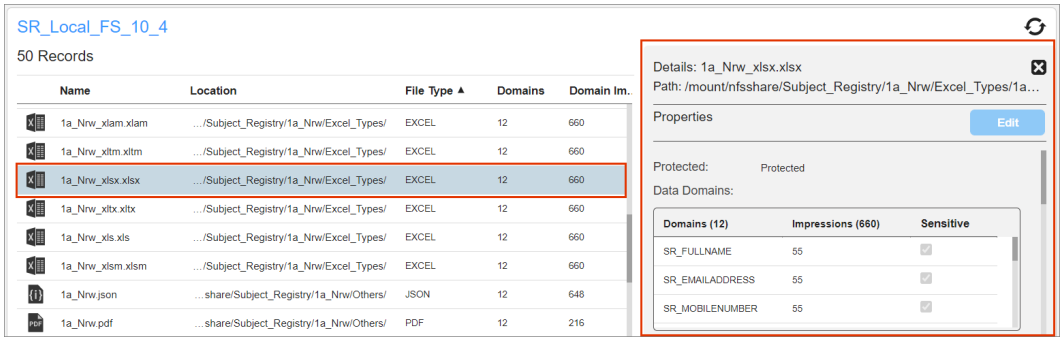

6. In the **Properties** pane, scroll down to view the metadata that the Scan job retrieved.

   Note: A dash (-) character indicates that the Scan job did not retrieve a value for the property.

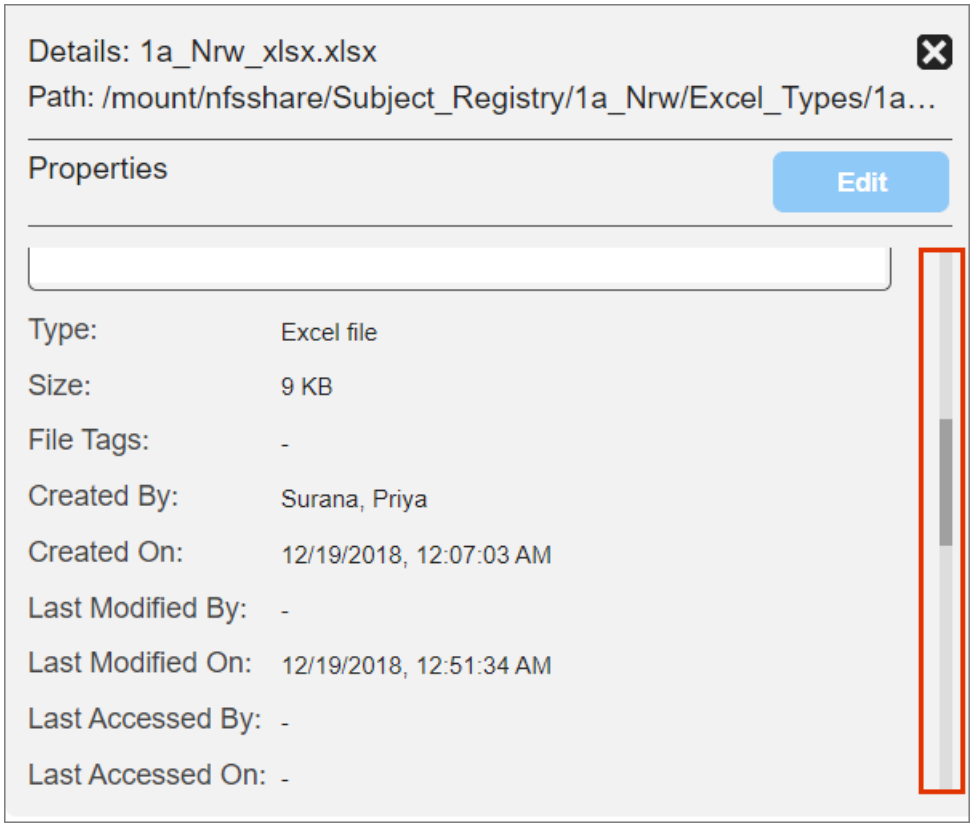

Detailed Properties for Amazon S3 Source Files

When you scan an Amazon S3 data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types in Amazon S3 data stores, remote agent scans do not retrieve permission information.

The following table shows the metadata values that the Scan job retrieves or does not retrieve for each file type in an Amazon S3 data store:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM - Web-HTM, HTML, MHTML, XHT, XHTML - Web-other - XML	- Location - Name - Size - Type - Last Modified On	- Created By - Created On - Last Modified By - Last Accessed By - Last Accessed On - Tags
- Excel - PowerPoint - Word	- Location - Name - Size - Type - Created By - Created On - Last Modified By - Last Modified On - Tags	- Last Accessed By - Last Accessed On
- PDF - RTF	- Location - Name - Size - Type - Created By - Created On - Last Modified On	- Last Modified By - Last Accessed By - Last Accessed On - Tags

For Microsoft Excel, PowerPoint, and Word files with Windows operating system file tags, the data store scan retrieves tag metadata if the tags are separated by a semicolon (;). The Scan job parses the files and retrieves the file tags from Apache Tika.

Detailed Properties for Microsoft Azure Blob Storage Source Files

When you scan a Microsoft Azure Blob Storage data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types in Microsoft Azure Blob Storage data stores, remote agent scans do not retrieve permission information.

The following table shows the metadata values that the Scan job retrieves or does not retrieve for each file type in a Microsoft Azure Blob Storage data store:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM - Web-HTM, HTML, MHTML, XHT, XHTML - Web-other - XML	- Location - Name - Size - Type - Last Modified On	- Created By - Created On - Last Modified By - Last Accessed By - Last Accessed On - Tags
- Excel - PowerPoint - Word	- Location - Name - Size - Type - Created By - Created On - Last Modified By - Last Modified On - Tags	- Last Accessed By - Last Accessed On
- PDF - RTF	- Location - Name - Size - Type - Created By - Created On - Last Modified On	- Last Modified By - Last Accessed By - Last Accessed On - Tags

For Microsoft Excel, PowerPoint, and Word files with Windows operating system file tags, the data store scan retrieves tag metadata if the tags are separated by a semicolon (;).

Detailed Properties for Microsoft Azure Data Lake Source Files

When you scan a Microsoft Azure Data Lake data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types in Microsoft Azure Data Lake data stores, remote agent scans do not retrieve permission information.

The following table shows the metadata values that the Scan job retrieves or does not retrieve for each file type in a Microsoft Azure Data Lake data store:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM - Web-HTM, HTML, MHTML, XHT, XHTML - Web-other - XML	- Location - Name - Size - Type - Last Modified On - Last Accessed By - Last Accessed On	- Created By - Created On - Last Modified By - Tags
- Excel - PowerPoint - Word	- Location - Name - Size - Type - Created By - Created On - Last Modified By - Last Modified On - Last Accessed By - Last Accessed On - Tags	-
- PDF - RTF	- Location - Name - Size - Type - Created By - Created On - Last Modified On - Last Accessed By - Last Accessed On	- Last Modified By - Tags

For Microsoft Excel, PowerPoint, and Word files with Windows operating system file tags, the data store scan retrieves tag metadata if the tags are separated by a semicolon (;).

Authors

Virginia Manders

Narayana Rao Balusu

Sai Tilak

Raviteja Ravuri