How-To Library

Informatica

Viewing File Metadata in Scanned File Management Sources

© Copyright Informatica LLC 2020, 2021. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html.

Abstract

This article explains how Data Privacy Management processes file metadata when you scan an unstructured File Management data store type with a remote agent.

Supported Versions

- Data Privacy Management 10.4.1.1

Table of Contents

Overview. 2
Viewing File Metadata on the Sensitive Fields Page. 3
Detailed Properties for File System Source Files. 4
Local File Protocol. 4
SFTP File Protocol. 5
SMB/CIFS File Protocol. 6
Detailed Properties for Google Drive Source Files. 7
Detailed Properties for Microsoft OneDrive Source Files. 8
Detailed Properties for Microsoft SharePoint Source Files. 9

Overview

When you scan a File System, Google Drive, Microsoft OneDrive, or Microsoft SharePoint data store with a remote agent, Data Privacy Management retrieves metadata for the sensitive files in the data store.

The metadata that appears on the **Sensitve Fields** page depends on the file type.

You can include the following file types in a File System, Google Drive, Microsoft OneDrive, or Microsoft SharePoint scan:

- Avro
- Compressed files
- CSV
- JSON
- Microsoft Excel
- Microsoft PowerPoint
- Microsoft Word
- PDF
- Rich text format (RTF)
- TXT
- Web files - CHM, HTML, MHTML, OTH, XHT, XHTML
- XML

Viewing File Metadata on the Sensitive Fields Page

To view the detailed properties for sensitive files in a File System, Google Drive, Microsoft OneDrive, or Microsoft SharePoint data store, access the **Sensitive Fields** page from the Security Dashboard.

1. Log in to Data Privacy Management.

   The **Overview** workspace appears.

2. If the workspace displays the Security Dashboard, go to step 4. If the workspace displays the Privacy Dashboard, click the **Settings** icon in the header.


   The **Settings** workspace appears.

3. In the **Defaults** pane, select the **Security** dashboard and then click **Save**.

   The Security Dashboard appears on the **Overview** workspace.


4. In the **Top Data Stores** indicator, locate the File Management data store and click the number in the **Fields/ Files** column.

   The **Sensitive Fields** page appears.

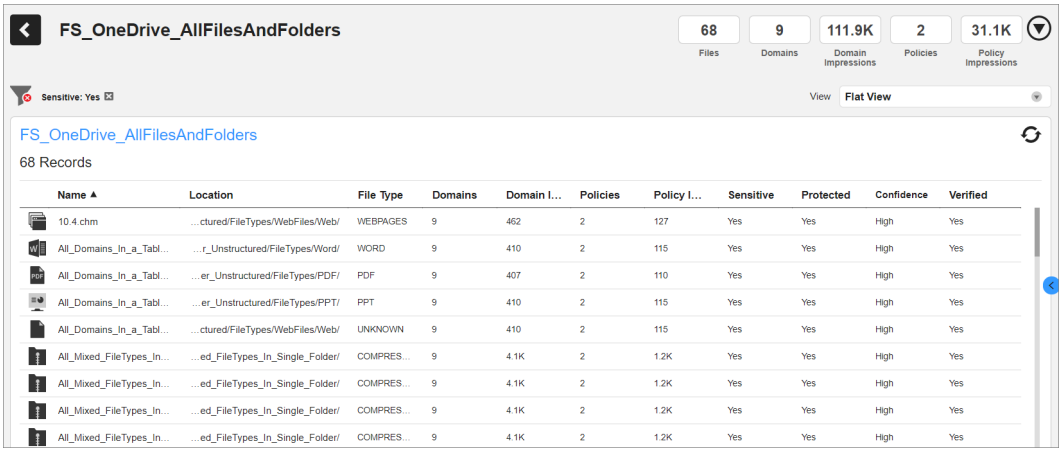


5. Click the row for a file to view the detailed properties.

   The **Properties** pane appears on the right side of the list.

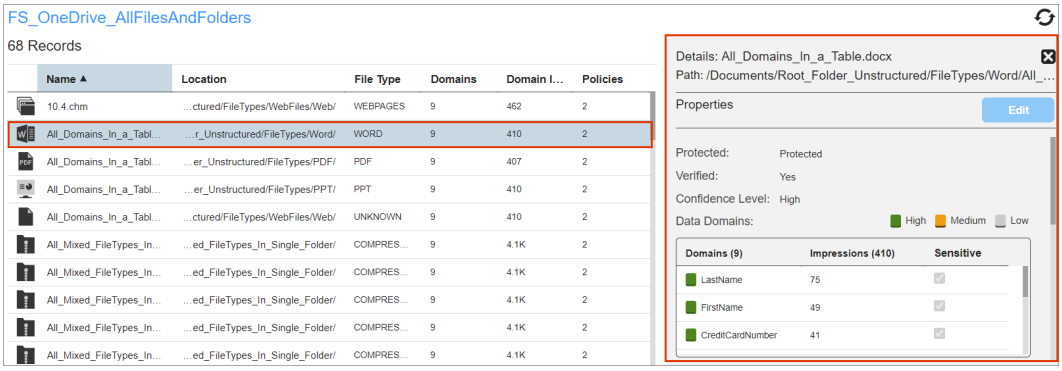

6. In the **Properties** pane, scroll down to view the metadata that the Scan job retrieved.

   Note: A dash (-) character indicates that the Scan job did not retrieve a value for the property.

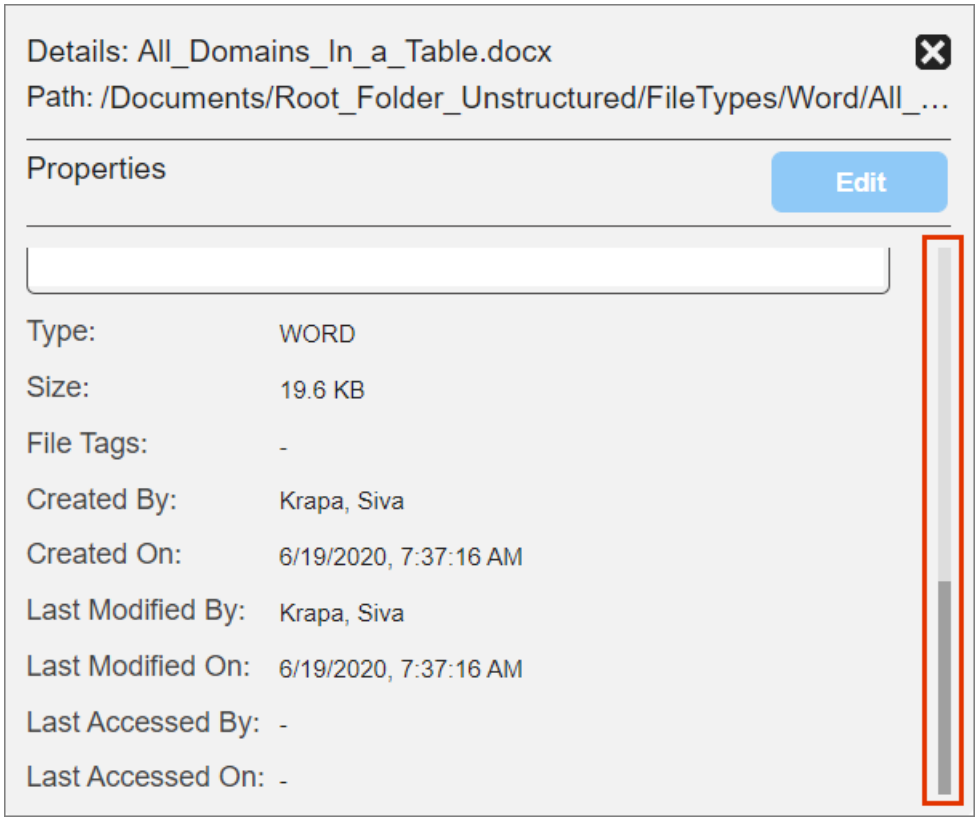

Detailed Properties for File System Source Files

When you scan File System data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

Local File Protocol

When you scan a File System data store that uses the Local File protocol with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types that use the Local File protocol, remote agent scans do not retrieve permission information, and source level tags are not applicable.

The following table shows the metadata values that the Scan job retrieves and does not retrieve for each file type in a File System data store that uses the Local File protocol:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM, HTM, HTML, OTH, XHT, XHTML - XML	- Type - Size - Created On - Last Modified On - Last Accessed On	- Created By - Last Modified By - Last Accessed By - Transformed Tags (not applicable)
- Excel - PowerPoint - Word	- Type - Size - Created By - Created On - Last Modified By - Last Modified On - Last Accessed On - Transformed Tags	Last Accessed By
- PDF - RTF	- Type - Size - Created By - Created On - Last Modified On - Last Accessed On	- Last Modified By - Last Accessed By - Transformed Tags (not applicable)

For Microsoft Excel, PowerPoint, and Word files with Windows operating system file tags, the data store scan retrieves tag metadata if the tags are separated by a semicolon (;). The Scan job parses the files and retrieves the file tags from Apache Tika.

SFTP File Protocol

When you scan a File System data store that uses the Secure File Transfer Protocol (SFTP) with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types that use the SFTP protocol, remote agent scans do not retrieve permission information, and source level tags are not applicable.

The following table shows the remaining metadata values that the Scan job retrieves and does not retrieve for each file type in a File System data store that uses the SFTP protocol:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Compressed - CSV - JSON - Parquet - TXT - Web-CHM, HTM, HTML, OTH, XHT, XHTML - XML	- Type - Size - Last Modified On - Last Accessed On	- Created By - Created On - Last Modified By - Last Accessed By - Transformed Tags (not applicable)
- Excel - PowerPoint - Word	- Type - Size - Created By - Created On - Last Modified By - Last Modified On - Last Accessed On - Transformed Tags	Last Accessed By
- PDF - RTF	- Type - Size - Created By - Created On - Last Modified On - Last Accessed On	- Last Modified By - Last Accessed By - Transformed Tags (not applicable)

For Microsoft Excel, PowerPoint, and Word files with Windows operating system file tags, the data store scan retrieves tag metadata if the tags are separated by a semicolon (;). The Scan job parses the files and retrieves the file tags from Apache Tika.

SMB/CIFS File Protocol

When you scan a File System data store that uses the Server Message Block (SMB) or Common Internet File System (CIFS) protocol with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types that use the SMB or CIFS protocol, remote agent scans do not retrieve permission information, and source level tags are not applicable.

The following table shows the metadata values that the Scan job retrieves for each file type in a File System data store that uses the SMB or CIFS protocol:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM, HTM, HTML, OTH, XHT, XHTML - XML	- Type - Size - Last Modified On	- Created By - Created On - Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (not applicable)
- Excel - PowerPoint - Word	- Type - Size - Created By - Created On - Last Modified By - Last Modified On - Transformed Tags	- Last Accessed By - Last Accessed On
- PDF - RTF	- Type - Size - Created By - Created On - Last Modified On	- Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (not applicable)

For Microsoft Excel, PowerPoint, and Word files with Windows operating system file tags, the data store scan retrieves tag metadata if the tags are separated by a semicolon (;). The Scan job parses the files and retrieves the file tags from Apache Tika.

Detailed Properties for Google Drive Source Files

When you scan a Google Drive data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types in a Google Drive data store, remote agent scans do not retrieve permission information.

The following table shows the metadata values that the Scan job retrieves and does not retrieve for each file type in a Google Drive data store:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM, HTM, HTML, OTH, XHT, XHTML - XML	- Type - Size - Created On - Last Modified On - Source Level Tags	- Created By - Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (not applicable)
- Excel - PowerPoint - Word	- Type - Size - Created By - Created On - Last Modified By - Last Modified On - Transformed Tags - Source Level Tags	- Last Accessed By - Last Accessed On
- PDF - RTF	- Type - Size - Created By - Created On - Last Modified On - Source Level Tags	- Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (not applicable)

For all supported file types, the data store scan retrieves Google Drive or Windows operating system file tag metadata if the tags are separated by a semicolon (`;`). If files have source-level (Google Drive) tags and Windows operating system tags, the Scan job retrieves the source-level tags only. If files have Windows operating system tags only, the Scan job parses the files and retrieves the file tags from Apache Tika.

Detailed Properties for Microsoft OneDrive Source Files

When you scan a Microsoft OneDrive data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types in a Microsoft OneDrive data store, remote agent scans do not retrieve permission information.

The following table shows the metadata values that the Scan job retrieves and does not retrieve for each file type in a Microsoft OneDrive data store:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM, HTM, HTML, OTH, XHT, XHTML - XML	- Type - Size - Created On - Last Modified On	- Created By - Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (not applicable) - Source Level Tags
- Excel - PowerPoint - Word	- Type - Size - Created By - Created On - Last Modified By - Last Modified On - Transformed Tags	- Last Accessed By - Last Accessed On - Source Level Tags
- PDF - RTF	- Type - Size - Created By - Created On - Last Modified On	- Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (not applicable) - Source Level Tags

For Microsoft Excel, PowerPoint, and Word files, the data store scan retrieves Windows operating system file tag metadata if the tags are separated by a semicolon (;). The Scan job parses the files and retrieves the file tags from Apache Tika.

Detailed Properties for Microsoft SharePoint Source Files

When you scan a Microsoft SharePoint data store with a remote agent, Data Privacy Management retrieves metadata from the files included in the data store scan.

The metadata appears in the detailed properties for each sensitive file on the **Sensitive Fields** page.

For all file types in a Microsoft SharePoint data store, remote agent scans do not retrieve permission information.

The following table shows the metadata values that the Scan job retrieves and does not retrieve for each file type in a Microsoft SharePoint data store:

File Type	Metadata Retrieved	Metadata Not Retrieved
- Avro - Compressed - CSV - JSON - Parquet - TXT - Web-CHM, HTM, HTML, OTH, XHT, XHTML - XML	- Type - Size - Created On - Last Modified On - Source Level Tags (List)	- Created By - Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (List) - not applicable - Transformed Tags (Library) - not applicable - Source Level Tags (Library)
- Excel - PowerPoint - Word	- Type - Size - Created By - Created On - Last Modified By - Last Modified On - Transformed Tags (List) - Transformed Tags (Library) - Source Level Tags (List) - Source Level Tags (Library)	- Last Accessed By - Last Accessed On
- PDF - RTF	- Type - Size - Created By - Created On - Last Modified On - Source Level Tags (List)	- Last Modified By - Last Accessed By - Last Accessed On - Transformed Tags (List) - not applicable - Transformed Tags (Library) - not applicable - Source Level Tags (Library)

For Microsoft Excel, PowerPoint, and Word files in a SharePoint Library, the data store scan retrieves SharePoint Library, SharePoint Folder, and Windows operating system file tag metadata.

For Microsoft Excel, PowerPoint, and Word files in a SharePoint List, the data store scan retrieves SharePoint List and Windows operating system tag metadata. If the files are attached, the Scan job retrieves SharePoint List tag metadata only.

Authors

Virginia Manders

Narayana Rao Balusu

Sai Tilak

Raviteja Ravuri