Informatica® Cloud Data Profiling
October 2026

Getting Started

Informatica Cloud Data Profiling Getting Started
October 2026
July 2026

© Copyright Informatica LLC 2016, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Subject to your opt-out rights, the software will automatically transmit to Informatica in the USA information about the computing and network environment in which the Software is deployed and the data usage and system statistics of the deployment. This transmission is deemed part of the Services under the Informatica privacy policy and Informatica will use and otherwise process this information in accordance with the Informatica privacy policy available at https://www.informatica.com/in/privacy-policy.html. You may disable usage collection in Administrator tool.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-11-01

Table of Contents

Preface 4

Informatica Resources 4

- Informatica Network 4
- Informatica Knowledge Base 4
- Informatica Documentation 4
- Informatica Product Availability Matrices 5
- Informatica Marketplace 5
- Informatica Global Customer Support 5

Chapter 1: Getting Started with Informatica Cloud Data Profiling 6

Chapter 2: System Requirements 7

Enabling CORS in Internet Explorer 11 7

Chapter 3: Installing Secure Agents 12

Installing on Windows 12

- Secure Agent requirements on Windows 12
- Downloading and installing the Secure Agent on Windows 13
- Updating proxy settings through the Secure Agent Manager 15
- Configuring a login for a Windows Secure Agent service 15

Installing on Linux 16

- Secure Agent requirements on Linux 16
- Downloading and installing the Secure Agent on Linux 18
- Configure the proxy settings on Linux 19

Chapter 4: Connection Configuration 21

Configuring a connection 21

Object search and selection 22

Chapter 5: Project Setup 24

Creating projects and project folders 24

Creating assets 25

Chapter 6: Editing your user profile 26

Chapter 7: Switching to a different organization 27

Index 28

Preface

Refer to *Getting Started* for information about how to begin using Data Profiling. *Getting Started* explains how to configure a runtime environment, create connections to data sources, and begin a project.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit https://network.informatica.com.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at https://network.informatica.com/community/informatica-network/product-availability-matrices.

Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at https://marketplace.informatica.com.

Informatica Global Customer Support

You can contact a Global Support Center by telephone or through the Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:
https://www.informatica.com/services-and-training/customer-success-services/contact-us.html.

To find online support resources on the Informatica Network, visit https://network.informatica.com and select the Support option.

CHAPTER 1

Getting Started with Informatica Cloud Data Profiling

You can create a data profiling project in just a few steps.

Step 1. Check system requirements

Make sure that you are using a compatible browser when you design your projects. Check the IDMC Product Availability Matrix for operating systems, databases, and other systems that Data Profiling supports.

Step 2. Configure a runtime environment

A runtime environment is the execution platform for running tasks. A runtime environment consists of one or more Secure Agents. A Secure Agent is a lightweight program that runs tasks and enables secure communication across the firewall between your organization and IDMC. You must have at least one runtime environment in each organization so that users in the organization can run tasks.

Use a Secure Agent group to access data on-premises. A Secure Agent group contains one or more Secure Agents. The agents in a group run within your network or in a cloud computing services environment such as Amazon Web Services or Microsoft Azure.

To create a Secure Agent group, download and install the Secure Agent. You can install one Secure Agent on each physical or virtual machine. Each agent that you install is added to its own group by default. Based on your license, you can add multiple agents to a group to balance workloads and improve scalability.

Step 3. Create a connection

Before you can create a data profiling task, you need to create a connection. When you configure the connection, you specify the connector that enables the exchange of data between the profile and source object.

Step 4. Create your project

Create a project folder and folders to contain the assets that you need for your project. If you do not create any project or folder, data profiling saves the data profiling tasks in the Default project.

CHAPTER 2

System Requirements

Use one of the following browsers when you work with Data Profiling:

- Google Chrome 62 and higher
- Microsoft Internet Explorer 11

  Note: To use Internet Explorer 11, you must enable cross-origin support (CORS) in the browser.
- Mozilla Firefox (64-bit) 56 and higher

For more information about system requirements, see the Product Availability Matrix (PAM) for Data Profiling. The PAM indicates the versions of operating systems, databases, and other types of data sources and targets that a product release supports. You can access the PAM on Informatica Network at https://network.informatica.com/community/informatica-network/product-availability-matrices/.


Enabling CORS in Internet Explorer 11

IDMC requires that cross-origin support (CORS) be enabled in Internet Explorer 11. In Internet Explorer 11, CORS is not enabled by default.

Note: Some company security policies restrict the ability of users to enable CORS in a web browser. Before you update these settings, verify that your company or IT department allows you to change the CORS settings.


1. Open Internet Explorer 11.
2. On the **Tools** menu, select **Internet Options**.

3. On the **Security** tab, click **Trusted sites**, and then click **Sites** as shown in the following image:

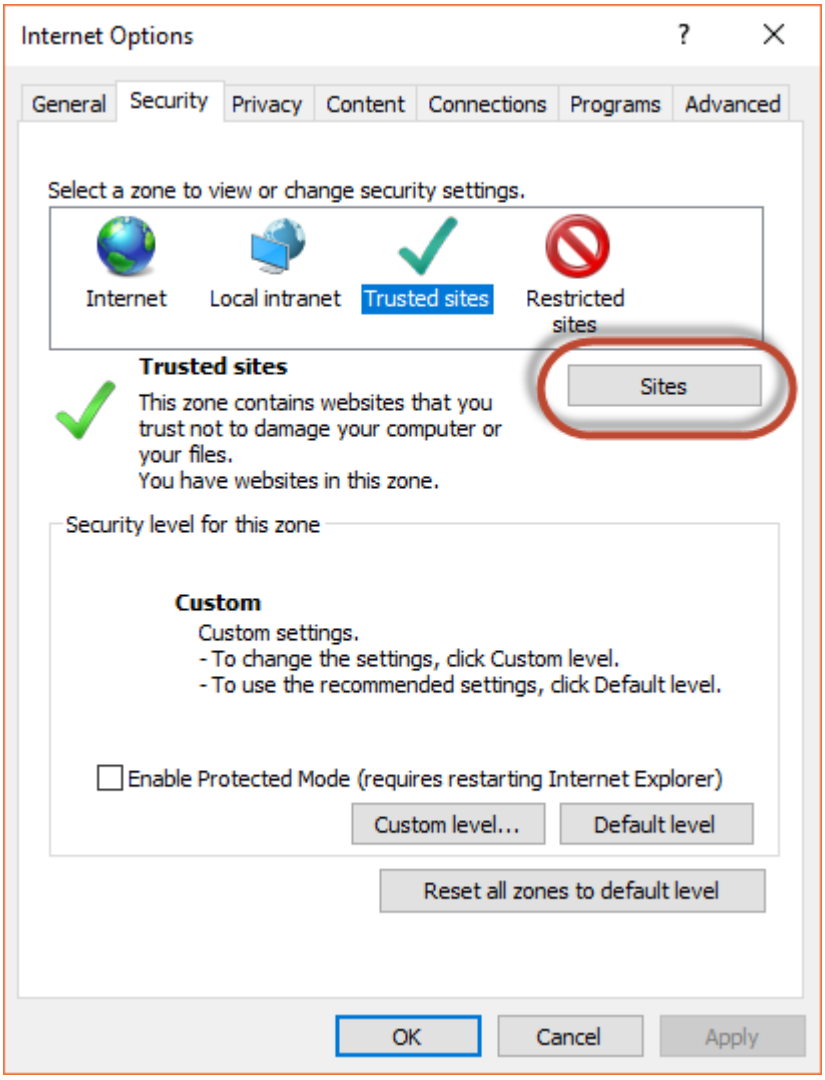


4. In the **Trusted Sites** dialog box, add the IDMC domain to the zone, and click **Add**.

For example, the following image shows the domain `https://*.informaticacloud.com` added to the zone:

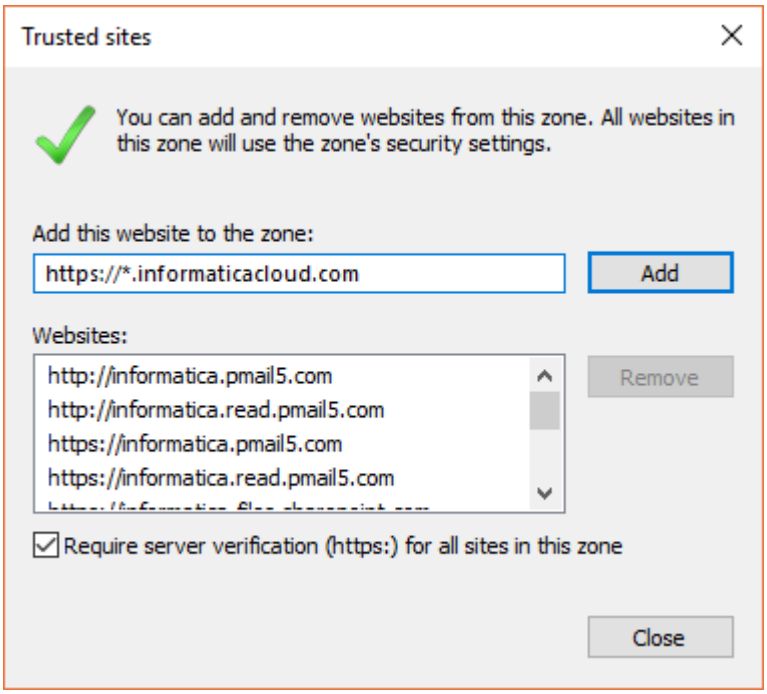


5. Click **Close**.

6. In the **Security level for this zone** area on the **Security** tab, click **Custom level** as shown in the following image:

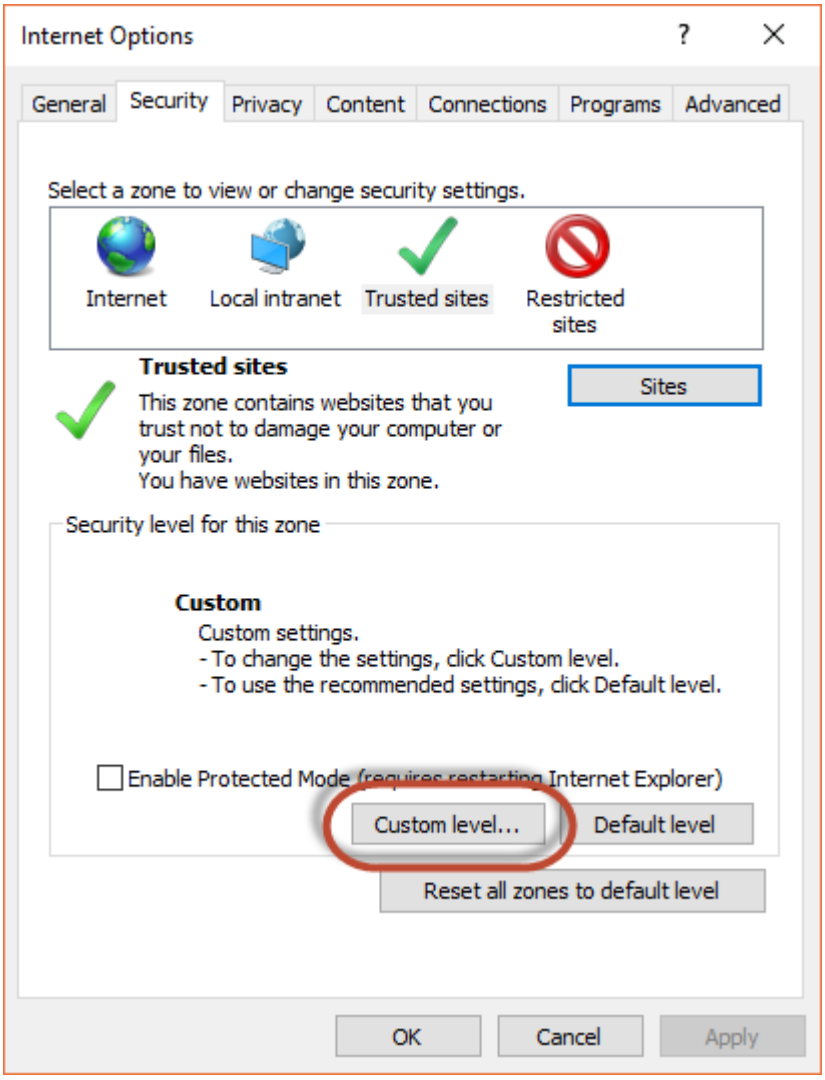

7. In the **Security Settings - Trusted Sites Zone** dialog box, scroll down to the **Miscellaneous** heading, and enable **Access data sources across domains** as shown in the following image:

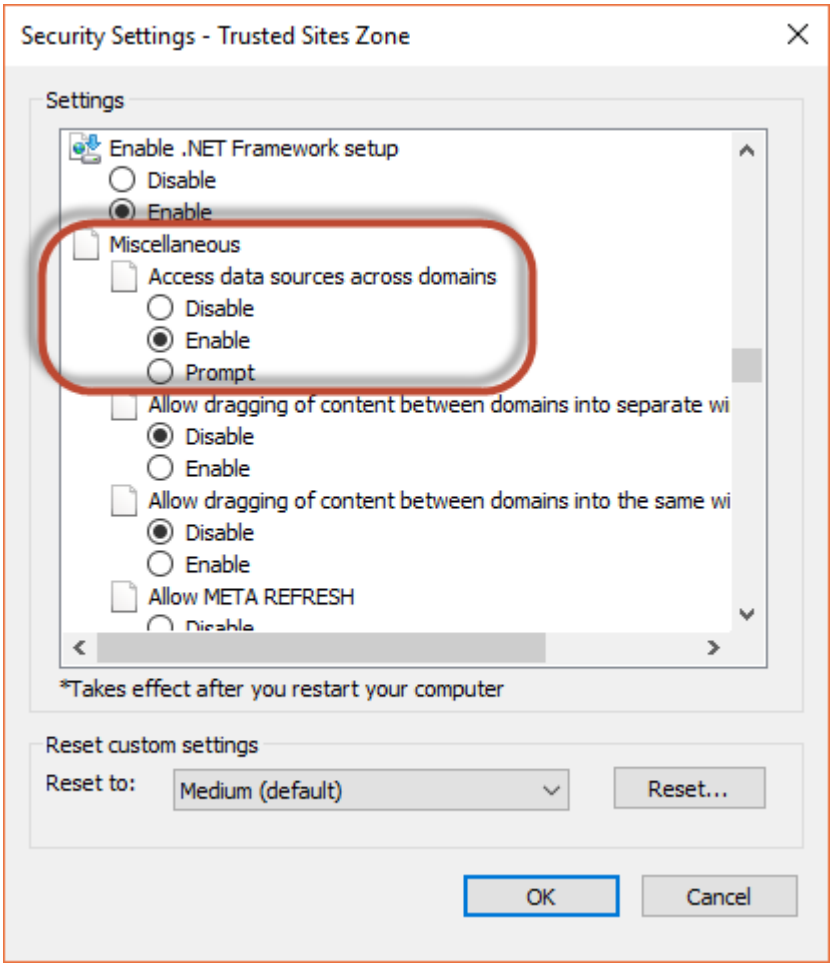

8. Click **OK**.
9. If prompted, confirm that you want to change the settings for the zone.
10. Click **OK**.
11. Restart Internet Explorer and re-open IDMC.

CHAPTER 3

Installing Secure Agents

You can install Secure Agents on Windows or Linux.

Installing on Windows

On Windows, the Secure Agent runs as a Windows service. When you install the Secure Agent, you also install the Informatica Cloud Secure Agent Manager.

By default, the Secure Agent starts when you start Windows. You can stop and restart the Secure Agent using the Secure Agent Manager or Windows Services. If you install the Secure Agent on a different volume than you use to run the installation program, you must start and stop the Secure Agent from Windows Services.

You can also use the Secure Agent Manager to check the Secure Agent status and configure proxy information. The Secure Agent works with BASIC, DIGEST, and NTLMv2 proxy authentication.

You can launch the Secure Agent Manager from the Start menu or desktop icon. When you close the Secure Agent Manager, it minimizes to the Windows taskbar notification area for quick access.

When you install a Secure Agent, you perform the following tasks:

1. Verify that the machine meets the minimum requirements.
2. Download the Secure Agent installer files.
3. Install and register the Secure Agent.

Secure Agent requirements on Windows

You can install the Secure Agent on any machine that has internet connectivity and can access IDMC.

Verify the following requirements before you install the Secure Agent on Windows:

- The Secure Agent machine uses a supported operating system. For the list of supported operating systems for the Secure Agent, see the Product Availability Matrix (PAM) for Intelligent Data Management Cloud on the Knowledge Base.
- The Secure Agent machine has the following attributes at a minimum:
  - x86 64-bit architecture
  - 4 CPU cores
  - 16 GB RAM
  - 5 GB free disk space

- The Secure Agent machine is on a volume with at least 250GB disk space, with at least 5 GB free space or three times the size of the Secure Agent installation, whichever is greater.
- The account you use to install the Secure Agent has access to all remote directories that contain flat source or target files.
- No other Secure Agent is installed on the machine. If another Secure Agent is installed on the machine, uninstall it first.

For more information, see this KB article:
Minimum requirements and best practices when installing Informatica Cloud Secure Agent.

Configure the firewall

If your organization uses a protective firewall, include the IDMC domain name or IP address ranges in the list of approved domain names or IP addresses. To ensure that the Secure Agent can perform all necessary tasks through the firewall, enable the port that the Secure Agent uses.

The Secure Agent uses port 443 (HTTPS) to connect to the internet. Configure your firewall to allow traffic to pass over port 443. Also exclude the following directory from security scans: `<Secure Agent installation directory>/apps`. Scanning files in this directory can interfere with the operation of the Secure Agent.

The list of allowed domains and IP addresses can vary according to your POD (Point of Deployment). You can identify your POD through the URL that appears when you open any service. The first few characters of the URL string identify the POD. For example, if the URL starts with `usw3.dm-us.informaticacloud.com`, your POD is USW3.

For the list of all the domains and IP addresses that you must allow for the different PODs, see Pod Availability and Networking.

Setting Secure Agent permissions on Windows

A Secure Agent requires certain permissions to transfer data between sources and targets.

When you install a Secure Agent on Windows, the Secure Agent must be part of the local Administrators group.

Configuring Windows settings

Before you use the Secure Agent on Windows, configure proxy settings and a Windows Secure Agent service login.

You can configure proxy settings in Secure Agent Manager. Configure a login for the Windows Secure Agent service on Windows.

Note: If you use the Secure Agent for Informatica Cloud Data Wizard, you do not need to configure proxy settings or a Windows service login for the Secure Agent.

Downloading and installing the Secure Agent on Windows

To install the Secure Agent on a Windows machine, download and run the Secure Agent installer and then register the agent.

Before you download and install the Secure Agent, verify that no other Secure Agent is installed on the machine. If any other Secure Agent exists, you must uninstall it first.

Tip: To verify the checksum of the Secure Agent installation program, use the agent REST API version 2 resource. For more information about the agent resource, see *REST API Reference*.

1. Open Administrator and select **Runtime Environments**.
2. On the **Runtime Environments** page, click **Download Runtime Installer**.
3. Select **Secure Agent** as the environment type.
4. Select **Windows 64** as the platform.
5. Click **Copy** to copy the install token.


   You will need this token to install the Secure Agent. The token expires after 24 hours. If the token expires before you install the Secure Agent, repeat steps 1 to 5 to obtain a new token. You don't need to download the installer again.
6. Click **Download**.

   The installer is downloaded to your machine. The name of the installer is `agent64_install_ng_ext.<agent core version>.exe`.
7. Run the installer as an Administrator and complete the following steps:
   a. Specify the Secure Agent installation directory, and click **Next**.

      Note: Ensure that the file path doesn't contain multibyte characters. If the path contains multibyte characters, the Secure Agent might not start.

   b. Click **Install** to install the agent.

   The **Cloud Secure Agent** dialog box opens and prompts you to register the agent as shown in the following image:

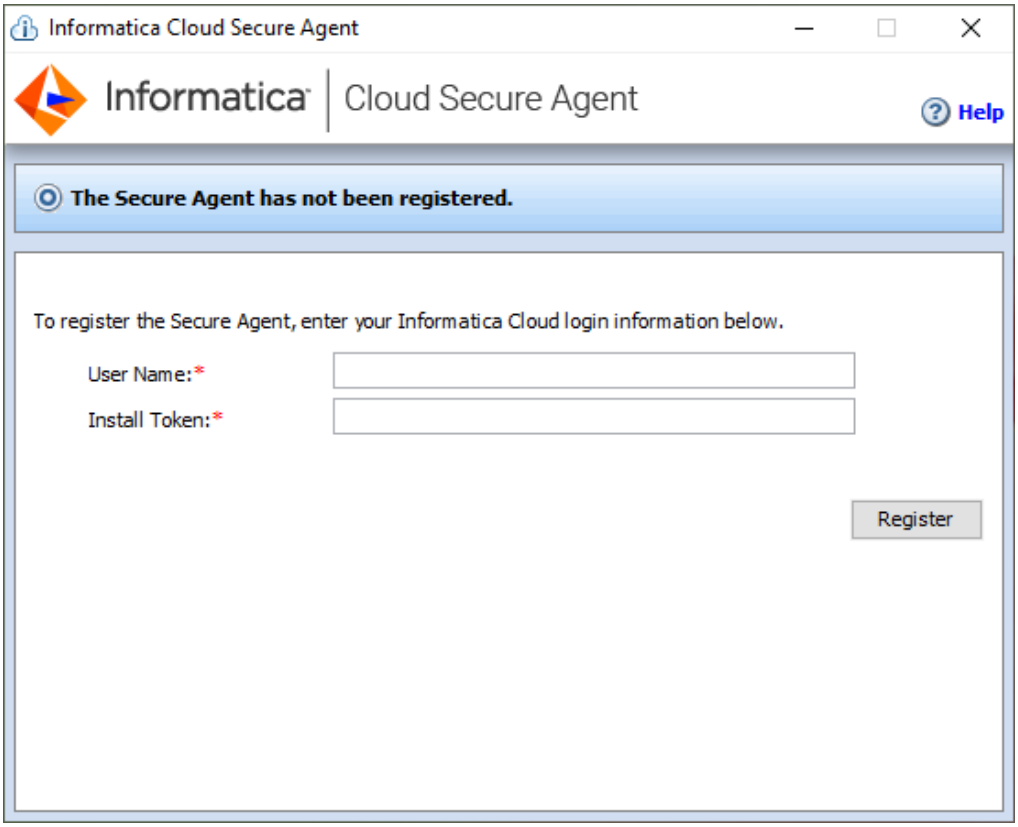

8. In the Secure Agent Manager, enter the following information, and then click **Register**:

Option	Description
User Name	User name that you use to access IDMC.
Install Token	Token that you copied when you downloaded the runtime installer.

The Secure Agent Manager displays the status of the Secure Agent. It takes a minute for all of the services to start.

Tip: When you register the agent, it is added to its own Secure Agent group by default. You can add the agent to a different Secure Agent group if necessary.

9. If your organization uses an outgoing proxy server to connect to the internet, enter the proxy server information.
10. Close the Secure Agent Manager.

The Secure Agent Manager minimizes to the taskbar and continues to run as a service until stopped.

Updating proxy settings through the Secure Agent Manager

To update proxy hosts, proxy ports, and the username and password used to connect to the proxy server, edit the proxy settings through the Secure Agent Manager.

1. In the Secure Agent Manager, click **Proxy**.
2. To enter proxy server settings, click **Use a Proxy Server**.
3. Enter the following information:

Field	Description
Proxy Host	Required. Host name of the outgoing proxy server that the Secure Agent uses.
Proxy Port	Required. Port number of the outgoing proxy server.
User Name	User name to connect to the outgoing proxy server.
Password	Password to connect to the outgoing proxy server.

4. Click **OK**.

The Secure Agent Manager restarts the Secure Agent to apply the settings.

Configuring a login for a Windows Secure Agent service

On Windows, configure a network login for the Secure Agent service. The Secure Agent can access the network with the privileges and permissions associated with the login.

Configure a login for the Secure Agent machine to allow the Secure Agent to access directories to configure and run tasks. When you configure connections, configure tasks, and run tasks that use flat file or FTP/SFTP connection types, the Secure Agent might require read and write permissions on the related directories.

For example, to browse to a directory to configure a flat file or FTP/SFTP connection, the Secure Agent login might require permission to access the directory. Without a Secure Agent login with the appropriate permissions, IDMC cannot display the directory in the **Browse for Directory** dialog box.

1. Go to the **Services** window from the Windows Administrative tools.
2. In the **Services** window, right-click the Informatica Cloud Secure Agent service and choose **Properties**.
3. In the **Properties** dialog box, click the **Log On** tab.
4. To configure a login, select **This Account**.
5. Enter an account and password.

   Use an account with the required privileges and permissions for the network security defined for the domain. By default, the account format is <domain name>\<user name>.
6. Click **OK**.
7. In the **Services** window, restart the Secure Agent service for the changes to take effect.

Installing on Linux

On Linux, the Secure Agent runs as a process. You can use a shell command line to install, register, start, stop, and uninstall the Secure Agent.

You can also use the shell command line to check the Secure Agent status.

When you install a Secure Agent, you perform the following tasks:

1. Verify that the machine meets the minimum requirements.
2. Download the Secure Agent installer files.
3. Install and register the Secure Agent.

Consider the following guidelines:

- Create a specific user profile to install the Secure Agent with full access to all folders from the Secure Agent installation directory. Don't install the Secure Agent as the root user.
- You can't install more than one Secure Agent on the same machine under the same user account. Multiple agents may exist under different user accounts.
- Don't install the Secure Agent on any node within the Informatica domain.

Secure Agent requirements on Linux

You can install the Secure Agent on any machine that has internet connectivity and can access IDMC. Before you install the Secure Agent on Linux, verify the system requirements.

Verify the following requirements before you install the Secure Agent on Linux:

- Verify that the Secure Agent machine uses a supported operating system. For the list of supported operating systems for the Secure Agent, see the Product Availability Matrix (PAM) for Intelligent Data Management Cloud on the Knowledge Base.
- Verify that the Secure Agent machine is running the x86 64-bit architecture, with at least 11 GB free disk space.
- Verify that the `libidn.x86_64` package is installed.
  If the package isn't present, install it using the following command: `sudo yum install libidn.x86_64`

Note: The command to install the package might vary based on your Linux distribution.

- Verify that the `libidn.so.*` libraries are installed.
  If the libraries aren't present, run the following commands:
  1. Change to the appropriate directory on the Secure Agent machine.
     - For 64-bit systems: `cd /usr/lib/x86_64-linux-gnu`
     - For 32-bit systems: `cd /usr/lib/i386-linux-gnu`
  2. Create a symbolic link using the following command:

     ```
     sudo ln -s libidn.so.12 libidn.so.11
     ```

  If you are installing the Secure Agent on RHEL 9, create an additional symbolic link using the following command:

  ```
  sudo ln -s libidn2.so.0 libidn.so.11
  ```
- The account that you use to install the Secure Agent must have access to all remote directories that contain flat source or target files.
- If you use PowerCenter, install the Secure Agent using a different user account than the account you used to install PowerCenter.
  IDMC and PowerCenter use some common environment variables. If the environment variables are not set correctly for IDMC, your jobs might fail at run time.

For more information, see this KB article:
Minimum requirements and best practices when installing Informatica Cloud Secure Agent.

Configure the firewall

If your organization uses a protective firewall, include the IDMC domain name or IP address ranges in the list of approved domain names or IP addresses. To ensure that the Secure Agent can perform all necessary tasks through the firewall, enable the port that the Secure Agent uses.

The Secure Agent uses port 443 (HTTPS) to connect to the internet. Configure your firewall to allow traffic to pass over port 443. Also exclude the following directory from security scans: `<Secure Agent installation directory>/apps`. Scanning files in this directory can interfere with the operation of the Secure Agent.

The list of allowed domains and IP addresses can vary according to your POD (Point of Deployment). You can identify your POD through the URL that appears when you open any service. The first few characters of the URL string identify the POD. For example, if the URL starts with `usw3.dm-us.informaticacloud.com`, your POD is USW3.

For the list of all the domains and IP addresses that you must allow for the different PODs, see Pod Availability and Networking.

Setting Secure Agent permissions on Linux

A Secure Agent requires certain permissions to transfer data between sources and targets.

When you install a Secure Agent on Linux, the Secure Agent must have read/write/execute permissions for the installation directory.

Downloading and installing the Secure Agent on Linux

To install the Secure Agent on a Linux machine, download and run the Secure Agent installer and then register the agent.

Before you download and install the Secure Agent, verify that no other Secure Agent is installed on the machine using the same Linux user account. If any other Secure Agent exists, you must uninstall it first.

Tip: To verify the checksum of the Secure Agent installation program, use the agent REST API version 2 resource. For more information about the agent resource, see *REST API Reference*.

1. Open Administrator and select **Runtime Environments**.
2. On the **Runtime Environments** page, click **Download Runtime Installer**.
3. Select **Secure Agent** as the Environment Type.
4. Select **Linux 64** as the Platform.
5. Click **Copy** to copy the install token.

   You will need this token to install the Secure Agent. The token expires after 24 hours. If the token expires before you install the Secure Agent, repeat steps 1 to 5 to obtain a new token. You don't need to download the installer again.
6. Click **Download**.

   The installer is downloaded to your machine. The name of the installer is `agent64_install_ng_ext.<agent core version>.bin`.
7. Save the installer to a directory on the machine where you want to run the Secure Agent.

   Note: Ensure that the file path doesn't contain spaces or multibyte characters. If the file path contains spaces, the installation might fail. If the path contains multibyte characters, the Secure Agent might not start.
8. From a shell command line, navigate to the directory where you downloaded the installation program and enter the following command:

   ```
   ./agent64_install_ng_ext.bin -i console
   ```
9. When the installer completes, navigate to the following directory:

   ```
   <Secure Agent installation directory>/apps/agentcore
   ```
10. To start the Secure Agent, enter the following command:

    ```
    ./infaagent.sh startup
    ```

    The Secure Agent Manager starts. Register the agent using the user name that you use to access IDMC and also supply the install token.
11. To register the agent, in the `<Secure Agent installation directory>/apps/agentcore` directory, enter one of the following commands using your IDMC user name and the token that you copied:
    - To add the agent to its own Secure Agent group, use the following command:

      ```
      ./consoleAgentManager.sh configureToken <user name> <install token>
      ```
    - To add the agent to an existing Secure Agent group, use the following command:

      ```
      ./consoleAgentManager.sh configureTokenWithRuntime <user name> <install token>
      <Secure Agent group name>
      ```

      Note: If the command includes a Secure Agent group name that doesn't exist, the Secure Agent is not assigned to a group. Be sure to use a valid Secure Agent group name.

The following table lists the command options:

Option	Description
User Name	Required. IDMC user name of the user installing the Secure Agent.
Install Token	Required. The install token that you copied when you downloaded the runtime installer.
Secure Agent group name	Optional. Include a group name when you want to add the agent to an existing Secure Agent group instead. If this option isn't included in the command, the agent will be in its own Secure Agent group.

You can check the registration status of a Secure Agent using the following command:

```
./consoleAgentManager.sh isConfigured
```

Configure the proxy settings on Linux

If your organization uses an outgoing proxy server to connect to the internet, the Secure Agent connects to IDMC through the proxy server. The Secure Agent installer configures the proxy server settings for the Secure Agent based on settings configured in the browser. Update the proxy server settings from the command line and in the Administrator service.

1. Open a command prompt and navigate to the following directory:

   ```
   <Secure Agent installation directory>/apps/agentcore
   ```

2. Use a shell command that updates the `proxy.ini` file. Contact the network administrator to determine the proxy settings.

   Use the following command to update the `proxy.ini` file:

   ```
   ./consoleAgentManager.sh configureProxy <proxy host> <proxy port> <proxy user name>
   <proxy password>
   ```

3. Log in to IDMC.
4. Open the Administrator Service and select **Runtime Environments**.
5. Select the Secure Agent for which you want to configure a proxy server.
6. On the upper-right corner of the page, click **Edit**.
7. In the **System Configuration Details** section, set the **Service** property to **Data Integration Server** and set the **Type** property to DTM.
8. Add the parameters that you require to any available **JVMOption** field and specify appropriate values for each parameter.

   The following table describes the parameters that you can add:

Parameter	Description
-Dhttp.proxyHost=	Host name of the outgoing HTTP proxy server.
-Dhttp.proxyPort=	Port number of the outgoing HTTP proxy server.
-Dhttp.proxyUser=	Authenticated user name for the HTTP proxy server. This is required if the proxy server requires authentication.

Parameter	Description
-Dhttp.proxyPassword=	Password for the authenticated user. This is required if the proxy server requires authentication.
-Dhttps.proxyHost=	Host name of the outgoing HTTPS proxy server.
-Dhttps.proxyPort=	Port number of the outgoing HTTPS proxy server.
-Dhttps.proxyUser=	Authenticated user name for the HTTPS proxy server. This is required if the proxy server requires authentication.
-Dhttps.proxyPassword=	Password for the authenticated user. This is required if the proxy server requires authentication.

Example for HTTP

```
JVMOption1=-Dhttp.proxySet=true
JVMOption2=-Dhttp.proxyHost=localhost
JVMOption3=-Dhttp.proxyPort=<http port>
JVMOption4=-Dhttp.proxyUser=<proxy_user_name>
JVMOption5=-Dhttp.proxyPassword=<proxy_password>
```

Example for HTTPS

```
JVMOption1=-Dhttp.proxySet=true
JVMOption2=-Dhttp.proxyHost=localhost
JVMOption3=-Dhttp.proxyPort=<http port>
JVMOption4=-Dhttp.proxyUser=<proxy_user_name>
JVMOption5=-Dhttp.proxyPassword=<proxy_password>

OR

JVMOption1=-Dhttps.proxySet=true
JVMOption2=-Dhttps.proxyHost=localhost
JVMOption3=-Dhttps.proxyPort=<http port>
JVMOption4=-Dhttps.proxyUser=<proxy_user_name>
JVMOption5=-Dhttps.proxyPassword=<proxy_password>
```

9. Click **Save**.

   The Secure Agent restarts to apply the settings.

CHAPTER 4

Connection Configuration

When you create a data profiling task, you need a connection to the source object. You can create a connection in Administrator service.

For most connection types, when you configure a connection, you specify the runtime environment for the connection. The runtime environment must contain an agent that is running when you configure the connection. For other connection types, you specify the runtime environment when you configure the task.

This section includes general information about setting up a connection. For more information about connections and for specific information about configuring Flat File and FTP connections, see *Connections*. For specific information about other connection types, see the Data Integration Connector topics in the **Connectors** section of the Data Integration help.

Configuring a connection

You can configure a connection on the **Connections** page in Administrator service.


To access the **Connections** page, in Administrator, select **Connections**.

1. Configure the following connection details:


Connection detail	Description
Connection Name	Name of the connection. Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + - Maximum length is 100 characters. Connection names are not case sensitive.
Description	Description of the connection. Maximum length is 255 characters.
Type	Type of connection, such as Salesforce or Oracle.

2. Configure the connection-specific properties. For example, if this is a Flat File connection type, enter the runtime environment to be used with the connection, the directory where the flat file is stored, the date

format for date fields in the flat file, and the code page of the system that hosts the flat file. The following image shows the property fields for a flat file connection:

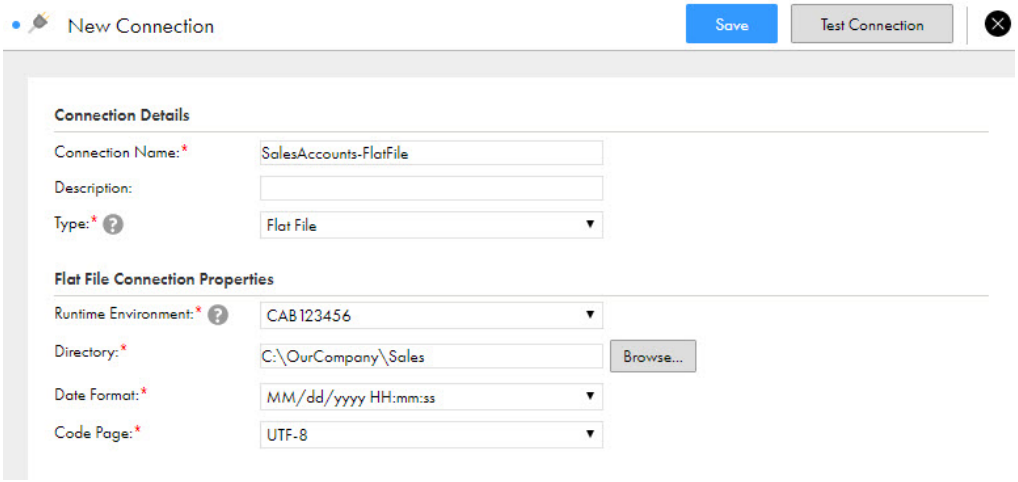

3. To test the connection, click **Test**. The results of the test display on the page, as shown in the following image:

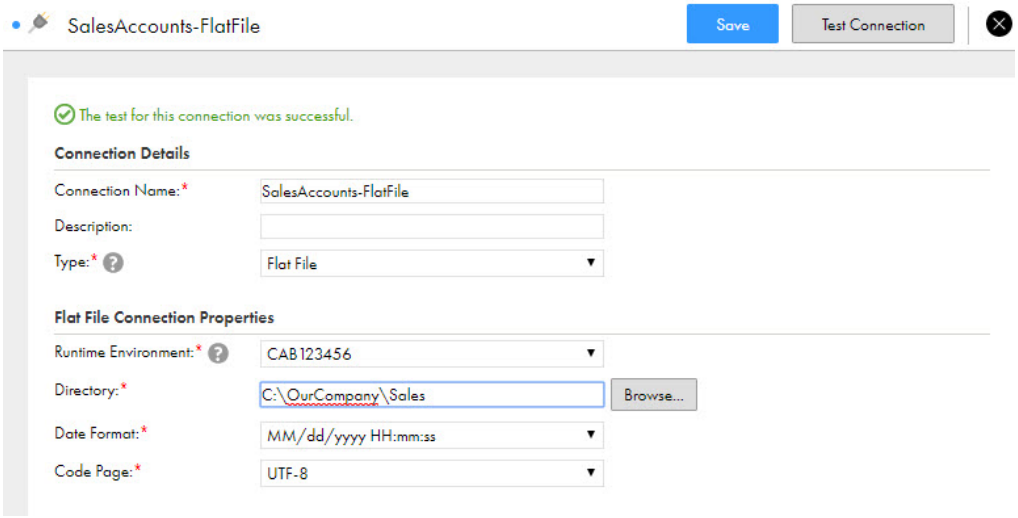

If a database connection fails, contact the database administrator.

4. Click **Save** to save the connection.

Object search and selection

You can search for the source object when you select a connection for a data profiling task.

When you search for an object, the **Select Object** dialog box displays the first 200 objects available for the connection. You can select one of the objects or you can enter a search string. To begin a search, click **Search** or press **Enter**.

A search returns a maximum of 200 objects. If your search returns 200 objects without displaying the object that you want to use, enter a more specific search string.

You can use the object search at any time, but you must use the object search when the selected connection returns more than 200 objects.

Use the following guidelines when you enter a search string:

- Use an asterisk (*) as a wildcard character.
- Use quotation marks (") to perform an exact search. An exact search is case-sensitive.
- You can use the following search parameters based on the connection type:

Connection type	Search parameters
Databases	Name
Flat File	Name

CHAPTER 5

Project Setup

Create projects and project folders on the **Explore** page to organize your assets. After you have set up the runtime environment and connections that are required for a project, you can create the assets for the project.

The **Explore** page does not support the following characters:


```
# ? ` | { } " ^ & [ ] / \
```

Do not use these characters in project, folder, asset, or tag names.


Creating projects and project folders

Projects can contain multiple folders that you can use to organize the assets used in the project. Create projects using the **Explore** page.

To create a project, go to the **Explore** page and select to explore by projects and folders, and then click **New Project**.

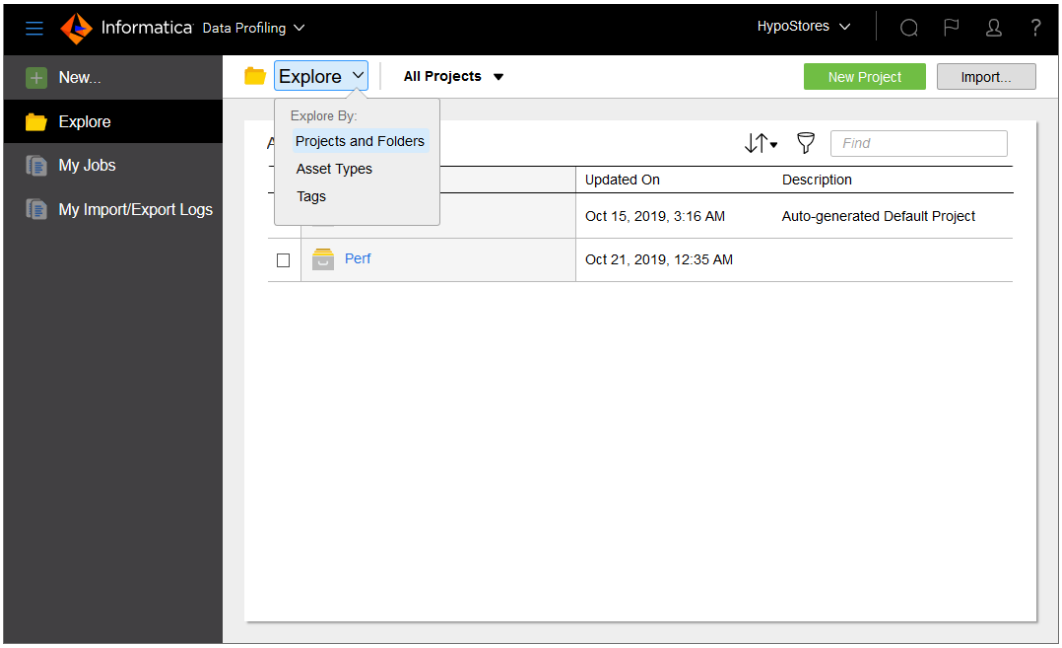

To create a project folder, go to the **Explore** page and open the project, and then click **New Folder**.

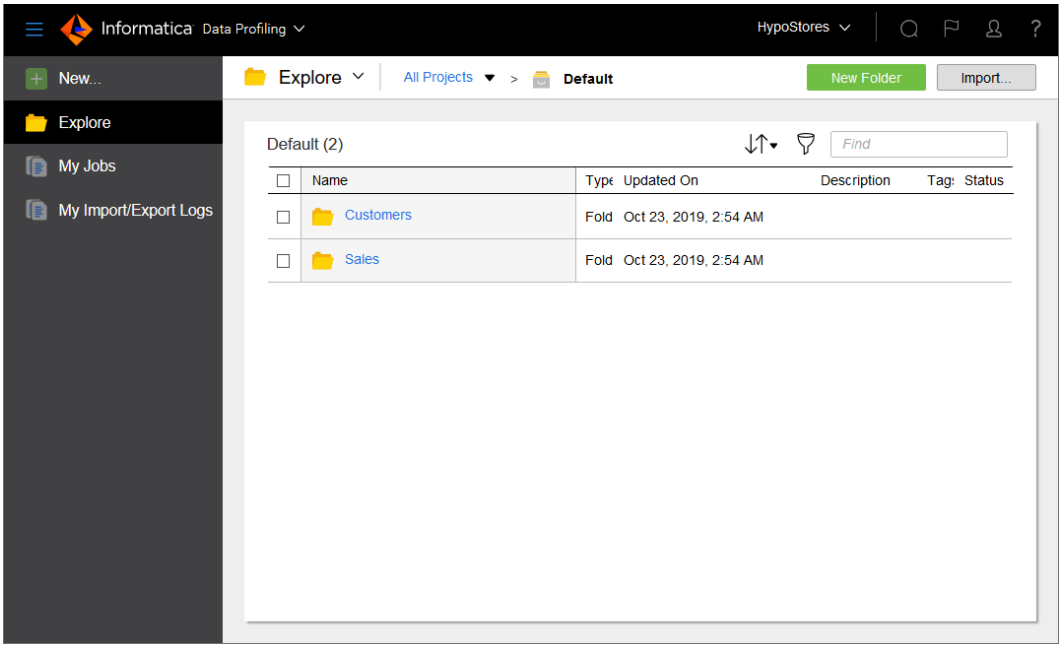

You can create one level of folders in a project. You cannot create folders within folders.


For more information about working with projects, see *Asset Management*.

Creating assets

You can create data profiling tasks in Data Profiling. You can create and run a data profiling task on a data source to determine the quality of data and understand the completeness, conformity, and consistency of data.

To create a data profiling task, click **New** and then select **Data Profiling Task**.

The following image shows the **New** dialog box:

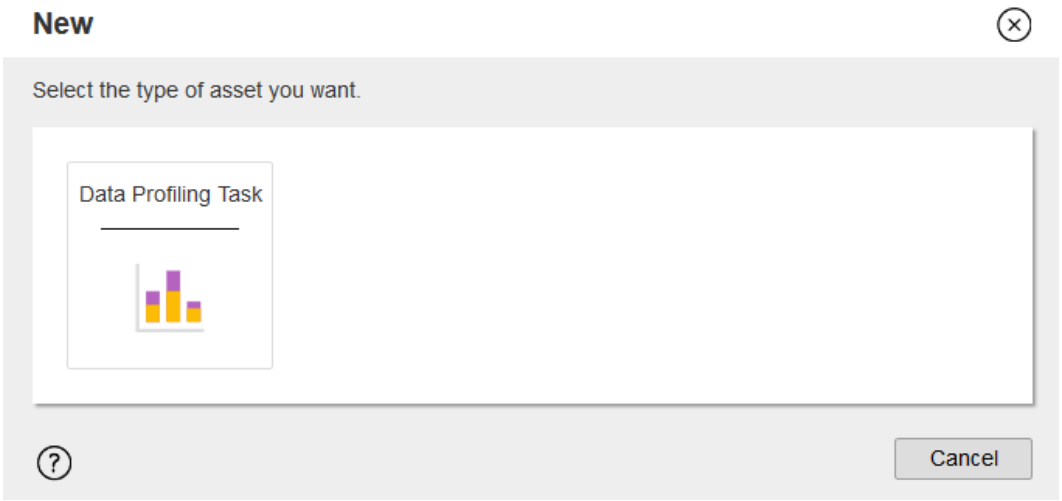

For more information about creating a data profiling task, see *Data Profiling*.

CHAPTER 6

Editing your user profile

Your user profile contains the details of your IDMC user account.

You can update the following information in your profile:

- First and last name
- Job title
- Email address
- Phone number
- Time zone (used in the job execution time stamps on the **All Jobs**, **Running Jobs**, **My Jobs**, **Import/Export Logs**, and **My Import/Export Logs** pages)
- Password
- Security question and answer

Note: If you use SAML to log in to IDMC and your organization administrator has enabled SAML group and role mapping on the **SAML Setup** page in Administrator, you can update the time zone attribute. Your enterprise directory updates the other attributes directly each time you log in to IDMC.

1. Click the **User** icon in the top right corner of the IDMC window and then select **Profile**.
2. On the **Profile** page, add or edit personal information such as your name, job title, phone number, and time zone.
3. To update your email address, click **Update Email**.

   IDMC sends a verification email to your new email address. The email contains a link that is valid for 24 hours. When you click the link in the email, IDMC verifies the new address, and it appears in your profile. If the link expires, you can resend the verification email.
4. Optionally, change your password or security question.
5. Click **Save**.

CHAPTER 7

Switching to a different organization

If you are an administrator in a parent organization or a user in a parent organization that has privileges to view sub-organizations, you can switch among organizations. You do not have to log out and log back in to IDMC.

Note: If you switch from a parent organization to a sub-organization, you can't perform the following operations in the sub-organization:

- Create or import data transfer tasks
- Create or import dynamic mapping tasks
- Create, validate, publish, and run taskflows
- Export and import taskflows

To switch to a different organization:

▶ From the **Organization** menu in the upper right corner, select the organization that you want to view.

INDEX

A

allowlist
  Secure Agent domains 13, 17
  Secure Agent IP addresses 13, 17
assets
  creating 25

B

browser
  requirements 7

C

connections
  configuring properties 21
  creating 21
  testing 21
creating
  assets 25
  folders 24
  projects 24

D

directories
  configuring Secure Agent login to access 15

E

email addresses
  for notification 26

F

firewall
  configuration 13, 17
folders
  creating 24

G

getting started
  activities 6

I

Internet Explorer 11
  requirements 7

L

Linux
  configuring proxy settings 19
lookups
  searching in a task wizard 22

O

object search
  in a task wizard 22
organizations
  switching to another organization 27

P

passwords
  changing 26
POD
  how to identify 13, 17
Product Availability Matrix 7
profiles
  editing 26
projects
  creating 24
  creating folders 24
proxy settings
  configuring on Linux 19

R

requirements
  browser 7
  Internet Explorer 11 7
  Product Availability Matrix 7
  Secure Agent 12, 16
runtime environments
  configuring 6

S

search
  for objects for a task wizard 22
Secure Agent groups
  definition 6

Secure Agent Manager
launching 12
Secure Agents
communication port 13, 17
configuring a Windows service login 15
definition 6
domains allowlist 13, 17
installing on Linux 18
installing on Windows 13
IP address allowlist 13, 17
permissions on Linux 17
permissions on Windows 13
registering on Linux 18
registering on Windows 13
requirements on Linux 16
requirements on Windows 12
starting on Windows 12
security questions
editing 26
sources
searching in a task wizard 22
sub-organizations
switching to another organization 27
system requirements 7

T

targets
searching in a task wizard 22
time zones
changing user profile 26

U

user profiles
editing 26

W

Windows service
configuring Secure Agent login 15