Informatica® Intelligent Data Management Cloud

October 2026

Administrator What's New

Informatica Intelligent Data Management Cloud Administrator What's New
October 2026

© Copyright Informatica LLC 2019, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-11-02

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- IDMC Communities 5
- IDMC Marketplace 5
- Data Integration connector documentation 6
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- IDMC Pulse Dashboard 6
- Informatica Global Customer Support 6

Chapter 1: October 2026 7

Changelog October 2026 7

Important notices and upcoming changes 7

New features and enhancements 9

Changed behavior 11

Chapter 2: July 2026 13

Changelog July 2026 13

Important notices 13

- Secure Agent changes 14

Changed behavior 14

Chapter 3: April 2026 15

Changelog April 2026 15

Important notices 16

New features and enhancements 17

Changed behavior 18

Chapter 4: October 2025 21

Important notices 21

New features and enhancements 22

Changed behavior 23

Chapter 5: July 2025 25

Important notices 25

New features and enhancements 25

Changed behavior 27

Chapter 6: May 2025 29
Important notices 29
Changed behavior 29

Chapter 7: Upgrade 30
Preparing for the upgrade 30
Disk space requirements and file preparation 30
Updated requirements for elastic runtime environments 31
Advanced clusters on AWS 31

Index 35

Preface

Read *Administrator What's New* to learn about new features, enhancements, and behavior changes in the Administrator service for the October 2026 release. You can also learn about upgrade steps that you might need to perform.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

October 2026

The October 2026 release of IDMC Administrator includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 29,2026	Added	"America/Winnipeg time zone" on page 9
October 22, 2026	Added	"Dropped support" on page 8
October 8, 2026	Added	"OData query parameter restrictions" on page 11
October 1, 2026	Modified	"Git repository verification" on page 11
September 24, 2026	Added	"Git repository verification" on page 11
September 21, 2026	Modified	"Downloading metering data using REST API" on page 11
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Administrator includes the following important notices and upcoming changes.

Deprecated support

The following functionalities are deprecated:

Redeploying a serverless runtime environment

Effective in the October 2026 release, redeploying a serverless runtime environment is deprecated. Informatica intends to drop support for redeployment in a future release. Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

To update a serverless runtime environment, stop the runtime environment, edit it, and restart it. If the runtime environment fails or encounters an error, resolve the error and save the runtime environment to automatically restart it. For more information about stopping and starting a serverless runtime environment, see "New features and enhancements" on page 9.

Session-based authentication

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use REST V2 Connector to call IDMC APIs.

Source control repository access using Azure DevOps OAuth

Microsoft has deprecated Azure DevOps OAuth and plans to drop support soon. If your organization uses Azure DevOps OAuth to access its source control repository, the organization needs to switch to Microsoft Entra ID OAuth to prevent source control interruptions.

Note that Azure DevOps source control isn't going away. You can still use an Azure DevOps repository. Only the application that you use for repository access is changing.

An administrator can update the organization to use Microsoft Entra ID OAuth on the **Settings** page in Administrator. After the administrator switches the organization's repository access to Microsoft Entra ID OAuth, users can continue to use source control without any immediate action. However, each user needs to refresh their access token before support for Azure DevOps OAuth is dropped to avoid interruption in source control access. To refresh the token, click the User icon on the toolbar and select **Settings**. In the **Source Code Control Credentials** section, click **Drop Authentication** and then reconfigure OAuth authentication.

Note: After an organization switches to Microsoft Entra ID OAuth, it can't revert to using Azure DevOps OAuth.

Dropped support

Effective in the October 2026 release, Informatica drops support for HTTP/1.0.

All HTTP 1.0 requests receive an HTTP status code 426. To prevent this error, use HTTP/1.1 or later.

Upcoming change

We want to let you know that starting in an upcoming release, JWT authentication token values will be limited to a maximum of 2000 characters.

New features and enhancements

The October 2026 release of Administrator includes the following new features and enhancements.

America/Winnipeg time zone

You can use the America/Winnipeg time zone to schedule jobs through the IDMC user interface or REST API.

Starting November 1, 2026, Manitoba will observe Central Daylight Time (UTC-5) as a permanent, year-round time zone. If you have schedules that use the America/Chicago time zone, re-save them in the America/Winnipeg time zone so that your jobs continue to run at the correct local time after November 1, 2026.


For information about editing a schedule through the IDMC user interface, see Schedules.

For information about updating a schedule's time zone through the REST API, see Schedules in the *REST API Reference*.

Deployment ID

The Licenses page now displays the deployment ID for your organization. The deployment ID is a unique identifier for your organization hierarchy and is the same across your linked organizations. Use the deployment ID to compare consumption metrics from your IDMC metering dashboard with the IPU consumption reported in Salesforce.

The following image shows the Deployment ID property on the Licenses page:

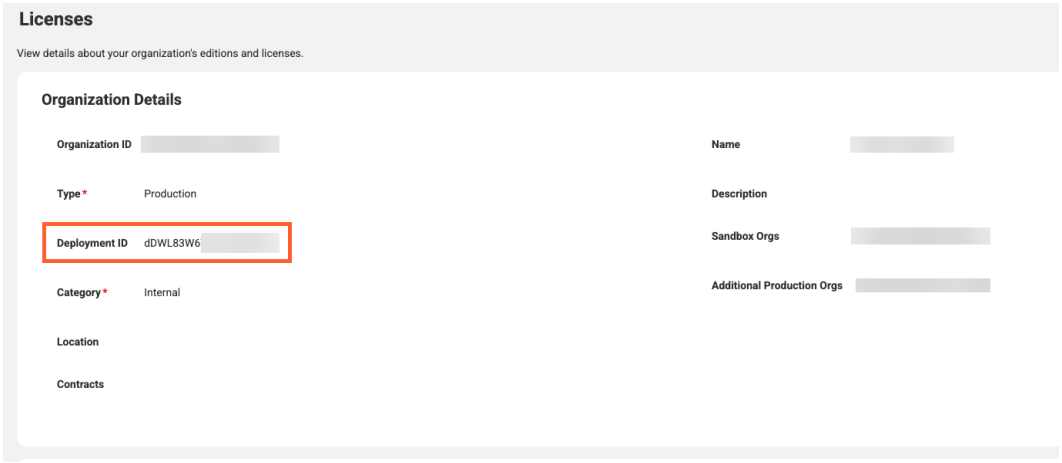

Elastic runtime environments

Elastic runtime environments include the following new features and enhancements:

- Flexible EFS directory projection for data storage. Organize your EFS data storage using any directory structure. You can now specify custom projected file paths in your environment configuration to route files to the appropriate paths within your Kubernetes Pods.
- Enhanced security with IMDSv2. Elastic runtime environments now enforce IMDSv2 (Instance Metadata Service Version 2) with a hop limit of 2 on both custom AMIs and master nodes.

- Improved reliability, security, and monitoring. Elastic runtime environments include improved cluster stability, clearer monitoring metrics, and better lifecycle management:
  - Installation messaging is more accurate.
  - Monitoring graphs separate master and worker node counts.
  - Configuration updates now avoid unnecessary node rotations when AMIs remain unchanged.
  - Updated kernel requirements ensure full compatibility with underlying Kubernetes components.
  - Expanded access controls, certificate validation, and automated cleanup routines improve cluster security and master node recovery.

For information about updating custom AMIs, see "Updated requirements for elastic runtime environments" on page 31.

Security audit log events

In addition to existing login and session events, the audit log now captures the following events:

- Failed login attempts
- Account lockouts
- Agent login failures
- Password changes
- IP whitelisting
- User group updates
- User role updates
- Organization attribute updates
- Organization name changes
- Password requirement changes
- Password reuse policy changes
- Password expiration policy changes
- Email notification changes
- CLAIRE preferences changes
- Organization environment type changes

These new events give administrators more visibility into security-related changes.

Stopping and starting a serverless runtime environment

You can now stop and start a serverless runtime environment to make platform configuration changes and bring the environment back online with its updated settings. You can also stop a serverless runtime environment to reduce costs during periods of inactivity.

Swagger files

The Swagger Files page is updated and reorganized for improved usability.

Large repositories in GitHub

You can now check in large repositories in GitHub. These are projects containing 500 or more assets in a single project or folder.

To enable this feature, you need to accept new permissions. If you've configured a GitHub OAuth App for IDMC source control, you may have received an email with a link leading directly to accepting the new permission. If you haven't received this email, follow the directions in the Checking in large repositories in source control Knowledge article.

Changed behavior

The October 2026 release of Administrator includes the following changed behavior.

Downloading metering data using REST API

When you use the version 3 metering resource to download usage data, the REST API can't export a ZIP file greater than 50 MB.

Previously there was no size limit, which could cause OutOfMemory errors.

Elastic RTE Manager role

We renamed the existing Elastic RTE Manager role, which was previously named Elastic RTE Dev Ops Engineer.

Field name changes in ClusterConfig API calls

In ClusterConfig API calls, the following field names were changed in the systemDiskConfig and dataDisksConfig objects:

- sourceMount is now sourceFilePath
- targetMount is now projectedFilePath

Fingerprint authentication always on

IDMC performs a fingerprint authentication check every time a Secure Agent starts up and sends an alert to the notifications tray when there's a mismatch.

Previously, you could turn off fingerprint authentication checks and IDMC sent mismatch alerts by email only.

Git repository verification

When you use an on-premise Git repository for source control, IDMC saves a local copy of the repository. To ensure that the correct repository is used, IDMC now verifies that the saved copy matches the repository that you request during a source control operation.

After the October 2026 upgrade, the first time you connect to a repository that was saved before the upgrade, IDMC creates a fresh copy instead of reusing the cached repository. This process can take extra time depending on the size of the repository and your network speed. Subsequent connections use the new copy as usual. IDMC doesn't delete the old saved copies automatically. Administrators can clear the old copies from the cache to free up disk space.

Master node requirements for elastic runtime environments

To set up an elastic runtime environment, the master node needs 60 GB of free disk space to account for additional libraries. Previously, the master node needed 50 GB.

Multi-factor authentication by default

IDMC enables multi-factor authentication by default for native human users in new organizations.

OData query parameter restrictions

If you have custom scripts or integrations that call OData endpoints directly, note that new restrictions apply to the following query parameters:

- `$top`, which limits the number of records returned per request
- `$select`, which controls which fields are returned

Note: This change doesn't affect use of IDMC APIs. The IDMC REST API has its own independent limits which are not changed

Review the restrictions below to avoid HTTP 400 errors or unexpected result truncation after the upgrade to the October 2026 release:

$select=* is no longer accepted

Requests that use `$select=*` to retrieve all fields now return an HTTP 400 error. This applies to all OData entities with no exceptions. Replace `$select=*` with an explicit list of the fields your integration requires. For example, use `$select=id,name` instead of `$select=*`.

$top values are subject to per-entity maximums

Each OData entity now has a configured maximum number of records that a single request can retrieve. If your request specifies a `$top` value that exceeds this maximum, the request might return a truncated result set or fail with an HTTP 400 error, depending on the enforcement configuration applied to that entity. In most cases, requests that omit `$top` are also capped to the entity maximum. Previously, many requests without an explicit `$top` returned the full result set. Review `$top` values in your queries. If your integration relies on receiving a complete, unpaginated result set by omitting `$top`, update it to use pagination or an explicit `$top` value within the entity limit.

The following data types are unaffected by this change:

- Job log entries
- Audit log entries
- Notification messages
- Users and groups

Password confirmation for email updates

When users update their email address, they are now required to enter their current password to initiate the change.

Previously, no password confirmation was needed to update an account's email address.

Resetting users

You can reset disabled SAML users who were not provisioned using SCIM.

Previously, the option to reset a user wasn't available for organizations configured to use SAML.

Scraping Secure Agent details

The Secure Agent details page changed in the October 2026 release. If you employed web scraping to extract information from this page, you must update the scraping script for the new user interface.

CHAPTER 2

July 2026

The July 2026 release of IDMC Administrator includes the following updates.

Changelog July 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
July 16, 2026	Added	"Secure Agent changes" on page 14
July 16, 2026	Added	"Upcoming change" on page 14
June 11, 2026	Initial publication	

Important notices

The July 2026 release of Administrator includes the following important notices.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use API Manager or if you use REST V2 Connector to call IDMC APIs. API Center, which replaces API Manager, supports JWT authentication.

Upcoming change

We want to let you know that starting in the October 2026 release or later, JWT authentication token values will be limited to a maximum of 2000 characters.

Secure Agent changes

The July 2026 release of Administrator includes the following changes to the Secure Agent and its services.

The Secure Agent version remains unchanged at 76.17. To use the July 2026 version of IDMC, your Secure Agent version must be currently at version 76.17.

The Data Integration Server version is changed to 77.x.

Changed behavior

The July 2026 release of Administrator includes the following changed behavior.

Creating a user with the REST API

When you create a user with the version 3 users resource, you must include the identityType in the request when multi-factor authentication is enabled.

Previously, the identityType attribute wasn’t required.

Bitbucket configuration fields

The following field labels for Bitbucket authentication were changed on the **Settings** page:

- The **User Name** field is now named **Bitbucket Email Address**.
- The **App Password** field is now named **Bitbucket API Token**.

REST API project and folder DELETE requests

When you send a REST API request to delete a project, IDMC validates that the ID or name included in the request is a project ID or name. If the ID or name is for a folder or asset, you receive an error.

Similarly, when you send a REST API request to delete a folder, IDMC validates that the ID or name included in the request is a folder ID or name. If the ID or name is for a project or asset, you receive an error.

Previously, IDMC didn't validate that the ID or name in a request to delete a project or folder was the appropriate object type for the request.

CHAPTER 3

April 2026

The April 2026 release of IDMC Administrator includes the following updates.

Changelog April 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
June 1, 2026	Added	"Preview initiated" on page 17
April 30, 2026	Added	"Permission-based connection access" on page 18
April 20, 2026	Deleted	Ability to preserve logs for completed processes.
April 10, 2026	Added	"Authentication type" on page 20
April 10, 2026	Added	"Advanced configuration asset privilege" on page 19
April 10, 2026	Added	"Advanced clusters on AWS" on page 31
April 2, 2026	Added	"Platform REST API" on page 18
April 2, 2026	Modified	"Deprecated support" on page 16
March 27, 2026	Added	"Support for dynamic dispatch queue configuration on Secure Agents" on page 19
March 27, 2026	Added	"Enhanced metering reports" on page 17
March 19, 2026	Modified	"Deprecated support" on page 16

Publication Date	Type of Change	Section Title
March 19, 2026	Added	"Bitbucket source control repositories" on page 19
March 19, 2026	Modified	"Bitbucket source control repositories" on page 16
March 19, 2026	Added	"Elastic runtime environments" on page 20
March 11, 2026	Initial publication	

Important notices

The April 2026 release of Administrator includes the following important notices.

Advanced clusters upgrade to Kubernetes 1.34

The April 2026 release upgrades advanced clusters to use Kubernetes 1.34. If you use an advanced cluster on AWS and use custom master and worker roles, update the IAM policies before the upgrade.

For more information, see "Advanced clusters on AWS" on page 31

Bitbucket source control repositories

Bitbucket has deprecated app passwords and replaced them with API tokens. Bitbucket will no longer accept app passwords for repository access starting June 9, 2026. This change affects the source control authentication information that you enter in IDMC.

For more information, see "Changed behavior" on page 18.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in the October 2026 release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs used for user authentication with JSON Web Tokens (JWT). The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. If the administrator enables the JSON Web Token (JWT) authentication type, browser-based user interface communications seamlessly use JWT behind the scenes.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, REST API scripts must be updated to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the July 2026 release, JWT will be the default authentication method. By October 2026, session-based authentication will no longer be available.

Note: Effective in the April 2026 release, B2B Gateway supports JWT authentication. Don't enable JWT authentication if you use API Manager or if you use REST V2 Connector to call IDMC APIs. API Center, which replaces API Manager, supports JWT authentication.

Preview initiated

Effective in the April 2026 release, the ability to enable Application Integration and API Center in an elastic runtime environment is available for preview.

For more information, see the Auto-scaling Process Server using Kubernetes orchestration and Manage APIs in an elastic runtime environment on Kubernetes Knowledge Base articles.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

New features and enhancements

The April 2026 release of Administrator includes the following new features and enhancements.

Elastic runtime environments

You can perform the following configurations for elastic runtime environments:

- Use a custom AMI to start up master and worker nodes by specifying an AMI ID in the elastic runtime environment properties.
- Enable load balancing and high availability for the Data Integration Server by editing the Data Integration Server properties to start up more than one Data Integration Server application.
- Configure the number of cores and the amount of memory to reserve for the Data Integration Server and the jobs that run in the elastic runtime environment by editing the Data Integration Server properties.
- Effective in the April 2026 release, the ability to enable Application Integration and API Center in an elastic runtime environment is available for preview.
  For more information, see the Auto-scaling Process Server using Kubernetes orchestration and Manage APIs in an elastic runtime environment on Kubernetes Knowledge Base articles.

  Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

For more information about elastic runtime environments, see *Runtime Environments*. For more information about the Data Integration Server, see *Secure Agent Services*.

Enhanced metering reports

The **Metering** page provides the following additional details to group and analyze the IPU usage for assets that are maintained in Cloud Application Integration:

- Project name
- Folder name

- Asset name
- Asset type

For more information, see *Organization Administration*.

Platform REST API

You can validate whether a JWT session is valid by including the JWT value in the following API request:

```
/api/v2/user/validSessionId
```

For more information, see *REST API Reference*.

Serverless runtime environments

A serverless runtime environment using AWS PrivateLink for service network endpoints can run mappings in advanced mode.

For more information, see *Runtime Environments*.

Support for metering tags for Application Integration assets

You can create and assign metering tags for Application Integration assets to organize and track IPU usage across various departments, projects, or initiatives. You can assign the tags to projects, folders, and assets.

After assigning metering tags to assets, you can view your IPU usage by metering tag on the **Tag Breakdown** tab on the **Metering** page.

For more information, see *Organization Administration*.

Administrator introduction video

The **Administrator Overview** video introduces all the components within Administrator.

You can access this video using either of the following methods:

From the Documentation portal

1. Open **Administrator** from the Informatica documentation portal.
2. Select the **Videos** tab.
3. Click **Administrator Overview**. This should be the first video in the list.

From YouTube

The video is located here: https://bit.ly/46GQM3P

Changed behavior

The April 2026 release of Administrator includes the following changed behavior.

Permission-based connection access

Informatica enforces connection-level permissions for listing and selecting connection assets. You can now granularly control who can view, edit, or delete specific connections based on the permissions. This update improves security and access control by restricting visibility and access to connection assets based on your assigned permissions, preventing unauthorized users from viewing or using connections.

Previously, you could see the names of all connections in the organization, even if you didn't have specific permissions for those connections.

For more information about the required permissions, see Permissions in the Administrator help.

Bitbucket source control repositories

If your organization uses a Bitbucket email address and API token for authentication, enter the following source control authentication information in the IDMC user settings page:

- **User name**. For cloud-hosted repositories, enter the email address associated with the Bitbucket repository.
  Previously, you entered a Bitbucket user name.
- **App password**. For cloud-hosted and on-premises repositories, enter the Bitbucket API token.
  Previously, you entered the Bitbucket app password.

The field labels in the IDMC user interface will change accordingly in an upcoming release.

Note: When you create a Bitbucket API token for IDMC, be sure to select the following scopes:

- read:workspace:Bitbucket
- read:project:Bitbucket
- read:pullrequest:Bitbucket
- read:repository:Bitbucket
- read:user:Bitbucket
- write:pullrequest:Bitbucket
- write:repository:Bitbucket

For more information about Bitbucket API tokens, see the Bitbucket documentation.

Advanced configuration asset privilege

The asset privilege that allows users to create, read, update, delete, or run advanced configurations has been renamed to Advanced Configuration.

Previously, the privilege was named Elastic Configuration.

Critical notifications

Administrators can't opt out of notifications from the Critical Notifications category. Critical notifications include updates for the organization and network, operational changes that impact service availability, and release information that requires user action.

Previously, administrators were encouraged to stay opted in to these notifications but had the ability to opt out.

For more information, see *User Administration*.

Support for dynamic dispatch queue configuration on Secure Agents

If Process Server runs on a Secure Agent, you can enable the dispatch service to dynamically create dispatch queue configurations and avoid deadlocks.

To enable dynamic dispatch queue configuration, in the **Custom Configuration Details** section of the agent details page, add the **useDynamicDispatchService** property and set the value to true.

Previously, you used the dispatch service to manually create dispatch configurations that throttle requests made to the Process Server.

For more information, see *Secure Agent Services* in the Administrator help.

Elastic runtime environments

Elastic runtime environments have the following changes:

- The environment variables in the config.txt file have been updated to improve cluster deployment.
- You need sudo access to install and uninstall the cluster on the master node. Previously, you could run commands to install and uninstall the cluster without sudo access.
- To install the cluster, you now run `sudo ./cluster-installer.sh` instead of `./create_cluster_nodes_ha.sh`.
- You need to run the cluster installer in the foreground. Previously, you could run the cluster installer in the background if you didn't configure proxy server settings.
- When you run the cluster installer, it prompts you for your IDMC user name, IDMC password, certificate path, and proxy password. Previously, it prompted you for only the proxy password if you configured proxy server settings.

For more information, see *Runtime Environments*.

IPU consumption alerts

You can now assign the *metering.admin* privilege to allow users to edit IPU consumption alerts.

Previously, only users with the Administrator role could edit the IPU consumption alerts.

REST API getting Secure Agent basic information

When using the `/api/v2/agent` API call to get agent details, the information returned no longer includes package and configuration details by default. To include this information, add the request parameter `basicinfo=true` to the API call.

For example, the following API call returns details for all Secure Agents in the organization, including package and configuration information:

```
/api/v2/agent?basicInfo=true
```

Resetting a user with SAML single sign-on

The **Reset** option on the **Users** page is no longer available if Intelligent Data Management Cloud is configured to use SAML single sign-on. For password assistance in this instance, contact your SAML administrator.

Organization settings

In Administrator, the following settings have been moved from the **Organization** page to the **General** tab of the **Settings** page:

- Authentication
- Data Integration Service
- Enterprise Data Catalog

For more information, see the *Organization Administration* guide.

Authentication type

Users with a role that includes the privilege to view organization information in Administrator can view the authorization type on the **Settings** page. Previously, only users with the Admin role could view the authorization type.

CHAPTER 4

October 2025

The following topic provides information about the behavior change in the October 2025 release of IDMC Administrator.

Important notices

The October 2025 release of Administrator includes the following important notices.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in the October 2026 release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs used for user authentication with JSON Web Tokens (JWT). Organization administrators have the option to use either session-based authentication or JWT-based authentication on the **Settings** page in Administrator. When JWT authentication is enabled, browser-based user interface communications seamlessly use JWT behind the scenes.

For REST API calls, session IDs must still be included in request headers. However, now the session value carries a JWT with a fixed expiry time configured on the **Settings** page. As a result, REST API scripts must be updated to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

In the October 2025 release, session-based authentication is the default. In the April 2026 release, JWT is the default authentication method. By October 2026, session-based authentication will no longer be available.

Note: If your organization uses B2B Gateway, API Manager, or the REST V2 Connector, don't select the JWT option in the October 2025 release. The JWT option for B2B Gateway and REST V2 Connector will be available in a future release.

New features and enhancements

The October 2025 release of Administrator includes the following new features and enhancements.

CLAIRE Copilot feature privilege for Data Integration and Data Ingestion and Replication

You can assign the Data Integration feature privilege "Access Data Integration Copilot" to allow roles to use CLAIRE Copilot for Data Integration and Data Ingestion and Replication. The privilege is automatically assigned to the Admin, Designer, and Monitor system-defined roles. The Admin and Designer roles can create and summarize assets. The Monitor role can't create assets but it can summarize assets.

Elastic runtime environments

You can perform the following tasks for elastic runtime environments:

- Download the cluster installer from Administrator.
- Use AWS Secrets Manager to retrieve connection credentials.
- Edit the environment configuration to update a deployed elastic runtime environment.
- Disable and re-enable high availability. Previously, if you enabled high availability, it couldn’t be disabled.
- Run scripts in an elastic runtime environment by specifying a script path.
- Run a REST API to retrieve, update, and delete a supplementary file specification using the URI `/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig`. You can upload the following supplementary files to an elastic runtime environment:
  - Database drivers
  - Native libraries and executables
  - JAR files and Java libraries for the Java transformation
  - SSL/TLS certificates and keystores
  - SAP connectivity drivers and libraries
- View the following details in the user interface for an elastic runtime environment:
  - A lifecycle graph that shows the number of worker nodes in the elastic runtime environment over time.
  - A list of jobs that were submitted to the elastic runtime environment.
  - A list of images that the elastic runtime environment uses.
- Run a script to clean up both AWS and Kubernetes resources. Previously, you needed to manually delete AWS resources.

Note: The cluster installer and worker policies have an updated set of permissions. To view the updated policies, see *Runtime Environments*.

For more information about elastic runtime environments, see *Runtime Environments*. For more information about REST APIs, see *REST API Reference*.

Filter notifications by category and subcategory

On the **Notifications** page, you can filter by category and subcategory.

For more information, see *User Administration*.

Multi-factor authentication

Multi-factor authentication is available for native human users who log in to IDMC. You can enable multi-factor authentication on the **Organization** page and then categorize users as human users on the **Users** page.

When multi-factor authentication is enabled, native human users receive a verification code through email when they log in to the user interface. Non-human users can continue running APIs with no disruption.

For more information, see *Organization Administration* and *User Administration*.

REST API authentication type

You can now use JWT-based authentication instead of session-based authentication for REST API calls. You can choose to change the authentication type on the **Organization** page in Administrator. For more information, see "Important notices" on page 21.

Runtime status parameter

You can use the new *includeAllImageStates* query parameter in Platform REST API version 3 to retrieve runtime staus.

Schedules page enhancements

The **Schedules** page includes the following enhancements:

- Descriptions appear on the main page.
- A search bar is available to find schedules by name and description.

Serverless runtime environments

You can create a serverless runtime environment using AWS PrivateLink for service network endpoints. It uses a resource share to connect to data sources through your AWS account.

This feature is in preview for select customers, with general availability in November 2025.

For more information, see *Runtime Environments*.

Set the default service for user groups and individual users

You can determine the service that opens after a user logs in. You can set the default service for user groups or individual users. Users can override this setting by choosing their own default on the **My Services** page.

Changed behavior

The October 2025 release of Administrator includes the following changed behavior.

SQL ELT name

The Advanced Pushdown Optimization meter is now called SQL ELT.

PMExtProcDir

Use the PMExtProcDir variable to specify the directory for external procedures when you define the OSProfileUserMappingFile Data Integration Server property.

Previously, this variable was incorrectly named PmExtProcDir, which uses a lower case "m". If you use PmExtProcDir, the value is ignored.

Downloading a Secure Agent

In Runtime Environments, the **Download Secure Agent** button is renamed to **Download Runtime Installer** and the **Generate Install Token** button is removed.

You can obtain new install tokens using **Download Runtime Installer.**

For more information, see *Runtime Environments*.

Unified metering for B2B Gateway and Industry Solutions

You can view metering information for both B2B Gateway and Industry Solutions in the new unified **B2B & Industry Solutions** section on the **Metering** tab of Administrator. The new meter provides a centralized and simplified way to track the consumption for B2B Gateway and Industry Solutions.

Previously, metering information for B2B Gateway and Industry Solutions appeared under their own sections.

For more information, see *Organization Administration*.

CHAPTER 5

July 2025

The following topic provides information about the behavior change in the July 2025 release of IDMC Administrator.

Important notices

The July 2025 release of Administrator includes the following important notices.

Preview initiated

Effective in the July 2025 release, the following features are available for preview:

Creating connections in Data Integration when your organization uses a secrets manager

Effective in the July 2025 release, the capability to create connections in Data Integration when your organization uses an external secrets manager is available for private preview.

Elastic runtime environments

Effective in the July 2025 release, elastic runtime environments are available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

New features and enhancements

The July 2025 release of Administrator includes the following new features and enhancements.

Metering usage report for Application Integration processes in the Turbo mode

You can download the metering usage reports for Application Integration processes and subprocesses that run in the Turbo mode within an organization. The report includes execution details for processes, subprocesses, guides, and OData APIs.

For more information, see *Organization Administration*.

Elastic runtime environments

An elastic runtime environment is similar to a Secure Agent group, except it uses containers and Kubernetes orchestration to provide elastic scaling to optimize resource management. It is ideal for environments with fluctuating workload demands and the need to control costs. You can quickly deploy this environment in your AWS cloud environment and customize the scaling by adding new nodes or enhancing existing ones.

For more information, see *Runtime Environments*.

Note: Effective in the July release, elastic runtime environments are available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Filtering, sorting, and searching for user groups and roles

When you edit a user, you can filter, sort, and search for available user groups and roles on the user details page so that you can find them more easily.

For more information, see *User Administration*.

New cipher suites supported with TLS 1.3

Informatica now supports Transport Layer Security (TLS) 1.3. This involves supporting the following additonal cipher suites:

- TLS_AES_128_GCM_SHA256
- TLS_AES_256_GCM_SHA384

Ensure that your organization uses at least one of the TLS 1.3 ciphers or supported TLS 1.2 ciphers. For more information, see the following KB article: Change in Cipher Suites for IDMC with TLS 1.3

REST API

The REST API has the following enhancements:

Activity logs

The startTimeUtc and endTimeUtc fields are added to the GET response for the activityMonitor v2 API and to the GET response for the activityLog v2 API when you retrieve information for a specific ID. These fields return the start and end times for a running task or for items in completed jobs for linear taskflows and replication tasks in Coordinated Universal Time (UTC).

File transfer

When you use the upload command to transfer a file to the server using a URL such as `https://<host name>:<port>/fileservers/upload`, you can optionally use the following request parameters:

- generateUniqueId. Set to true to generate and return a unique ID for the file transfer task. Default is false.
- fileMetadata. Metadata related to the file in JSON format.

If you include these request parameters, the response includes the following return parameters, respectively:

- fileUniqueId. Unique ID generated for the file transfer task.
- fileMetadata. Metadata related to the file in JSON format.

Time zones

The America/Santiago time zone is added for REST API calls.

RunAJob utility

You can specify the initial and maximum heap sizes that the RunAJob utility uses to run Java commands.

For more information, see *REST API Reference*.

Secrets manager enhancements

Access to external secrets managers is enhanced in the following ways:

- The Secure Agent can access AWS Secrets Manager using instance profile authentication.
- If you use AWS Secrets Manager, the account that the Secure Agent uses to access secrets can differ from the account in which the secrets are stored as long as both accounts are in the same region.
- If you use AWS Secrets Manager, you can retrieve a secret using the full Amazon Resource Name (ARN).
- When your organization uses an external secrets manager, you can create and view connections in Data Integration when you create or edit a mapping or task. You can also configure the connections to retrieve sensitive credentials from the secrets manager.

  Note: Effective in the July 2025 release, the capability to create connections in Data Integration when your organization uses a secrets manager is available for private preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

For more information, see *Organization Administration*.

SUSE Linux Enterprise 15 Service Pack 6

Informatica now supports SUSE Linux Enterprise 15 SP6.

User access to pre- and post- commands

You can create a user role to control access to pre- and post-command tasks.

For more information, see *User Administration*.

Changed behavior

The July 2025 release of Administrator includes the following changed behavior.

Asset privileges for data services

When you create a custom role with asset privileges for data services in Data Integration, the role allows a user to have permissions to access data services without requiring the user to additionally have the Admin role.

Previously, these permissions took effect only if the user was assigned the Admin role in addition to the custom role.

For more information, see *User Administration*.

Maximum login attempts

The maximum number of incorrect login attempts is now 10. Default is 3. Users who previously had unlimited login attempts now have a maximum of 10 attempts.

Previously, the maximum number of login attempts was unlimited. Default was 10.

For more information, see *User Administration*.

Organization general properties

On the **Organization** page, the general properties include the following changes:

- The values available for the property **Environment Type** are now filtered based on the organization's license. Previously, you could set the property to a value that wasn't available for the license.
- The property **MDM Environment Type** no longer appears.

For more information, see *Organization Administration*.

CHAPTER 6

May 2025

The following topic provides information about the behavior change in the May 2025 release of IDMC Administrator.

Important notices

The May 2025 release of Administrator includes the following important notices.

Email preferences for critical notifications

The option to turn off critical notification emails is available in your user settings. The configuration takes effect in July 2025.

Changed behavior

The May 2025 release of Administrator includes the following changed behavior.

CLAIRE preferences

You can configure CLAIRE preferences for your organization on the **Settings** page.

Previously, the CLAIRE preferences were on the **Organization** page.

For more information, see *Organization Administration*.

Application Integration processes of new organizations run only in Turbo mode

In organizations that are created on or after April 30, 2025, all the Application Integration processes will run only in the Turbo mode. In the **Settings** page of **Administrator**, the option to manually enable the Turbo mode is greyed out and non-editable for these organizations. However, you can enable or disable the Turbo mode for organizations that were created before April 30, 2025.

For more information, see *Organization Administration*.

CHAPTER 7

Upgrade

The following topics provide information about the tasks that you might need to perform before and after the upgrade of IDMC Administrator. Post-upgrade tasks for previous monthly releases are also included in case you haven't performed these tasks after the previous upgrade.

Preparing for the upgrade

Perform the following tasks to prepare for upgrade to the latest release.

Disk space requirements and file preparation

The Secure Agent upgrades the first time that you access the system after the upgrade.

Files that you added to the following directory are preserved after the upgrade:

```
<Secure Agent installation directory>/apps/Data_Integration_Server/ext/deploy_to_main/bin/rdtm-extra
```

Note: After a major release upgrade, the old and new versions of the services might continue to run concurrently for up to 24 hours. Ensure that the Secure Agent machine has sufficient free memory to avoid memory depletion during this period.

Perform the following steps to ensure that the Secure Agent is ready for the upgrade:

1. Ensure that each Secure Agent machine has sufficient disk space and memory available for upgrade.

   The machine must have sufficient available memory to run two Secure Agents simulatenously.

   The machine must have at least 5 GB free space or the amount of disk space calculated using the following formula, whichever is greater:

   ```
   Minimum required free space = 3 * (size of current Secure Agent installation directory - space used for logs directory)
   ```

2. Close all applications and open files to avoid file lock issues, for example:
   - Windows Explorer
   - Notepad
   - Windows Command Processor (`cmd.exe`)

Updated requirements for elastic runtime environments

When you upgrade to the October 2026 release, update your elastic runtime environments to ensure compatibility with the latest requirements.

Perform the following tasks to update an elastic runtime environment:

Update custom AMIs

Ensure that custom AMIs meet the following requirements:

- The operating system is Rocky Linux 10.x.
- IMDSv2 is enabled and the hop limit is set to 2.
- The kernel can load the following modules:

  br_netfilter

  nf_conntrack

  nfs

  nfsv4

  overlay

  vxlan

Previously, custom AMIs were required to use Rocky Linux 9.x, IMDSv2 had to be disabled, and only the br_netfilter and overlay modules were required.

Reserve additional disk space for the master node

Ensure that the master node has a minimum of 60 GB of free disk space to account for additional libraries.

Note: Previously, the master node needed 50 GB free disk space.

Advanced clusters on AWS

In April 2026, advanced clusters was upgraded to use Kubernetes 1.34. If you use an advanced cluster on AWS and use custom master and worker roles, update the IAM policies if you haven't done so already.

For the master role, update `minimal_master_policy` to the following policy:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeInstances",
        "ec2:DescribeRegions",
        "ec2:DescribeRouteTables",
        "ec2:DescribeSecurityGroups",
        "ec2:DescribeSubnets",
        "ec2:DescribeVolumes",
        "ec2:DescribeAvailabilityZones", // April 2026 release requirement
        "ec2:DescribeSnapshots", // April 2026 release requirement
        "ec2:DescribeTags" // April 2026 release requirement
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeVpcs",
        "ec2:CreateTags",
        "ec2:CreateVolume",
```

```
        "ec2:DescribeVolumesModifications",
        "ec2:ModifyInstanceAttribute",
        "ec2:ModifyVolume"
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:AttachVolume", // If enabling CLAIRE, move AttachVolume to the same section
as CreateVolume.
        "ec2:DeleteVolume",
        "ec2:DetachVolume"
      ],
      "Resource": [""],
      "Condition": {
        "StringLike": {
          "ec2:ResourceTag/KubernetesCluster": ".k8s.local"
        }
      }
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:CreateSnapshot", // April 2026 release requirement
        "ec2:DeleteSnapshot" // April 2026 release requirement
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "autoscaling:DescribeAutoScalingGroups",
        "autoscaling:DescribeLaunchConfigurations",
        "autoscaling:DescribeAutoScalingInstances",
        "autoscaling:DescribeTags",
        "autoscaling:DescribeScalingActivities"
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "autoscaling:SetDesiredCapacity",
        "autoscaling:TerminateInstanceInAutoScalingGroup",
        "autoscaling:UpdateAutoScalingGroup"
      ],
      "Resource": [""],
      "Condition": {
        "StringLike": {
          "autoscaling:ResourceTag/KubernetesCluster": ".k8s.local"
        }
      }
    },
    {
      "Effect": "Allow",
      "Action": [
        "elasticloadbalancing:AddTags",
        "elasticloadbalancing:AttachLoadBalancerToSubnets",
        "elasticloadbalancing:ApplySecurityGroupsToLoadBalancer",
        "elasticloadbalancing:ConfigureHealthCheck",
        "elasticloadbalancing:DeleteLoadBalancer",
        "elasticloadbalancing:DeleteLoadBalancerListeners",
        "elasticloadbalancing:DescribeLoadBalancers",
        "elasticloadbalancing:DescribeLoadBalancerAttributes",
        "elasticloadbalancing:DetachLoadBalancerFromSubnets",
        "elasticloadbalancing:DeregisterInstancesFromLoadBalancer",
        "elasticloadbalancing:ModifyLoadBalancerAttributes",
        "elasticloadbalancing:RegisterInstancesWithLoadBalancer",
        "elasticloadbalancing:SetLoadBalancerPoliciesForBackendServer"
      ],
```

```
      "Resource": [""],
      "Condition": {
        "StringLike": {
          "elasticloadbalancing:ResourceTag/KubernetesCluster": ".k8s.local"
        }
      }
    },
    {
      "Effect": "Allow",
      "Action": [
        "elasticloadbalancing:AddTags",
        "elasticloadbalancing:DeleteListener",
        "elasticloadbalancing:DeleteTargetGroup",
        "elasticloadbalancing:DeregisterTargets",
        "elasticloadbalancing:DescribeListeners",
        "elasticloadbalancing:DescribeLoadBalancerPolicies",
        "elasticloadbalancing:DescribeTargetGroups",
        "elasticloadbalancing:DescribeTargetHealth",
        "elasticloadbalancing:ModifyListener",
        "elasticloadbalancing:ModifyTargetGroup",
        "elasticloadbalancing:RegisterTargets",
        "elasticloadbalancing:SetLoadBalancerPoliciesOfListener"
      ],
      "Resource": [""],
      "Condition": {
        "StringLike": {
          "elasticloadbalancing:ResourceTag/KubernetesCluster": ".k8s.local"
        }
      }
    },
    {
      "Effect": "Allow",
      "Action": [
        "iam:ListServerCertificates",
        "iam:GetServerCertificate"
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "s3:Get*"
      ],
      "Resource": [
        "arn:aws:s3:::<cluster-staging-dir1>/"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "kms:Encrypt",
        "kms:Decrypt",
        "kms:ReEncrypt",
        "kms:GenerateDataKey*",
        "kms:DescribeKey"
      ],
      "Resource": ["*"]
    }
  ]
}
```

For the worker role, update `minimal_worker_policy` to the following policy:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeInstances",
        "ec2:DescribeRegions",
```

```
            "ec2:CreateVolume", // April 2026 release requirement
            "ec2:AttachVolume", // April 2026 release requirement
            "ec2:DeleteVolume", // April 2026 release requirement
            "ec2:DetachVolume", // April 2026 release requirement
            "ec2:ModifyVolume", // April 2026 release requirement
            "ec2:DescribeAvailabilityZones", // April 2026 release requirement
            "ec2:DescribeSnapshots", // April 2026 release requirement
            "ec2:DescribeTags", // April 2026 release requirement
            "ec2:DescribeVolumes", // April 2026 release requirement
            "ec2:DescribeVolumesModifications", // April 2026 release requirement
            "ec2:CreateSnapshot", // April 2026 release requirement
            "ec2:DeleteSnapshot" // April 2026 release requirement
          ],
          "Resource": [
            "*"
          ]
        },
        {
          "Effect": "Allow",
          "Action": [
            "ec2:CreateTags"
          ],
          "Resource": [
            "arn:aws:ec2:*:*:volume/*"
          ]
        },
        {
          "Effect": "Allow",
          "Action": [
            "autoscaling:DescribeAutoScalingInstances",
            "autoscaling:DescribeTags"
          ],
          "Resource": [
            "*"
          ]
        },
        {
          "Effect": "Allow",
          "Action": [
            "s3:Get*"
          ],
          "Resource": [
            "arn:aws:s3:::<cluster-staging-dir1>/*"
          ]
        },
        {
          "Effect": "Allow",
          "Action": [
            "kms:Encrypt",
            "kms:Decrypt",
            "kms:ReEncrypt*",
            "kms:GenerateDataKey*",
            "kms:DescribeKey"
          ],
          "Resource": [
            "*"
          ]
        }
      ]
    }
```

INDEX

C

Cloud Application Integration community
  URL 5
Cloud Developer community
  URL 5

D

Data Integration community
  URL 5

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6

S

Secure Agents
  upgrade preparation 30
status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6
upgrade preparation
  Secure Agent preparation 30

W

web site 5