Informatica® Cloud Data Integration for PowerCenter

October 2026

Domain Updates

Informatica Cloud Data Integration for PowerCenter Domain Updates
October 2026
October 2026

© Copyright Informatica LLC 2023, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-22

Table of Contents

Preface 4

Chapter 1: Domain updates 5

Domain update stages 5
Domain update modes 6
Domain updates in multi-node setups 8
Before you update 8
Review the environment variables 10
Rules and guidelines for Java Runtime Environment on AIX 10
Rules and guidelines for TLS host name verification with subject alternative names 11
Updating a domain 11
Prepare the domain for updates 12
Reprepare the domain for updates 14
Schedule an update 15
Manage Emergency Bug Fixes (EBFs) and patches 15
Applying Emergency Bug Fixes (EBFs) and patches 16
Manual update of a CDI-PC domain 16
Updating a CDI-PC domain manually in command-line mode 17
Synchronize domain versions 18
After you update 19
Update the configuration files 19
Add external certificates to the trust certificates file 20
Configure JVM parameters 20
Restart a failed update 21
Update PowerExchange libraries and files 21
Before you update 21
CDI-PC update for PowerExchange users 21
Post-update task for PowerExchange for PostgreSQL 23
Troubleshooting update issues 23
Troubleshooting Listener Service issues 25

Preface

Read *Domain Updates* to learn how to update your CDI-PC domain. Learn how to apply and schedule updates and to monitor the status of updates.

CHAPTER 1

Domain updates

You can update a domain from the CDI-PC service page. Updates can include new features, security patches, and EBFs. Updates might be mandatory or optional. Some updates can be applied only if the domain is on a specific version or above. You can choose to initiate an update or to schedule the update to run at an appropriate time.

Domain updates are automated. After you initiate or schedule it, you don't need to perform any manual tasks such as shutting down the domain or downloading and running the installer. The CDI-PC service handles all tasks required to apply the update including shutting down the domain before and starting the domain after the update.

The domain information indicates whether an update is available for the domain. Multiple mandatory and optional updates might be available at a given point. The details include the due date by which a mandatory update must be applied. Before you initiate or schedule an update, ensure that your domain is on at least the minimum required version to apply the update.

Note: Mandatory updates must be applied by the due date. Domains that you don't update by the due date are marked obsolete.

Obsolete indicates that the domain is on an outdated version. You can't run jobs or perform tasks on an obsolete domain. You can update only the immediate previous version (n-1) of an obsolete domain. To update older versions (prior to n-1), contact Informatica Global Customer Support.

You can schedule an update to run at a date and time of your choice. For mandatory updates, the due date is the latest by which the update must be applied. You can't schedule a date beyond it. You can also manually initiate an update job and track the job progress. For more information, see “Schedule an update” on page 15.

Domain update stages

Updates include multiple stages. Each stage includes specific tasks that need to be completed successfully before the next stage begins. You can view the progress of the update from the **Update Tracker**. After the update is applied, the domain starts and services return to the state they were in prior to update. You can view the update history of a domain from the **View Update Details** page.

Note: If you deregister a domain, all update history and update plans of the domain get deleted. If you register the domain again, you can't view previous update history or plans that were created before deregistration.

The following table lists the stages that the update job includes:

Stage	Description
Prepare for update	The Domain Management Service connects to the on-premises domain, downloads installer binaries and packages for the update to the Secure Agent machine, and updates third-party binaries. The Secure Agent then downloads the files to each node in the domain. The installer files are downloaded to the following location on each node: `<CDI-PC installation directory>/Informatica/platform/sys/data/downloads/<update version number>/` The installer files get extracted to the following location on each node: `<CDI-PC installation directory>/Informatica/platform/sys/data/installer`
Prepare in Progress	The domain preparation process is currently underway. During this time, changes are being applied, but the update has not yet occurred.
Prepare Unsuccessful	The domain preparation process encountered an issue and did not complete successfully. The domain remains functional, and you may need to troubleshoot the problem or attempt preparation again before proceeding with the update.
Prepare Successful	Confirms that the domain preparation completed successfully without errors. The domain is now ready for the final update step, which can be scheduled at your convenience.
Prepare Outdated	Denotes that a prepared domain has new updates. Reprepare the domain before you update.
Begin update	The service process connects to the on-premises domain to start the update. For multi-node domains, the domain is shut down.
Updating	Performs update tasks including domain shutdown for single node domains, backup of domain binaries, update application, and domain startup. The domain binaries are backed up to the following location: `<CDI-PC installation directory>/Informatica/platform/sys/data/backup` The backup includes only the domain binaries that are modified during the update.
Clean-up	Deletes temporary files created during each stage of the update.
Finalize	The service process that performs the update is stopped.

Note: Do not edit or delete files in the following location: `<CDI-PC installation directory>/Informatica/platform/sys/data`


An update requires additional disk space on the node. In the preparation stage, the job verifies that the node has a minimum of 30 GB disk space available. If not available, it generates an error and the update fails.

If the update fails at any stage, check the log messages to find the cause of the failure. You can troubleshoot and then restart the update.

Domain update modes

You can update a domain using the two different modes available on the CDI-PC service page.

The following image shows the domain update methods:

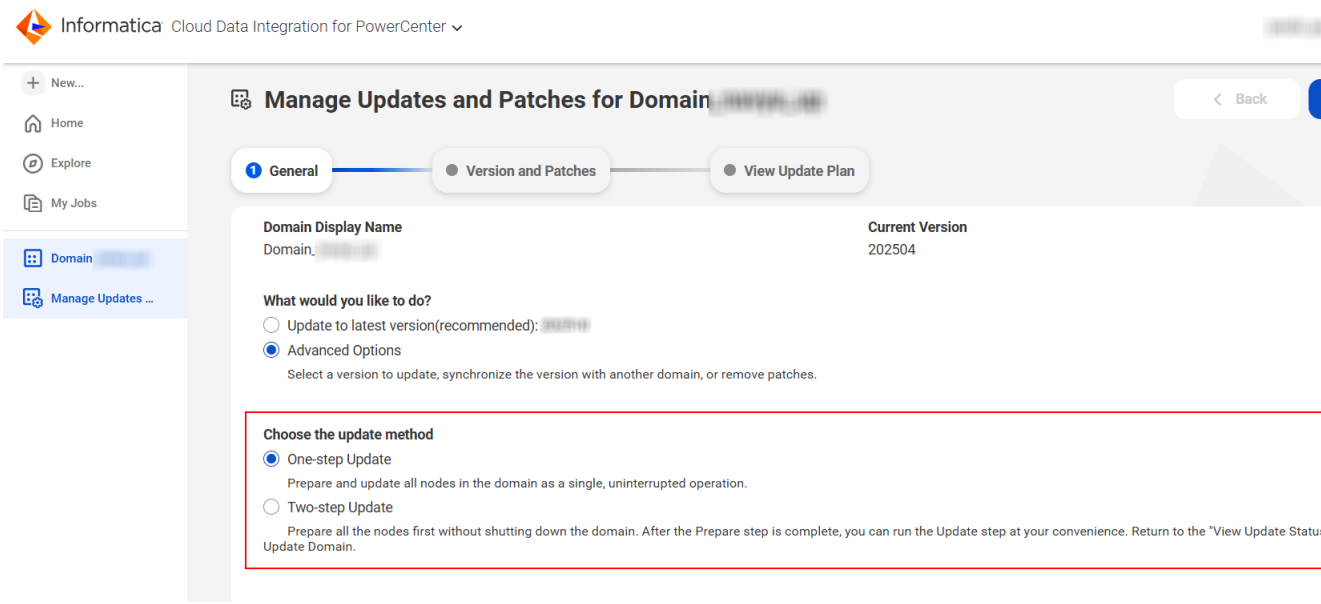

One-step Update

You can use the one-step update mode to complete the domain preparation and update in one seamless action. When you select this option, the system prepares and updates the domain simultaneously, completing the entire process with a single flow.

Two-step Update

You can use the two-step update to prepare the domain in advance, separately from the actual update. First, you perform the preparation step, which can be done days before the planned maintenance window. This ensures that your domain remains functional even if issues occur during preparation. After preparation is complete, you run the final update step at a convenient time. You can view the status of each stage, from preparation to update, to track the domain update progress.

You can leverage the two-step update mode to minimize disruption during domain updates. During the preparation phase, the maintenance window has not started yet, which means you can continue performing certain critical operations that are normally blocked during an update. For example, you can still edit the domain display name or run assessment jobs while preparation is in progress. This approach ensures continuous domain availability and operational flexibility.

For the prepare step to succeed, the domain must remain fully operational and responsive. The update process requires communication with the domain to execute key stages, such as listener service start and stop commands. Any domain shutdown during this phase causes the preparation to fail.

In the preparation phase, you have greater control to customize the update process, such as forcing a re-download of update components, adding additional nodes to the update preparation, or switching between simple and advanced update modes for better control. These options provide flexibility to tailor the update process to the specific needs of your domain environment while maintaining uninterrupted operation.

If the preparation step fails, the domain status turns to **Prepare Unsuccessful**. You won't see the usual update options and you are directed to the **Update Plan** page. You can retry preparation to resolve the issue and proceed with the update again. The two-step update mode helps ensure the domain remains stable and that you can address preparation issues without impacting the update environment.

You can use the following steps to diagnose a preparation failure to quickly identify and address issues, ensuring preparation completes successfully:

1. Open the **Domain Details** page.

2. Click **View Domain Update** to access detailed status information.
3. Hover over the final state icon to view a summary of the failure.
4. Review the logs for detailed error messages and troubleshooting guidance.

Domain updates in multi-node setups

In a multi-node setup, an update job applies the update to nodes in the domain in a sequence. The sequence begins with the master gateway node. The Domain Management Service prepares the update plan that determines the sequence in which nodes are updated.

If you initiate the update, the Domain Management Service refreshes the update plan when you click **Update**. If you schedule the update to run at a later date and time, the Domain Management Service refreshes the update plan at the scheduled date and time. The plan includes all available nodes in the domain at the time it is refreshed. If the domain includes nodes that are offline when the update plan refreshes, they don't get included in the update plan. The update plan doesn't refresh after the update begins. Even if the node starts and becomes available, you can't include it in the update. You must manually update such nodes to ensure they are on the same version as other nodes in the domain. Contact Informatica Global Customer Support for information about how to manually update a node.

The update begins at the same time on all nodes in the domain. After download of binaries or the Prepare for update stage, the other nodes pause the update while the update continues on the master node. When the master node reaches the Clean-up stage, the other nodes continue the update and the update on these nodes progresses simultaneously. The update summary or status updates when the update is complete on all nodes in the domain update plan.

If the master node fails to start after the update is applied, a second gateway node becomes the master. However, the update job retains the initial master node information and waits for the node to start. The update therefore doesn't continue on other nodes until the initial master gateway node starts. Failure in other nodes doesn't impact the overall update job. If one node fails, the update continues on other nodes.

Before you update

Consider the following guidelines when you update a CDI-PC domain:

- Before you update to a CDI-PC version that includes a new Java version (for example, moving from Java 11 to Java 17), validate all your custom Java code, dependencies, and external JARs, especially those referenced in Java transformations. See the Product Availability Matrix for Cloud Data Integration for PowerCenter (CDI-PC) corresponding to your current version to identify the exact JDK version that will be replaced by JDK 17.
- Before you start the domain update, ensure that you restore the file permissions to match the original installation settings. If you changed any permission setting for files during after the installation of CDI-PC, you must restore them to original permissions before the update.
- Before you update the domain, verify that the domain server certificate meets the subject alternative names (SAN) requirements. For more information, see "Rules and guidelines for TLS host name verification with subject alternative names" on page 11.
- Before you initiate or retry an update, make sure that the nodes are available. Do not start or stop the domain, nodes, or services manually.

- To ensure a smooth update process, verify the following items:
  - Confirm that there are no jobs currently in progress to prevent disruption during the update. When a domain is shutdown or unavailable during update, running jobs might be impacted.
  - Make sure that the following directory is not open in any file explorer:

    ```
    <CDI-PC Installation Directory>\Informatica\platform\home
    ```
  - Disable any custom scripts used to start and monitor the CDI-PC domain to avoid unexpected errors during or after the update.
- When you create a domain, join a domain, migrate a domain, or update a domain, make sure that you do not configure the following directories under `INFA_HOME`:
  - sitekey
  - Administrator Console keystore
  - Node keystore
  - Node truststore
  - Domain log
  - System log
  - Database truststore location
  - SAML keystore directory
  - SAML truststore directory
  - Backup directory
- Make sure that you create custom configuration files or directories only within the `/usr` directory and avoid placing them elsewhere in the installation folder.
- If you use PowerExchange, back up the `dbmover.cfg` file before you update the domain. After you complete the domain update, copy the `dbmover.cfg` file to the new `<CDI-PC HOME>\usr\config\pwx\` directory. If you have configured an `overrides.cfg` file, make sure that you copy the `overrides.cfg` file to the new directory.

  For more information, see Post-installation step for PowerExchange.
- When you start the domain update, all existing service jobs are terminated. You can't cancel, pause, or stop the update after you start.
- After the update begins, don't start or stop the domain, nodes, or services manually, unless asked to by the Informatica Global Customer Support team.
- Don't edit the details of a domain after you initiate an update. The update fails when you shut down the domain to edit the details. If you retry the update, it fails because of a mismatch in domain details. Editing the domain details on the CDI-PC service page does not resolve the mismatch.

Review the environment variables

Before you update the CDI-PC domain, review the environment variables mentioned in the following table:

Variable	Description
IATEMPDIR	Location of the temporary files created during installation. Informatica requires 1 GB disk space for temporary files. For UNIX and Linux, do not set the `IATEMPDIR` directory under root (`/`) mount. Configure the environment variable if you do not want to create temporary files in the `/tmp` directory. If you want to change the default `/tmp` directory, you must set the `IATEMPDIR` environment variable to the new directory. For example, set the variable to `export IATEMPDIR=/home/user`. **Note:** Unset the `IATEMPDIR` variable after the installation.
_JAVA _OPTIONS	Configure the environment variable to change the temporary directory. If you want to change the default `/tmp` directory, you must set the `_JAVA_OPTIONS` environment variable to the new directory. For example, set the variable to `export _JAVA_OPTIONS=-Djava.io.tmpdir=/home/user`. **Note:** Unset the `_JAVA _OPTIONS` variable after the installation.
DISPLAY	For UNIX and Linux, unset the `DISPLAY` environment before you run the installer. Installation might fail if the `DISPLAY` environment variable has some value.
LAX_DEBUG	For UNIX and Linux, unset the `LAX_DEBUG` flag before the update. If `LAX_DEBUG` is set, the installer runs in debug mode and generates a `sea.log` file under `UID/sys/data/installer/<version>/extracted/`. This `sea.log` file disrupts the update process.
LC_ALL	For AIX, set the `LC_ALL` system environment variable to `en_US` before running any CDI-PC operation in IDMC. After you set the `LC_ALL` system environment variable, restart the Secure Agent.

Note: Make sure that the `NOEXEC` flag is not set for the file system mounted on the `/tmp` directory.

Rules and guidelines for Java Runtime Environment on AIX

Consider the following guidelines for Java Runtime Environment on AIX:

- Informatica doesn't ship the Java libraries for AIX. Before you install CDI-PC on AIX, you must download the IBM Semeru Runtime Certified Edition 17.0.16.0 (build 17.0.16+8).
  Download the following file:

  ```
  OpenJ9 VM 17.0.16.0 (build openj9-0.53.0, JRE 17 AIX ppc64-64-Bit Compressed
  References 20250715_1043 (JIT enabled, AOT enabled)
  ```

  For more information, see https://developer.ibm.com/languages/java/semeru-runtimes/downloads/.

  If you have problems installing the JRE, contact the JRE vendor.
- Provide the updated JAVA version path before starting the CDI-PC update.
  Set the `INFA_JRE_HOME_<release_version>` property in `infaserviceconfig.sh` pointing to the path of the updated JAVA version installation. The JAVA version must match the version to which the CDI-PC domain needs to be updated. You must set JAVA version path on all the nodes before updating the domain.

  After a successful domain update, you must update the environment variable `INFA_JRE_HOME` to the new JAVA installation.

Rules and guidelines for TLS host name verification with subject alternative names

Consider the following rules and guidelines for Subject Alternative Name (SAN) when you create or request a certificate for a CDI-PC domain:

Bare wildcard SAN entries are invalid

A bare wildcard SAN entry consisting of a single asterisk (*) is invalid and does not match any host name during TLS host name verification. Always use a specific host name or a qualified wildcard, such as `*.example.com`. Never use a bare asterisk.

A wildcard matches only one label under a domain suffix

A wildcard matches exactly one domain level. For example, `*.example.com` matches `host.example.com`. However, a wildcard does not match the following suffixes:

- A short, single-label host name: `myhost`
- A multi-level host name: `a.b.example.com`

A short host name requires an exact SAN entry

If you access the domain using a short host name that lacks a domain suffix, verification fails unless the SAN explicitly lists that exact short host name as a DNS entry. A wildcard can't cover a short host name because there is no domain suffix for the wildcard to match.

Recommended actions

To avoid TLS host name verification failures, perform the following actions:

- **Use fully qualified domain names (FQDNs)**. Access the domain using its FQDN, such as `myhost.example.com`, so that `a *.example.com` SAN entry can successfully match the host name.
- **Add explicit SAN entries for short names**. If you must use short host names, include them as explicit DNS entries in the SAN.
- **Avoid bare asterisks**. Do not use a bare * SAN entry.

SAN configuration example

The following sample code shows an `[alt_names]` section with the FQDN, a qualified wildcard, and the short host name as explicit DNS entries:

```
[alt_names]
DNS.1 = myhost.example.com
DNS.2 = *.example.com
DNS.3 = myhost
```

Updating a domain

You can choose to schedule the update or manually initiate a domain update from the **Domain Details** page.

1. On the **Explore** page, select a domain to open the **Domain Details** page.

   The update status in the **Version and Update** section indicates whether an update is available.

2. Click **Manage Updates and Patches**.

   The **Manage Updates and Patches for <domain name>** page appears. This pages displays the domain display name and the current version of the domain.

3. Select **Update to latest version** to update your domain to the latest recommended version, and click **Next**.

   The **View Update Plan** page appears and displays the recommended version for your domain update. This page include the following tabs:

   - **Nodes**. Displays the list of nodes that require update.
   - **Services**. Displays the status of the CDI-PC services before, during, and after the domain update.
   - **Patches**. Displays the list of EBFs applied to the domain during installation, any patch to be applied to the domain, or any patch that you might want to remove from the domain.

4. Click **Update Domain** to start the update or click **Next** to schedule an update.

   For more information about scheduling a domain updates, see "Schedule an update" on page 15.

5. On the confirmation message that appears, click **Update Domain** to confirm.
6. Enter the domain credentials and click **Update Domain**.

   A message appears to indicate that the update started. The update job shuts down the domain, applies the update, and then starts the domain and application services.

   The **Update Domain** page tracks the status of each stage of the update. The status information on the **Services** tab updates after the domain update completes.

7. You can refresh the information in the **Nodes**, **Services**, or **Patches** tabs to view updated information.

   When the update completes, the domain status moves to **Available** and the version number updates to the latest update. If the update fails, the domain status that appears depends on the point at which the update fails.

   If the update fails before the domain is shut down, the status indicates that the domain is available and the update failed.

   If the update fails after the domain is shut down, the status indicates that the domain is offline and the update failed.

   If the update fails in the clean-up or finalize stages, the job generates a warning and continues. Warnings generated in these stages don't impact the update job or the status of the domain. You can continue to use the domain when the update completes.

   When the update completes, services return to the state they were in prior to the update. For services that were in the **Available** state when the update began, the job checks for the status post update. If there is a difference in the status before and at the end of the update, the update job tries to match the service states. The **Services** table refreshes and indicates if there is a mismatch in the state of a service.

The Secure Agent, CloudConnect, and task output log files record corresponding tasks that are performed to complete the update. When a node successfully updates, the following log file is generated on the node:
`<CDI-PC installation directory>/Informatica/platform/logs/installer/<version>/Informatica_CDIPC_Services_Update_Platform_Apply_<timestamp>_Install.log`

Prepare the domain for updates

You can update a CDI-PC domain through two distinct update modes available on the CDI-PC service page. You can use the one-step update mode to prepare and update the domain simultaneously with a single

action. You can also choose to update your domain in two steps by preparing in advance of the actual update.

The two-step update ensures that your domain remains functional even if the preparation encounters an issue. The update status clearly indicates the stages of preparation and final update, allowing you to complete preparation several days prior to your scheduled maintenance window.

1. On the **Explore** page, select a domain to open the **Domain Details** page.

   The update status in the **Version and Update** section indicates whether an update is available.

2. Click **Manage Updates and Patches**.

   The **Manage Updates and Patches for <domain name>** page appears. This pages displays the domain display name and the current version of the domain.

3. Select **Update to latest version** to update your domain to the latest recommended version.

4. Select one of the update methods.

Option	Description
One-step Update	Choose this update mode to prepare and update the domain simultaneously with a single action.
Two-step Update	Choose this update mode to prepare all the nodes without shutting down the domain. Once the preparation step is complete, you can run the update step at your convenience. Return to the **View Update Status** page and click **Update Domain** to proceed. For more information about two-step update, see "Two-step Update" on page 7.

5. Click **Next**.

   Based on your selection, the next steps differ.

   - If you select one-step update, you can view the update plan for the domain, optionally schedule a update, and then complete the domain update. Complete steps 4 to 6 of "Updating a domain" on page 11 to complete the domain update with a single action. For more information about scheduling a domain update, see "Schedule an update" on page 15.
   - If you select two-step update, you can view the update plan for the domain, and then prepare the domain for update. You can't schedule an update with the two-step update method. You can use the two-step update method apply or remove EBFs and patches. For more information, see "Applying Emergency Bug Fixes (EBFs) and patches" on page 16.

   The **View Update Plan** page displays the selected update process and the recommended version for your domain update.

   - **Nodes**. Displays the list of nodes that requires update.
   - **Services**. Displays the status of the CDI-PC services before and after the domain update.
   - **Patches**. Displays the list of EBFs applied to the domain during installation, any patch to be applied to the domain, or any patch that you might want to remove from the domain.

6. Click **Prepare Domain Update**.

   A warning message appears.

7. Read the listed documentation and click **Continue** to update the domain.

8. On the confirmation message that appears, click **Update Domain** to confirm.

   Note that after you start the domain update, all existing service jobs are terminated. You can't cancel, pause, or stop the update after you start.

9. Enter the domain credentials and click **Update Domain**.

A message appears to indicate that the preparation for the update started. In the **Domain Details** page, the update status changes to **Prepare in Progress**.
In the two-step update process, the domain is not shut down during prepare step. Once the update preparation is successful, the status of the domain changes to **Prepare Successful**.

10. Select the domain to open the **Domain Details** page.
11. Click **Update Domain** to initiate the domain update process.

    On the confirmation message that appears, click **Update Domain** to confirm.
    The update job shuts down the domain, applies the update, and then starts the domain and application services.

    The **Update Domain** page tracks the status of each stage of the update. The status information on the **Services** tab updates after the domain update completes.

Reprepare the domain for updates

You can reprepare a domain for an update when changes, such as a mandatory EBF or a new installer version, become available after your initial preparation.

If a domain has been successfully prepared but new updates or EBFs are released, its status will automatically change to **Prepare Outdated**. This new status allows you to easily filter and identify which domain require attention. You can then review the new changes that will be applied and choose to reprepare the domain. This action updates your plan with the latest changes without initiating the full domain update, giving you the flexibility to incorporate them at your convenience before committing to the final update schedule.

1. On the **Explore** page, select a domain to open the **Domain Details** page.

   The update status in the **Version and Update** section indicates whether an update is available.
2. Click **Manage Updates and Patches**.

   The **Manage Updates and Patches for <domain name>** page appears. This pages displays the domain display name and the current version of the domain.
3. Select **Two-step Update** and click **Next**. For more information about two-step update, see "Two-step Update" on page 7.

   The update status of the domain appears as **Prepare Outdated**.
4. Click **Reprepare Domain Update**.

   A warning message about available patches or nodes since the last preparation attempt appears.
5. Read the listed documentation and click **Continue** to reprepare the domain.
6. On the confirmation message that appears, click **Reprepare Domain Update** to confirm.

   Once the repreparation step is complete, you can run the update step at your convenience. Return to the **View Update Status** page and click **Update Domain** to proceed.

Schedule an update

You can schedule the update to run at an appropriate date and time. You can change the schedule after you set it. For mandatory updates, the scheduled date and time must be before the due date.

You can schedule one update at a time. When you create a new schedule, existing update schedules for other versions will be deleted. After the domain update begins, any unavailable nodes will not be updated. To update these nodes manually, contact Informatica Global Customer Support.

1. On the **Explore** page, select a domain to open the **Domain Details** page.

   The update status in the **Version and Update** section indicates whether an update is available.

2. Click **Manage Updates and Patches**.

   The **Manage Updates and Patches for <domain name>** page appears. This pages displays the domain display name and the current version of the domain.

3. Select **Update to latest version** to update your domain to the latest recommended version, and click **Next**.

   The **View Update Plan** page appears and displays the recommended version for your domain update.

   - **Nodes**. Displays the list of nodes that requires update.
   - **Services**. Displays the status of the CDI-PC services before and after the domain update.
   - **Patches**. Displays the list of EBFs applied to the domain during installation, any patch to be applied to the domain, or any patch that you might want to remove from the domain.

4. Click **Next** to schedule an update or click **Update Domain** to start the update.

   For more information about starting the domain updates, see "Updating a domain" on page 11.

5. On the **Schedule Update** page, choose from one of the available options, and click **Update Domain**.

   - Click **Run now**, enter the domain credentials, and click **Update Domain**
   - Click **Run later**, select a date, time, and time zone, and then click **Schedule Update**.

   For mandatory updates, dates after the due date appear unavailable.

   You can choose from a range of times at 30-minute intervals.

   The update status on the **Domain Details** page changes to **Update Scheduled**. If you previously scheduled another update, it gets cancelled.

6. To modify the schedule, you can repeat the steps and change the date and time.

Manage Emergency Bug Fixes (EBFs) and patches

Informatica releases Emergency Bug Fixes (EBFs) and patches to provide fixes for critical issues that were found in previous releases. You can use the CDI-PC service page to apply the EBFs on a CDI-PC domain. You can also view the list of all EBFs that apply to the domain.

Alternatively, when you run the CDI-PC installer to create or migrate a domain, all available EBFs are installed automatically. For more information, see the CDI-PC *Installation Guide*.

In CDI-PC, you can apply an EBF tailored to address the critical issue that you encounter. You do not need to apply all the cumulative fixes that has no impact on your production environment. You can now plan and quickly apply the required EBFs on your domain and nodes on the **Domain Details** page in CDI-PC. When you apply an EBF, the PODs are restarted and the binaries of the EBFs that you apply are updated.

When you install a new node, copy the installers of the EBFs already applied to the domain into the EBF folder. This ensures that your new node has the same EBFs applied as the other nodes in the domain.

Applying Emergency Bug Fixes (EBFs) and patches

Update the domain to the October 2026 release of CDI-PC to view the list of available EBFs and patches and then apply them. The list includes the EBFs that are already applied on the domain.

1. On the **Explore** page, select a domain to open the **Domain Details** page.

   The update status in the **Version and Update** section indicates whether an update is available
2. Click **Manage Updates and Patches**.

   The **Manage Updates and Patches for <domain name>** page appears. This pages displays the domain display name and the current version of the domain.
   You can either update your domain to the latest recommended version or
3. Select **Advanced Options** to select a version to update, synchronize the version with another domain, or remove patches.
4. Click **Next**.

   The **Version and Patches** page appears.
5. Select **Choose version and patches**.
6. In the **Update to Version** section, select your target version.
7. On the **Patches** tab, select the patches that you want to apply to the domain.

   Mandatory patches are applied automatically. To apply an optional patch, search for the patches, and move them from the left to the right table.
8. Click **Next**.

   The **View Update Plan** page appears and displays a summary of your selection.
9. Click **Update Domain** to start the update.
10. On the confirmation message that appears, click **Update Domain** to confirm.
11. Enter the domain credentials and click **Update Domain**.

    A message appears to indicate that the update started. The update job shuts down the domain, applies the update, and then starts the domain and application services.

Manual update of a CDI-PC domain

You can run installer commands manually to update a CDI-PC domain instead of updating through IDMC. Manual updates are useful in customer-managed environments where you don't want to update the domain through IDMC.

With a manual update, you control the full update process for a CDI-PC domain without IDMC. Use manual updates when you manage the domain in an air-gapped environment. In an air-gapped environment, your security policies might require you to run security scans on the installer binaries before you apply them to the domain. To update the domain manually, download the full installer and run security scans on the binaries. Then, apply the full installer on each node. For more information about downloading the installer, see Download the installers.

You can update the domain from your current version to the next version. Before you update, shut down the domain completely and verify that no processes are running. Run the update commands from the directory that contains the extracted binaries.

Updating a CDI-PC domain manually in command-line mode

You can run the CDI-PC installer in command-line mode to update a domain manually on Linux, AIX, or Windows.

On a shell command line, run the `install.sh` file to update on Linux and AIX or `install.bat` to update on Windows. The command has the following options:

- **--uid**. User install directory
- **--ops**. The operation that the script performs. You can Apply or Rollback an update.
- **--comp**. Component to select. Choose from Cloud, Thirdparty, or Platform.
- **--reqid**. Request ID for logging, tracking, or processing the update request

Updating on Linux or AIX

Domain update

Run the `install.sh` file in the following sequence to apply the domain update:

1. Apply third-party component. `./install.sh --uid=/home/user/CDI-PC/Informatica/platform --ops=Apply --comp=Thirdparty --reqid=1234`
2. Apply Cloud component. `./install.sh --uid=/home/user/CDI-PC/Informatica/platform --ops=Apply --comp=Cloud --reqid=1234`
3. Apply platform component. `./install.sh --uid=/home/user/CDI-PC/Informatica/platform --ops=Apply --comp=Platform --reqid=1234`

EBF update

Run the `install.sh` file in the following sequence to apply the EBF update:

1. Apply third-party component. `./install.sh --uid=/home/user/CDI-PC/Informatica/platform --ops=Apply --comp=Thirdparty --reqid=1234 --advargs=deferComponentFolderCleanup:true`
2. Apply Cloud component. `./install.sh --uid=/home/user/CDI-PC/Informatica/platform --ops=Apply --comp=Cloud --reqid=1234 --advargs=deferComponentFolderCleanup:true`
3. Apply platform component. `./install.sh --uid=/home/user/CDI-PC/Informatica/platform --ops=Apply --comp=Platform --reqid=1234 --advargs=deferComponentFolderCleanup:true`

Updating on Windows

Domain update

Run the `install.bat` file in the following sequence to apply the domain update:

1. Apply third-party component. `install.bat "--uid=C:\CDI-PC\Informatica\platform" "--ops=Apply" "--comp=Thirdparty" "--reqid=1234"`
2. Apply Cloud component. `install.bat "--uid=C:\CDI-PC\Informatica\platform" "--ops=Apply" "--comp=Cloud" "--reqid=1234"`
3. Apply platform component. `install.bat "--uid=C:\CDI-PC\Informatica\platform" "--ops=Apply" "--comp=Platform" "--reqid=1234"`

EBF update

Run the `install.bat` file in the following sequence to apply the EBF update:

1. Apply third-party component. `install.bat "--uid=C:\CDI-PC\Informatica\platform" "--ops=Apply" "--comp=Thirdparty" "--reqid=1234" "--advargs=deferComponentFolderCleanup:true"`

2. Apply Cloud component. `install.bat "--uid=C:\CDI-PC\Informatica\platform" "--ops=Apply" "--comp=Cloud" "--reqid=1234" "--advargs=deferComponentFolderCleanup:true"`
3. Apply platform component. `install.bat "--uid=C:\CDI-PC\Informatica\platform" "--ops=Apply" "--comp=Platform" "--reqid=1234" "--advargs=deferComponentFolderCleanup:true"`

Note: If the Windows domain runs in Process mode, set the environment variable `INFA_WIN_SERVICE_NAME` to `<INFA_SERVICE_NAME>` and run the following command after the update and before bringing up the domain:

```
infaservice.bat update <INFA_SERVICE_NAME>
```

For example:

```
..\CDI-PC\Informatica\platform\home\tomcat\bin\infaservice.bat update "InformaticaCDI-PC"
```

Here, `INFA_SERVICE_NAME` is `InformaticaCDI-PC`.

Synchronize domain versions

You can synchronize the domain versions with the latest available versions so that you can leverage all the available features, security enhancements, and performance improvements offered by CDI-PC.

1. On the **Explore** page, select a domain to open the **Domain Details** page.

   The update status in the **Version and Update** section indicates whether an update is available
2. Click **Manage Updates and Patches**.

   The **Manage Updates and Patches for <domain name>** page appears. This pages displays the domain display name and the current version of the domain.
   You can either update your domain to the latest recommended version or
3. Select **Advanced Options** to select a version to update, synchronize the version with another domain, or remove patches.
4. Click **Next**.

   The **Version and Patches** page appears.
5. Select **Synchronize version with another domain**.

   You can synchronize versions between available domains only.

   All the domains with the same version number or higher appears in the **Domains** section.
6. Select a domain from the list of available domains.

   The **Details <domain name>** section displays the details of all the EBFs and patches applied to the domain.
7. Click **Next**.

   The **View Update Plan** page appears and displays a summary of your selection.

   The **Patches** tab displays the list of EBFs and patches to be applied or removed. This cumulative list contains all the patches and equivalent EBFs of both the domains that you want to synchronize. For a multi-node domain, you can view the cumulative list of all the patches and EBFs applied to all the nodes in both the domains.
8. Click **Update Domain** to start the update.
9. On the confirmation message that appears, click **Update Domain** to confirm.

10. Enter the domain credentials and click **Update Domain**.

    A message appears to indicate that the update started. The update job shuts down the domain, applies the update, and then starts the domain and application services.

After you update

After you update the CDI-PC domain, restore your previous customizations and copy any necessary files to ensure the updated CDI-PC domain functions seamlessly.

- Copy the custom JAR files from PowerCenter `INFA_HOME/server/bin/javalib` folder to `CDIPC_HOME/server/bin/javalib`.
- After the update completes, the assigned permissions in the `pmimpprocess` executable changes. Configure the `pmimpprocess` executable to change the ownership and access permissions required for each user.
- After the update completes, you must manually create all the custom symbolic links again.

Update the configuration files

When you update, the installer overwrites configuration files, such as odbc.ini, odbcinst.ini, or sapnwrfc.ini. If any of the configuration files contain customization, updated, or new properties, you can manually merge the changes from the backup files into the latest installed file. For instance, if odbc.ini contains some variables or connection options, you need to manually merge the changes to the latest install file paths.

Manually merge the latest configuration changes into the following install file paths after you update:

`$INFA_HOME/ODBC7.1/odbc.ini`

`$INFA_HOME/ODBC7.1/odbcinst.ini`

`$INFA_HOME/server/bin/sapnwrfc.ini`

Here, `$INFA_HOME` denotes `<install_dir>/Informatica/platform/home` and `$INFA_HOME/ODBC7.1` is a softlink for `<install_dir>/Informatica/platform/usr/bin/ODBC7.1`.

The backup files are available in the following location: `<install_dir>/Informatica/platform/sys/data/backup/<release_version>/PLATFORM/home`

During an update, the installer creates a backup copy of the odbcinst.ini file in the same folder, appending the pre-update version number to the backup file name.

The following table lists examples of configuration files and their corresponding backup files:

Sample configuration file	Backup file	File to be updated
odbc.ini	<install_dir>/Informatica/platform/sys/data/backup/202404/PLATFORM/home/ODBC7.1/odbc.ini_202404_<DateTime of Backup>	<install_dir>/Informatica/platform/usr/bin/ODBC7.1/odbc.ini
sapnwrfc.ini	<install_dir>/Informatica/platform/sys/data/backup/202404/PLATFORM/home/server/bin/sapnwrfc.ini_202404_<DateTime of Backup>	<install.dir>/Informatica/platform/home/server/bin/sapnwrfc.ini

Use script files to set environment variables for infaservice and infasetup commands. If you added custom configuration values in your Informatica domain, copy those values to the corresponding script file before performing an update.

You can find the script files, `infasestupconfig.sh` and `infaserviceconfig.sh`, in the following location:

```
<CDI-PC installation directory>/Informatica/platform/usr/bin/
```

Note: Any values that you edit in the `infasetup.sh` and `infaservice.sh` files might be overwritten when you apply updates.

Add external certificates to the trust certificates file

Consider the following guideline for adding external trust certificate files:

After you update the CDI-PC domain, you must import all the previously imported certificate files to `ca-bundle.crt` files. During the update, the installer moves your previously imported certificate files to the following location:

```
ca-bundle.crt: ../<CDI-PC installation directory>/Informatica/platform/sys/data/backup/
<version>/PLATFORM/home/server/bin
```

Configure JVM parameters

Use script files to set environment variables for infaservice and infasetup commands. If you added custom values in your Informatica domain, copy the values to the corresponding script file after you migrate or update the domain.

You can find the script files, `infasestupconfig.sh` and `infaserviceconfig.sh`, in the following location:

```
<CDI-PC installation directory>/Informatica/platform/usr/bin/
```

For any custom settings, use the `Informatica/platform/usr/bin/infaserviceconfig.sh file` to configure JVM parameters for the domain.

If you use environment variables such as `INFA_JAVA_OPTS` or `INFA_JAVA_CMD_OPTS` to set customized values for JVM parameters that `infaservice` and `infasetup` commands use, set the variables and values in the configuration file for each command.

For example, to set the maximum heap size to 4 GB for each of the commands, configure each file as follows:

- **infaserviceconfig.sh**. `INFA_JAVA_OPTS="-Xmx4096m -XX:MaxMetaspaceSize=256m ${INFA_JAVA_OPTS}"`

- **infasetupconfig.sh**. `INFA_JAVA_CMD_OPTS="-Xmx4096m -XX:MaxMetaspaceSize=128m ${INFA_JAVA_CMD_OPTS}"`

Note: Any values that you edit in the `infasetup.sh` and `infaservice.sh` files might be overwritten when you apply updates.

Restart a failed update

The update job goes through multiple stages to complete the update. You can monitor the progress of the update on the **Update Domain** page. If the update fails at any stage, you can retry the update.

On the Update Domain page, click **Retry Update** in the **Final Status** column.

A retry might fail if there is a mismatch between the domain status required to restart the update and the actual domain status. View the logs for information on the failure and troubleshoot the issue before you retry the update.

Update PowerExchange libraries and files

You need to update PowerExchange libraries and configuration files to ensure compatibility with the CDI-PC 2025.04.M update.

Based on the PowerExchange version that you want to update, review and update key configuration files, adjust environment variables, and verify that the PowerExchange Listener and Logger Services in the Administrator tool match the updated configurations.

Before you update

If you use PowerExchange, back up the `dbmover.cfg` file before you update the domain. After you complete the domain update, copy the `dbmover.cfg` file to the new `<CDI-PC HOME>\usr\config\pwx\` directory.

For more information, see Post-installation step for PowerExchange.

CDI-PC update for PowerExchange users

Use these instructions to update CDI-PC to the latest CDI-PC release while managing different PowerExchange update scenarios, such as SSL-enabled environments, the PowerExchange Listener or Logger service, or an on-premises PowerExchange installation.

Whether you run SSL-enabled environments, use the PowerExchange Listener or Logger service, or maintain an on-premises PowerExchange installation, use the following instructions to update CDI-PC to the latest CDI-PC release and effectively manage different PowerExchange update scenarios.

When neither SSL is used nor a PowerExchange on-premises installation exists

- Update the CDI-PC domain directly to the latest CDI-PC release.
- No additional configuration or actions are required.

When SSL is enabled in the PowerExchange network

Before you update to the latest CDI-PC release, complete the following tasks:

- In the DBMOVER configuration file, update existing SSL_CONTEXT_METHOD statements to select TLSV1_2.
- Update SSL certificates. Note that OpenSSL 3.3.1 rejects certificates with an RSA key smaller than 2048 bits or signed with SHA1.
- If you're running a PowerExchange 10.4.x Listener, upgrade it to version 10.5.x or later before updating to the latest CDI-PC release.

When PowerExchange Listener or PowerExchange Logger services are used with an on-premises PowerExchange installation

Before you update to the latest CDI-PC release, complete the following upgrade tasks for PowerExchange:

- Install PowerExchange 10.5.8 or later alongside the current PowerExchange installation.

  Note: Do not uninstall your existing PowerExchange installation.
- Complete all the standard upgrade procedures for PowerExchange.
- Create a copy of the existing PowerExchange configuration files, such as `dbmover.cfg` and `pwxccl.cfg`, and update the copied files as required to ensure compatibility with PowerExchange 10.5.8 or later. For more information, see DBMOVER Configuration File.
- Align with the configuration values and configuration file locations of the PowerExchange installation. For more information, see PowerExchange Listener Overview.

Before you apply the latest CDI-PC release update, complete the following tasks:

- Stop all running workflows.
- Shut down the entire PowerExchange environment.
- Update environment variables, such as, `PATH`, `LD_LIBRARY_PATH`, and `PWX_HOME`, to point to the PowerExchange installation directory.
- If any PowerExchange configuration file locations have changed, update the PowerExchange Listener and Logger Services settings in the Administrator tool as necessary.
- Update CDI-PC to the latest release.
- After completing the update, resume all workflows.

If you use PowerExchange on-premises installation instead of the CDI-PC PowerExchange client

- If you do not require the PowerExchange on-premises installation, switch to the CDI-PC PowerExchange client before you update to the latest CDI-PC release.
- If you use the PowerExchange on-premises installation because of a workaround recommended by Informatica Global Customer Support and the issue is resolved in the current CDI-PC release, switch to the CDI-PC PowerExchange client during the upgrade.
- If you want to continue using the existing PowerExchange on-premises installation version after you update to the latest CDI-PC release, make sure the following conditions are met:
  - If you use SSL or the PowerExchange Listener or Logger service, you must upgrade to PowerExchange version 10.5.8 or later.
  - If you're not using SSL or the PowerExchange Listener or Logger service, you can continue using a earlier PowerExchange version.

Post-update task for PowerExchange for PostgreSQL

If you use PowerExchange for PostgreSQL and upgrade the CDI-PC domain, the PostgreSQL mappings might fail unless you register the PostgreSQL plugin again and verify the override schema changes.

1. Copy the following file from the CDI-PC node to your workspace:

   `<INFA_HOME>/server/bin/Plugin/postgres_Plugin.xml`
2. Log in to Informatica Administrator (the Administrator tool) and go to **Manage** > **Services and Nodes**.
3. Select the CDI-PC Repository Service and change the operating mode to **Exclusive**.

   The repository service restarts in exclusive mode.
4. In the **Contents** panel of the repository service, click the **Plug-ins** view.
5. In the **Actions** menu of the **Domain** tab, select **Register Plug-in**.
6. Select the file you copied in 1, and select **Update existing plug-in registration**.
7. Enter the user name, password, and the security domain.
8. Click **OK**.

   The CDI-PC Repository Service registers the plug-in with the repository. The results of the registration operation appear in the activity log.
9. On the **Properties** tab of the repository service, change the operating mode to **Normal**.

   The repository service restarts in normal mode.

Troubleshooting update issues

A domain update can fail due to multiple reasons. View the error logs and correct the issue before you retry the update.

The update fails with unrelated error messages even after multiple restarts.

Reason: An update might fail at any stage and generate an error message. When you correct the issue mentioned and restart the update, the update fails again with an error message.

Solution: To correct the issue, perform the following tasks:

1. Verify the node status on the CDI-PC Home page.
2. If the node is unavailable, run the `infaservice` start command.
3. When the node is available, restart the update.

The node update appears as successful but the Clean-up stage generates a warning.

Reason: If you change port numbers or make other changes to a domain during an update, the update might complete but generate warnings.

Solution: You can ignore clean-up and finalize stage warnings if the node update is successful. To avoid such errors, don't make domain changes during updates. Domain changes can include changes to port numbers, domain name, and addition or removal of nodes.

Update fails during the Download stage with a certificate error in the `taskoutput` log file.

Reason: To enable communication between the Secure Agent and the domain, both the truststore certificates must be shared and available. If the update fails during the download stage because of a certificate error, the domain truststore and Secure Agent truststore certificates might not be exchanged. You see the following error:

```
Please check the host, port and TLS configurations. Error:
[javax.net.ssl.SSLHandshakeException: PKIX path building failed:
sun.security.provider.certpath.SunCertPathBuilderException: unable to find valid
certification path to requested target]
```

Solution: Verify that the Secure Agent contains the domain truststore and that the domain certificates folder contains the Secure Agent certificate. See *Cloud Data Integration for PowerCenter Installation* for information. Stop all running processes associated with the domain and then retry the update.

Update fails at the Initialize stage and the page becomes unresponsive.

Reason: The update fails and the page becomes unresponsive when the required amount of disk space is not available on the node. You see the following error in the CloudConnect logs:

```
[CloudConn_10010] Received launcher response: [mkdir: cannot create directory â/data/
cdipc/Informatica/<XYZ>_UI_Diskspace/productx/sys/apps/listener/202304.<Version>.1/../
tmpâ: No space left on device.
```

Solution: Create the required amount of disk space and retry the update.

Retry update fails at the Initialize stage after initial domain downtime.

The retry update fails at the first attempt with the following error:

```
[2025-06-20 20:41:35,785 IST] [INFO ] [cc-async-thread-3] [ListenerLaunchProcessWrapper]
[reqid:4ctCK5hHaMGgy566WisbkG] [CloudConn_10031] Operation completed with status:
[TIMEDOUT]
```

Solution: Retry the update again.

Retry update fails in the Download stage.

The update fails and you can't restart the update if the Listener service is suspended.

Solution: Run the `dmlistenerlauncher` script to stop the Listener. Then retry the update. The `dmlistenerlauncher` script is stored in the following location: `<Installation directory>/Informatica/platform/sys/apps/listener/<current version number>`

To run the script, enter: `./dmlistenerlauncher.sh stop`

The *INFA_HOME* variable must be set to run the script.

The CDI-PC Integration Service does not get enabled after an update successfully completes.

Reason: The CDI-PC Integration Service might take some time to start or might fail to start after an update completes.

Solution: Restart the service if the service does not get enabled.

Updating a domain fails, but the domain status remains in update in progress state.

Reason: If a node update fails in the first stage of update, the domain status remains as **In progress** for indefinite time in the **Domain Details** page and **Explore** page. As a result, the plan-level **Retry** button and the

Update Progress does not appear in the **Update Plan** page. However, the node-level **Retry** button remains enabled in the **Update Plan** page.

Solution: Click the node-level **Retry** button. Once re-triggered, DMS restores the latest plan state from the database to ensure an accurate operation state assessment.

When you initiate an update of a CDI-PC domain running as a Windows service, the domain starts in the process mode instead of the service mode.

Reason: In JDK 9 and later releases, the `java.endorsed.dirs` system property is no longer available. **CDI-PC April 2026** has upgraded its JDK version to 17. The **java.endorsed.dirs** JVM property is part of the registry in a Windows CDI-PC domain configured to start as a service. This specific registry entry was created while creating the domain and was not modified during the update from the CDI-PC service page (DMS).

Solution:

1. After the domain is updated successfully, use the following command to stop the Informatica CDI-PC service on the target Windows system where you want to start the domain as a Windows service.

   ```
   INFA_HOME/tomcat/bin/infaservice.bat shutdown
   ```

2. Run the following command to remove the Informatica CDI-PC service:

   ```
   INFA_HOME/tomcat/bin/infaservice.bat remove "InformaticaCDI-PC"
   ```

3. Run the following command to reinstall the Informatica CDI-PC service:

   ```
   INFA_HOME/tomcat/bin/infaservice.bat install "InformaticaCDI-PC" "Informatica CDI-PC"
   ```

Update retry fails with due to expired token

Reason: The authentication token expired while the domain was shutdown and the system did not acquire a new one for the retry update attempt.

Solution: Restart the domain and retry the update again.

For information about troubleshooting other CDI-PC issues, see the *Troubleshooting* document.

Troubleshooting Listener Service issues

The Listener is a process that runs as an extension to each node in a domain. The Domain Management Service communicates with a node to start the Listener Service on the node to perform tasks related to updates.

The Listener Service starts and stops multiple times during an update until it shuts down when the update is complete. The Listener Launcher Service starts and stops the Listener Service.

During an update, the Listener Service might become unresponsive and fail to start or stop. This impacts the progress of the update task. You might see an error message that prompts you to check the CloudConnect logs. Check the CloudConnect Logs and Launcher logs to view the status of the Listener Service.

If you see a message related to the slowness or unresponsive state of the Listener Service, and the domain is stopped, perform the following tasks:

1. Run the `./dmlistenerlauncher.sh stop` command to stop the Listener Service. The command stops the Listener Service if it exists.
   The launcher script is available in the following directory: `<Installation directory>/Informatica/platform/sys/apps/listener/<current version number>`.
2. If the command generates an error, or does not indicate a successful stop of the service, verify the status of the service from the log files in the following location: `<Installation directory>/Informatica/platform/logs/listener/DMListenerLauncherLogs/`
   Review the logs for the date when you initiated the update. A "Listener might be running slow or hung." message indicates that the Listener Service still exists and is in a non-responsive state.
3. Perform a forced stop of the Listener process.
   Run the command with the following syntax: `kill -9 <PID>` where PID refers to the Listener Service process ID.
4. Delete the temporary files in the following location: `<Installation directory>/Informatica/platform/sys/apps/listener/tmp/`
5. Verify the domain status. Start the domain if it is stopped.
6. Restart the update. The domain must be available when you start the update.