Informatica® Intelligent Data Management Cloud

October 2026

REST API Reference

Informatica Intelligent Data Management Cloud REST API Reference
October 2026

© Copyright Informatica LLC 2016, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-11-02

Table of Contents

Preface 12

Informatica Resources 12

- Informatica Documentation 12
- IDMC web site 12
- IDMC Communities 12
- IDMC Marketplace 12
- Data Integration connector documentation 13
- Informatica Knowledge Base 13
- IDMC Trust Center 13
- IDMC Pulse Dashboard 13
- Informatica Global Customer Support 13

Chapter 1: IDMC REST API 14

Platform and service-specific REST APIs 14

REST API versions 14

Header and body configuration 16

- Request header 16
- Request body 17
- Return lists 18
- JSON format example 18
- XML format example 19

Update modes 20

Date/time values 21

Object IDs 22

Session IDs 22

REST API responses 24

Success object 25

Error object 25

REST API rules and guidelines 26

Documentation conventions 26

Chapter 2: REST API resource quick references 27

Platform resource quick reference 27

Data Integration resource quick reference 45

Data Ingestion and Replication resource quick reference 54

Chapter 3: Platform REST API version 2 resources 57

Activity logs 57

- Logs for completed jobs 58
- Logs for running jobs 68

Audit logs. . . . 71
Bundles. . . . 75
Bundle details. . . . 75
Bundle licenses. . . . 77
Installing and uninstalling bundles. . . . 78
Jobs. . . . 79
Starting a job. . . . 80
Stopping a job. . . . 82
Cleanly stopping a job. . . . 83
Login. . . . 84
Logging in. . . . 84
Logging in using a JSON web token. . . . 88
Logging in using SAML. . . . 93
Logging in using Salesforce. . . . 96
Logout. . . . 99
Logging out. . . . 99
Logging out and ending all sessions. . . . 100
Organizations. . . . 100
Organization management. . . . 100
Creating sub-organizations. . . . 105
Runtime environments. . . . 110
Getting runtime environment details. . . . 110
Creating, updating, and deleting Secure Agent groups. . . . 114
Managing Secure Agent group selections. . . . 116
Configuring Secure Agent service properties for Secure Agent groups. . . . 120
Schedules. . . . 123
Secure Agents and services. . . . 130
Server time. . . . 135
Tasks. . . . 135
Users. . . . 136

Chapter 4: Platform REST API version 3 resources. . . . 141

Elastic runtime environments. . . . 141
Environment configurations. . . . 141
Images. . . . 149
Runtime environment associations. . . . 151
Supplementary files. . . . 153
Tokens. . . . 162
Export and import. . . . 166
Exporting objects. . . . 168
Starting an export job. . . . 168
Getting the export job status. . . . 171
Downloading an export package. . . . 175

Identity providers. . . . 176
Registering an identity provider. . . . 176
Getting identity provider details. . . . 179
Updating an identity provider 180
Deleting an identity provider. . . . 182
Importing objects. . . . 182
Uploading an import package. . . . 183
Starting an import job. . . . 184
Getting the import job status. . . . 188
IP addresses. . . . 192
Key rotation. . . . 194
Getting key rotation interval settings. . . . 194
Changing key rotation intervals. . . . 195
Licenses. . . . 196
Getting license details. . . . 196
Updating a sub-organization's licenses. . . . 198
Login. . . . 199
Logout. . . . 202
Lookup. . . . 202
Metering data. . . . 206
Requesting summary IPU usage data. . . . 206
Requesting project-level metering data. . . . 211
Requesting asset-level data. . . . 213
Requesting job-level metering data. . . . 215
Getting the metering data export job status. . . . 217
Getting custom IPU alert configurations. . . . 219
Downloading the metering data. . . . 221
Meter IDs. . . . 221
Object state synchronization. . . . 223
fetchState. . . . 224
loadState. . . . 230
Objects. . . . 236
Finding an asset. . . . 237
Finding asset dependencies. . . . 242
Object permissions. . . . 244
Creating permissions. . . . 245
Updating permissions. . . . 246
Deleting permissions. . . . 247
Getting permission details. . . . 248
Checking permissions. . . . 249
Passwords. . . . 250
Changing a password. . . . 250

Resetting a password. . . . 251
Privileges. . . . 251
Projects and folders. . . . 253
Creating a project. . . . 253
Updating a project. . . . 254
Deleting a project. . . . 255
Creating a folder. . . . 255
Updating a folder. . . . 256
Deleting a folder. . . . 257
Roles. . . . 258
Getting role details. . . . 258
Creating a role. . . . 260
Updating a role. . . . 261
Deleting a role. . . . 262
SAML group and role mapping. . . . 262
Adding SAML group mappings. . . . 262
Adding SAML role mappings. . . . 264
Removing SAML group mappings. . . . 265
Removing SAML role mappings. . . . 265
Getting SAML group mapping details. . . . 266
Getting SAML role mapping details. . . . 268
Schedules. . . . 269
Getting schedule details. . . . 270
Creating a schedule. . . . 274
Updating a schedule. . . . 278
Deleting a schedule. . . . 283
SCIM. . . . 283
Managing SCIM tokens. . . . 284
Getting SCIM-managed user details. . . . 285
Getting SCIM-managed groups. . . . 287
Secure Agent services. . . . 288
Security logs. . . . 290
Source control. . . . 293
Pulling objects. . . . 293
Pulling objects in a commit. . . . 299
Checking out objects. . . . 303
Undoing a checkout. . . . 306
Checking in objects. . . . 311
Getting commit details. . . . 314
Getting commit history. . . . 317
Comparing object versions. . . . 320
Getting repository connection details. . . . 324

Getting the status of a source control operation. . . . 325
Tags. . . . 327
Assigning tags. . . . 328
Removing tags. . . . 328
Users. . . . 329
Getting user details. . . . 330
Creating a user. . . . 333
Updating role assignments. . . . 336
Updating user group assignments. . . . 337
Deleting a user. . . . 337
User groups. . . . 338
Getting user group details. . . . 338
Creating a user group. . . . 341
Updating a user group. . . . 342
Deleting a user group. . . . 343

Chapter 5: Data Integration REST API. . . . 344

Code tasks. . . . 344
Create a code task 345
Start a code task. . . . 347
View a code task. . . . 348
Status of a code task. . . . 350
Cancel a code task. . . . 352
Session logs for a code task. . . . 352
Spark task results for a code task. . . . 353
Connections. . . . 354
CSV Flat File Connections. . . . 361
FTP and SFTP Connections. . . . 362
Microsoft Access Connections. . . . 364
Microsoft Dynamics CRM Connections. . . . 365
Microsoft SQL Server Connections. . . . 366
MySQL Connections. . . . 367
NetSuite Connections. . . . 367
ODBC Connections. . . . 368
Oracle Connections. . . . 369
Oracle CRM On Demand Connections. . . . 370
Salesforce Connections. . . . 371
SAP IDoc Reader Connections. . . . 371
SAP IDoc Writer Connections. . . . 372
Snowflake Data Cloud connections. . . . 373
Web Service Connections. . . . 374
Connection migration. . . . 376
Connectors. . . . 378

Data preview. . . . 379
Data services. . . . 384
Dynamic mapping tasks. . . . 386
Logging in. . . . 387
Getting dynamic mapping task details. . . . 388
Running a dynamic mapping task. . . . 404
Fields. . . . 405
Getting field details. . . . 405
Updating fields in flat files. . . . 408
Updating fields in objects with non-flat file formats. . . . 409
File listeners. . . . 411
Getting file listener details. . . . 412
Creating a file listener. . . . 416
Updating a file listener. . . . 422
Deleting a file listener. . . . 426
Starting a file listener. . . . 427
Stopping a file listener. . . . 428
Getting the status of a file listener. . . . 428
Getting file listener job details. . . . 429
Changing the owner of a file listener association. . . . 430
File transfer. . . . 431
Transferring files to a remote server. . . . 431
Receiving files from a remote server. . . . 433
Getting job status. . . . 435
File transfer tasks. . . . 435
HTTPS file transfer. . . . 447
Fixed-width configuration. . . . 453
Hierarchical mappers. . . . 457
Creating a hierarchical mapper. . . . 457
Running a hierarchical mapper. . . . 459
Getting hierarchical mapper metadata. . . . 461
Job log files. . . . 462
Logging in. . . . 462
Getting log information. . . . 464
Linear taskflows. . . . 468
Mappings. . . . 473
Getting mapping details. . . . 473
Getting transformation details. . . . 476
Getting an image of a mapping. . . . 480
Mapping tasks. . . . 480
Getting advanced connection property details. . . . 500
Mask rule parameter attributes for masking techniques. . . . 501

Mask rule parameter attribute values. . . . 504
PowerCenter mapplets. . . . 508
Synchronization task conversion. . . . 513
Testing compatibility. . . . 513
Converting an asset to a data transfer task. . . . 514
Taskflows. . . . 515
Running a taskflow as an API. . . . 516
Modifying taskflow attributes with the update resource. . . . 521
Adding a custom name to a taskflow name. . . . 524
Monitoring taskflow status with the status resource. . . . 527
Publishing taskflows in bulk. . . . 534
Unpublishing taskflows in bulk. . . . 536
Customer Managed Secure Agent group REST API. . . . 537
Validating expressions. . . . 542
Data Integration REST API supplemental information. . . . 543
Connector data types. . . . 543
Connection user interface fields to REST API attributes mapping. . . . 544

Chapter 6: Cloud Data Integration for PowerCenter (CDI-PC) REST API. 546

Login. . . . 546
Register a domain. . . . 547
Get domain status. . . . 550
Reconcile a domain. . . . 551
Delete a domain. . . . 552
Deregister a domain. . . . 553

Chapter 7: Data Ingestion and Replication REST API. 557

Logging in. . . . 557
Database and Application Ingestion and Replication REST API. . . . 558
Get a request body for a new task. . . . 559
Create a database or application ingestion and replication task. . . . 578
Deploy a database or application ingestion and replication task. . . . 624
Run a database or application ingestion and replication job. . . . 628
Stop a database or application ingestion and replication job. . . . 631
Resume a database or application ingestion and replication task. . . . 632
Undeploy a database or application ingestion and replication job. . . . 635
Get job status for a database or application ingestion and replication task. . . . 637
Get statistics for a database or application ingestion and replication job. . . . 641
Get database or application ingestion and replication task details. . . . 648
File Ingestion and Replication REST API. . . . 660
Jobs. . . . 660
Activity logs. . . . 666
Tasks. . . . 673

Streaming Ingestion and Replication REST API. 687
Creating a streaming ingestion and replication task. 688
Deploying, undeploying, starting, and stopping streaming ingestion and replication tasks. . . . 690
Copying a streaming ingestion and replication task. 692
Updating a streaming ingestion and replication task. 693
Getting details about a streaming ingestion and replication job. 719
Getting a list of streaming ingestion and replication jobs. 721
Job status. 723
Job statistics. 725
Job history. 727
Customer Managed REST APIs for Data Ingestion and Replication. 728
Database and application ingestion and replication Customer Managed REST APIs. 728
File Ingestion and Replication Customer Managed REST APIs. 735

Chapter 8: Customer Managed REST API. 742

Configure the proxy port. 742
Logging in. 743
Calling APIs through the proxy. 743

Chapter 9: RunAJob utility. 745

RunAJob utility setup. 746
Login properties. 746
Job status. 748
Log file detail. 748
Java heap sizes. 749
Using the RunAJob utility. 750
Task location. 751
RunAJob utility arguments. 751
Job status codes. 753

Chapter 10: ParamSetCli utility. 754

ParamSetCli utility requirements. 754
ParamSetCli utility setup. 754
Login properties. 755
Using the ParamSetCli utility. 756
ParamSetCli utility arguments. 756
Running the ParamSetCli commands. 757

Chapter 11: REST API codes. 760

State codes. 760
Country codes. 761
Time zone codes. 768

Index 771

Preface

Use *REST API Reference* to learn how to use the IDMC REST API to interact with your IDMC organization.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

IDMC REST API

Use the IDMC REST API to access information from your IDMC organization. You can also perform tasks such as create, update, and delete connections and configure permissions.

To use the IDMC REST API, you need a valid IDMC login and an understanding of REST API guidelines.

To configure a request using the REST API, use the appropriate resource and method, along with the applicable objects. IDMC returns the requested information, performs the requested task, or returns an error and related messages.

IDMC REST API supports the Transport Layer Security (TLS) version 1.2 and TLS version 1.3 protocols.

Note that some of the features and functionality mentioned in this guide might not be available to your organization due to licensing.

Platform and service-specific REST APIs

IDMC includes common functionality that is the platform on which the services in IDMC are built. Each Informatica Intelligent Cloud service has functionality that is only applicable to that service, in addition to platform functionality.

For example, tasks are applicable to most services in IDMC. To get a list of tasks in your organization, you use the platform resource, task. A mapping task is a type of task that is only applicable to the Data Integration service. To get details about a mapping task or create a mapping task, you use the Data Integration resource, mttask.

There are two versions of the IDMC platform REST API. Use the version that includes the resource you need. You can use both versions in the same session however the base URL and headers are slightly different. For more information, see Chapter 3, “Platform REST API version 2 resources” on page 57 and Chapter 4, “Platform REST API version 3 resources” on page 141.

For information about Data Integration resources, see Chapter 5, “Data Integration REST API” on page 344.

REST API versions

IDMC supports the platform REST API version 2 and version 3 resources, and service-specific resources.

You can log in to IDMC using the platform REST API version 2 or version 3 login resource. The version of any subsequent resource that you use does not need to match the version of the login resource that you use to log in.

Note the following differences between REST API version 2 and version 3 calls:

Format

You can use the following formats depending upon which API version you use:

- Version 2 supports XML and JSON calls.
- Version 3 supports JSON calls.

Login URL

Use one of the following login URLs:

- For version 2, use `https://dm-<POD region>.informaticacloud.com/ma/api/v2/user/login`.
- For version 3, use `https://dm-<POD region>.informaticacloud.com/saas/public/core/v3/login`.

Your POD (Point of Deployment) region is based on the location of your IDMC data center. Use one of the following POD regions:

- For North America, use `us`
- For Europe, use `em`
- For Asia, use `ap`

The POD region is included in the URL you receive when you register with IDMC.

Base URL

The login response includes the base URL that you must include in subsequent calls.

The base URL includes the following components:

- The name and region of the POD that your organization uses, for example, usw3.dm-us.
- The IDMC domain, informaticacloud.com.
- The internal service that manages the API calls, for example, saas.

The following example is a base URL for an organization on the usw3.dm-us POD:

```
https://usw3.dm-us.informaticacloud.com/saas
```

In the login response, the attribute that provides the base URL depends on the API version that you use to log in. For example:

- In a version 2 response, the attribute name is `serverUrl`.
- In a version 3 response, the attribute name is `baseApiUrl`.

Request URL

The URL that you use in requests differs between the version 2 and version 3 resources, for example:

- For version 2 resources, use `<serverUrl>/api/v2/<REST API resource>`, for example:

  ```
  https://usw3.dm-us.informaticacloud.com/saas/api/v2/activityLog
  ```

- For version 3 resources, use `<baseApiUrl>/public/core/v3/<REST API resource>`, for example:

  ```
  https://usw3.dm-us.informaticacloud.com/saas/public/core/v3/schedule
  ```

Session ID

The login response includes a session ID that you must include in headers during the session. You can use the same session ID for version 2 and version 3 resources. In the login response, the name of the attribute for session ID depends on the API version that you use to log in. Use one of the following attributes:

- For version 2 resources, use `icSessionId` in the header.

- For version 3 resources, use `INFA-SESSION-ID` in the header.

Header and body configuration

Configure the request header and request body as required, taking into consideration the format of the call and the resource version that you use.

Request header

The request header is slightly different for version 2 and version 3 resources.

For version 2 calls, use the following format in the REST API request header:

```
<METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
Content-Type: application/<json | xml>
Accept: application/<json | xml>
icSessionId: <SessionId>
```

For version 3 calls, use the following format in the REST API request header:

```
<METHOD> <baseApiUrl>/<URI> HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

Note that if you use a tool such as Postman, requests automatically include the HTTP version. If you enter the HTTP version in the URL, the request is not successful because the HTTP version occurs twice in the URL.

The following list describes the attributes of the version 2 and version 3 request header formats:

Attribute	Required	Description
METHOD	Yes	Method you want to use, such as GET, POST, or DELETE.
serverUrl	Required for most v2 resources	Base URL for all version 2 resources except login and register. Use a placeholder for serverUrl, and replace the placeholder with the IDMC URL returned by the login resource. For the login and register resources, use the URL listed in the resource.
baseApiUrl	Required for most v3 resources	Base URL for all version 3 resources except login. Use a placeholder for baseApiUrl, and replace the placeholder with the IDMC URL returned by the login resource. For the login resource, use the URL listed in the resource definition.
URI	Required for most resources	Resource URI. The URI includes the base URL and the resource name and can also include parameters. For the login and register resources, use the URL listed in the resource definitions.
HTTP version	Yes	HTTP version that you are using. Some tools such as Postman automatically include the HTTP version in the header.

Attribute	Required	Description
Content-Type	Required for POST requests	Format of the request. Use one of the following options: - application/json. Reads request as JSON. - application/xml. Reads request as XML. Only applicable to version 2 resources. Default is json.
Accept	No	Request format that you want to receive. Use one of the following options: - application/json. Sends response as JSON. - application/xml. Sends response as XML. Only applicable to version 2 resources. Default is json.
icSessionId	Required for most v2 resources	IDMC session ID. Required for all version 2 resources except login and register. Use a placeholder for sessionId, and replace the placeholder with the session ID returned by the login resource. Maximum length is 16,000 characters to accommodate JWT values.
INFA-SESSION-ID	Required for most v3 resources	IDMC session ID. Required for all version 3 resources except login. Use a placeholder for sessionId, and replace the placeholder with the session ID returned by the login resource. Maximum length is 16,000 characters to accommodate JWT values.

Request body

Use the request body to pass additional attributes for the resource. When you pass attributes in a request body, you pass the attributes as part of an object.

For example, to log in with the login resource, you pass the required username and password attributes in a login object.

Some requests include sub-objects for attributes. Declare the sub-objects before listing the related attributes.

JSON format

When you use the JSON format for version 2 REST API calls, you can optionally define a request object with the @type attribute, as shown in the following examples:

```
{
  "@type": "<request object>",
  "<attribute1>": "<value1>",
  "<attribute2>": "<value2>",
 }
```

When an attribute includes an object, state the attribute and use the object name as follows:

```
{
  "@type": "<request object>",
  "<attribute1>": "<value1>",
  "<attribute2>": {
     "@type": "<attribute object>",
     "<attributeA>": "<valueA>",
     "<attributeB>": "<valueB>",}
     "@type": "<attribute object>",
     "<attributeD>": "<valueD>",
     "<attributeE>": "<valueE>",}
  "<attribute3>": "<value3>",
}
```

Note: For version 3 REST API calls, do not use the @type attribute.

XML format

When you use the XML format, define a request object as an enclosing set of tags, as follows:

```
<request object>
   <attribute1>value1</attribute1>
   <attribute2>value2</attribute2>
</request object>
```

When an attribute includes an object, enclose the attribute object within the attribute tags as follows:

```
<request object>
   <attribute1>value1</attribute1>
   <attribute2>
     <attribute object>
       <attributeA>valueA</attributeA>
       <attributeB>valueB</attributeB>
     </attribute object>
     <attribute object>
       <attributeC>valueC</attributeC>
       <attributeD>valueD</attributeD>
     </attribute object>
   </attribute2>
   <attribute3>value3</attribute3>
</request object>
```

Return lists

When the REST API returns a series of objects in XML, it encloses the list in the root tag, as follows:

```
<root>
  <return object 1>
    <attribute1>value1</attribute1>
    <attribute2>value2</attribute2>
  </return object 1>
  <return object 2>
    <attribute1>value1</attribute1>
    <attribute2>value2</attribute2>
  </return object 2>
</root>
```

In JSON, no additional attributes are used. The REST API encloses the list in square brackets ([ ]), as follows:

```
[
 {
    "<attribute1>": "<value1>",
    "<attribute2>": "<value2>",
 }{
    "<attribute1>": "<value1>",
    "<attribute2>": "<value2>",
 }
]
```

JSON format example

To log in using JSON, you might use the following request header and body:

```
POST https://dm-us.informaticacloud.com/saas/public/core/v3/login
Content-Type: application/json
Accept: application/json

{
    "username": "user@informatica.com",
    "password": "mypassword"
}
```

The login might return the following information:

```
{
     "products": [
         {
             "name": "Integration Cloud",
             "baseApiUrl": "https://usw3.dm-us.informaticacloud.com/saas"
         }
     ],
     "userInfo": {
         "sessionId": "9KA11tLGqxVcGeul8SQBK3",
         "id": "9L1GFroXSDHe2IIg7QhBaT",
         "name": "user",
         "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
         "orgId": "0cuQSDTq5sikvN7x8r1xm1",
         "orgName": "MyOrg_INFA",
         "groups": {},
         "status": "Active"
     }
}
```

You can then use the sessionId and the baseapiUrl to construct a request to obtain your organization's license information, for example:

```
GET https://https://usw3.dm-us.informaticacloud.com/saas/public/core/v3/license/org/
52ZSTB0IDK6dXxaEQLUaQu
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
```

XML format example

You can use XML calls with version 2 resources.

To log in using XML, you might use the following header and body:

```
POST https://dm-us.informaticacloud.com/ma/api/v2/user/login
Content-Type: application/xml
Accept: application/xml

<login>
         <username>useremail@company.com</username>
         <password>mypassword</password>
</login>
```

The login might return the following information:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<user>
  <id>00000B03000000000001</id>
  <orgId>00000B</orgId>
  <name>user@company.com</name>
  <createTime>2012-06-14T15:00:00.000Z</createTime>
  <updateTime>2012-06-14T15:00:00.000Z</updateTime>
  <createdBy>System</createdBy>
  <updatedBy>user@company.com</updatedBy>
  <firstName>Firstname</firstName>
  <lastName>Lastname</lastName>
  <title>Senior Software Engineer</title>
  <password>********</password>
  <phone>1111111111111111111</phone>
  <timezone>America/Los_Angeles</timezone>
  <serverUrl>http://example.informatica.com/saas</serverUrl>
  <icSessionId>IV4wOrJmd6YUtmKa8t</icSessionId>
</user>
```

You can then use the icSessionId and the serverUrl to construct a request to delete a schedule as follows. The schedule ID is 000001D0000000000001.

```
DELETE http://example.informatica.com/saas/api/v2/schedule/000001D0000000000001
Accept: application/xml
icSessionId: IV4wOrJmd6YUtmKa8t
```

Note that Content-Type is not required because the DELETE method does not have additional attributes to pass in the request body.

Update modes

For Data Integration calls, you can submit a POST request using full update mode or partial update mode.

Use partial mode to submit a POST request that only includes the changed object fields, instead of including all of the object fields. For example, if you want to update the connection in an mttask object, you can submit a POST request using partial mode that might look like the following example:

```
POST api/v2/mttask/<taskId>
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
Update-Mode: PARTIAL
{
  "@type": "mtTask",
  "parameters": [
    {
      "@type": "mtTaskParameter",
      "name": "$NewSource$",
      "type": "EXTENDED_SOURCE",
      "sourceConnectionId": "<sourceConnectionId>"
    }
  ]
}
```

If you do not use partial mode, you need to include the entire object in the request. By default, the REST API uses full mode.

Partial mode is available for the following resources:

- connection
- fwConfig
- masterTemplate
- mttask
- schedule
- workflow

When you submit a POST request in partial mode, format the request using JSON and include the following line in the header:

```
Update-Mode=PARTIAL
```

Include the @type attribute for the updated object in the body.

Some fields are grouped in collections. To update a field that resides in a collection, include the key field for the collection in the POST request. The following table lists the collections and corresponding key fields:

Resource/object	Collection	Key Field
fwConfig	fwColumn	name
masterTemplate	mtParameter	name type
mttask	mtTaskInOutParameter	name
mttask	sequenceDefinition	txName
mttask	mtTaskOverriddenField	name
mttask	mtTaskParameter	name type
extendedObject (object in mttask)	objects	name
workflow	workflowTask	taskId

Date/time values

With the REST API, IDMC uses the UTC date format to pass all date/time values.

Use the following UTC date format for all date/time values that you pass in requests. The same format is used for all date/time values returned from IDMC.

```
<yyyy>-<MM>-<dd>T<HH>:<mm>:<ss>.<SSS>Z
```

The following list describes the attributes of the UTC date format:

yyyy

Year expressed in four digits.

MM

Month expressed in two digits.

dd

Date of the month expressed in two digits.

T

Indicates the time portion of the format.

HH

Hour in the 24-hour format. For example, 0 for 12:00:00 a.m. and 23 for 11:00:00 p.m.

mm

Minutes expressed in two digits.

ss

Seconds expressed in two digits.

SSS

Microseconds expressed in three digits.

Z

UTC time indicator.

For example, the following date string represents 3:00 pm on December 14, 2012:

```
2012-12-14T15:00:00.000Z
```

Object IDs

Many requests require an object ID, such as a connection ID or linear taskflow ID. To find the object ID that you need, you can use the related GET request.

For example, to determine the linear taskflow ID that you need to update a linear taskflow, you can use a workflow GET request to view the details of all linear taskflows in the organization. The return list of linear taskflow details includes the linear taskflow ID. Similarly, to determine the ID of a user, you can perform a user GET request.

Object IDs appear differently based on the REST API version you use. The REST API version 2 resources use eight-character object IDs while version 3 resources use the FRS object ID. You can find the FRS object ID by opening an asset in the IDMC user interface. In the URL, the last string of characters is the FRS ID. Other object IDs are not always readily available through the user interface.

Session IDs

When you log in to an IDMC organization using the REST API, the login resource returns the REST API session ID. You include this session ID in most subsequent REST API requests during the session.

Organization administrators can configure the organization to use one of following authentication types:

- Session ID. If the organization uses the session ID authentication type, session-based authentication is used. The session ID expires after 30 minutes of inactivity. A grace period of up to 2 minutes might be included to account for any network or unexpected delays.
- JSON Web Token (JWT). If the organization uses the JSON Web Token (JWT) authentication type, the session ID value that's returned in a login response is a JWT value. If you use custom scripts, ensure that the scripts handle automatic re-authentication before the JWT expires to avoid any interruptions. For more information, see the JWT Support Knowledge article.

Include the session ID in the header for all API requests other than login requests. The maximum length for session IDs is 2,000 characters.

The attribute name in the header can vary depending on the resource:

- For REST API version 2 resources, use the icSessionId attribute in the header to hold the session ID value.
- For REST API version 3 resources, use the INFA-SESSION-ID attribute in the header to hold the session ID value.
- For other resources, use the IDS-SESSION-ID attribute in the header to hold the session ID value.

The following example shows how icSessionId is used in the header for a REST API version 2 call::

```
GET https://app.informaticacloud.com/saas/api/v2/licenseInfo/org/<id>
Content-Type: application/xml
Accept: application/xml
icSessionId: <session ID>
```

The following example shows how INFA-SESSION-ID is used in the header for a REST API version 3 call:

```
GET https://app.informaticacloud.com/saas/public/core/v3/license/org/{orgId}
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SABC1
```

You can submit a POST request to determine the status of a session ID.

Use the following URI to submit the request:

```
/api/v2/user/validSessionId
```

Include the following attributes in the request:

- userName. Your IDMC user name.
- icToken. If the organization uses the session ID authentication type, include the session ID. If the organization uses the JWT authentication type, include the JWT value.

For example, you might use the following request:

```
POST https://app.informaticacloud.com/saas/api/v2/user/validSessionId
Content-Type: application/json
Accept: application/json

{
"@type": "validatedToken",
"userName": "user@informatica.com",
"icToken": "9KA11tLGqxVcGeul8SABC1"
}
```

The response returns whether the session ID is valid or not and the number of minutes left before the session ID expires. For example, you might receive the following response:

```
{
"@type": "validatedToken",
"timeUntilExpire": 29,
"isValidToken": true
}
```

Note: The timeUntilExpire value changes to "0" when the session or JWT will expire in less than 1 minute. The isValidToken value changes to "false" when the session or JWT expires. To avoid the risk of authentication failure, reauthenticate when the timeUntilExpire value changes to 0.

Customer Managed runtime environments

In a Customer Managed runtime environment, perform the following steps to obtain a token for API calls:

1. Issue the following call:

   ```
   POST /rm/api/v2/login { username, password }
   ```

2. Copy the token in the response, for example:

   ```
   { token: "eyJ...",expiresIn: 1800 }
   ```

3. Use the token for API calls, for example:

   ```
   POST /rm/api/v2/jobs/execute RM-USER-TOKEN: eyJ...
   ```

4. If successful, you will see a response similar to the following:

   ```
   { status: "RUNNING", jobId: "..." }
   ```

REST API responses

A successful REST API response returns the requested object, an array of objects, or an HTTP success code. A failed response returns an HTTP error code and can also return an error object.

Successul responses

The following table describes common successful responses to REST API requests:

Request type	Response
GET	For an information request, returns the requested object or an array of objects when applicable. For an action request, returns the HTTP 200 success code. Can also return the REST API success object.
POST	Returns the object that you created or updated. Can also return the HTTP 201 success code.
DELETE	HTTP 200 success code. Can also return the REST API success object.

For example, if you use a GET request to view a schedule, a successful response is the schedule object that you requested. Or, if you use a POST request to update the time that the schedule runs, a successful response is the schedule object that you updated, including the update. If you use a DELETE request to delete a schedule that is no longer being used, a successful response is the 200 success code.

Failed responses

For a failed response, the REST API returns a standard HTTP error code and can also return an error object.

The following table describes some of the standard HTTP error codes that might be returned:

HTTP error code	Description
400	Bad request. Can be a field or format issue such as an invalid character or incorrect string length.
401	Authentication issue. For example, invalid credentials or invalid session IDs.
403	Generic error. For example, user doesn't have required permissions for a resource.
404	Resource can't be found.
500	Unexpected error. Generic error message that appears when an unexpected condition was encountered.
502	Network issue.
503	Service unavailable. The server cannot handle the request.

In Customer Managed runtime environments, some errors might originate from the Resiliency Manager service in the environment. These errors carry the `RM_` prefix. The following table describes some of the RM error codes that might be returned:

RM error code	Description
400	Malformed RM app path (nothing after `/rm`)
401	Missing, invalid, or expired token
404	No customer-managed mapping for this API
502	Product application is unreachable
503 + Retry-After	Secure Agent is not ready, or product not yet deployed
504	Product application timed out

Success object

When the REST API successfully performs an action, it returns a 200 or 201 success response. It might also return a success object.

The success object has the following structure:

```
<xs:complexType name="success">
    <xs:sequence>
      <xs:element name="description" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
```

Error object

When the REST API encounters an error, it returns a REST API error object.

For REST API version 2 calls, the error object has the following structure:

```
{
    "code": "UI_10000",
    "description": "User name or password is not valid.",
    "statusCode": 403,
    "@type": "error"
}
```

For REST API version 3 calls, the error object has the following structure:

```
{
    "error": {
        "code": "IDS_085",
        "message": "User name or password is not valid.",
        "requestId": "9hr8e2ObIcChbwYftgDui7",
        "details": null
    }
}
```

REST API rules and guidelines

The following list is a summary of rules and guidelines to follow when working with the IDMC REST API:

- Use the login resource to start a REST API session. Reuse the session ID that's returned in the login response in all of the requests that you make during the session.
  You can use a placeholder for the session ID in request headers. Replace the placeholder with the session ID data that's returned in the login response.
- A REST API session expires after 30 minutes of inactivity. However, best practice is to log out before the session expires. To continue work with the REST API, start a new session.
- Do not include icSessionId or INFA-SESSION-ID in the request header for login and register resources.
- Don't log out of a REST API session until all the requests that you've sent have been executed.
- For all resources except login, use a placeholder for the base URL. For version 2 resources, replace the placeholder with the URL returned in the serverUrl. For version 3 resources, replace the placeholder with the URL returned in the baseApiUrl.
- All resources and attributes are case-sensitive.
- Specify the format of the request and response in the header. Use the Content-Type attribute to specify the request format and the Accept attribute to specify the response format.
- If a request or response type isn't configured, IDMC uses JSON by default.
- For requests in JSON that use version 2 resources, you can optionally use the @type attribute to define an object. For requests in JSON that use version 3 resources, do not use the @type attribute.
- For requests in XML, use an enclosing <object name> tag to define an object.
- XML responses that include a list of objects return the objects enclosed in the <root> tag.
- For POST requests, you must include all fields in the request object unless you submit the request in JSON format using partial mode. Partial mode is not applicable to most resources. By default, the REST API uses full mode.
- Where indicated, enclose POST request attributes in the specified object. When no object is specified, include attributes in the request body.

Documentation conventions

IDMC REST API documentation uses the following conventions:

- Methods are in capital letters, such as GET.
- Request syntax uses the following conventions:
  - Variables are enclosed in angle brackets (< >), such as <id> for a user ID.
  - When listing a choice of attribute values, options are separated by a pipe (|).
  - Optional attributes are in *italics*.

CHAPTER 2

REST API resource quick references

Use the resource quick reference lists to find quick descriptions of REST API resources used by the IDMC platform and services.

Platform resource quick reference

The following list describes the operations that you can perform on IDMC REST API platform resources:

Activity logs for completed jobs (version 2 resource)

Get log information for completed jobs from Monitor.

The following table lists the operations:

Operation	Method	URI
Get all log information.	GET	`/api/v2/activity/activityLog`
Get log information by log ID.	GET	`/api/v2/activity/activityLog/<id>`
Get log information by task ID.	GET	`/api/v2/activity/activityLog?taskId=<taskId>`
Get log information by run ID.	GET	`/api/v2/activity/activityLog?runId=<runId>`
Get log information by specifying the number of rows to skip.	GET	`/api/v2/activity/activityLog?offset=<offset>`
Get log information by specifying a row limit.	GET	`/api/v2/activity/activityLog?rowLimit=<rowLimit>`
Get a session log.	GET	`/api/v2/activity/activityLog/<id>/sessionLog`

Activity logs for running jobs (version 2 resource)

Get log information for running jobs from Monitor.

The following table lists the operations:

Operation	Method	URI
Get all log information.	GET	/api/v2/activity/activityMonitor
Get log information that includes tasks, linear taskflows, and child objects.	GET	/api/v2/activity/activityMonitor?details=true

Audit logs (version 2 resource)

Request entries from the audit log.

The following table lists the operations:

Operation	Method	URI
Get the most recent 200 entries in the audit log.	GET	/api/v2/auditlog
Get a batch of audit log entries by batch ID and batch size.	GET	/api/v2/auditlog?batchId=<batchId>&batchSize=<batchSize>

Bundles (version 2 resource)

Get bundle details and manage bundles in your organization.

The following table lists the operations:

Operation	Method	URI
Get a bundle by bundle ID.	GET	/api/v2/bundleObject/<bundle ID>
Get a bundle by bundle name.	GET	/api/v2/bundleObject/name/<bundle name>
Get details for all bundles published by the organization.	GET	/api/v2/bundleObject/?published=true
Get details for all bundles installed by the organization.	GET	/api/v2/bundleObject/?installed=true
Get license information for a bundle associated with the organization.	GET	/api/v2/bundleObjectLicense/<bundleObjectId>
Install a bundle on the organization.	POST	/api/v2/bundleObjectLicense

Operation	Method	URI
Push a private published bundle to install the bundle on all sub-organizations.	POST	/api/v2/bundleObject/push/<bundleId>
Uninstall a bundle from the organization.	DELETE	/api/v2/bundleObjectLicense?bundleObjectId=<bundleId>&updateOption=<updateOption>

Elastic runtime environments (version 3 resource)

Manage an elastic runtime environment, including its environment configuration, images, runtime environment association, supplementary file specification, and tokens.

The following table lists the operations:

Operation	Method	URI
Get elastic configuration details.	GET	/public/core/v3/ClusterConfig/<config_id>
Get the association between an elastic configuration and a runtime environment.	GET	/public/core/v3/RuntimeEnvironment/<rte_id>/Cluster
Get the association between a cluster and an elastic runtime environment.	GET	/public/core/v3/RuntimeEnvironment/<cluster_id>/Cluster
List all images.	GET	/public/core/v3/ais/RuntimeApplicationImage?runtimeEnvironmentId=<rteId>&includeAllImageStates=<true or false>
Get all tokens in the organization.	GET	/public/core/v3/containerImageToken
Get a new token to access and download images.	GET	/public/core/v3/containerimagetoken/create
Get the supplementary file specification.	GET	/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
Create an elastic configuration.	POST	/public/core/v3/ClusterConfig
Associate a cluster with a runtime environment.	POST	/public/core/v3/RuntimeEnvironment/<rte_id>/Cluster/<cluster_id>

Operation	Method	URI
Update or delete a supplementary file specification.	POST	/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
Update an elastic configuration.	PUT	/public/core/v3/ClusterConfig/<advanced_config_ID>
Revoke a token.	DELETE	/public/core/v3/containerImageToken/revoke/<tokenId>

Exporting objects (version 3 resource)

Export objects from an organization.

The following table lists the operations:

Operation	Method	URI
Download an export package.	GET	/public/core/v3/export/<id>/package
Get the status of the export job.	GET	/public/core/v3/export/<id>
Get the status of each object in the export job.	GET	/public/core/v3/export/<id>?expand=objects
Download the export job log.	GET	/public/core/v3/export/<id>/log
Start an export job.	POST	/public/core/v3/export

Identity providers (version 3 resource)

Register and manage your identity provider.

The following table lists the operations:

Operation	Method	URI
Get details about the identity provider for the organization.	GET	/public/core/v3/Orgs/<orgId>/IdentityProviders
Register an identity provider.	POST	/public/core/v3/Orgs/<orgId>/IdentityProviders
Update the identity provider.	PUT	/public/core/v3/Orgs/<orgId>/IdentityProviders/<identity provider ID>
Delete an identity provider.	DELETE	/public/core/v3/Orgs/<orgId>/IdentityProviders/<identity provider ID>

Importing objects (version 3 resource)

Import objects to an organization.

The following table lists the operations:

Operation	Method	URI
Get the status of the import job.	GET	/public/core/v3/import/<id>
Get the status of each object in the import job.	GET	/public/core/v3/import/<id>?expand=objects
Download the import job log.	GET	/public/core/v3/import/<id>/log
Upload an import package.	POST	/public/core/v3/import/package
Start an import job.	POST	/public/core/v3/import/<id>

IP addresses (version 3 resource)

Get a list of trusted IP address ranges and add trusted IP address ranges. You can also enable or disable trusted IP address filtering.

The following table lists the operations:

Operation	Method	URI
Get a list of trusted IP address ranges for an organization or sub-organization.	GET	/public/core/v3/Orgs/<organization ID>/TrustedIP
Add values of trusted IP ranges for an organization or a sub-organization and enable or disable trusted IP ranges.	PUT	/public/core/v3/Orgs/<organization ID>/TrustedIP

Jobs (version 2 resource)

Start or stop a task, including linear taskflows.

The following table lists the operations:

Operation	Method	URI
Start a job.	POST	/api/v2/job
Stop a job.	POST	/api/v2/job/stop
Stop a job cleanly.	POST	/api/v2/job/stop?cleanStop=true

For file ingestion and replication tasks, use the file ingestion and replication job resource. For more information, see "Jobs" on page 660.

Key rotation (version 3 resource)

Get information about the organization's encryption key rotation settings and change the settings.

The following table lists the operations:

Operation	Method	URI
Get details about key rotation intervals.	GET	/public/core/v3/key/rotationSettings
Change the key rotation interval.	PATCH	/public/core/v3/key/rotationSettings

Licenses (version 3 resource)

Get license details for an organization and assign licenses to sub-organizations.

The following table lists the operations:

Operation	Method	URI
Get license details for an organization or sub-organization.	GET	/public/core/v3/license/org/<orgId>
Update license details for a sub-organization.	PUT	/public/core/v3/license/org/<orgId>

Log in (version 2 resource)

Log in to your organization to use REST API version 2 resources.

The following table lists the operations:

Operation	Method	URI
Log in using your IDMC user account.	POST	https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/login
Log in using a JSON Web Token (JWT) access token.	POST	https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/loginOAuth
Log in using a Security Assertion Markup Language (SAML) token.	POST	https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/loginSaml
Log in using Salesforce credentials.	POST	https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/loginSf

Log in (version 3 resource)

Log in to your organization to use REST API version 3 resources.

The following table lists the operations:

Operation	Method	URI
Log in to use REST API version 3 resources.	POST	`https://<cloud provider>-<region>.informaticacloud.com/saas/public/core/v3/login`

Log out (version 2 resource)

Log out of an organization and end the REST API version 2 session or end all REST API version 2 sessions for the organization.

The following table lists the operations:

Operation	Method	URI
Log out of an organization and end the REST API version 2 session.	POST	`/api/v2/user/logout`
Log out of an organization and end all REST API version 2 sessions for the organization.	POST	`https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/logoutall`

Log out (version 3 resource)

Log out of an organization and end the REST API version 3 session.

The following table lists the operations:

Operation	Method	URI
Log out of an organization and end the REST API version 3 session.	POST	`https://<cloud provider>-<region>.informaticacloud.com/saas/public/core/v3/logout`

Lookup (version 3 resource)

Look up an object's ID, name, path, or type attributes.

The following table lists the operations:

Operation	Method	URI
Get lookup details.	POST	`/public/core/v3/lookup`

Metering data (version 3 resource)

Download metering usage data.

The following table lists the operations:

Operation	Method	URI
Get the status of the export job.	GET	/public/core/v3/license/metering/ExportMeteringData/<jobId>
Download metering data after the export job completes.	GET	public/core/v3/license/metering/ExportMeteringData/<jobId>/download
Get the custom IPU alert configurations for your organization.	GET	/public/core/v3/metering/ipuAlert/org('<organization Id>')
Get the custom IPU alert configurations for your tags.	GET	/public/core/v3/metering/ipuAlert/org('<organization Id>')/viewTagsPreference
Send an export job request using the new REST API resource. Get project-level and asset-level metering data.	POST	/public/core/v3/license/metering/ExportMeteringData
Send an export job request using the older REST API resource.	POST	/public/core/v3/license/metering/ExportMeteringDataAllLinkedOrgsAcrossRegion
Send an export job request for job-level metering data.	POST	/public/core/v3/license/metering/ExportServiceJobLevelMeteringData

Objects (version 3 resource)

List assets in an organization.

The following table lists the operations:

Operation	Method	URI
Get a list of assets.	GET	/public/core/v3/objects?<query parameters>
Get a list of dependencies for an asset.	GET	/public/core/v3/objects/<objectId>/references?<parameters>

Object permissions (version 3 resource)

Configure user and user group permissions on objects such as assets, folders, and projects.

The following table lists the operations:

Operation	Method	URI
Get details for an access control list.	GET	/public/core/v3/objects/<object ID>/permissions/<ACL ID>
Get details of all permissions on an object.	GET	/public/core/v3/objects/<object ID>/permissions

Operation	Method	URI
Get your access rights for an object.	GET	/public/core/v3/objects/<object ID>/permissions/checkAccess?type=<asset type>
Create an access control list.	POST	/public/core/v3/objects/<object ID/permissions
Update an access control list.	PUT	/public/core/v3/objects/<object ID>/permissions/<ACL ID>
Delete the permissions that a user or user group has for an object.	DELETE	/public/core/v3/objects/<object ID>/permissions/<ACL ID>
Delete all the permissions configured for an object.	DELETE	/public/core/v3/objects/<object ID>/permissions

Object state synchronization (version 3 resource)

Synchronize object states and runtime attributes between organizations after you migrate an object from one organization to another.

The following table lists the operations:

Operation	Method	URI
Get the status of the job to create an object states package.	GET	/public/core/v3/fetchState/<job id>
Get the status of each object in the job to create an object states package.	GET	/public/core/v3/fetchState/<job id>?expand=objects
Get the status of the job to load an object states package.	GET	/public/core/v3/loadState/<id>
Get the status of each object in the job to load an object states package.	GET	/public/core/v3/loadState/<id>?expand=objects
Download an object states package.	GET	/public/core/v3/fetchState/<id>/package
Start a job to create an object states package.	POST	/public/core/v3/fetchState
Start a job to load an object states package.	POST	/public/core/v3/loadState/<id>
Upload an object states package.	POST	/public/core/v3/loadState/package

Organizations (version 2 resource)

Get details of your IDMC organization or a related sub-organization, create a sub-organization, update an organization or related sub-organization, and delete a sub-organization.

The following table lists the operations:

Operation	Method	URI
Get organization details.	GET	/api/v2/org
Get sub-organization details by organization ID.	GET	/api/v2/org/<sub-organization ID>
Get sub-organization details by organization name.	GET	/api/v2/org/name/<sub-organization name>
Create a sub-organization.	POST	/api/v2/user/register
Update the details of your organization.	POST	/api/v2/org
Update the details of a sub-organization.	POST	/api/v2/org/<id>
Delete a sub-organization.	DELETE	/api/v2/org/<id>

Passwords (version 3 resource)

Manage passwords.

The following table lists the operations:

Operation	Method	URI
Change your password.	POST	/public/core/v3/Users/ChangePassword
Reset your password.	POST	/public/core/v3/Users/ResetPassword

Privileges (version 3 resource)

Get a list of privileges that you can use for custom roles.

The following table lists the operations:

Operation	Method	URI
Get a list of enabled and disabled privileges.	GET	/public/core/v3/privileges
Get a complete list of privileges that includes enabled, disabled, default, and unassigned privileges.	GET	/public/core/v3/privileges?q=status==All

Projects and folders (version 3 resource)

Create, update, and delete projects and folders.

The following table lists the operations:

Operation	Method	URI
Create a project.	POST	/public/core/v3/projects
Create a folder in the Default project.	POST	/public/core/v3/folders
Create a folder in a project by project ID.	POST	/public/core/v3/projects/<project ID>/folders
Create a folder in a project by project name.	POST	/public/core/v3/projects/name/<project name>/folders
Update a project by project ID.	PATCH	/public/core/v3/projects/<project ID>
Update a project by project name.	PATCH	/public/core/v3/projects/name/<project name>
Update a folder in the Default project.	PATCH	/public/core/v3/folders/<folder ID>
Update a folder in a project by folder and project ID.	PATCH	/public/core/v3/projects/<project ID>/folders/<folder ID>
Update a folder in a project by folder and project name.	PATCH	/public/core/v3/projects/name/<project name>/folders/name/<folder name>
Delete a project by project ID.	DELETE	/public/core/v3/projects/<project ID>
Delete a project by project name.	DELETE	/public/core/v3/projects/name/<project name>
Delete a folder in the Default project.	DELETE	/public/core/v3/projects/<folder ID>
Delete a folder in a project by folder and project ID.	DELETE	/public/core/v3/projects/<project ID>/folders/<folder ID>
Delete a folder in a project by folder and project name.	DELETE	/public/core/v3/projects/name/<project name>/folders/name/<folder name>

Roles (version 3 resource)

Get details for roles in your organization. You can also create, update, and delete custom roles.

The following table lists the operations:

Operation	Method	URI
Get details of all roles in the organization.	GET	/public/core/v3/roles
Create a custom role.	POST	/public/core/v3/roles
Add privileges to a custom role by role ID.	PUT	/public/core/v3/roles/<role ID>/addPrivileges
Add privileges to a custom role by role name.	PUT	/public/core/v3/roles/name/<role name>/addPrivileges
Remove privileges from a custom role by role ID.	PUT	/public/core/v3/roles/<role ID>/removePrivileges
Remove privileges from a custom role by role name.	PUT	/public/core/v3/roles/name/<role name>/removePrivileges
Delete a custom role.	DELETE	/public/core/v3/roles/<role ID>

Runtime environments (version 2 resource)

Get runtime environment details and manage Secure Agent groups.

The following table lists the operations:

Operation	Method	URI
Get runtime environment details.	GET	/api/v2/runtimeEnvironment
Get runtime environment details by environment ID.	GET	/api/v2/runtimeEnvironment/<id>
Get runtime environment details by environment name.	GET	/api/v2/runtimeEnvironment/name/<name>
Get enabled services and connectors for a Secure Agent group.	GET	/api/v2/runtimeEnvironment/<id>/selections
Get all services and connectors available for a Secure Agent group.	GET	/api/v2/runtimeEnvironment/<id>/selections/details
Get Secure Agent service properties that you can edit.	GET	/api/v2/runtimeEnvironment/<id>/configs/details/*<platform>*
Get a list of group-level properties that override the Secure Agent service default property settings.	GET	/api/v2/runtimeEnvironment/<id>/configs/*<platform>*
Create a Secure Agent group.	POST	/api/v2/runtimeEnvironment
Update a Secure Agent group by ID.	POST	/api/v2/runtimeEnvironment/<id>

Operation	Method	URI
Enable services and connectors for a Secure Agent group.	POST	/api/v2/runtimeEnvironment/<id>/selections
Configure Secure Agent service properties.	PUT	/api/v2/runtimeEnvironment/<id>/configs/*<platform>*
Delete a Secure Agent group.	DELETE	/api/v2/runtimeEnvironment/<id>
Delete Secure Agent service property settings.	DELETE	/api/v2/runtimeEnvironment/<id>/configs

SAML group and role mappings (version 3 resource)

Map SAML groups and roles to IDMC roles.

The following table lists the operations:

Operation	Method	URI
Get all group mappings in the organization.	GET	public/core/v3/Orgs/<organization ID>/SAMLConfig/groupMappings
Get all role mappings in the organization.	GET	public/core/v3/Orgs/<organization ID>/SAMLConfig/roleMappings
Add a mapping between an IDMC role and a SAML group.	PUT	/public/core/v3/Orgs/<organization ID>/addSamlGroupMappings
Add a mapping between an IDMC role and a SAML role.	PUT	/public/core/v3/Orgs/<organization ID>/addSamlRoleMappings
Remove a SAML group mapping.	PUT	/public/core/v3/Orgs/<organization ID>/removeGroupMappings
Remove a SAML role mapping.	PUT	/public/core/v3/Orgs/<organization ID>/removeSamlRoleMappings

Schedules (version 2 resource)

Get the details of a schedule or the details of all schedules in the organization. You can create or update a schedule. You can also delete a schedule.

The following table lists the operations:

Operation	Method	URI
Get details of all schedules.	GET	/api/v2/schedule
Get schedule details by ID.	GET	/api/v2/schedule/<id>
Get schedule details by name.	GET	/api/v2/schedule/name/<name>

Operation	Method	URI
Create a schedule.	POST	/api/v2/schedule
Update a schedule.	POST	/api/v2/schedule/<id>
Delete a schedule.	DELETE	/api/v2/schedule/<id>

Schedules (version 3 resource)

Get details of the schedules in the organization. You can also create, update, or delete schedules.

The following table lists the operations:

Operation	Method	URI
Get details of all schedules in the organization.	GET	/public/core/v3/schedule
Get schedule details by schedule ID.	GET	/public/core/v3/schedule/<id>
Create a schedule.	POST	/public/core/v3/schedule
Update, enable, or disable a schedule.	PUT	/public/core/v3/schedule/*<id>*
Delete a schedule	DELETE	/public/core/v3/schedule/<id>

SCIM

Manage SCIM tokens and get SCIM-managed users and groups.

The following table lists the operations:

Operation	Method	URI
Get a list of SCIM tokens you created.	GET	/public/core/v3/scimTokens
Create a SCIM token.	POST	/public/core/v3/scimTokens
Delete a SCIM token.	DELETE	/public/core/v3/scimTokens/<token_id>
Get SCIM-managed user details.	GET	/scim-service/Users?filter=userName eq \"<user name>\"
Get SCIM-managed groups.	GET	/scim-service/Groups

Secure Agents and services (version 2 resource)

Get an install token to register a Secure Agent, download the checksum of the agent installation program, request the details about Informatica Cloud Secure Agents or Secure Agent services, or delete a Secure Agent.

The following table lists the operations:

Operation	Method	URI
Get an install token or get the checksum of the agent installation program.	GET	/api/v2/agent/installerInfo/<platform>
Get details of all Secure Agents.	GET	/api/v2/agent
Get all Secure Agents that aren't assigned to a Secure Agent group.	GET	/api/v2/agent/?includeUnassignedOnly=true
Get a Secure Agent by agent ID.	GET	/api/v2/agent/<agent ID>
Get a Secure Agent by agent name.	GET	/api/v2/agent/name/<name>
Get the status of services that run on all of the Secure Agents	GET	/api/v2/agent/details
Get the status of services that run on a Secure Agent by agent ID.	GET	/api/v2/agent/details/<agent ID>
Get the status of services that run on a Secure Agent, including Secure Agent details, by agent ID.	GET	/api/v2/agent/details/<agent ID>?onlyStatus=false
Delete a Secure Agent.	DELETE	/api/v2/agent/<id>

Secure Agent services (version 3 resource)

Start or stop a Secure Agent service.

The following table lists the operations:

Operation	Method	URI
Start or stop a Secure Agent service.	POST	public/core/v3/agent/service

Security logs (version 3 resource)

Get security log entries.

The following table lists the operations:

Operation	Method	URI
Get security log entries from the last 24 hours.	GET	/public/core/v3/securityLog

Server time (version 2 resource)

Get the local time for the IDMC server.

The following table lists the operations:

Operation	Method	URI
Get the local time of the IDMC server	GET	/api/v2/server/serverTime

Source control (version 3 resource)

Interact with a source control repository to manage and track changes made to IDMC objects such as projects, folders, and assets.

The following table lists the operations:

Operation	Method	URI
Get details about the repository connection.	GET	/public/core/v3/repositoryConnection
Get the status of a source control action.	GET	/public/core/v3/sourceControlAction/<action ID>
Get the status for each object in the source control action.	GET	/public/core/v3/sourceControlAction/<action ID>?expand=objects
Get commit details.	GET	/public/core/v3/commit/<commitHash>
Get commit history.	GET	/public/core/v3/commitHistory
Check out an object.	POST	/public/core/v3/checkout
Check in an object.	POST	/public/core/v3/checkin
Undo a checkout.	POST	/public/core/v3/undoCheckout
Pull objects from the repository to load their latest versions in your organization.	POST	/public/core/v3/pull
Pull objects from a commit to load them in your organization.	POST	/public/core/v3/pullByCommitHash
Compare versions of an object.	POST	/public/core/v3/compare/<asset ID>

Tags (version 3 resource)

Assign and remove tags.

The following table lists the operations:

Operation	Method	URI
Assign a tag to an asset.	POST	/public/core/v3/TagObjects
Remove a tag from an asset.	POST	/public/core/v3/UntagObjects

Tasks (version 2 resource)

Get a list of tasks of a specified type. You can use this resource to retrieve the name and ID for a task.

The following table lists the operations:

Operation	Method	URI
Get a list of tasks by type.	GET	/api/v2/task?type=<type>

Users (version 2 resource)

Get the details of an IDMC user account or the details of all user accounts in the organization. You can also create, update, and delete user accounts.

The following table lists the operations:

Operation	Method	URI
Get details of all IDMC users.	GET	/api/v2/user
Get details of an IDMC user by user ID.	GET	/api/v2/user/<id>
Get details of an IDMC user by user name.	GET	/api/v2/user/name/<name>
Create a user.	POST	/api/v2/user
Update user details.	POST	/api/v2/user/<id>
Delete a user.	DELETE	/api/v2/user/<id>

Users (version 3 resource)

Get user details, create users, update role and user group assignments, and delete users.

The following table lists the operations:

Operation	Method	URI
Get details for all users in the organization.	GET	/public/core/v3/users
Create a user.	POST	/public/core/v3/users
Add a role assignment by user ID.	PUT	/public/core/v3/users/<user ID>/addRoles
Add a role assignment by user name.	PUT	/public/core/v3/users/name/<user name>/addRoles
Remove a role assignment by user ID.	PUT	/public/core/v3/users/<user ID>/removeRoles
Remove a role assignment by user name.	PUT	/public/core/v3/users/name/<user name>/removeRoles

Operation	Method	URI
Assign a user to a group by user ID.	PUT	/public/core/v3/users/<user ID>/addGroups
Assign a user to a group by user name.	PUT	/public/core/v3/users/name/<user name>/addGroups
Remove a user from a group by user ID.	PUT	/public/core/v3/users/<user ID>/removeGroups
Remove a user from a group by user name.	PUT	/public/core/v3/users/name/<user name>/removeGroups
Delete a user.	DELETE	/public/core/v3/users/<userId>

User groups (version 3 resource)

Create, update, and delete user groups.

The following table lists the operations:

Operation	Method	URI
Get details of all user groups in the organization.	GET	/public/core/v3/userGroups
Create a user group.	POST	/public/core/v3/userGroups
Add a role to a user group by group ID.	PUT	/public/core/v3/userGroups/<user group ID>/addRoles
Add a role to a user group by group name.	PUT	/public/core/v3/userGroups/name/<user group name>/addRoles
Remove a role from a user group by group ID.	PUT	/public/core/v3/userGroups/<user group ID>/removeRoles
Remove a role from a user group by group name.	PUT	/public/core/v3/userGroups/name/<user group name>/removeRoles
Add a user to a user group by group ID.	PUT	/public/core/v3/userGroups/<user group ID>/addUsers
Add a user to a user group by group name.	PUT	/public/core/v3/userGroups/name/<user group name>/addUsers
Remove a user from a user group by group ID.	PUT	/public/core/v3/userGroups/<user group ID>/removeUsers
Remove a user from a user group by group name.	PUT	/public/core/v3/userGroups/name/<user group name>/removeUsers
Delete a user group.	DELETE	/public/core/v3/userGroups/<user group Id>

Data Integration resource quick reference

The following list describes the operations that you can perform on Data Integration resources:

Code tasks (version 1 resource)

Create, start, and cancel a code task job. You can also access session logs, view job details and job status of a code task.

The following table lists the operations:

Operation	Method	URI
Get the configuration parameters for a code task.	GET	GET <server URL>/disnext/api/v1/CodeTask/<Code task ID>
Get the job status for a code task.	GET	GET <server URL>/disnext/api/v1/CodeTask/JobStatus/<Code task job ID>
Get the session logs for a code task.	GET	GET <server URL>/logservice/api/v1/jobs/<Code task job ID>/logs
Get the Spark task results for a code task.	GET	GET <server URL>/logservice/api/v1/jobs/<Code task job ID>/callback
Create a code task.	POST	POST <server URL>/disnext/api/v1/CodeTask
Start a code task.	POST	POST <server URL>/disnext/api/v1/CodeTask/Start
Cancel a code task.	PUT	PUT <server URL>/disnext/api/v1/CodeTask/Cancel

Connections (version 2 resource)

Get connection details for an organization. You can also use this resource to create, update, test, and delete a connection.

The following table lists the operations:

Operation	Method	URI
Get details of all connections in the organization.	GET	/api/v2/connection
Get a list of connections by Secure Agent ID and connection type.	GET	/api/v2/connection/search?agentId=<agentId>&uiType=<uiType>

Operation	Method	URI
Get a list of connections by runtime environment ID and connection type.	GET	/api/v2/connection/search? runtimeEnvironmentId=<runtimeEnvironmentId>&uiType=<uiType>
Get connection details by connection ID.	GET	/api/v2/connection/<id>
Get connection details by connection name.	GET	/api/v2/connection/name/<name>
Get source metadata details for a connection.	GET	/api/v2/connection/source/<connection ID>/metadata
Get target metadata details for a connection.	GET	/api/v2/connection/target/<connection ID>/metadata
Get the objects that you can use as a source by connection ID.	GET	/api/v2/connection/source/<id>
Get the objects that you can use as a source by connection name.	GET	/api/v2/connection/source/name/<name>
Get the objects that you can use as a target by connection ID.	GET	/api/v2/connection/target/<id>
Get the objects that you can use as a target by connection name.	GET	/api/v2/connection/target/name/<name>
Test a connection.	GET	/api/v2/connection/test/<id>
Create a connection.	POST	/api/v2/connection
Update a connection.	POST	/api/v2/connection/<id>
Delete a connection.	DELETE	/api/v2/connection/<id>

Connection migration (version 2 resource)

Migrate an old version of a connection in referenced assets to the latest version in the organization.

The following table lists the operations:

Operation	Method	URI
Start a migration job for a connection.	POST	saas/api/v2/connectionMigration/migrate

Connectors (version 2 resource)

Get a list of connectors that are available to an organization along with connector details and their attributes.

The following table lists the operations:

Operation	Method	URI
Get available connectors for an organization.	GET	/api/v2/connector
Get metadata for a connector type.	GET	/api/v2/connector/metadata?connectorName=<connectorName>

Data preview (version 2 resource)

Preview data in a mapping.

The following table lists the operations:

Operation	Method	URI
Preview source data by connection ID.	GET	/api/v2/connection/source/<id>/datapreview/<objectName>
Preview source data by connection name.	GET	/api/v2/connection/source/name/<name>/datapreview/<objectName>
Preview target data by connection ID.	GET	/api/v2/connection/target/<id>/datapreview/<objectName>
Preview target data by connection name.	GET	/api/v2/connection/target/name/<name>/datapreview/<objectName>

Data services (version 1 resource)

Run data services from the data services repository.

The following table lists the operations:

Operation	Method	URI
Run a data service.	POST	/DSRepo/rest/api/v1/services/run/<service name>

Dynamic mapping tasks (version 1 resource)

Create a dynamic mapping task to batch jobs together that are based on the same mapping. You can also run the task and get details about the job.

The following table lists the operations:

Operation	Method	URI
Get details for a dynamic mapping task.	GET	/batch-mapping/api/v1/dynamictask/<id>
Get details for a job that runs a dynamic mapping task.	GET	/batch-mapping/api/v1/Job/monitor/task/<Id>/run/<runId>
Create a dynamic mapping task.	POST	/batch-mapping/api/v1/dynamictask
Run a dynamic mapping task.	POST	/batch-mapping/api/v1/Job
Stop a job that runs a dynamic mapping task.	POST	/batch-mapping/api/v1/Job/stop
Update a dynamic mapping task.	PUT	/batch-mapping/api/v1/dynamictask/<Id>
Delete a dynamic mapping task.	DELETE	/batch-mapping/api/v1/dynamictask/<id>

Expressions (version 2 resource)

Validate expressions.

The following table lists the operations:

Operation	Method	URI
Validate an expression.	POST	/saas/api/v2/expression/validate

Fields (version 2 resource)

Get and update field details for a source or target object.

The following table lists the operations:

Operation	Method	URI
Get fields for a source object by connection ID.	GET	/api/v2/connection/source/<id>/field/<object name>
Get fields for a source object by connection name.	GET	/api/v2/connection/source/name/<name>/field/<object name>
Get fields for a target object by connection ID.	GET	/api/v2/connection/target/<id>/field/<object name>
Get fields for a target object by connection name.	GET	/api/v2/connection/target/name/<name>/field/<object name>
Update fields in a source flat file by connection ID.	POST	/api/v2/connection/source/<id>/field/<objectName>

Operation	Method	URI
Update fields in a target flat file by connection ID.	POST	/api/v2/connection/target/<id>/field/<objectName>
Update fields in a source object that's not a flat file by connection ID.	POST	/api/v2/connection/source/<id>/fields?objectName=<object name>
Update fields in a target object that's not a flat file by connection ID.	POST	/api/v2/connection/target/<id>/fields?objectName=<object name>

File listeners (version 1 resource)

Create, update, delete, run a file listener, and change the owner of a file listener association from one user to another.

The following table lists the operations:

Operation	Method	URI
Get file listener details.	GET	mftsaas/api/v1/filelisteners/<filelistener ID>
Get the status of a file listener.	GET	mftsaas/api/v1/filelisteners/job/<Job ID>/status
Get file listener job details.	GET	mftsaas/api/v1/filelisteners/<Run ID>/activityLog
Create a file listener and event listener.	POST	mftsaas/api/v1/filelisteners
Change the owner of a file listener association.	POST	mftsaas/api/v1/ChangeCallbackOwnership
Start a file listener.	POST	mftsaas/api/v1/filelisteners/<file listener ID>/start
Stop a file listener.	POST	mftsaas/api/v1/filelisteners/<file listener ID>/stop
Update a file listener.	PUT	mftsaas/api/v1/filelisteners/<filelistener ID>
Delete a file listener.	DELETE	mftsaas/api/v1/filelisteners/<file listener ID>

File transfer (version 1 resource)

Send files to a remote server or receive files from a remote server.

The following table lists the operations:

Operation	Method	URI
Get the status of a file transfer job.	GET	mftsaas/api/v1/job/<runID>/status
Transfer files.	POST	mftsaas/api/v1/sendfiles/<connection ID>
Receive files.	POST	mftsaas/api/v1/receivefiles/<connection ID>
Compress and transfer files for a file transfer task using a hosted server.	POST	mftsaas/api/v1/filetransferTask/execute/1003
Decompress and transfer files for a file transfer task using a hosted server.	POST	mftsaas/api/v1/filetransferTask/execute/1004
Encrypt and transfer files for a file transfer task using a hosted server.	POST	mftsaas/api/v1/filetransferTask/execute/1001
Decrypt and transfer files for a file transfer task using a hosted server.	POST	mftsaas/api/v1/filetransferTask/execute/1002
Compress and transfer files for a file transfer task using a remote server.	POST	mftsaas/api/v1/filetransferTask/execute/1003
Decompress and transfer files for a file transfer task using a remote server.	POST	mftsaas/api/v1/filetransferTask/execute/1004
Encrypt and transfer files for a file transfer task using a remote server.	POST	mftsaas/api/v1/filetransferTask/execute/1001
Decrypt and transfer files for a file transfer task using a remote server.	POST	mftsaas/api/v1/filetransferTask/execute/1002

Fixed-width configuration (version 2 resource)

Get, create, update, and delete fixed-width formats for flat file sources, targets, and lookups.

The following table lists the operations:

Operation	Method	URI
Get all fixed-width formats.	GET	/api/v2/fwConfig
Get a fixed-width format by format ID.	GET	/api/v2/fwConfig/<id>
Get a fixed-width format by federated ID.	GET	/api/v2/fwConfig/frs/<id>
Get a fixed-width format by format name.	GET	/api/v2/fwConfig/name/<name>
Create a fixed-width format.	POST	/api/v2/fwConfig

Operation	Method	URI
Update a fixed-width format.	POST	/api/v2/fwConfig/<id>
Delete a fixed-width format.	DELETE	/api/v2/fwConfig/<id>

Hierarchical mappers (version 1 resource)

Create or run a hierarchical mapper that converts hierarchical data to a different hierarchical structure. You can also get metadata about a hierarchical mapper.

The following table lists the operations:

Operation	Method	URI
Get metadata about a hierarchical mapper.	GET	/h2h/api/v1/idsm/metadata/<hierarchical mapper ID>
Create a hierarchical mapper.	POST	/h2h/api/v1/create/<hierarchical mapper ID>
Run a hierarchical mapper.	POST	/h2h/api/v1/service/run/<hierarchical mapper ID>

Job log files (version 1 resource)

Get log information for completed Data Integration jobs from Operational Insights.

The following table lists the operations:

Operation	Method	URI
Get all log information.	GET	/cdiinsights-service/api/v1/analytical/Orgs(<orgID>)/JobLogEntries

Linear taskflows (version 2 resource)

Get the details of a linear taskflow or the details of all linear taskflows in the organization. You can also create, update, and delete linear taskflows.

The following table lists the operations:

Operation	Method	URI
Get details of all linear taskflows.	GET	/api/v2/workflow
Get details for a linear taskflow by taskflow ID.	GET	/api/v2/workflow/<id>
Get details for a linear taskflow by taskflow name.	GET	/api/v2/workflow/name/<name>
Create a linear taskflow.	POST	/api/v2/workflow

Operation	Method	URI
Update a linear taskflow.	POST	/api/v2/workflow/<id>
Delete a linear taskflow.	DELETE	/api/v2/workflow/<id>

Mappings (version 2 resource)

Get details for a mapping or the details of all mappings in the organization.

The following table lists the operations:

Operation	Method	URI
Get details of all mappings.	GET	/api/v2/mapping
Get mapping details by mapping ID.	GET	/api/v2/mapping/<id>
Get mapping details by mapping name.	GET	/api/v2/mapping/name/<name>
Get details for all transformations in a mapping by mapping ID	GET	/api/v2/mapping/additionalTransformationInfo/<mapping ID>
Get details for transformations of a particular type in a mapping by mapping ID	GET	/api/v2/mapping/additionalTransformationInfo/<mapping ID>?txType=<transformation type>
Get details for all transformations in a mapping by mapping name	GET	/api/v2/mapping/additionalTransformationInfoByName/<mapping name>
Get details for transformations of a particular type in a mapping by mapping name	GET	/api/v2/mapping/additionalTransformationInfoByName/<mapping name>?txType=<transformation type>
Get a mapping image.	GET	/api/v2/mapping/*<id>*/image?deployed=<true|false>

Mapping tasks (version 2 resource)

Get details of a mapping task. You can also create, update, and delete mapping tasks.

The following table lists the operations:

Operation	Method	URI
Get mapping task details by task ID.	GET	/api/v2/mttask/<id>
Get mapping task details by federated ID.	GET	/api/v2/mttask/frs/<id>
Get mapping task details by task name.	GET	/api/v2/mttask/name/<name>
Create a mapping task.	POST	/api/v2/mttask/

Operation	Method	URI
Update a mapping task by task ID.	POST	/api/v2/mttask/<id>
Update a mapping task by federated ID.	POST	/api/v2/mttask/frs/<id>
Delete a mapping task.	DELETE	/api/v2/mttask/<id>

PowerCenter mapplets (version 2 resource)

Get details of a PowerCenter mapplet or to request a list of all PowerCenter mapplets in the organization. You can also use this resource to upload and delete PowerCenter mapplets.

The following table lists the operations:

Operation	Method	URI
Get a list of all PowerCenter mapplets.	GET	/api/v2/customFunc
Get PowerCenter mapplet details by mapplet ID.	GET	/api/v2/customFunc/<id>
Get PowerCenter mapplet details by mapplet name.	GET	/api/v2/customFunc/name/<name>
Upload a new PowerCenter mapplet.	POST	/api/v2/customFunc
Update a PowerCenter mapplet.	POST	/api/v2/customFunc/<id>
Delete a PowerCenter mapplet.	DELETE	/api/v2/customFunc/<id>

Synchronization task conversion

Convert synchronization tasks to data transfer tasks.

The following table lists the operations:

Operation	Method	URI
Test compatibility between a synchronization task and data transfer task features.	GET	/dtt/dss/convert/test/<assetId>
Convert a synchronization task to a data transfer task.	POST	/dtt/dss/convert/<assetId>

Taskflows (version 1 resource)

Get the status of a taskflow, publish taskflows, and unpublish taskflows.

The following table lists the operations:

Operation	Method	URI
Get the status of a taskflow.	GET	/active-bpel/services/tf/status/<run ID>
Publish a taskflow.	POST	/active-bpel/asset/v1/publish
Unpublish a taskflow.	POST	/active-bpel/asset/v1/unpublish

Data Ingestion and Replication resource quick reference

The following list describes the operations that you can perform on Data Ingestion and Replication resources:

Database and application ingestion and replication tasks

Create and deploy database ingestion and replication tasks and application ingestion and replication tasks. Also manage and monitor the jobs associated with the tasks.

The following table lists the operations:

Operation	Method	URI
Create a task.	POST	/dbmi/public/api/v2/task/create
Deploy a task.	POST	/dbmi/public/api/v2/task/deploy/{taskId}
Run a job.	POST	/dbmi/public/api/v2/job/start
Stop a job.	POST	/dbmi/public/api/v2/job/stop
Resume a job.	POST	/dbmi/public/api/v2/job/resume
Undeploy a job.	POST	/dbmi/public/api/v2/job/undeploy
Get job status.	GET	/dbmi/public/api/v2/job/status
Get job metrics.	GET	/dbmi/public/api/v2/job/metrics
Get task details.	GET	/dbmi/public/api/v2/task/details?taskId={taskId}&projectId={projectId}&folderId={folderId}

File ingestion and replication

Create, manage, and monitor file ingestion and replication tasks.

The following table lists the operations:

Operation	Method	URI
Get job status.	GET	/mftsaas/api/v1/job/<runId>/status
Get job logs.	GET	/mftsaas/api/v1/job/<runId>/logs
Get details for a completed job using the task ID.	GET	/mftsaas/api/v1/mitasks/activityLog?taskId=<taskId>
Get details for an active or a completed job using the run ID.	GET	/mftsaas/api/v1/mitasks/activityLog?runId=<runId>
Get details for an active or a completed job using the run ID, including the number of rows to skip and a row limit.	GET	/mftsaas/api/v1/mitasks/activityLog?taskId={{taskID}}&<offset>
Get details for all jobs.	GET	/mftsaas/api/v2/mitasks/activityLog
Get details for all jobs using the task ID.	GET	/mftsaas/api/v2/mitasks/activityLog?taskId=<taskId>
Get details for all jobs using the run ID.	GET	/mftsaas/api/v2/mitasks/activityLog?runId=<runId>
Get details for all jobs including the rows to skip.	GET	/mftsaas/api/v2/mitasks/activityLog?taskId=<taskId>&offset=<offset>
Get details for all jobs and include a row limit.	GET	/mftsaas/api/v2/mitasks/activityLog?taskId=<taskId>&rowLimit<rowLimit>
Get details for all jobs based on the job type.	GET	/mftsaas/api/v2/mitasks/activityLog?jobType=<jobType>
Get the number of file events to display and include the file event limit.	GET	/mftsaas/api/v2/mitasks/activityLog?runId={{runID}}&fetchFileEvents=true&fileEventsLimit=10
View details of a particular task.	GET	/mftsaas/api/v1/mitasks/{{TASK-ID}}
View details for all tasks in the organization.	GET	/mftsaas/api/v1/mitasks
Create a task.	POST	/mftsaas/api/v1/mitasks
Update a task.	POST	/mftsaas/api/v1/mitasks/<taskID>

Operation	Method	URI
Get the location of a task.	GET	/mftsaas/api/v1/mitasks?resolveLocation=true
Delete a task.	DELETE	/mftsaas/api/v1/mitasks/<taskID>

Streaming ingestion and replication

Create, manage, and monitor streaming ingestion and replication jobs.

The following table lists the operations:

Operation	Method	URI
Create a task.	POST	/sisvc/restapi/v1/CreateEntity/Documents
Deploy a task.	POST	/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.Deploy
Undeploy a task.	POST	/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.Undeploy
Start a task.	POST	/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.Start
Stop a task.	POST	/sisvc/api/v1/Dataflows('<dataflowID>')/OData.SI.Stop
Copy a task.	POST	/sisvc/restapi/v1/CopyEntities
Update a task.	POST	/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Get task details.	GET	/sisvc/monitor/v1/jobs/<dataflow ID>/<run ID of the job>
Get the list of jobs.	GET	/mijobmonitor/api/v1/MIJobs
Get the job status.	GET	/sisvc/monitor/v1/status/dataflows/<dataflow ID>
Get the job statistics.	GET	/sisvc/monitor/v1/statistics/dataflows/<dataflow ID>
Get the job history.	GET	/sisvc/monitor/v1/history/dataflows/<dataflow ID>

CHAPTER 3

Platform REST API version 2 resources

The REST API version 2 resources in this section apply to multiple services in IDMC.

When you use version 2 resources, note the following rules:

- Use JSON or XML format.
- Use the following URI:

  ```
  /api/v2/<API name>
  ```

- Use the serverUrl value from the login response as the base URL. For example:

  ```
  https://na4.dm-us.informaticacloud.com/saas
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  icSessionId: <SessionId>
  ```

In the following example, the serverUrl is `https://na4.dm-us.informaticacloud.com/saas` and the URI is `/api/v2/agent`:

```
<METHOD> https://na4.dm-us.informaticacloud.com/saas/api/v2/agent HTTP/1.1
Content-Type: application/json
Accept: application/json
icSessionId: IV4wOrJmd6YUtmKa8t
```

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Activity logs

You can use the REST API to request log information for completed and running jobs.

Logs for completed jobs

Use this resource to request log information for completed jobs from the Monitor service. You can also request error logs and session logs. To request log information for jobs that are running, use the activityMonitor resource.

GET Request

You can request all of the log information or filter the log response. To request information from the log, use the following URI:

```
/api/v2/activity/activityLog
```

To request information for a specific log ID, use the following URI:

```
/api/v2/activity/activityLog/<id>
```

To request information for a specific run ID, include the run ID and task ID in the following URI:

```
/api/v2/activity/activityLog?runId=<runId>&taskId=<taskId>
```

Note: The task ID is required whenever the run ID is included in a request.

To request information for a specific task, include the task ID in the following URI:

```
/api/v2/activity/activityLog?taskId=<taskId>
```

To specify the number of rows to skip, use the following URI:

```
/api/v2/activity/activityLog?offset=<offset>
```

To specify a row limit, use the following URI:

```
/api/v2/activity/activityLog?rowLimit=<rowLimit>
```

You can use any combination of these options. For example, you can use the following URI:

```
/api/v2/activity/activityLog?
offset=<offset>&rowLimit=<rowLimit>&taskId=<taskId>&runId=<runId>
```

You can also use the activityLog resource to get a session log. To get a session log, use the following URI:

```
/api/v2/activity/activityLog/<id>/sessionLog
```

You can use the following optional attributes in the activityLog GET URI:

Field	Description
id	Log entry ID. Include this attribute if you want to receive information for a specific ID.
runId	Job ID associated with the log entry ID. Whenever runId is included in a request, taskId is required.
taskId	Task ID associated with the log entry ID. If taskId is not specified, all activityLog entries for all tasks are returned.
offset	The number of rows to skip. For example, you might want to skip the first three rows.
rowLimit	The maximum number of rows to return. The maximum number you can specify is 1000. If you omit this attribute, the activityLog returns all available rows, up to a maximum of 200 rows.

GET Response

Returns an activityLogEntry object for each row in the log or returns an activityLogEntry object for the specified ID. Returns the error object if errors occur.

When you request information for each row in the log, the activityLogEntry object includes the following attributes:

Field	Type	Description
id	String	Log entry ID.
type	String	The type of task. For Data Integration, returns one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
objectId	String	Task ID.
objectName	String	Name of the task.
runId	Long	ID for the task run.
agentId	String	Agent that runs the task.
runtimeEnvironmentId	String	Runtime environment that runs the task.
startTime	Date/time	Start time for the task or linear taskflow. Uses Eastern Time Zone (ET).
endTime	Date/time	End time for the task or linear taskflow. Uses Eastern Time Zone (ET).
startTimeUtc	Date/time	Start time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
endTimeUtc	Date/time	End time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
state	Short	Indicates whether the task completed successfully. Returns one of the following codes: - 1. The task completed successfully. - 2. The task completed with errors. - 3. The task failed to complete.
failedSourceRows	Long	Number of rows that the task failed to read from the source.
successSourceRows	Long	Number of rows that the task successfully read from the source.
failedTargetRows	Long	Number of rows that the task failed to write to the target.
successTargetRows	Long	Number of rows that the task successfully wrote to the target.
scheduleName	String	Schedule name, if task was initiated by a schedule.
entries		Indicates the start of information for a child object.

The *entries* object includes activityLogEntry child objects. The child objects include the following attributes:

Field	Type	Description
id	String	Activity log entry item ID. **Note:** You can't use the ID from an activityLogEntry child object to request information for a specific log.
type	String	The type of task. For Data Integration, returns one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
objectName	String	Name of the task.
runId	String	ID for the task run.
agentId	String	Agent that runs the task.
runtimeEnvironmentId	String	Runtime environment that runs the task.
startTime	Date/time	Start time for the task or linear taskflow. Uses Eastern Time Zone (ET).
endTime	Date/time	End time for the task or linear taskflow. Uses Eastern Time Zone (ET).
startTimeUtc	Date/time	Start time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
endTimeUtc	Date/time	End time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
state	Short	Indicates whether the task completed successfully. Returns one of the following codes: - 1. The task completed successfully. - 2. The task completed with errors. - 3. The task failed to complete. - 4. The task has not started.
UIState	Short	Used for internal purposes only.
failedSourceRows	Long	Number of rows that the task failed to read from the source.
successSourceRows	Long	Number of rows that the task successfully read from the source.
failedTargetRows	Long	Number of rows that the task failed to write to the target.
successTargetRows	Long	Number of rows that the task successfully wrote to the target.
errorMsg	String	Error message associated with the job.
startedBy	String	User who started the task.

Field	Type	Description
runContextType	String	Method through which the task was initiated. Returns one of the following options: - ICS_UI. Task was initiated through the user interface. - SCHEDULER. Task was initiated through the task scheduler. - REST-API. Task was initiated through the REST API. - OUTBOUND MESSAGE. Task was initiated through an outbound message.
entries		Indicates the start of information for a child object.
subTaskEntries		Indicates the start of information for subtask child objects.
logEntryItemAttrs		Indicates the start of metadata about the task, including the task's location and the number compute units the job consumed.
sessionVariables		Indicates the start of advanced session properties provided in the task.
totalSuccessRows	Long	Total number of rows that were successfully read from the source and written to the target.
totalFailedRows	Long	Total number of rows that were not read from the source and written to the target.
stopOnError	Boolean	Determines the runtime environment action to take when a nonfatal error occurs. Includes the following values: - True. The linear taskflow stops when an error occurs. - False. The linear taskflow continues to process when an error occurs.
hasStopOnErrorRecord	Boolean	Indicates whether the task encountered an error and stopped.
contextExternalId	String	Task ID of the parent object.
isStopped	Boolean	Indicates whether the task was stopped by the user. A value of `true` is possible if the task completed with errors or failed to complete.
transformationEntries		Includes information in an entry object for each transformation.

When you request log information for a specific ID, the activityLogEntry object includes the following attributes:

Field	Type	Description
id	String	Log entry ID.
type	String	The type of task. For Data Integration, returns one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
objectId	String	Task ID.

Field	Type	Description
objectName	String	Name of the task.
runId	String	ID for the task run.
agentId	String	Agent that runs the task.
runtimeEnvironmentId	String	Runtime environment where the task runs.
startTime	Date/time	Start time for the task or linear taskflow. Uses Eastern Time Zone (ET).
endTime	Date/time	End time for the task or linear taskflow. Uses Eastern Time Zone (ET).
startTimeUtc	Date/time	Start time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
endTimeUtc	Date/time	End time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
state	Short	Indicates whether the task completed successfully. Returns one of the following codes: - 1. The task completed successfully. - 2. The task completed with errors. - 3. The task failed to complete. - 4. The task has not started.
UIState	Short	Used for internal purposes only.
isStopped	Boolean	Indicates whether the task was stopped by the user. A value of `true` is possible if the task completed with errors or failed to complete.
failedSourceRows	Long	Number of rows that the task failed to read from the source.
successSourceRows	Long	Number of rows that the task successfully read from the source.
failedTargetRows	Long	Number of rows that the task failed to write to the target.
successTargetRows	Long	Number of rows that the task successfully wrote to the target.
errorMsg	String	Error message associated with the job.
startedBy	String	User who started the task.
runContextType	String	Method through which the task was initiated. Returns one of the following options: - UI. Task was initiated through the user interface. - SCHEDULER. Task was initiated through the task scheduler. - REST-API. Task was initiated through the REST API. - OUTBOUND MESSAGE. Task was initiated through an outbound message.
scheduleName	String	Schedule name, if task was initiated by a schedule.
orgId	String	Organization ID.

Field	Type	Description
totalSuccessRows	Long	Total number of rows that were successfully read from the source and written to the target.
totalFailedRows	Long	Total number of rows that were not read from the source and written to the target.
logFilename	String	The name of the generated log file.
errorFilename	String	The name of the generated error file.
errorFileDir	String	The location of the error file on the Secure Agent machine.
connType	String	Connection type.
stopOnError	Boolean	Determines the runtime environment action to take when a nonfatal error occurs. Includes the following values: - True. The linear taskflow stops when an error occurs. - False. The linear taskflow continues to process when an error occurs.
items		Includes an activityLogEntryItem object for each task.
type	String	Included in the activityLogEntryItem object. The type of task. For Data Integration, returns one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
objectId	String	Included in the activityLogEntryItem object. Task ID.
objectName	String	Included in the activityLogEntryItem object. Name of the task.
runId	String	Included in the activityLogEntryItem object. ID for the task run.
agentId	String	Included in the activityLogEntryItem object. Agent that ran the task.
runtimeEnvironmentId	String	Included in the activityLogEntryItem object. Runtime environment where the task ran.
startTime	Date/time	Included in the activityLogEntryItem object. Start time for the task or linear taskflow. Uses Eastern Time Zone (ET).
endTime	Date/time	Included in the activityLogEntryItem object. End time for the task or linear taskflow. Uses Eastern Time Zone (ET).

Field	Type	Description
startTimeUtc	Date/time	Included in the activityLogEntryItem object. Start time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
endTimeUtc	Date/time	Included in the activityLogEntryItem object. End time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
state	String	Included in the activityLogEntryItem object. Indicates whether the task completed successfully. Returns one of the following codes: - 1. The task completed successfully. - 2. The task completed with errors. - 3. The task failed to complete.
isStopped	Boolean	Included in the activityLogEntryItem object. Indicates whether the task was stopped by the user. A value of `true` is possible if the task completed with errors or failed to complete.
errorMsg	String	Included in the activityLogEntryItem object. Error message associated with the job.
connType	String	Included in the activityLogEntryItem object. Connection type.
children	String	Included in the activityLogEntryItem object. Returns an activityLogEntryItem object for each table in the linear taskflow.
startedBy	String	User who started the task.
runContextType	String	Method through which the task was initiated. Returns one of the following options: - UI. Task was initiated through the user interface. - SCHEDULER. Task was initiated through the task scheduler. - REST-API. Task was initiated through the REST API. - OUTBOUND MESSAGE. Task was initiated through an outbound message.
scheduleName	String	Schedule name, if task was initiated by a schedule.
transformationEntries		Includes information in a transformationLogEntry object for each transformation.
id	String	Included in the transformationLogEntry object. Transformation ID.
txName	String	Included in the transformationLogEntry object. Transformation name. For target transformations, returns the target object name.
txType	String	Included in the transformationLogEntry object. Transformation type.

Field	Type	Description
successRows	Long	Included in the transformationLogEntry object. Number of successful rows for the transformation.
affectedRows	Long	Included in the transformationLogEntry object. Number of rows affected by the defined task operation. Applies to target transformations in data transfer tasks and mapping tasks based on mappings that are not configured for full SQL ELT optimization. Doesn't apply to mappings in SQL ELT mode or advanced mappings.
failedRows	Long	Included in the transformationLogEntry object. Number of failed rows for the transformation.
sequenceValues		Returns information generated from a task that includes the sequence generator transformation. Includes a sequenceValueLogEntry object for each transformation.
txName	String	Included in the sequenceValueLogEntry object. Transformation name. For target transformations, returns the target object name.
nextValue	String	Included in the sequenceValueLogEntry object. The last value generated by the task.
inOutParameterValues		The in-out parameter values used in the task. Includes an inOutParameterValueLogEntry for each parameter.
name	String	Included in the inOutParameterValueLogEntry object. Parameter name.
value	String	Included in the inOutParameterValueLogEntry object. Parameter value.

GET Example

To request 20 rows of information returned from the log in JSON format, you might use the following request:

```
GET <serverUrl>/api/v2/activity/activityLog?rowLimit=20
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

A successful request returns a list: an activityLogEntry object for each entry returned from the log.

The following text is a sample return in JSON:

```
[
    {
        "@type": "activityLogEntry",
        "id": "000001C100000000000C",
        "type": "DRS",
        "objectName": "drstask1",
        "runId": 1,
        "runtimeEnvironmentId": "00000C25000000000002",
        "startTime": "2012-07-30T13:30:30.000Z",
        "endTime": "2012-07-30T13:32:30.000Z",
        "startTimeUtc": "2012-07-30T17:30:30.000Z",
        "endTimeUtc": "2012-07-30T17:32:30.000Z",
```

```
    "state": 1,
    "failedSourceRows": 0,
    "successSourceRows": 39,
    "failedTargetRows": 0,
    "successTargetRows": 39,
    "errorMsg": null,
    "entries": [
        {
            "@type": "activityLogEntry",
            "id": "128964732",
            "type": "DRS",
            "objectName": "Contact",
            "runId": 0,
            "runtimeEnvironmentId": "00000C25000000000002",
            "agentId: "01000008000000000006",
            "startTime": "2012-07-30T13:32:31.000Z",
            "endTime": "2012-07-30T13:35:31.000Z",
            "startTimeUtc": "2012-07-30T17:32:31.000Z",
            "endTimeUtc": "2012-07-30T17:35:31.000Z",
            "state": 1,
            "isStopped": FALSE,
            "failedSourceRows": 0,
            "successSourceRows": 39,
            "failedTargetRows": 0,
            "successTargetRows": 39,
            "errorMsg": "No errors encountered.",
            "entries": []
        },
    ]
},
{
    "@type": "activityLogEntry",
    "id": "010000C10000000000PGP",
    "type": "MTT_TEST",
    "objectId": "0100000Z00000000001N",
    "objectName": "Mapping-MultiSource",
    "runId": 12,
    "startTime": "2020-03-27T08:05:56.000Z",
    "endTime": "2020-03-27T08:06:07.000Z",
    "startTimeUtc": "2020-03-27T12:05:56.000Z",
    "endTimeUtc": "2020-03-27T12:06:07.000Z",
    "state": 2,
    "failedSourceRows": 0,
    "successSourceRows": 800,
    "failedTargetRows": 200,
    "successTargetRows": 600,
    "startedBy": "di@infa.com",
    "runContextType": "ICS_UI",
    "entries": [
        {
            "@type": "activityLogEntry",
            "id": "118964723",
            "type": "MTT_TEST",
            "objectName": "",
            "runId": 12,
            "agentId": "01000008000000000004",
            "runtimeEnvironmentId": "01000025000000000004",
            "startTime": "2020-03-27T08:05:56.000Z",
            "endTime": "2020-03-27T08:06:07.000Z",
            "startTimeUtc": "2020-03-27T12:05:56.000Z",
            "endTimeUtc": "2020-03-27T12:06:07.000Z",
            "state": 2,
            "failedSourceRows": 0,
            "successSourceRows": 800,
            "failedTargetRows": 200,
            "successTargetRows": 600,
            "errorMsg": null,
            "startedBy": "di@infa.com",
            "runContextType": "ICS_UI",
            "entries": [],
```

```
                    "subTaskEntries": [],
                    "logEntryItemAttrs": {
                        "CONSUMED_COMPUTE_UNITS": "0.0",
                        "ERROR_CODE": "0",
                        "IS_SERVER_LESS": "false",
                        "REQUESTED_COMPUTE_UNITS": "0.0",
                        "Session Log File Name": "s_mtt_0Sr7LdcbAG2ldG33Lp8koQ_2.log"
                    },
                    "totalSuccessRows": 0,
                    "totalFailedRows": 0,
                    "stopOnError": false,
                    "hasStopOnErrorRecord": false,
                    "contextExternalId": "0100000Z00000000001N",
                    "transformationEntries": [
                        {
                            "@type": "transformationLogEntry",
                            "id": "141332309",
                            "txName": "FFSource2",
                            "txType": "SOURCE",
                            "successRows": 600,
                            "failedRows": 0
                        },
                        {
                            "@type": "transformationLogEntry",
                            "id": "141332310",
                            "txName": "FFSource1",
                            "txType": "SOURCE",
                            "successRows": 200,
                            "failedRows": 0
                        },
                        {
                            "@type": "transformationLogEntry",
                            "id": "141332311",
                            "txName": "FFTarget.csv",
                            "txType": "TARGET",
                            "successRows": 600,
                            "affectedRows": 600,
                            "failedRows": 0
                        },
                        {
                            "@type": "transformationLogEntry",
                            "id": "141332312",
                            "txName": "MYSQLTarget",
                            "txType": "TARGET",
                            "successRows": 0,
                            "affectedRows": 0,
                            "failedRows": 200
                        }
                    ]
                }
            ]
        }
    ]
```


Note: If you request log information for a job that includes both Data Integration Server and advanced cluster subtasks, the response contains a transformation log entry for a temporary target.

Error Log Requests

You can request an error log from the server.

To request an error log from the server for a specific log ID, use the following URI:

```
/api/v2/activity/errorLog/id
```

To retrieve an error log from the server, you might use the following request:

```
GET <server URL>/api/v2/activity/errorLog/000002C10000000002BG  HTTP/1.1
Accept:application/json
icSessionId: <icSessionId>
```

The server returns the error log as a string, as shown in the following example:

```
"Col1","Col2","Error"

"05/11/2015 00:00:00.000000000","05/11/2015 00:00:00.000000000","ERROR: Target table
[test] has no keys specified."

"05/11/2015 00:00:00.000000000","05/11/2015 00:00:00.000000000","ERROR: Target table
[test] has no keys specified."

"05/11/2015 00:00:00.000000000","05/11/2015 00:00:00.000000000","ERROR: Target table
[test] has no keys specified."

"05/11/2015 00:00:00.000000000","05/11/2015 00:00:00.000000000","ERROR: Target table
[test] has no keys specified."

"05/11/2015 00:00:00.000000000","05/11/2015 00:00:00.000000000","ERROR: Target table
[test] has no keys specified."
```

Session Log Requests

You can download session logs for all task types using the sessionLog API. For tasks that have subtasks such as replication tasks and linear taskflows, you can download a ZIP file that contains all of the session logs in the hierarchy. For replication tasks, which have two levels of tasks, you can specify an itemId to return a session log for a subtask if you do not want all of the session logs. For linear taskflows, which have three levels of tasks, you can specify an itemId or childItemId to return a session log for a particular subtask.

Use the following URI to download session logs:

```
/saas/api/v2/activity/activityLog/<Top_Level_Log_Entry_Id>/sessionLog?itemId=<child-log-
entry-item-id>&childItemId=<child-log-entry-item-id>
```

The following example requests include a request for a specific session log and requests for session logs for subtasks:

- To request a session log, which may return a ZIP file if the task is a replication task or linear taskflow, you might use the following request:

  ```
  /saas/api/v2/activity/activityLog/000001C1000000000591/sessionLog
  ```

- To request a session log for a particular subtask for a replication task or linear taskflow, you might use the following request:

  ```
  /saas/api/v2/activity/activityLog/000001C1000000000591/sessionLog?itemId=233
  ```

- To request a session log for a sub-subtask in a linear taskflow, you might use the following request:

  ```
  /saas/api/v2/activity/activityLog/000001C1000000000591/sessionLog?
  itemId=233&childItemId=234
  ```

Logs for running jobs

Use this resource to request log information for running jobs from the Monitor service. To request log information for completed jobs, use the activityLog resource.

GET Request

To request log information about running jobs, use the following URI:

```
/api/v2/activity/activityMonitor?details=<true|false>
```

You can use the following attribute in the activityMonitor GET URI:

details

Optional.

Log detail to be returned from IDMC. Use one of the following options:

- true. Returns log information for tasks, linear taskflows, and child objects. Child objects can include tasks within linear taskflows, and objects within replication tasks.
- false. Returns log information for tasks and linear taskflows.

Default is false. If you omit this optional attribute, Monitor does not return additional details.

GET Response

Returns an activityMonitorEntry object for each row in the log. Returns the error object if errors occur.

The activityMonitorEntry object includes the following GET response attributes:

Field	Type	Description
id	String	Log entry ID.
type	String	The type of task. Returns one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MAPPING. Job type of the sub job when you run a dynamic mapping task. - MTT. Mapping task. - MTT_DP. Job type when you run data preview for a mapping. - MTT_DP_CDIE. Job type when you run data preview for a mapping in advanced mode. - MTT_TEST. Job type when you use the Run button in the Mapping Designer. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
taskId	String	Task ID.
taskName	String	Task name.
objectName	String	Source object used in the task, or the replication object being processed.
runId	Long	ID for the task run.
startTime	Date/time	Start time for the task or linear taskflow. Uses Eastern Time Zone (ET).
endTime	Date/time	End time for the task or linear taskflow. Uses Eastern Time Zone (ET).
startTimeUtc	Date/time	Start time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
endTimeUtc	Date/time	End time for the task or linear taskflow. Uses Coordinated Universal Time (UTC).
executionState	String	State of the task. Returns one of the following codes: - QUEUED - INITIALIZED - RUNNING - STOPPING - FAILED FAILED can be returned for linear taskflow subtasks only.

Field	Type	Description
failedSourceRows	Long	Number of rows that were not read from the source.
successSourceRows	Long	Number of rows that were successfully read from the source.
failedTargetRows	Long	Number of rows that were not written to the target.
successTargetRows	Long	Number of rows that were successfully written to the target.
errorMsg	String	Error message associated with the job.
entries		Indicates the start of information for a child object. A child object might be a task within a linear taskflow, or an object in a replication task.
agentId	String	Agent used for the activity.
runtimeEnvironmentId	String	Runtime environment used for the activity.
startedBy	String	User who started the task.
runContextType	String	Method through which the task was initiated. Includes the following values: - UI. Task was initiated through the Data Integration user interface. - SCHEDULER. Task was initiated through the task scheduler. - REST-API. Task was initiated through the REST API. - OUTBOUND MESSAGE. Task was initiated through an outbound message.
scheduleName	String	Schedule name, if task was initiated by a schedule.
callbackURL	String	Status of the job.

GET Example

To return log information including details about child objects in XML, you might use the following request:

```
GET <serverUrl>/api/v2/activity/activityMonitor?details=true
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
```

A successful request returns an activityMonitorEntry object for each item returned from Monitor.

The following text is a sample return in XML:

```
<root>
 <activityMonitorEntry>
   <id>000001C100000000000D</id>
   <type>DSS</type>
   <objectName>dss-f2f</objectName>
   <runId>0</runId>
   <startTime>2012-07-30T13:30:00.000Z</startTime>
   <endTime></endTime>
   <startTimeUtc>2012-07-30T17:30:00.000Z</startTimeUtc>
   <endTimeUtc></endTimeUtc>
   <executionState>RUNNING</executionState>
   <failedSourceRows>0</failedSourceRows>
   <successSourcerows>938</successSourceRows>
   <failedTargetRows>0</failedTargetRows>
   <successTargetRows>596</successTargetRows>
   <errorMsg> </errorMsg>
   <entries> </entries>
   <agentId>00000C0800000000003</agentId>
   <runtimeEnvironmentId>00000C25000000000002</runtimeEnvironmentId>
```

```
 </activityMonitorEntry>
 <activityMonitorEntry>
   <id>000001C500000000000L</id>
   <type>PCS</type>
   <objectName>pcs-lookup</objectName>
   <runId>2</runId>
   <startTime>2012-07-30T13:30:03.001Z</startTime>
   <endTime>2012-07-30T13:30:03.010Z</endTime>
   <startTimeUtc>2012-07-30T17:30:03.001Z</startTimeUtc>
   <endTimeUtc>2012-07-30T17:30:03.010Z</endTimeUtc>
   <executionState>COMPLETE</executionState>
   <failedSourceRows>0</failedSourceRows>
   <successSourcerows>688</successSourceRows>
   <failedTargetRows>0</failedTargetRows>
   <successTargetRows>688</successTargetRows>
   <errorMsg> </errorMsg>
   <entries> </entries>
   <agentId>00000C08000000000003</agentId>
   <runtimeEnvironmentId>00000C25000000000002</runtimeEnvironmentId>
 </activityMonitorEntry>
</root>
```

Audit logs

Use this resource to request entries from the audit log.

GET Request

To request the most recent 200 entries in the audit log, use the following URI:

```
/api/v2/auditlog
```

To request a specific batch of audit log entries, define the batch size and request a batch number with the following URI:

```
/api/v2/auditlog?batchId=<batchId>&batchSize=<batchSize>
```

Include the following information in the GET URI:

Field	Required	Description
batchSize	Yes	Number of entries to include in a batch.
batchId	Yes	The batch that you want to view. Use 0 for the first batch, which contains the most recent audit log entries. For example, to view entries 26-50, use a batch size of 25, and request batch 1.

GET Response

Returns an auditLogEntry object for each audit log entry returned. Returns the error object if errors occur.

The auditLogEntry object includes the following attributes:

Field	Type	Description
id	String	Audit log entry ID.
version	Int	Version.
orgId	String	Organization ID.
username	String	User who performed the action.
entryTime	Date/time	Time the action occurred. Uses Eastern Time Zone (ET).
entryTimeUTC	Date/time	Time the action occurred. Uses Coordinated Universal Time (UTC).
objectId	String	ID of the object used.
objectName	String	Name of the object used.

Field	Type	Description
category	String	Category of audit log entry. Returns one of the following codes: - AGENT. Secure Agent installation, configuration, status updates, and operational activities. - AGREEMENT. Subscription agreement updates, renewals, and changes to terms of service. - AUTH. Authorization events such as user logins, logouts, password changes, and permission changes. - B2BGW_CUSTOMER. B2B Gateway customer interactions such as data exchange or transaction processing. - B2BGW_MONITOR. B2B Gateway monitoring activities such as performance tracking and event logging. - B2BGW_SUPPLIER. B2B Gateway supplier interactions such as transaction and communication logging. - BUNDLE. Creating, modifying, and deploying bundles. - CONNECTION. Creating, modifying, and deleting connections. - CONNECTOR. Informatica Cloud Connector setup, configuration, and updates. - CUSTOM_FUNC. Mapplets or user-defined processes or functions. - CUSTOM_SOURCE. Custom sources such as saved queries or custom data connections. - DATA_FILE. Creating, uploading, downloading, modifying, and deleting files. - DMASK.Masking events such as applying, updating, and removing masking policies on sensitive data. - DOMAIN. Domain configuration changes and updates. - DQA. Data assessment such as data quality checks, reporting, and issue resolution. - DRS. Replication events such as configuring and running replication tasks and getting status updates. - DSS. Synchronizationevents when synchronizing data between systems. - DTEMPLATE. Creating, modifying, and running mappings. - EDITION. Informatica Cloud edition events such as edition changes in the organization or edition updates. - EXT_CONNECTION. Creating, modifying, and deleting exernal connections such as connections stored on a local Secure Agent. - GUIDE. Accessing, creating, and modifying user guides and process guides. - MI_TASK. Setting up and running file ingestion tasks and getting status updates. - MIGRATE. Migrating data, configurations, and applications between environments. - MTT. Creating, modifying, running, and deleting mapping tasks. - OBJECT_ACL. Object permissions including setting, modifying, and removing access control lists (ACLs) on objects. - ORG. Creating, modifying, and deleting organizations. - ORG_EDITION. Changes to the organization edition association, such as reassigning an organization to a new edition or updating edition features. - PACKAGE. Configuring, updating, and deploying packages. - PCS. PowerCenter events that involve workflows, mappings, and other configurations. - PROCESS. Creating, managing, and running processes. - PROCESS_OBJECT. Process objects including updates, logs, and error reports. - RUNTIME_ENVIRONMENT. Configuration changes, status changes, and updates to runtime environments. - SCHEDULE. Creating, modifying, and running scheduled tasks or processes. - SCHEDULE_BLACKOUT. Blackout periods for schedules including configuration changes and the start and end of these periods. - SUB_ORG. Creating, modifying, and deleting sub-organizations. - SUBSCRIPTION_BILLING. Invoices, payments, or changes to billing plans. - SYSTEM_INFO. System status updates, logging, and updates to the configuration. - TASKFLOW. Creating, modifying, and running taskflows. - USER. Creating, modifying, and deleting user accounts and changes to role assignments. - USER_GROUP. Creating, modifying, and deleting user groups and changes to group membership.

Field	Type	Description
		- WORKFLOW. Creating, modifying, running, and deleting linear taskflows.
event	String	Type of action performed. Returns one of the following codes: - ADD_TAG - CREATE - DELETE - DEREGISTER - DISABLE - DOWNLOAD - EDIT - ENCRYPT - EXPORT - FETCHSTATE - IMPORT - LINK - LOADSTATE - MAKE_DEFAULT - MIGRATED - MOVE_CONNS_TO_AGENT - MOVE_CONNS_TO_IOD - PUBLISH - RECONCILE - REGISTER - REMOVE_TAG - RETRY_REGISTRATION - RUN - STOP - UPDATE - UPDATE_PERMISSION - VERSION1 - VERSION2 - VERSION3 - VERSION4 - VERSION5 - VERSION6 - VERSION7
eventParam	String	Objects related to the action. **Note:** The value can be a maximum of 1024 characters. If the value exceeds 1024 characters, it is truncated and prefixed with "Full Value Truncated."
message	String	Additional information.

GET Example

To view rows 21-40, you might use the following request:

```
GET <server URL>/api/v2/auditlog?batchId=1&batchSize=20
Content-Type: application/json
Accept: application/json
icSessionId: <SessionId>
```

Bundles

You can use the REST API to get bundle details and manage bundles in your organization.

You can perform the following tasks using the REST API:

- Get bundle details and push a published private bundle to sub-organizations
- Get license information about bundles installed on or available to the organization
- Install and uninstall bundles

Bundle details

Use this resource to request the details for a specific bundle or the details for all bundles published by the organization or installed by the organization. You can also push a published private bundle to sub-organizations.

GET Request

To request the details of a particular bundle, you can include the bundle ID or the bundle name in the URI. Use one of the following URIs:

```
/api/v2/bundleObject/<id>
```

```
/api/v2/bundleObject/name/<name>
```

If you use the bundle name in the URI and the bundle name includes a space, replace the space with `%20`. For example:

```
/api/v2/bundleObject/name/first%20bundle
```

To request the details for all bundles published by the organization, use one of the following URIs:

```
/api/v2/bundleObject/?published=true
```

```
/api/v2/bundleObject/?published=true&installed=false
```

To request the details for all bundles installed by the organization, use one of the following URIs:

```
/api/v2/bundleObject/?installed=true
```

```
/api/v2/bundleObject/?published=false&installed=true
```

GET Response

When you request the details for a bundle, returns the bundleObject for the bundle.

When you request a list of published bundles, returns a bundleObject for each bundle that the organization published.

When you request a list of installed bundles, returns a bundleObject for each bundle that the organization installed.

Returns the error object if errors occurred.

The bundleObject includes the following attributes:

Field	Type	Description
id	String	Bundle ID.
orgId	String	Organization ID.
name	String	Bundle name.
description	String	Description.
createTime	Date/time	Time the bundle was created.
updateTime	Date/time	Time the bundle was updated.
createdBy	String	User who created the bundle.
updatedBy	String	User who last updated the bundle.
lastVersion	String	The current published version of the bundle.
revokeTime	Date/time	This attribute is not used at this time.
paid	Boolean	Whether the bundle was purchased. Returns true for paid, false for free.
copyable	Boolean	Determines whether users can download the contents of the bundle locally. Returns true or false.
accessType	String	Access type for the bundle. Returns the following codes in the BundleObjectAccessType object: - PUBLIC. Available to all IDMC organizations. - SUBORGS. Available to sub-organizations of the publishing organization. - ACCESS_LIST. Available to the organization IDs in the sharedWith attribute.
objects		Objects in the bundle. Includes information for each object in the bundleRefObject object.
objectTypeCode	String	Included in the bundleRefObject object. The type of bundle. Includes the following values: - 17. Mapping. - 0L. Mapplet.
objectId	String	Included in the bundleRefObject object. Object identified in the bundle.
objectName	String	Included in the bundleRefObject object. Name of the object in the bundle.
objectUpdateTime	String	Included in the bundleRefObject object. The date and time that the object in the bundle was last updated.
publishOrgId	String	ID of the organization that published the bundle.

Field	Type	Description
publishOrgName	String	Name of the organization that published the bundle.
externalId	String	External ID for the bundle.

POST Request

As part of a parent organization, you can share a private bundle with sub-organizations.

You can push a published private bundle to install the bundle on all sub-organizations. Push a published private bundle when you want the objects in the bundle to be immediately available to all sub-organizations.

To push a bundle to a sub-organization, use the ID of the bundle object in the following URI:

```
/api/v2/bundleObject/push/<bundleId>
```

POST Response

Returns the success response if the request is successful. Returns the error object if errors occur.

Bundle licenses

Use this resource to request license information about bundles installed on or available to the organization.

GET Request

To request license information for a bundle associated with to the organization, use the bundle ID in the following URI:

```
/api/v2/bundleObjectLicense/<bundleObjectId>
```

To request license information for all bundles associated with the organization, omit the optional bundle ID.

GET Response

If successful, returns the BundleObjectLicenseType for the requested bundle.

If you request license information for all bundles, returns the bundleObjectLicense object for all bundles associated with the organization.

Returns the error object if errors occur.

The bundleObjectLicense object includes the following attributes:

Field	Type	Description
bundleObjectId	String	Bundle ID.
orgId	String	Organization ID.
updateOption	String	This attribute is not used at this time.
licenseType	String	Bundle type. Returns one of the following values: - Free - Trial - Subscription
endDate	Date/time	Date the license expires. Returns NULL for free public bundles.

Field	Type	Description
numberOfDaysToApply	Int	Not used at this time.
numberOfMonthsToApply	Int	Not used at this time.
beginDate	Date/time	Publish date for the bundle.
bundleVersion	String	Version number for the bundle.
createTime	Date/time	Creation date for the bundle.
installed	Boolean	Indicates if the organization installed the bundle. Returns TRUE for installed bundles and FALSE for available bundles.
active	Boolean	Indicates that the bundle is available and active. Returns TRUE.
accessCode	String	Required to install a licensed bundle. Used for sharing private bundles. Read only.

Installing and uninstalling bundles

Use this resource to install and uninstall bundles.

POST Request

To install a bundle on the organization, use the following URI:

```
/api/v2/bundleObjectLicense
```

With this URI, use the following attribute in a bundleObjectLicense object:

Field	Type	Required	Description
bundleObjectId	String	Yes	The ID of the bundle.

POST Response

Returns the success response if the request is successful. Returns the error object if errors occur.

DELETE Request

To uninstall a bundle from the organization, use the following URI:

```
/api/v2/bundleObjectLicense?bundleObjectId=<bundleId>&updateOption=<updateOption>
```

Use the following bundleObjectLicense Delete URI attributes:

Field	Type	Required	Description
bundleObjectId	String	Yes	The ID of the bundle.
updateOption	String		Defines what happens if objects in the bundle are used. Use one of the following options: - DELETE_EXISTING_OBJECTS. Deletes the objects that use the bundle object. - UPDATE_EXISTING_OBJECTS. Updates the object that uses the bundle object. - EXCEPTION_IF_IS_USED. Returns a message when a bundle object is used and cancels the uninstallation.

DELETE Response

Returns the success response if the request is successful. Returns the error object if errors occur.

Jobs

Use the job resource to start or stop a task based on ID or name, including linear taskflows. You can also get the job completion status.

To start or stop a task based on an ID, you can use the eight-character object ID for the task or the federated task ID.

To find the eight-character object ID, see "Tasks" on page 135. However, this resource returns a task ID that you can use only to run tasks located in the Default folder.

If your organization uses projects and folders, see "Lookup" on page 202 or "Objects" on page 236 to retrieve the federated task ID.

For a Data Ingestion and Replication file ingestion and replication task, use the file ingestion and replication job resource. For more information, see " File Ingestion and Replication REST API" on page 660.

Job Status

When you include the callbackURL in the job request, the service sends a request to the callback URL when the job completes. The service always uses a JSON request for callbacks.

A callback might be called multiple times. For example, multiple callbacks might occur in the following situations:

- Your callback server returns an HTTP status code other than 200.
- Your callback server doesn't respond within 30 seconds.
- Your callback server is down.
- There is a transient network failure.

In any of these situations, the URL connection breaks and the service counts the break as a failed attempt. The service will make three immediate attempts to receive a successful response. Afterward, the attempts will occur in exponential increments. For example, the attempts might begin with a 30-second interval and progress up to a maximum 3-minute interval, until the total time reaches 30 minutes.

The service runs the POST request from the callback URL. The following text is a sample response:

```
{
   @type:"callbackUrlResponse"
   endTime: "2013-02-27T18:57:52.000Z",
   objectId: "0034J90000000M",
   objectName: "taskName",
   runId: 5,
   status: "COMPLETED" // or "FAILED"
}
```

Starting a job

Use the job resource to start a job.

POST request

Use the following URI:

```
/api/v2/job
```

The following table describes the attributes to use in a job object:

Field	Type	Required	Description
taskId	String	Required if taskName or taskFederatedId isn't included.	Task or linear taskflow ID. Use taskId or taskName in the URI. You can include this task ID when the task is located in the Default folder.
taskFederatedId	String	Required if the task isn't located in the Default folder.	Global unique identifier for the task, which includes the folder path to the task.
taskName	String	Required if taskId or taskFederatedId isn't included.	Task or linear taskflow name. Use taskId or taskName in the URI.
taskType	String	Yes	The type of task. For Data Integration, use one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
callbackURL	String	No	A valid, publicly available URL. The service posts the job status to the callbackURL.
runtime		No	Attribute that defines runtime properties.
parameterFileName	String	No	Parameter file name.
parameterFileDir	String	No	Parameter file directory on the Secure Agent machine.

POST response

The response returns the job object if the request is successful and an error object if an error occurs.

The following table describes the attributes in the job object:

Field	Type	Description
taskId	String	Task or linear taskflow ID.
taskFederatedId	String	Global unique identifier for the task, which includes the folder path to the task.
taskName	String	Task or linear taskflow name.
taskType	String	The type of task. Returns one of the following codes for Data Integration: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.
runId	Long	ID of the job.
callbackURL	String	Status of the job.

POST request examples

To start a linear taskflow with ID 0034J90000000M, you might use the following request:

```
POST <serverUrl>/api/v2/job HTTP/1.1
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
"taskId": "0034J90000000M",
"taskType": "Workflow",
"callbackURL": "https://MyIICSJobStatus.com",
}
```

To start a mapping task with ID 0100000Z000009, you might use the following request:

```
POST <serverUrl>/api/v2/job HTTP/1.1
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
    "@type": "job",
    "taskId": "0100000Z000009",
    "taskType": "MTT",
    "runtime": {
        "@type": "mtTaskRuntime"
    }
}
```

Because the request includes a runtime object, you can make additional requests to run the task simultaneously in other runtime environments.

To start a mapping task using a parameter file, you might use the following request:

```
POST <serverUrl>/api/v2/job HTTP/1.1
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
  "@type": "job",
  "taskId": "0116Q70Z0000000000N4",
```

```
  "taskType": "MTT",
  "runtime": {
    "@type": "mtTaskRuntime",
    "parameterFileName": "EmployeeDept.param",
    "parameterFileDir": "/root/dev/FlatFiles"
  }
}
```

You might get the following response:

```
{
  "@type": "job",
  "taskId": "0116Q70Z0000000000N4",
  "taskType": "MTT",
  "runId": 59,
  "taskName": "mct_03126935_Oracle_FF_Parameter",
  "runInParallel": false
}
```

Stopping a job

Use the job resource to stop a job.

POST request

Use the following URI:

```
/api/v2/job/stop
```

The following table describes the attributes to use in a job object:

Field	Type	Required	Description
taskId	String	Required if taskName isn't included.	Task or linear taskflow ID. Use taskId or taskName in the URI. You can include this task ID when the task is located in the Default folder.
taskFederatedId	String	Required if the task isn't located in the Default folder.	Global unique identifier for the task, which includes the folder path to the task.
taskName	String	Required if taskId isn't included.	Task or linear taskflow name. Use taskId or taskName in the URI.
taskType	String	Yes	The type of task. For Data Integration, use one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.

POST response

The response returns the success object if the request is successful and an error object if an error occurs.

POST request example

To stop a linear taskflow with ID 0034J90000000M, you might use the following request:

```
POST <serverUrl>/api/v2/job/stop HTTP/1.1
Content-Type: application/json
Accept: application/json
```

```
icSessionId: <icSessionId>

{
"@type": "job",
"taskId": "0034J90000000M",
"taskType": "Workflow"
}
```

Cleanly stopping a job

Use the job resource to cleanly stop a job.

POST request

Use the following URI:

```
/api/v2/job/stop?cleanStop=true
```

The following table describes the attributes to use in a job object:

Field	Type	Required	Description
taskId	String	Required if taskName not included.	Task or linear taskflow ID. Use taskId or taskName in the URI. You can include this task ID when the task is located in the Default folder.
taskFederatedId	String	Required if the task is not located in the Default folder.	Global unique identifier for the task, which includes the folder path to the task.
taskName	String	Required if taskId not included.	Task or linear taskflow name. Use taskId or taskName in the URI.
taskType	String	Yes	The type of task. For Data Integration, use one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - WORKFLOW. Linear taskflow.

POST response

The response returns the success object if the request is successful and an error object if an error occurs.

POST request example

To cleanly stop a mapping task named MappingTask1, you might use the following request:

```
POST <serverUrl>/api/v2/job/stop?cleanStop=true
Content-Type: application/json
Accept: application/json
icSessionId: <SessionId>

{
"@type": "job",
    "taskName": "MappingTask1",
    "taskType": "MTT"
}
```

Login

You can use the REST API to log in to your organization using your IDMC user account, a JSON web token, SAML, or Salesforce.

Logging in

You can use this resource to log in to your organization using your IDMC user account.

The login response includes the base URL and session ID values that you include in requests that you send during the REST API session.

Use the logout resource to end the session.

To log in using SAML single sign-on, see "Logging in using SAML" on page 93.

To log in using Salesforce credentials, see "Logging in using Salesforce" on page 96.

Note: Your team might use multiple organizations such as an organization for development and an organization for testing. The user credentials that you use to log in determine the organization that you access.

POST Request

To log in, use the following URL:

```
https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/login
```

The values for cloud provider and region correspond to the name of the POD (Point of Deployment) that your organization uses. The following table lists the POD names and the corresponding cloud provider and region to use in the login URL

POD name	Cloud provider-region
USW1	dm-us
USE2	dm-us
USW3	dm-us
USE4	dm-us
USW5	dm-us
USE6	dm-us
USW1-1	dm1-us
USW3-1	dm1-us
USW1-2	dm2-us
CAC1	dm-na
APSE1	dm-ap

POD name	Cloud provider-region
APSE2	dm1-apse
APNE1	dm1-ap
APNE2	dm-apne
APAUC1	dm1-apau
EMW1	dm-em
EMC1	dm1-em
UK1	dm-uk

For example, if your organization uses the APNE1 POD, use the following URL:

```
https://dm1-ap.informaticacloud.com/ma/api/v2/user/login
```

If you don't know the name of the POD that your organization uses, contact your organization administrator or Informatica Global Customer Support.

For more information about the POD names and corresponding cloud providers and regions, see the Product Availability Matrix (PAM) for IDMC on the Knowledge Base.

Use the following attributes in a login object:

Field	Type	Required	Description
username	String	Yes	IDMC user name for the organization that you want to log in to. Maximum length is 255 characters.
password	String	Yes	IDMC password. Maximum length is 255 characters.

POST Response

Returns the user object if the request is successful. Returns the error object if errors occur.

The response includes the following information that you need to include in the header of subsequent REST API calls:

- icSessionId. A REST API session ID or JWT that you include in the header for version 2 REST API calls. The length of the icSessionId value depends on the authentication type that the organization uses. For session-based authentication, the value is 22 characters. For JWT authentication, the maximum length is 16,000 characters.
  For more information about session IDs, see "Session IDs" on page 22.
- serverUrl. The base URL that you use in all version 2 resource URIs except for login, for example: `<serverUrl>/api/v2/job`

The user object includes the following attributes:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to. 22 characters. **Note:** Organizations that were created in legacy Informatica Cloud might have an organization ID of 6 characters.
orgUuid	String	Unique identifier for the organization.
name	String	Informatica Intelligent Cloud ServicesIDMC user name.
description	String	Description of the user.
createTime	String	When the user account was created.
updateTime	String	When the user account was last updated
createdBy	String	Informatica Intelligent Cloud Services user who created the user account.
updatedBy	String	Informatica Intelligent Cloud Services user who last updated the user account.
sfUsername	String	Salesforce user name. Included when user is configured to authenticate through Salesforce.
password	String	Salesforce user password. Included when user is configured to authenticate through Salesforce.
firstName	String	First name for the user account.
lastName	String	Last name for the user account.
title	String	Title of the user.
phone	String	Phone number for the user.
securityQuestion	String	Security question. Returns one of the following codes: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String	Answer to the security question.
roles		Object that includes a role object for each role assigned to the user.
name	String	Included in role object. Role name. Returns one of the following codes: - Service Consumer - Designer - Admin

Field	Type	Description
description	String	Included in role object. Role description.
emails	String	Email address to be notified when the user changes the account password.
timezone	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
serverUrl	String	Informatica Intelligent Cloud Services URL for the organization the user belongs to. Use the serverUrl as a base for most version 2 REST API resource URIs.
spiUrl	String	This field is no longer applicable and has been deprecated.
uuId	String	Unique identifier for the user.
icSessionId	String	IDMC session ID for version 2 REST API session. Use in most version 2 REST API request headers. Maximum length of 16,000 characters.
forceChangePassword	Boolean	Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.

POST Example

To log in to your IDMC organization, you might use the following request:

```
POST https://dm-us.informaticacloud.com/ma/api/v2/user/login
Content-Type: application/json
Accept: application/json

{
"@type": "login",
"username": "John@infa.com",
"password": "mypassword"
}
```

The response returns the user object which contains the serverUrl and icSessionId values to use in subsequent calls, as shown in the following example:

```
{
    "id": "0101TQ03000000000007",
    "orgId": "0101TQ",
    "orgUuid": "3FNFLs1uHe2IIgTs8tRjSJ",
    "name": "John@infa.com",
    "description": "",
    "createTime": "2018-02-16T00:20:07.000Z",
    "updateTime": "2018-07-17T22:45:50.000Z",
    "createdBy": "System built-in user",
    "updatedBy": "John@infa.com",
    "sfUsername": null,
    "firstName": "John",
    "lastName": "Randall",
    "title": "IICS Admin",
    "password": "**********",
    "phone": "123-456-7899",
    "emails": "John@infa.com",
    "timezone": null,
    "serverUrl": "https://usw3.dm-us.informaticacloud.com/saas",
```

```
    "icSessionId": "9KA11tLGqxVcGeul8SABC1",
    "securityQuestion": "In what city were you born?",
    "securityAnswer": "********",
    "uuid": "a51jk7TB0IDcnWLwJdLaW2",
    "forceChangePassword": false,
    "roles": [
        {
            "name": "Admin",
            "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
        },
        {
            "name": "Data Preview",
            "description": "Role to preview data"
        },
        {
            "name": "Designer",
            "description": "Role for creating assets, tasks, and processes. Can
configure connections, schedules, and runtime environments. Has access to the
Application Integration Console."
        }
    ],
}
```

Using the session ID and server URL values in the above response as an example, to send a GET request to obtain Secure Agent information, you might use the following request:

```
GET https://usw3.dm-us.informaticacloud.com/saas/api/v2/agent
Content-Type: application/json
Accept: application/json
```

Logging in using a JSON web token

Use this resource for an OAuth login to IDMC using a JSON Web Token (JWT) access token.

The JWT access token is provided by your identity provider, sometimes called an IDP. Retrieve the token from your identity provider and include it in the loginOAuth request. The token can be used for one login request.

Before you can use the loginOAuth resource, the following prerequisites must be met:

- The organization is configured to use SAML. For information about SAML configuration, see *User Administration* in the Administrator help.
- Users are set up as SAML users and are activated in the organization.
- The organization's identity provider is registered. For information about registering identity providers, see “Identity providers” on page 176.

The following table lists the claims that must be present in the JWT access token:

Claim	Description
iss	Issuer of the the JWT. Includes the absolute URL of the identity provider issuer. The JWT issuer claim must be the same as the issuer that appeared when the identity provider was registered.
sub	Subject of the JWT. Includes the user name or email address of the user.

Claim	Description
aud	Audience for the JWT. The JWT access token's audience claim maps to the SAML entity ID configured in your organization's SAML setup. The audience claim can be one of the following values: - api://<orgId>.<cloud provider>-<region>.informaticacloud.com - api://<cloud provider>-<region>.informaticacloud.com.<orgId> - api://<cloud provider>-<region>.informaticacloud.com/<orgId> - https://<orgId>.<cloud provider>-<region>.informaticacloud.com - https://<cloud provider>-<region>.informaticacloud.com.<orgId> - https://<cloud provider>-<region>.informaticacloud.com/<orgId> **Note:** Optionally, you can include the resource in the audience claim. The resource name is customizable and can be set to any value, for example, LoginResource1, or UserLoginResource.
exp	Expiration time for the JWT.
nbf	Time before which the JWT can't be accepted for processing.
iat	Time at which the JWT was issued. This value can determine the age of the JWT.
jti/uti	Unique identifier for the JWT. The identifier can be used to prevent the JWT from being replayed so that each JWT is used only once.

Note: If a required claim is absent, the API rejects the request and returns an error.

After you log in to IDMC, use the values from the following response fields to make subsequent requests:

- icSessionId. REST API session ID that you include in the header for REST API calls. The session expires at the earliest of the following values:
  - Current time plus 30 minutes
  - OAuth token expiration time

  After the session ID expires, log in again to continue working with the REST API. For information on retrieving session status details, see "Session IDs" on page 22.
- serverUrl. The base URL that you use in all resource URIs.

Use the logout resource to end the session.

POST request

The login request must include a JWT access token. To get a JWT access token, see the documentation provided by your identity provider.

To log in, use the following URL:

```
https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/loginOAuth
```

For a list of cloud provider and region values, see "Logging in" on page 84.

Include the following attributes in the request:

Field	Type	Required	Description
oauthToken	String	Yes	JWT access token.
orgId	String	Yes	ID of the organization the user belongs to.

POST response

Returns the user object if the request is successful. Returns the error object if errors occur.

Use the base URL and session ID returned in the response for subsequent requests during this session.

The user object includes the following attributes:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to.
orgUuid	String	Unique identifier for the organization.
name	String	IDMC user name.
description	String	Description of the user.
createTime	String	When the user account was created.
updateTime	String	When the user account was last updated
createdBy	String	IDMC user who created the user account.
updatedBy	String	IDMC user who last updated the user account.
sfUsername	String	Salesforce user name. Included when user is configured to authenticate through Salesforce.
password	String	Salesforce user password. Included when user is configured to authenticate through Salesforce.
firstName	String	First name for the user account.
lastName	String	Last name for the user account.
title	String	Title of the user.
password	String	User password, obfuscated.
phone	String	Phone number for the user.
emails	String	Email address to be notified when the user changes the account password.
timezone	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
serverUrl	String	IDMC URL for the organization that the user belongs to. Use as a base for most version 2 and version 3 REST API resource URIs.
icSessionId	String	IDMC Session ID. Use in most version 2 and version 3 REST API request headers.

Field	Type	Description
securityQuestion	String	Security question. Returns one of the following codes: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String	Answer to the security question, obfuscated.
uuId	String	Unique identifier for the user.
forceChangePassword	Boolean	Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.
roles		Object that contains roles assigned to the user.
name	String	Included in role object. Role name. Returns one of the following codes: - Service Consumer - Designer - Admin
description	String	Included in role object. Role description.
usergroups		Object that contains the usergroups assigned to the user.
id	String	Included in the usergroups object. User group ID.
orgId	String	Included in the usergroups object. ID of the organization the user group belongs to.
name	String	Included in the usergroups object. Name of the user group.
description	String	Included in the usergroups object. Description of the user group.
createTime	String	Included in the usergroups object. Date and time the user group was created.
updateTime	String	Included in the usergroups object. Date and time the user group was last updated.
createdBy	String	Included in the usergroups object. User who created the user account.

Field	Type	Description
updatedBy	String	Included in the usergroups object. User who last updated the user account.
spiUrl	String	This field is no longer applicable and has been deprecated.

POST example

To log in to IDMC using a JWT access token, you might use the following request:

```
POST https://dm-us.informaticacloud.com/ma/api/v2/user/loginOAuth
Content-Type: application/json
Accept: application/json

{
"orgId": "6xVpQpzHBAoizhbMOLzty9",
"oauthToken": "<JWT token>"
}
```

The response returns the user object which contains the serverUrl and icSessionId values to use in subsequent calls, as shown in the following example:

```
{
    "id": "01000103000000000002",
    "orgId": "010001",
    "orgUuid": "6xVpQpzHBAoizhbMOLzty9",
    "name": "Larry@infa.com",
    "description": null,
    "createTime": "2023-07-20T15:13:12.000Z",
    "updateTime": "2023-07-20T15:13:32.000Z",
    "createdBy": "ma",
    "updatedBy": "Scott@infa.com",
    "sfUsername": null,
    "firstName": "Larry",
    "lastName": "Felyne",
    "title": "Manager",
    "password": "********",
    "phone": "423435546657652",
    "emails": "Larry@infa.com",
    "timezone": null,
    "serverUrl": "https://na4.dm-us.informaticacloud.com/saas",
    "securityQuestion": "In what city did you meet your spouse/significant other?",
    "securityAnswer": "********",
    "uuid": "6qnnXdzBdtUbObUTYhyWO1",
    "forceChangePassword": false,
    "roles": [
        {
            "name": "Admin",
            "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
        },
        {
            "name": "Data Preview",
            "description": "Role to preview data"
        },
        {
            "name": "Designer",
            "description": "Role for creating assets, tasks, and processes. Can
configure connections, schedules, and runtime environments. Has access to the
Application Integration Console."
        }
    ],
    "usergroups": [
        {
            "id": "aRfrqNzCfg7e9SDOJ3y1Yn",
```

```
            "orgId": "010001",
            "name": "G2",
            "description": "",
            "createTime": "2023-08-01T05:33:22.000Z",
            "updateTime": "2023-08-01T05:33:23.000Z",
            "createdBy": "Scott@infa.com",
            "updatedBy": "Scott@infa.com"
        }
    ],
    "spiUrl": null
}
```

As an example of using the serverUrl and icSessionId values in subsequent requests, to send a GET request to obtain Secure Agent information, you might use the following request:

```
GET https://na4.dm-us.informaticacloud.com/saas/api/v2/agent HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
```

Logging in using SAML

Use this version 2 API resource to log in to IDMC using a Security Assertion Markup Language (SAML) token. The SAML token is a Base64-encoded XML file that contains a SAML assertion. This token is provided by your identity provider (IDP) after successful login.

Note: If a SAML token was already used to perform SSO login, it can't be used to perform API logins, even if the token hasn't expired yet. You must log in using your username and password.

The loginSaml response includes the session ID and base URL that you include in subsequent REST API calls. Use values from the following fields returned in the response:

- icSessionId. A 30-minute REST API session ID that you include in the header for version 2 REST API calls. After the session ID expires, log in again to continue working with the REST API.
  For information on retrieving session status details, see "Session IDs" on page 22.
- serverUrl. The base URL that you use in all version 2 resource URIs except for loginSaml, for example: `<serverUrl>/api/v2/job`

Use the logout resource to end the session.

POST Request

The login request must include a SAML token, which you can obtain from your identity provider.

To log in, use the following URL:

```
https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/loginSaml
```

For a list of cloud provider and region values, see "Logging in" on page 84.

With this URL, use the following attributes in a login object:

Field	Type	Required	Description
samlToken	String	Yes	SAML token.
orgId	String	Yes	IDMC organization ID. To find the organization ID, log in using the user interface and click the organization name in the top right corner.

POST Response

Returns the user object if the request is successful. Returns the error object if errors occur.

Use the base URL and session ID returned in the response for subsequent requests during this session.

The user object includes the following attributes:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to. 22 characters. **Note:** Organizations that were created in legacy Informatica Cloud might have an organization ID of 6 characters.
orgUuid	String	Unique identifier for the organization.
name	String	IDMC user name.
description	String	Description of the user.
createTime	String	When the user account was created.
updateTime	String	When the user account was last updated
createdBy	String	IDMC user who created the user account.
updatedBy	String	IDMC user who last updated the user account.
firstName	String	First name for the user account.
lastName	String	Last name for the user account.
title	String	Title of the user.
phone	String	Phone number for the user.
roles		Object that contains roles assigned to the user.
name	String	Included in role object. Role name. Returns one of the following codes: - Service Consumer - Designer - Admin
description	String	Included in role object. Role description.
email	String	Email address to be notified when the user changes the account password.
timezone	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
serverUrl	String	IDMC URL for the organization the user belongs to. Use the serverUrl as a base for most version 2 REST API resource URIs.
icSessionId	String	IDMC session ID for version 2 REST API session. Use in most version 2 REST API request headers.

Field	Type	Description
spiUrl	String	This field is no longer applicable and has been deprecated.
uuId	String	Unique identifier for the user.

POST Example

To log in to IDMC using SAML single sign-on, you might use the following request:

```
POST https://dm-us.informaticacloud.com/ma/api/v2/user/loginSaml/<URI>
Content-Type: application/json
Accept: application/json

{
"@type": "login",
"samlToken": "<SAML token>",
"orgId": "3FNFLs1uHe2IIgTs8tRjSJ"
}
```

The response returns the user object which contains the serverUrl and icSessionId values to use in subsequent calls, as shown in the following example:

```
{
    "id": "0101TQ03000000000007",
    "orgId": "3FNFLs1uHe2IIgTs8tRjSJ",
    "orgUuid": "3FNFLs1uHe2IIgTs8tRjSJ",
    "name": "John@infa.com",
    "description": "",
    "createTime": "2018-02-16T00:20:07.000Z",
    "updateTime": "2018-07-17T22:45:50.000Z",
    "createdBy": "System built-in user",
    "updatedBy": "John@infa.com",
    "sfUsername": null,
    "firstName": "John",
    "lastName": "Randall",
    "title": "IICS Admin",
    "phone": "123-456-7899",
    "emails": "John@infa.com",
    "timezone": null,
    "serverUrl": "https://na4.dm-us.informaticacloud.com/saas",
    "securityQuestion": "In what city were you born?",
    "securityAnswer": "********",
    "uuid": "a51jk7TB0IDcnWLwJdLaW2",
    "forceChangePassword": false,
    "roles": [
        {
            "name": "Admin",
            "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
        },
        {
            "name": "Data Preview",
            "description": "Role to preview data"
        },
        {
            "name": "Designer",
            "description": "Role for creating assets, tasks, and processes. Can
configure connections, schedules, and runtime environments. Has access to the
Application Integration Console."
        }
    ],
}
```

Using the above response as an example, to send a GET request to obtain Secure Agent information, you might use the following request:

```
GET https://na4.dm-us.informaticacloud.com/saas/api/v2/agent
Content-Type: application/json
Accept: application/json
```

Logging in using Salesforce

Use this resource to log in to an IDMC organization using Salesforce credentials.

The login response includes the session ID and base URL that you need to include in subsequent REST API calls.

Note: You must activate your IDMC user account before you can log in using the loginSf resource.

Use the Salesforce Web Services API to generate a Salesforce session ID and to retrieve the Salesforce server URL. For more information, see the Salesforce *Web Services API Developer's Guide*.

Use the logout resource to end the session.

POST Request

To log in using Salesforce credentials, use the following URL:

```
https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/loginSf
```

For a list of cloud provider and region values, see "Logging in" on page 84.

Use the following attributes in a loginSf object:

Field	Type	Required	Description
sfSessionId	String	Yes	Salesforce session ID. For information about generating the Salesforce session ID, see the login resource in the Salesforce *Web Services API Developer's Guide*.
sfServerUrl	String	Yes	Salesforce server URL. Retrieve the Salesforce server URL from the Salesforce API login resource response.

POST Response

Returns the user object if the request is successful. Returns the error object if errors occur.

The response includes the following information that you need to include in the header of subsequent REST API calls:

- icSessionId. A REST API session ID that you include in the header for version 2 REST API calls. The session ID expires after 30 minutes of inactivity. After the session ID expires, log in again to continue working with the REST API.
  For information on retrieving session status details, see "Session IDs" on page 22.
- serverUrl. The base URL that you use in all version 2 resource URIs except for login, for example:
  `<serverUrl>/api/v2/job`

The user object includes the following attributes:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to. 22 characters. **Note:** Organizations that were created in legacy Informatica Cloud might have an organization ID of 6 characters.
orgUuid	String	Unique identifier for the organization.
name	String	Informatica Intelligent Cloud ServicesIDMC user name.
description	String	Description of the user.
createTime	String	When the user account was created.
updateTime	String	When the user account was last updated
createdBy	String	Informatica Intelligent Cloud Services user who created the user account.
updatedBy	String	Informatica Intelligent Cloud Services user who last updated the user account.
sfUsername	String	Salesforce user name. Included when user is configured to authenticate through Salesforce.
password	String	Salesforce user password. Included when user is configured to authenticate through Salesforce.
firstName	String	First name for the user account.
lastName	String	Last name for the user account.
title	String	Title of the user.
phone	String	Phone number for the user.
securityQuestion	String	Security question. Returns one of the following codes: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String	Answer to the security question.
roles		Object that includes a role object for each role assigned to the user.
name	String	Included in role object. Role name. Returns one of the following codes: - Service Consumer - Designer - Admin

Field	Type	Description
description	String	Included in role object. Role description.
emails	String	Email address to be notified when the user changes the account password.
timezone	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
serverUrl	String	Informatica Intelligent Cloud Services URL for the organization the user belongs to. Use the serverUrl as a base for most version 2 REST API resource URIs.
spiUrl	String	This field is no longer applicable and has been deprecated.
uuId	String	Unique identifier for the user.
icSessionId	String	IDMC session ID for version 2 REST API session. Use in most version 2 REST API request headers. Maximum length of 16,000 characters.
forceChangePassword	Boolean	Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.

POST Example

To log in to your IDMC organization, you might use the following request:

```
POST https://dm-us.informaticacloud.com/ma/api/v2/user/loginSf
Content-Type: application/json
Accept: application/json

{
"@type": "loginSf",
"sfSessionId": "00Df40000000coF!ARYAQDO2SvoD3eRXOrNaiOb9a3Pp",
"sfServerUrl": "https://c.na41.visual.force.com/services/Soap/u/27.0/00Df40000000coF"
}
```

The response returns the user object which contains the serverUrl and icSessionId values to use in subsequent calls, as shown in the following example:

```
{
    "id": "0101TQ03000000000007",
    "orgId": "0101TQ",
    "orgUuid": "3FNFLs1uHe2IIgTs8tRjSJ",
    "name": "John@infa.com",
    "description": "",
    "createTime": "2018-02-16T00:20:07.000Z",
    "updateTime": "2018-07-17T22:45:50.000Z",
    "createdBy": "System built-in user",
    "updatedBy": "John@infa.com",
    "sfUsername": "JohnR",
    "firstName": "John",
    "lastName": "Randall",
    "title": "IICS Admin",
    "password": "**********",
    "phone": "123-456-7899",
    "emails": "John@infa.com",
    "timezone": null,
    "serverUrl": "https://na4.dm-us.informaticacloud.com/saas",
```

```
    "securityQuestion": "In what city were you born?",
    "securityAnswer": "********",
    "uuid": "a51jk7TB0IDcnWLwJdLaW2",
    "forceChangePassword": false,
    "roles": [
        {
            "name": "Admin",
            "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
        },
        {
            "name": "Data Preview",
            "description": "Role to preview data"
        },
        {
            "name": "Designer",
            "description": "Role for creating assets, tasks, and processes. Can
configure connections, schedules, and runtime environments. Has access to the
Application Integration Console."
        }
    ],
}
```

Using the above response as an example, to send a GET request to obtain Secure Agent information, you might use the following request:

```
GET https://na4.dm-us.informaticacloud.com/saas/api/v2/agent
Content-Type: application/json
Accept: application/json
```

Logout

You can use the REST API to log out of an organization and end the version 2 REST API session, or you can end all version 2 REST API sessions for the organization.

Logging out

Use this resource to log out of an organization and end the version 2 REST API session specified in the request.

Don't log out of a REST API session until all the requests that you've sent have been executed.

POST Request

To log out an organization and end the version 2 REST API session, include the session ID in the request header with the following URI:

```
/api/v2/user/logout
```

POST Response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST Example

To log out of your organization, you might use the following request:

```
POST <serverURL>/api/v2/user/logout
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

Logging out and ending all sessions

Use this resource to log out of an organization and end all version 2 REST API sessions for the organization.

Don't log out of the sessions until all the API requests have been executed.

POST Request

To log out of an organization and end all version 2 REST API sessions for the organization, use the following URL:

```
https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/logoutall
```

With this URL, use the following attributes in a logout object:

username

IDMC user name.

password

IDMC password.

POST Response

Returns the success object if the request is successful.

Returns the error object if errors occur.

POST Example

To log out of an organization and all version 2 REST API sessions, you might use the following request:

```
POST https://dm-us.informaticacloud.com/ma/api/v2/user/logoutall
Content-Type: application/json
Accept: application/json
icSessionId: <SessionId>

{
"@type": "logout",
"username": "useremail@company.com",
"password": "mypassword"
}
```

Organizations

You can use the REST API to request details of your IDMC organization or a related sub-organization, update an organization or related sub-organization, delete a sub-organization, and create a sub-organization.

Organization management

Use this resource to request the details of your IDMC organization or a related sub-organization. You can use this resource to update an organization or related sub-organization. You can also delete a sub-organization.

GET Request

To request the details of your organization, use the following URI:

```
/api/v2/org
```

To request the details of a sub-organization related to your organization, you can include the sub-organization ID or sub-organization name in the URI. Use one of the following URIs:

```
/api/v2/org/<sub-organization ID>
/api/v2/org/name/<sub-organization name>
```

If you use an organization name in the URI and the name includes a space, replace the space with `%20`. For example:

```
/api/v2/org/name/my%20suborg
```

GET Response

When you request the details of an organization, IDMC returns the org object in list format.

If the organization is a parent organization in an organization hierarchy, the org object includes the IDs and names of all sub-organizations.

Returns the error object if errors occurred.

The **org** object includes the following attributes:

Field	Type	Description
id	String	Organization ID.
orgId	String	Organization ID.
name	String	Organization name.
description	String	Description of the organization.
createTime	Date/time	Time the organization was created.
updateTime	Date/time	Last time the organization was updated.
createdBy	String	ser who created the organization.
updatedBy	String	Last user who updated the organization.
parentOrgId	String	Organization ID for the parent organization. Returns 0 if the organization is a stand-alone or parent organization.
address1	String	Address for the organization.
address2	String	Additional address information for the organization.
address3	String	Additional address information for the organization.
city	String	City where the organization is based.
state	String	State where the organization is based. Returns a state code. For more information, see "State codes" on page 760.
zipcode	String	Postal code of the area where the organization is based.
timezone	String	Time zone of the organization. For more information, see "Time zone codes" on page 768.

Field	Type	Description
country	String	Country where the organization is based. Returns a country code. For more information, see "Country codes" on page 761.
employees	String	Range of employees in the organization.
offerCode	String	Offer code assigned to IDMC partners.
successEmails	String	Email address to receive notification of tasks that complete successfully.
warningEmails	String	Email address to receive notification of tasks that complete with errors.
errorEmails	String	Email address to receive notification of tasks that fail to complete.
campaignCode	String	Campaign code.
atlasProjectId	String	Atlas project ID.
zuoraAccountId	String	Zuora account ID.
spiUrl	String	This field is no longer applicable and has been deprecated.
devOrg	Boolean	Indicates the organization is a development organization. Returns 1 for a development organization. Returns 0 for a production organization.
maxLogRows	Int	Maximum number of rows to keep in the activity log.
minPasswordLength	Int	Minimum number of characters for a user account password.
minPasswordCharMix	Int	Mix of characters each password must contain. Passwords can contain a mix of the following character sets: lowercase letters, capital letters, numbers, and special characters. Returns one of the following values: - 1. Contains at least one of the character sets. - 2. Contains at least two of the character sets. - 3. Contains at least three of the character sets. - 4. Contains all four character sets.
passwordReuseInDays	Int	Number of days until a previous password can be used again. A value of 0 means a password can always be reused.
passwordExpirationInDays	Int	Number of days until a password expires. A value of 0 means a password will never expire.
subOrgLimit	Int	Number of sub-organizations allowed. If the limit has been customized, the REST API returns the custom limit. Otherwise, the REST API returns the limit associated with the edition.
restApiSessionLimit	Int	Number of concurrent REST API sessions allowed. If the limit has been customized, the REST API returns the custom limit. Otherwise, the REST API returns the limit associated with the edition.

Field	Type	Description
parentOrgId	String	Organization ID of the parent organization. 0 indicates the organization is a stand-alone or parent organization.
jobExecUserProfile	String	IDMC user account configured to run contact validation tasks.
orgUUID	String	Unique identifier for the organization.
subOrgs		Object that contains information for each sub-organization.
id	String	Included in subOrgs object. ID of the sub-organization.
name	String	Included in subOrgs object. Name of the sub-organization.

POST Request

You can update an IDMC organization if the user that started the REST API session has the Admin role and belongs to either the organization that you want to update or the parent organization.

You can update a sub-organization if your organization has the appropriate license and if the user that started the REST API session has the Admin role in the parent organization.

To update the details of a sub-organization related to your parent organization, use the organization ID in the following URI. To update the details of your organization, omit the optional ID.

```
/api/v2/org/<id>
```

Note: When you update an organization through the REST API, the action is a full update. If a field isn't included in the request, the value resets to the default.

You cannot update the organization ID, offer code, or organization administrator user account created with the organization.

With this URI, you can use the following attributes in the **org** object:

Field	Type	Required	Description
name	String	Yes	Organization name.
address	String	Yes	Address of organization.
address2	String		Additional address information for the organization.
address3	String		Additional address information for the organization.
city	String	Yes	City where the organization is based.
state	String	Required when Country is US	State where the organization is based. Use the appropriate state code. Required when Country is set to US. For more information, see Appendix A , "State codes" on page 760.

Field	Type	Required	Description
zipcode	String	Required when Country is US	Postal code of the area where the organization is based. Required when Country is set to US
country	String	Yes	Country where the organization is based. Use the appropriate country code. For more information, see Appendix A , "Country codes" on page 761.
timezone	String		Time zone of the organization. Time zone honors Daylight Saving Time. For more information, see Appendix A , "Time zone codes" on page 768.
description	String		Description of the organization. Maximum length is 255 characters.
successEmails	String		Default email address for notification of successful job completion.
warningEmails	String		Default email addresses for warnings about job completion.
errorEmails	String		Default email address for notification about job failure.
employees	String	Yes	Range of employees in the organization. Use one of the following ranges: - "0_10" - "11_25" - "26_50" - "51_100" - "101_500" - "501_1000" - "1001_5000" - "5001_"
offerCode	String		Offer code assigned to IDMC partners.
passwordReuseInDays	Int		Number of days until a previous password can be used again. Maximum number of days is 730 (2 years). A value of 0 means a password can always be reused.
passwordExpirationInDays	Int		Number of days until the password expires. Maximum number of days is 360. A value of 0 means a password will never expire.

POST Response

If successful, returns the org request object for the organization that you created or updated.

Returns the error object if errors occur.

DELETE Request

You can delete an IDMC sub-organization if the user that started the REST API session has the Admin role and belongs the parent organization.

To delete an IDMC organization, use the organization ID with the following URI:

```
/api/v2/org/<id>
```

DELETE Response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST Example

To update a sub-organization with an ID of 02340000, you might use the following request:

```
POST <serverUrl>/api/v2/org/02340000
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>

<org>
  <name>Dev Org</name>
  <address1>333 Main Street</address1>
  <city>City</city>
  <state>MD</state>
  <zipcode>90001</zipcode>
  <country>US</country>
  <timezone>America/Chicago</timezone>
</org>
```

A successful request returns the org request object for the sub-organization that you updated.

Creating sub-organizations

Use this resource to create an IDMC sub-organization. For IDMC partners only.

You can create an IDMC sub-organization if your organization has the appropriate license and if the user that started the REST API session has the Admin role in the parent organization.

register POST Request

To create an IDMC sub-organization, use the following URI.

```
/api/v2/user/register
```

Use the session ID from the login response in the request header. Use the serverUrl from the login response as the base URL.

You can use the following attributes in a registration object:

Field	Type	Required	Description
org			Attribute that defines an IDMC organization.
offerCode	String		Include in the org object. Offer code assigned to IDMC partners.
name	String	Yes	Include in the org object. Name for the new IDMC organization.
address1	String	Yes	Include in the org object. Address where the organization is located.

Field	Type	Required	Description
address2	String		Include in the org object. Additional address information for the organization.
address3	String		Include in the org object. Additional address information for the organization.
city	String	Yes	Include in the org object. City where the organization is located.
state	String	Yes	Include in the org object. State where the organization is located. Use the appropriate state code. Required for the United States. For more information, see Appendix A, "State codes" on page 760.
zipcode	String	Yes	Include in the org object. Postal code where the organization is located.
country	String	Yes	Include in the org object. Country where the organization is located. Use the appropriate country code. For more information, see Appendix A, "Country codes" on page 761.
timezone	String		Include in the org object. **Note:** IDMC uses America/Los_Angeles as the default time zone. After you create the sub-organization, you can use the org resource to change the time zone or you can change the time zone in Administrator.
employees	String	Yes	Include in the org object. Number of employees in the organization. Use one of the following ranges: - "0_10" - "11_25" - "26_50" - "51_100" - "101_500" - "501_1000" - "1001_5000" - "5001_"
user			Attribute that defines the organization administrator user account.
name	String	Yes	Include in the user object. Email address for the organization administrator account.
password	String	Yes	Include in the user object. Password for the organization administrator account.
firstName	String	Yes	Include in the user object. First name of the organization administrator.

Field	Type	Required	Description
lastName	String	Yes	Include in the user object. Last name of the organization administrator.
title	String	Yes	Include in the user object. Title of the organization administrator.
phone	String	Yes	Include in the user object. Phone number for the organization administrator.
emails	String	Yes	Include in the user object. Email address that receives notification from IDMC.
timezone	String		Include in the user object. Time zone of the organization administrator. **Note:** IDMC uses America/Los_Angeles as the default time zone. After you create the sub-organization, you can use the org resource to change the time zone or you can change the time zone in Administrator.
securityQuestion	String		Include in the user object. Security question. Use one of the following codes to select the security question: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String		Include in the user object. Answer to the security question.
forceChangePassword	Boolean		Include in the user object. Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.
optOutOfEmails	Boolean		Include in the user object. Whether the user opts in or out of receiving marketing communication from Informatica. TRUE indicates that the user does not want to receive marketing communication.
registrationCode	String		Registration code.
sendEmail	Boolean		When registration completes, sends an email to the user email address with temporary login information. Use TRUE to send an email.

POST Response

Returns the user object if the request is successful. Returns the error object if errors occur.

The user object includes the following attributes.

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to. 22 characters. **Note:** Organizations that were created in legacy Informatica Cloud might have an organization ID of 6 characters.
orgUuid	String	Unique identifier for the organization.
name	String	Informatica Intelligent Cloud ServicesIDMC user name.
description	String	Description of the user.
createTime	String	When the user account was created.
updateTime	String	When the user account was last updated
createdBy	String	Informatica Intelligent Cloud Services user who created the user account.
updatedBy	String	Informatica Intelligent Cloud Services user who last updated the user account.
sfUsername	String	Salesforce user name. Included when user is configured to authenticate through Salesforce.
password	String	Salesforce user password. Included when user is configured to authenticate through Salesforce.
firstName	String	First name for the user account.
lastName	String	Last name for the user account.
title	String	Title of the user.
phone	String	Phone number for the user.
securityQuestion	String	Security question. Returns one of the following codes: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String	Answer to the security question.
roles		Object that includes a role object for each role assigned to the user.
name	String	Included in role object. Role name. Returns one of the following codes: - Service Consumer - Designer - Admin

Field	Type	Description
description	String	Included in role object. Role description.
emails	String	Email address to be notified when the user changes the account password.
timezone	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
serverUrl	String	Informatica Intelligent Cloud Services URL for the organization the user belongs to. Use the serverUrl as a base for most version 2 REST API resource URIs.
spiUrl	String	This field is no longer applicable and has been deprecated.
uuId	String	Unique identifier for the user.
icSessionId	String	IDMC session ID for version 2 REST API session. Use in most version 2 REST API request headers. Maximum length of 16,000 characters.
forceChangePassword	Boolean	Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.

POST Examples

To register an organization in JSON, you might use the following request:

```
POST <serverUrl>/api/v2/user/register
Content-Type: application/json
Accept: application/json
icSessionId: <SessionId>

{
    "@type" : "registration",
    "user" : {
        "@type" : "user",
        "name" : "useremail@company.com",
        "emails" : "useremail@company.com",
        "firstName" : "firstName",
        "lastName" : "lastName",
        "title" : "jobTitle",
        "phone" : "(0)1234 567 890",
        "timezone" : null,
        "forceChangePassword" : "true"
        "optOutOfEmails" : "true"
    },
    "org" : {
        "@type" : "org",
        "offerCode" : "PPC30daytrial",
        "campaignCode" : "PPC",
        "name" : "myOrg",
        "address1" : "1 Main St",
        "city" : "Mycity",
        "state" : "CA",
        "zipcode" : "90210",
        "country" : "US",
        "employees" : "5001_"
    },
    "registrationCode" : "ics-standard",
```

```
    "sendEmail" : true
}
```

A successful request returns the user object that was created, which includes the organization ID for the organization that was created.

Runtime environments

You can use the runtimeEnvironment resource to request runtime environment details and manage Secure Agent groups.

You can perform the following tasks using the REST API:

- Get details about runtime environments.
- Create, update, delete Secure Agent groups.
- Enable and disable IDMC and connectors for Secure Agent groups.
- Configure Secure Agent service properties for Secure Agent groups.

Getting runtime environment details

Use the runtimeEnvironment resource to get runtime environment details.

You can request the details for a specific runtime environment or details for all of an organization's runtime environments,

To request runtime environment information for an organization, use the following URI:

```
/api/v2/runtimeEnvironment
```

To request the details of a particular runtime environment, you can include the runtime environment ID or name in the URI. Use one of the following URIs:

```
/api/v2/runtimeEnvironment/<id>
/api/v2/runtimeEnvironment/name/<name>
```

If you use the runtime environment name in the URI and the runtime environment name includes a space, replace the space with `%20`. For example:

```
/api/v2/runtimeEnvironment/name/my%20runtime%20environment
```

GET Response

Returns runtime environment information for the requested runtime environment. The runtimeEnvironment object includes the following attributes:

Field	Type	Description
id	String	Runtime environment ID.
orgId	String	Organization ID.
name	String	Runtime environment name.
description	String	Description of the runtime environment.

Field	Type	Description
createTime	Date/time	Date and time the runtime environment was created.
updateTime	Date/time	Date and time that the runtime environment was last updated.
createdBy	String	User who created the runtime environment.
updatedBy	String	User who last updated the runtime environment.
agents		Agents assigned to the runtime environment. See the agent resource.
isShared	Boolean	Indicates whether the Secure Agent group is shared. Returns one of the following values: - true. The Secure Agent group is shared. - false. The Secure Agent group is not shared.
federatedId	String	Global unique identifier.
serverlessConfig		Attribute that defines serverless runtime environment properties.

If you get information about a serverless runtime environment, the runtimeEnvironment object also includes the serverlessConfig object. The serverlessConfig object includes the following attributes:

Field	Type	Description
platform	String	Cloud platform that hosts the serverless runtime environment.
applicationType	String	Application that can use the serverless runtime environment.
status	String	Status of the serverless runtime environment.
statusMessage	String	Status message for the serverless runtime environment.
statusMessageDetails	String	Validation error data from AWS for the serverless runtime environment.
cloudProviderConfig		Defines basic properties and Data Integration properties.
infaAccountNumber	String	Included in the cloudProviderConfig object. Informatica's account number on the cloud platform.
externalId	String	Included in the cloudProviderConfig object. External ID to associate with the role.
configurationName	String	Included in the cloudProviderConfig object. Name of the serverless runtime environment.
configurationDescription	String	Included in the cloudProviderConfig object. Description of the serverless runtime environment.
params		Defines the AWS resource configuration properties.

Field	Type	Description
s3	String	Included in the params object. Location on Amazon S3 to store supplementary files.
subnet	String	Included in the params object. ID of the subnet.
role	String	Included in the params object. Name of the role that the serverless runtime environment assumes.
vpc	String	Included in the params object. ID of the VPC (Amazon Virtual Private Cloud).
externalId	String	Included in the params object. External ID that is configured for the role.
securityGroup	String	Included in the params object. Security group ID.
accountNumber	String	Included in the params object. Your account number on the cloud platform.
referenceId	String	Included in the params object. Internal ID used to reference the serverless runtime environment.
computeUnits	String	Included in the params object. Maximum number of serverless compute units that a task can use.
executionTimeout	String	Included in the params object. Amount of time in minutes to wait for a task to complete.
cloudInstanceId	String	Included in the params object. Instance ID.
zone	String	Included in the params object. Availability zone ID.
region	String	Included in the params object. Region on the cloud platform.
infaAccountNumber	String	Included in the params object. Informatica's account number on the cloud platform.
awsTags	String	Included in the params object. AWS tags.
resourceShareId	String	Included in the params object. ID of the resource share.
networkMode	String	Included in the params object. AWS serverless runtime environment type.

Field	Type	Description
advancedCustomProperties	String	Included in the params object. Domain map of all resource configurations in the resource share.
maxComputeUnits	String	Maximum number of serverless compute units that a task can use.
executionTimeout	String	Amount of time in minutes to wait for a task to complete.

Get Example

To request the details of a particular runtime environment, you might use the following request:

```
GET <serverUrl>/api/v2/runtimeEnvironment/00000425000000000004
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

The following text is a sample return in JSON:

```
{
    "@type": "runtimeEnvironment",
    "id": "00000425000000000004",
    "orgId": "000004",
    "name": "SUT_Agent",
    "createTime": "2016-12-09T12:34:01.000Z",
    "updateTime": "2016-12-09T17:54:00.000Z",
    "createdBy": "org1@mycompany.com",
    "updatedBy": "org1@mycompany.com",
    "agents": [],
    "isShared": true,
    "federatedId": "<ID>"
  }
```

The following text is a sample return for a serverless runtime environment:

```
{
    "@type": "runtimeEnvironment",
    "id": "01000000000000000039",
    "orgId": "010211",
    "name": "Serverless runtime environment 1",
    "description": "My serverless runtime environment",
    "createTime": "2020-08-25T13:21:16.000Z",
    "updateTime": "2020-08-25T13:29:43.000Z",
    "createdBy": "admin",
    "updatedBy": "admin",
    "agents": [],
    "isShared": false,
    "federatedId": "<ID>",
    "serverlessConfig": {
        "platform": "AWS",
        "applicationType": "CDI",
        "status": "RUNNING",
        "statusMessage": "Serverless runtime is running",
        "cloudProviderConfig": {
            "cloudConfig": [
                {
                    "infaAccountNumber": "<ACCT_NUMBER>",
                    "externalId": "<EXT_ID>",
                    "configurationName": "Serverless runtime environment 1",
                    "configurationDescription": "My serverless runtime environment",
                    "params": {
                       "s3": "s3://my-bucket",
                       "subnet": "subnet-12345",
                       "role": "CDI_Serverless_Role",
                       "vpc": "vpc-12345",
                       "externalId": "<EXT_ID>",
```

```
                        "securityGroup": "sg-<SG_NUMBER>",
                        "accountNumber": "<ACCT_NUMBER",
                        "referenceId": "<REF_ID>",
                        "computeUnits": "1",
                        "executionTimeout": "2880",
                        "cloudInstanceId": "i-123456789",
                        "zone": "usw2-az3",
                        "region": "us-west-2",
                        "infaAccountNumber": "<ACCT_NUMBER>",
                        "awsTags": "Key=NAME,Value=test1
Key=EMAIL,Value=test1@informatica.com"
                        "resourceShareId": "06260abd-360c-4603-9866-4671d6",
                        "networkMode": "xeni",
                        "advancedCustomProperties":
"ResourceConfigDomainNameMap=rcfg-0123456abcdef:informatica-private.s3.us-
west-2.amazonaws.com,rcfg-6543210fedcba:serverless-redshift-cluster-1.abcdef0123456.us-
west-2.redshift.amazonaws.com,rcfg-fedcba6543210:serverless-postgresql-
db.cluster-0a1b2c3d4e5f6.us-west-2.rds.amazonaws.com,rcfg-6f5e4d3c2b1a0:serverless-
private.s3-us-west-2.amazonaws.com"
                    }
                }
            ]
        },
        "maxComputeUnits": "1",
        "executionTimeout": "2880"
    }
```

Creating, updating, and deleting Secure Agent groups

You can use the runtimeEnvironment resource to create, update, and delete Secure Agent groups.

Use a POST request to create and update Secure Agent groups. Use a DELETE request to delete a Secure Agent group.

POST request

To create a Secure Agent group, use the following URI:

```
/api/v2/runtimeEnvironment
```

Include the following fields in the request:

Field	Type	Required	Description
name	String	Yes	Name of the Secure Agent group.
isShared	Boolean	-	Whether the Secure Agent group can be shared with sub-organizations.

To update a Secure Agent group, include the agent group ID as shown in the following URI:

```
/api/v2/runtimeEnvironment/<id>
```

You can add or remove agents and rename Secure Agent groups. To move an agent from one Secure Agent group to another group, send a request to remove the agent from its current group and then send a request to add the agent to the new group.

Include the following fields in the request:

Field	Type	Required	Description
name	String	Yes	Name of the Secure Agent group.
isShared	Boolean	-	Whether the Secure Agent group can be shared with sub-organizations.
agents	Array	Yes	Agents assigned to the Secure Agent group.
orgId	String	Yes	Organization ID.
id	String	Yes	Agent ID.

POST response

Field	Type	Description
id	String	Secure Agent group ID.
orgId	String	Organization ID.
name	String	Secure Agent group name.
description	String	Description of the Secure Agent group.
createTime	Date/time	Date and time the Secure Agent group was created.
updateTime	Date/time	Date and time that the Secure Agent group was last updated.
createdBy	String	User who created the Secure Agent group.
updatedBy	String	User who last updated the Secure Agent group.
agents	Array	Agents assigned to the Secure Agent group. For more information, see the agent resource.
isShared	Boolean	Indicates whether the Secure Agent group is shared. Returns one of the following values: - true. The Secure Agent group is shared. - false. The Secure Agent group is not shared.
federatedId	String	Global unique identifier.
serverlessConfig		Attribute that defines serverless runtime environment properties.

POST request examples

The following example shows a request to create a Secure Agent group:

```
POST <serverUrl>/api/v2/runtimeEnvironment HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
  "@type": "runtimeEnvironment",
```

```
  "name": "14402",
  "isShared": true
}
```

The following example shows a request to add an agent to a Secure Agent group:

```
POST <serverUrl>/api/v2/runtimeEnvironment/00000425000000000004
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
  "@type": "runtimeEnvironment",
  "name": "14401",
  "agents": [
    {
      "@type": "agent",
      "id": "010003080000000000003",
      "orgId": "010003"
    }
  ],
  "isShared": false
}
```

POST response example

You might receive a response similar to the following example:

```
{
  "@type": "runtimeEnvironment",
  "id": "01000325000000000005",
  "orgId": "010003",
  "name": "USW1MJ02W6PP-2",
  "createTime": "2021-11-09T17:20:55.583Z",
  "updateTime": "2021-11-09T17:20:55.583Z",
  "createdBy": "ctan",
  "updatedBy": "ctan",
  "agents": [],
  "isShared": false,
  "federatedId": "9F4z0pY1kKqdlmLp5kYXkF",
  "createTimeUTC": "2021-11-09T22:20:55.583Z",
  "updateTimeUTC": "2021-11-09T22:20:55.583Z",
  "serverlessConfig": {
    "cloudProviderConfig": {
      "cloudConfig": []
    }
  }
}
```

DELETE request

To delete a Secure Agent group, include the agent group ID as shown in the following URI:

```
/api/v2/runtimeEnvironment/00000425000000000034
```

Managing Secure Agent group selections

You can use the runtimeEnvironment resource to enable or disable IDMC and connectors for a Secure Agent group. You can also get details about the selections.

Use a GET request to get the details about a Secure Agent group's enabled and disabled selections. Use a PUT request to assign a Secure Agent group to services and connectors.

GET request

You can request information about the selections that are enabled for a Secure Agent group. You can also request information about all of the selections that are available for a Secure Agent group based on the organization's license. The response includes the names and IDs of the available services and connectors.

To get information about enabled selections, use the following URI:

```
/api/v2/runtimeEnvironment/<id>/selections
```

To get information about all of the selections that are available to a Secure Agent group, use the following URI:

```
/api/v2/runtimeEnvironment/<id>/selections/details
```

GET response

Returns the Secure Agent group selections. If successful, returns the following fields:

Field	Type	Description
services		Contains selection information for services.
selections		Contains information for enabled services. If the request is to include details, also contains selection information for disabled services.
id	String	Included in the selections object. Service ID.
name	String	Included in the selections object. Service name.
enabled	Boolean	Included in the selections object. Whether the service is enabled for the Secure Agent group.
connectors		Contains selection information for connectors.
selections		Contains information for enabled connectors. If the request is to include details, also contains selection information for disabled connectors.
id	String	Included in the selections object. Connector ID.
name	String	Included in the selections object. Connector name.
enabled	Boolean	Included in the selections object. Whether the connector is enabled for the Secure Agent group.
Additional services		Contains selection information for additional services, for example, Git.
selections		Contains information for additional services that are enabled. If the request is to include details, also contains selection information for additional services that are disabled.
id	String	Included in the selections object. Service ID.

Field	Type	Description
name	String	Included in the selections object. Service name.
enabled	Boolean	Included in the selections object. Whether the service is enabled for the Secure Agent group.

GET request example

The following example shows a request to get information about enabled selections:

```
GET <serverUrl>/api/v2/runtimeEnvironment/0000042500000000000004/selections
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

The following example shows a request to get information about enabled and disabled selections:

```
GET <serverUrl>/api/v2/runtimeEnvironment/0000042500000000000004/selections/details
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

GET response example

If the request is for enabled and disabled selections, you might receive a response similar to the following example:

```
{
  "services": {
    "selections": [
      {
        "id": "00000047000000000002",
        "name": "Data Integration",
        "enabled": true
      }
    ]
  },
  "connectors": {
    "selections": [
      {
        "id": "01000000000005L",
        "name": "Amazon Redshift v2",
        "enabled": true
      },

     {
        "id": "01000000000005Q",
        "name": "Amazon S3",
        "enabled": false
      }
    ]
  },
  "additionalServices": {
    "selections": [
      {
        "id": "00000048000000000002",
        "name": "Git",
        "enabled": false
      }
    ]
  }
}
```

PUT request

To enable services and connectors for a Secure Agent group, include the agent group ID as shown in the following URI:

```
/api/v2/runtimeEnvironment/<id>/selections
```

To see a list of all of the services and connectors that are available and find the selection IDs, use a GET request to obtain information about enabled and disabled selections.

Include the following fields in the request:

Field	Type	Required	Description
id	String	Yes	The selection object ID.
name	String	-	The selection object name.
enabled	Boolean	-	Whether to enable or disable the selection.

PUT request example

If you want to select the Data Integration service, the Amazon Redshift v2 connector, and the Git service for a Secure Agent group, the request might be similar to the following example:

```
PUT <serverUrl>/api/v2/runtimeEnvironment/0000042500000000004/selections HTTP/<HTTP
version>
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
  "services": {
    "selections": [
      {
        "id": "00000047000000000002",
        "name": "Data Integration",
        "enabled": true
      }
    ]
  },
  "connectors": {
    "selections": [
      {
        "id": "01000000000005L",
        "name": "Amazon Redshift v2",
        "enabled": false
      },
      {
        "id": "01000000000005M",
        "name": "Amazon S3 v2",
        "enabled": false
      }
    ]
  },
  "additionalServices": {
    "selections": [
      {
        "id": "00000047000000000013",
        "name": "Self-hosted Git Repo",
        "enabled": true
      }
    ]
  }
}
```

Note: The IDs shown in the example are examples only. Use a GET request to find the selection IDs and names that are available to the Secure Agent group.

Configuring Secure Agent service properties for Secure Agent groups

You can use the runtimeEnvironment resource to configure Secure Agent service properties for a Secure Agent group. When you add a Secure Agent to the Secure Agent group, the agent uses the group-level property settings by default instead of using the Secure Agent service default settings.

The Secure Agent service properties that you can configure for a Secure Agent group depend on which services and connectors are assigned to the group. To see the editable properties for a particular Secure Agent group, you can send a GET request for configuration details.

The following rules apply when you configure Secure Agent service properties for a Secure Agent group:

- When you add a Secure Agent to a Secure Agent group that is configured to use group-level property settings, the group-level property settings replace the agent's property settings. If the agent has custom properties, the custom properties are removed.
- When you move a Secure Agent from a Secure Agent group that is configured to use group-level property settings to a group that doesn't use group-level property settings, the agent retains the property settings that were configured at the group level.

Warning: Do not configure agent-level Secure Agent service property settings for an agent in a Secure Agent group that uses group-level property settings. If you want to configure agent-level property settings, delete the group-level property settings before you configure the agent properties.

GET request

Use a GET request to get a list of editable Secure Agent service properties that you can configure for a Secure Agent group.

You can also get a list of group-level properties that have overridden Secure Agent service default property settings.

Include the Secure Agent group ID in the URI. Optionally, include the platform in the URI. You can use linux64 or win64. The default platform is linux64.

Use one of the following URIs:

- To get a list of editable properties, use the following URI:

  `/api/v2/runtimeEnvironment/<id>/configs/details/<platform>`
- To get a list of group-level properties that override the Secure Agent service default property settings, use the following URI:

  `/api/v2/runtimeEnvironment/<id>/configs/<platform>`

GET response

A successful response returns the Secure Agent services, property types, and the following fields in the property type object:

Field	Type	Description
name	String	Property name.
value	String	Value used for all agents added to the Secure Agent group.

Field	Type	Description
isCustom	Boolean	Whether the property is a custom property.
isSensitive	Boolean	Whether the property value is sensitive data that is masked.

GET response example

The following example shows a request to get information about the properties that have overridden the Secure Agent service default property settings:

```
GET <serverUrl>/api/v2/runtimeEnvironment/<id>/configs/<platform>
Content-Type: application/json
Accept: application/json
icSessionId: <SessionId>
```

If you request the properties that have overridden the Secure Agent service default property settings, you might receive a response similar to the following example:

```
{
    "Data_Integration_Server": [
       {
        "TOMCAT_CFG": [
           {
            "name": "MySQL_JDBC_DRIVER_JARNAME",
            "value": "mysql-connector-java-8.0.13.jar"
           },
           {
            "name": "NetworkTimeoutPeriod",
            "value": "335"
           }
         ]
       },
       {
        "PMRDTM_CFG": [
           {
            "name": "SalesforceConnectionTimeout",
            "value": "311"
           },
           {
            "name": "customConfig-DTM-DIX-linux",
            "value": "custom-new",
            "isCustom": "true"
           }
         ]
       }
    ]
}
```

PUT request

Use to configure Secure Agent service properties for a Secure Agent group. The properties that you configure will override the default property settings for the specified Secure Agent service. Include the Secure Agent group ID in the URI.

Optionally, include the platform in the URI. You can use linux64 or win64. The default platform is linux64.

Use the following URI:

```
/api/v2/runtimeEnvironment/<id>/configs/<platform>
```

In the body of the request, include the Secure Agent service name, the property type, and a name/value pair for the property, for example:

```
{
    "<Secure Agent service name>": [
```

```
        {
         "<Property type 1>": [
            {
             "name": "<property name>",
             "value": "<property value>"
            },
            {
             "name": "<property name>",
             "value": "<property value>"
            }
          ]
        },
        {
         "<Property type 2>": [
            {
             "name": "<property name>",
             "value": "<property value>"
            },
            {
             "name": "<property name>",
             "value": "<property value>"
            }
          ]
        }
    ]
}
```

Use the service and property names as shown in a GET response. For example, for the Data Integration Server service, use `Data_Integration_Server`.

The properties that you don't include in the request will retain their existing settings.

Include the following fields in the property type object:

Field	Type	Required	Description
name	String	Yes	Property name.
value	String	Yes	Value to use for all agents added to the Secure Agent group. To use the system default value, use APP_DEFAULT.
isCustom	Boolean	-	Whether the property is a custom property. Default is False.
isSensitive	Boolean	-	Whether the property value is sensitive data that you want to mask. Default is False.

Returns a success code if successful or errors if unsuccessful.

PUT request example

If you want to configure the TOMCAT_CFG property type for the Data Integration Server service, the request might be similar to the following example:

```
PUT <serverUrl>/api/v2/runtimeEnvironment/0000042500000000004/configs
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
{
    "Data_Integration_Server": [
       {
        "TOMCAT_CFG": [
           {
            "name": "MySQL_JDBC_DRIVER_JARNAME",
```

```
            "value": "mysql-connector-java-8.0.14.jar"
           },
           {
            "name": "customConfig-Tomcat-DIS-linux",
            "value": "custom-new",
            "isCustom": "true"
           }
         ]
       }
    ]
}
```

DELETE request

You can delete Secure Agent service property settings that were configured for a Secure Agent group. When you delete the group-level properties, the settings for all of the Secure Agents in the group change to the Secure Agent service default settings. Custom properties that were created for the Secure Agent group are removed.

To delete the property settings for a Secure Agent group, include the Secure Agent group ID in the following URI:

```
/api/v2/runtimeEnvironment/<id>/configs
```

Returns a success code if successful or errors if unsuccessful.

Schedules

Use this resource to request the details of a schedule or the details of all schedules in the organization. You can create or update a schedule. You can also delete a schedule.

Note: To leverage full scheduling capabilities, use the version 3 schedule resource instead of the version 2 schedule resource.

GET Request

To view the details of all schedules in the organization, use the following URI:

```
/api/v2/schedule
```

To request the details of a particular schedule, you can include the schedule ID or schedule name in the URI. Use one of the following URIs:

```
/api/v2/schedule/<id>
```

```
/api/v2/schedule/name/<name>
```

If you use the schedule name in the URI and the schedule name includes a space, replace the space with `%20`. For example:

```
/api/v2/schedule/name/my%20schedule
```

GET Response

If successful, returns the schedule object for the requested schedule. Or, if you request the details for all schedules, returns the schedule object for each schedule in the organization.

Returns the error object if errors occur.

The schedule object includes the following attributes:

Field	Type	Description
id	String	Schedule ID.
orgId	String	Organization ID.
name	String	Schedule name.
description	String	Description of the schedule.
createTime	Date/time	Time the schedule was created.
updateTime	Date/time	Last time the schedule was updated.
createdBy	String	User who created the schedule.
updatedBy	String	User who last updated the schedule.
startTime	Date/time	Date and time when the schedule starts running.
startTimeUTC	Date/time	Date and time when the schedule starts running the tasks. Uses Coordinated Universal Time (UTC).
endTime	Date/time	Date and time when the schedule stops running .
interval	String	Interval or repeat frequency at which the schedule runs. Returns one of the following codes: - None. The schedule does not repeat. - Minutely. Tasks run on an interval based on the specified number of minutes, days, and time range. - Hourly. Tasks run on an hourly interval based on the start time of the schedule. - Daily. Tasks run on a daily interval based on the start time of the schedule. - Weekly. Tasks run on a weekly interval based on the start time of the schedule. - Biweekly. Tasks run every two weeks based on the start time of the schedule. - Monthly. Tasks run on a monthly interval based on the start time of the schedule.
frequency	Int	Frequency that the schedule runs for the specified interval. For example, if the interval is Hourly, a frequency of 2 means the task runs every 2 hours. Returned for Minutely, Hourly, and Daily intervals only.
rangeStartTime	Date/time	The start of the time range within a day that tasks run. Returned for Minutely and Hourly intervals only.
rangeEndTime	Date/time	The end of the time range within a day that tasks run. Returned for Minutely and Hourly intervals only.
sun	Boolean	Tasks run on Sunday. Returns one of the following codes: - true - false Returned for Minutely, Hourly, Weekly, and Biweekly intervals only.
mon	Boolean	Tasks run on Monday. See description for sun.

Field	Type	Description
tue	Boolean	Tasks run on Tuesday. See description for sun.
wed	Boolean	Tasks run on Wednesday. See description for sun.
thu	Boolean	Tasks run on Thursday. See description for sun.
fri	Boolean	Tasks run on Friday. See description for sun.
sat	Boolean	Tasks run on Saturday. See description for sun.
weekDay	Boolean	Tasks run on weekdays only. Returns one of the following codes: - true - false Returned for Daily interval only.
dayOfMonth	Int	Date of the month that tasks run. Returns a date between 1-28. Returned for Monthly interval only.
weekOfMonth	String	Week of the month that tasks run. Returns one of the following codes: - First. The tasks run in the first week of the month. - Second. The tasks run in the second week of the month. - Third. The tasks run in the third week of the month. - Fourth. The tasks run in the fourth week of the month. - Last. The tasks run in the last week of the month. Returned for Monthly interval only.
dayOfWeek	String	Day of the week that tasks run. Returns one of the following codes: - Day. Tasks run on the first day or last day of the month, based on the selected weekOfMonth option. - Sunday - Monday - Tuesday - Wednesday - Thursday - Friday - Saturday Returned for Monthly interval only.
timeZone	String	Time zone of the user who last updated the schedule. Time zone honors Daylight Saving Time.

POST Request

To update a schedule, use the schedule ID with the following URI. To create a schedule, omit the optional schedule ID.

```
/api/v2/schedule/<id>
```

You can submit a partial update using partial mode. To submit a request using partial mode, use a JSON request and include the following line in the header:

```
Update-Mode=PARTIAL
```

You can use the following attributes in a **schedule** object:

Field	Type	Required	Description
id	String	Required for updates only	Schedule ID.
orgId	String	Yes	Organization ID.
name	String	Yes	Schedule name.
description	String		Description of the schedule.
startTime	Date/time	Yes	Date and time when the schedule starts running.
startTimeUTC	Date/time	Yes	Date and time when the schedule starts running. Uses Coordinated Universal Time (UTC).
endTime	Date/time		Date and time when the schedule stops running. If you do not use this parameter, the schedule runs indefinitely.

Field	Type	Required	Description
interval	String	Yes	Interval or repeat frequency at which the schedule runs. Use one of the following options: - None. Tasks run at the schedule start time. The schedule does not repeat. - Minutely. Tasks run on an interval based on the specified number of minutes, days, and time range. You can use the following parameters: - frequency. Frequency in minutes that tasks run. - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - startTimeRange and endTimeRange. The time range within a day tasks should run. Do not use if you want tasks to run all day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Hourly. Tasks run on an hourly interval based on the start time of the schedule. You can use the following parameters: - frequency. Frequency in hours that tasks run. - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - startTimeRange and endTimeRange. The time range within a day tasks should run. Do not use if you want tasks to run all day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Daily. Tasks run on a daily interval based on the start time configured for the schedule. You can use the following parameters: - frequency. Frequency in days that tasks run. - weekDay. Runs the tasks every weekday. Do not use if you want the tasks to run every day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Weekly. Tasks run on a weekly interval based on the start time of the schedule. You can use the following parameters: - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Biweekly. Tasks run every two weeks based on the start time of the schedule. You can use the following parameters: - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Monthly. Tasks run on a monthly interval based on the start time of the schedule. You can use the following parameters: - dayOfMonth. Day of the month when you want tasks to run, between 1-28. - dayOfWeek. Day of the week when you want tasks to run. - weekOfMonth. Week of the month when you want tasks to run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. To indicate when tasks should run, use dayOfWeek with weekOfMonth, such as the First Monday. Or use dayOfMonth, such as 1. Tip: To run tasks on the last day of the month, use the Last weekOfMonth parameter with the Day dayOfWeek parameter.

Field	Type	Required	Description
frequency	Int	Yes	Repeat frequency for tasks. Use one of the following values: - For the Minutely interval, use one of the following options: 5, 10, 15, 20, 30, 45. - For the Hourly interval, use one of the following options: 1, 2, 3, 4, 6, 8, 12. - For Daily intervals, use number of days between 1 -30. Default is 1. Use with Minutely, Hourly, and Daily intervals only.
rangeStartTime	Date/time		The start of the time range within a day that you want tasks to run. Enter a date and time using standard date/time format. Only the time portion is used. Use with Minutely and Hourly intervals only.
rangeEndTime	Date/time		The end of the time range within a day that you want tasks to run. Enter a date and time using standard date/time format. Only the time portion is used. Use with Minutely and Hourly intervals only.
sun	Boolean		Runs tasks on Sunday at the configured time. You can use the sun - sat parameters to run tasks on several days of the week. Use with Minutely, Hourly, Weekly, and Biweekly intervals only.
mon	Boolean		Runs tasks on Monday at the configured time. See description for sun.
tue	Boolean		Runs tasks on Tuesday at the configured time. See description for sun.
wed	Boolean		Runs tasks on Wednesday at the configured time. See description for sun.
thu	Boolean		Runs tasks on Thursday at the configured time. See description for sun.
fri	Boolean		Runs tasks on Friday at the configured time. See description for sun.
sat	Boolean		Runs tasks on Saturday at the configured time. See description for sun.
weekDay	Boolean		Runs tasks on weekdays. Use one of the following options: - True. Run tasks on Monday through Friday. Does not run tasks on the weekend. - False. Run tasks every day. Use with the Daily interval only.
dayOfMonth	Int		Date of the month that tasks should run. Use a date between 1-28. Use with the Monthly interval only. Tip: To run tasks on the last day of the month, use the Last weekOfMonth parameter with the Day dayOfWeek parameter.

Field	Type	Required	Description
weekOfMonth	String		Week of the month that tasks should run. Use with dayOfWeek to specify the day and week of the month that tasks should run. For example, the First Day or the Last Wednesday of the month. Use one of the following options: - First - Second - Third - Fourth - Last Use with the Monthly interval only.
dayOfWeek	String		Day of the week that tasks should run. Use with weekOfMonth to specify the day and week of the month that tasks should run. For example, the First Day or the Last Wednesday of the month. Use one of the following options: - Day - Sunday - Monday - Tuesday - Wednesday - Thursday - Friday - Saturday Use with the Monthly interval only.
timeZone	String		Time zone to use for the schedule. If no valid time zone is passed, IDMC uses the user's time zone. For more information, see Appendix A, "Time zone codes" on page 768

POST Response

Returns the schedule response object for the schedule that you created or updated.

Returns an error object if errors occur.

DELETE Request

To delete a schedule, use the schedule ID with the following URI:

```
/api/v2/schedule/<id>
```

DELETE Response

Returns the 200 response code if the request is successful.

Returns an error object if errors occur.

GET Example

To request information about all schedules in the organization, you might use the following request:

```
GET <serverUrl>/api/v2/schedule
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

A successful request returns a schedule object for each schedule in the organization.

Secure Agents and services

Use this resource to receive an install token to register a Secure Agent, download the checksum of the agent installation program, request the details about Informatica Cloud Secure Agents or Secure Agent services, or delete a Secure Agent.

GET request for Secure Agent install token and checksum

To request an install token so that you can complete the Secure Agent registration process or to get the checksum of the agent installation program, include the platform type in the URI as follows:

```
/api/v2/agent/installerInfo/<platform>
```

Use one of the following values for the platform:

- win64
- linux64

GET response for Secure Agent install token and checksum

A successful request returns the download URL, install token, and checksum download URL, as shown in the following sample response:

```
{
    "@type": "agentInstallerInfo",
    "downloadUrl": "https://pdm.ics.dev/package-manager/files/binary/
agent64_install_ng_ext/6403/win64/agent64_install_ng_ext.6403.exe",
    "installToken":
"PJ7NVrQ0SGpnpbmJ8K5yte18HLDw305DwPgP_jxG1R4KiOY9BL6qxV7jWiv7wSEfg7mQHKRWX6kcEVph1xjswX",
    "checksumDownloadUrl": "https://pdm.ics.dev/package-manager/files/binary/
agent64_install_ng_ext/6403/win64/agent64_install_ng_ext.6403_win64.sha256"
}
```

To verify the checksum on Windows, use a third-party utility, for example, HashMyFiles or 7-Zip, to find the checksum for the Secure Agent installation program and compare it to the checksum in the `checksum.txt` file. The hashing algorithm is CRC-32.

To verify the checksum on Linux, run the command `cksum <Secure Agent installer filename>` and compare the checksum to the checksum in the `checksum.txt` file. The first column of the command output is the checksum.

GET request for agent details

You can request the details about Secure Agents or details about the services that run on Secure Agents.

When you request details about Secure Agent services, the response includes services that are running or are expected to be running. The response doesn't include services that are stopped.

Secure Agent details

To request the details about all Secure Agents in the organization, use the following URI:

```
/api/v2/agent
```

To request a list of all the Secure Agents that are currently not assigned to any group, use the following URI:

```
/api/v2/agent/?includeUnassignedOnly=true
```

To request the details about a particular Secure Agent, you can include the Secure Agent ID or the Secure Agent name in the URI. Use one of the following URIs:

```
/api/v2/agent/<agent ID>
```

```
/api/v2/agent/name/<name>
```

If you use the Secure Agent name in the request and the Secure Agent name includes a space, replace the space with `%20`.

```
/api/v2/agent/name/special%20agent
```

To include package and configuration details, add the request parameter `basicinfo=true` to the API call.

For example, the following API call returns details for all Secure Agents in the organization, including package and configuration information:

```
/api/v2/agent?basicInfo=true
```

Secure Agent services status and details

To request the status of services that run on all of the Secure Agents in the organization, use the following URI:

```
/api/v2/agent/details
```

To request the status of services that run on a particular Secure Agent, include the agent ID in the URI as follows:

```
/api/v2/agent/details/<agent ID>
```

If you want the response to include Secure Agent details in addition to the status, include the following parameter in the request: `?onlyStatus=false`. For example, the following request returns the agentEngineStatus and agentEngineConfigs objects for a specified Secure Agent:

```
/api/v2/agent/details/<agent ID>?onlyStatus=false
```

GET response for agent details

Returns the agent object for the requested Secure Agent ID or Secure Agent name.

If you request information for all Secure Agents in the organization, returns an agent object for each Secure Agent in the organization.

If you request details for agent services, returns the agent object and an AgentEngine object for services that are running or are expected to be running. The response doesn't include services that are stopped.

Returns the error object if errors occur.

The agent object includes the following attributes:

Field	Type	Description
id	String	Secure Agent ID.
orgId	String	Organization ID.
name	String	Secure Agent name.
description	String	Description of the Secure Agent.
createTime	Date/time	Time the Secure Agent was created.
updateTime	Date/time	Last time the Secure Agent was updated.
createdBy	String	User who created the Secure Agent.
updatedBy	String	User who updated the Secure Agent.

Field	Type	Description
active	Boolean	Whether the Secure Agent is active. Returns true or false.
readyToRun	Boolean	Whether the Secure Agent is ready to run a task. Returns true or false.
platform	String	Platform of the Secure Agent machine. Returns one of the following values: - win64 - linux64
agentHost	String	Host name of the Secure Agent machine.
proxyHost	String	Host name of the outgoing proxy server that the Secure Agent uses.
proxyPort	Int	Port number of the outgoing proxy server.
proxyUser	String	User name to connect to the outgoing proxy server.
agentVersion	String	Secure Agent version.
spiUrl	String	This field is no longer applicable and has been deprecated.
upgradeStatus	String	Upgrade status.
lastUpgraded	Date/time	Last time the Secure Agent was upgraded.
lastUpgradeCheck	Date/time	Last time the Secure Agent was checked for upgrade.
lastStatusChange	Date/time	Last time the Secure Agent status was updated.
packages	String	This field is no longer applicable and has been deprecated.
configUpdateTime	Date/time	Last time a user updated Secure Agent properties.
agentGroupId	String	ID of the Secure Agent group.
agentConfigs		This object is no longer applicable and has been deprecated.
name	String	Included in the agentConfig object. Deprecated.
type	String	Included in the agentConfig object. Deprecated.
subtype	String	Included in the agentConfig object. Deprecated.
value	String	Included in the agentConfig object. Deprecated.
customized	Boolean	Included in the agentConfig object. Deprecated.

Field	Type	Description
overridden	Boolean	Included in the agentConfig object. Deprecated.
defaultValue	String	Included in the agentConfig object. Deprecated.
platform	String	Included in the agentConfig object. Deprecated.

If you request details for the services that run on Secure Agents, the agent object also includes the AgentEngine object. The AgentEngine object includes the following attributes:

Field	Type	Description
agentEngineStatus		Status of the agent service, which includes information in the AgentEngineStatus object.
appname	String	Included in the AgentEngineStatus object. The service name that is used internally.
appDisplayName	String	Included in the AgentEngineStatus object. The service name that displays in the user interface.
appversion	String	Included in the AgentEngineStatus object. The service version. The version number changes each time you modify the service.
replacePolicy	-	Used for internal purposes only.
status	String	Included in the AgentEngineStatus object. The status of the service. Possible values include: - RUNNING. The service is running and ready to accept jobs. - DEPLOYING: The service is being provisioned. - ERROR. The service is in an error state. - NEED_RUNNING. The start process is set to begin or has started. - NEED_STOP. The stop process is set to begin or has started.
desiredStatus	-	Used for internal purposes only.
subState	String	Included in the AgentEngineStatus object. A value of 0 indicates that the service is operational. All other values indicate that the service is not operational.
createTime	Date/time	Included in the AgentEngineStatus object. The time the service was created.
updateTime	Date/time	Included in the AgentEngineStatus object. The last time the service was updated.

Field	Type	Description
agentEngineConfigs		Defines agent service properties. Includes information in an engineConfig object for each agent service property. Included when the request includes the parameter `statusOnly=false`.
type	String	Included in the engineConfig object. Configuration type.
name	String	Included in the engineConfig object. Configuration property name.
value	String	Included in the engineConfig object. Value of the property.
platform	String	Included in the engineConfig object. Deprecated. Use the platform field in the agent object instead.
customized	Boolean	Included in the engineConfig object. Whether the property is in the custom configuration details. Returns true or false.

A successful response might look similar to the following example:

GET example

To request the details about the Secure Agent with an ID of 10044030000000000GC, to be returned in JSON format, you might use the following request:

```
GET <serverUrl>/api/v2/agent/10044030000000000GC
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

The following example shows a successful response:

```
{
"@type": "agent",
"id": "10044030000000000GC",
"orgId": "010025",
"name": "MyAgent",
"createTime": "2021-02-25T00:42:39:000Z",
"updateTime": "2021-02-25T00:42:39:000Z",
"createdBy": "larry104",
"updatedBy": "larry104",
"active": "false",
"readyToRun": "false",
"platform": "linux64",
"agentHost": "agentHost5",
"serverUrl": "https://na4.dm-us.informaticacloud.com/saas",
"proxyPort": "0",
"upgradeStatus": "NotUpgrading",
"federatedId": "6iPQuOsH1YAfnJvhZWPZjI",
"createTimeUTC": "2021-02-25T00:42:39:000Z",
"updateTimeUTC": "2021-02-25T00:42:39:000Z",
"agentGroupId": "01000125000000000002"
}
```

DELETE request

You can delete a Secure Agent if it is not associated with any connections. Before you delete a Secure Agent, update associated connections to use another Secure Agent.

To delete a Secure Agent, use the Secure Agent ID in the following URI:

```
/api/v2/agent/<id>
```

DELETE response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

Server time

Use this resource to return the local time for the IDMC server.

GET Request

To request the local time of the IDMC server, use the following URI.

```
/api/v2/server/serverTime
```

GET Response

Returns the serverTime object if the request is sucessful. Returns an error object if errors occur.

The serverTime object includes the following attribute:

time

Local time of the IDMC server.

GET Example

To check the local time of the IDMC server, you might use the following request:

```
GET <serverUrl>/api/v2/server/serverTime
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
```

Tasks

Use this resource to request a list of tasks of a specified type. You can use this resource to retrieve the name and ID for a task.

Do not use this resource to obtain a task ID to run a job. Instead, use the lookup resource. The lookup resource returns the federated task ID which is required to run a task that is not located in the Default folder.

Do not use this resource for a file ingestion and replication task. Instead, use the file ingestion and replication job resource. For more information see, "Tasks" on page 673.

GET Request

To request a list of tasks of a specified type, use the task type code in the following URI:

```
/api/v2/task?type=<type>
```

Use the following attribute in the URI:

Field	Required	Description
type	Yes	For Data Integration, use one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task.

GET Response

If the request is successful, returns the task object for every task of the requested type. Returns the error object if errors occur.

The task object includes the following attributes:

Field	Type	Description
id	String	Task ID.
orgId	String	Organization ID.
name	String	Task name.
description	String	Description.
createTime	String	Time the task was created.
updateTime	String	Last time the task was updated.
createdBy	String	User who created the task.
updatedBy	String	User who last updated the task.

GET Example

To view a list of all synchronization tasks, use the following request.

```
GET <ServerUrl>/api/v2/task?type=DSS
Content-Type: applicaion/json
Accept: application/json
icSessionId: <SessionId>
```

Users

Use this resource to request the details of an IDMC user account or the details of all user accounts in the organization. If you have administrator privileges, you can also use this resource to create or update a user account and to delete a user account. To ensure organization security, this resource does not display or update the password for a user account.

Note: To leverage full user management capabilities, use the version 3 users resource instead of the version 2 user resource. The version 3 users resource supports users, user groups, and roles. The version 2 user

resource does not support user groups and roles, and a GET request might not return all users in the organization.

GET Request

To request the details of all IDMC user accounts, use the following URI:

```
/api/v2/user
```

To request the details of a particular IDMC user account, you can include the user account ID or user name in the URI. Use one of the following URIs:

```
/api/v2/user/<id>
/api/v2/user/name/<name>
```

If you use the user name in the URI and the user name includes a space, replace the space with `%20`. For example:

```
/api/v2/user/name/Fred%20Smith
```

GET Response

When you request the details for a user account, IDMC returns the user object for the requested user account. When you request the details of all user accounts, IDMC returns the user object for each user account in the organization.

The user object includes the following attributes:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to. 22 characters. **Note:** Organizations that were created in legacy Informatica Cloud might have an organization ID of 6 characters.
orgUuid	String	Unique identifier for the organization.
name	String	Informatica Intelligent Cloud ServicesIDMC user name.
description	String	Description of the user.
createTime	String	When the user account was created.
updateTime	String	When the user account was last updated
createdBy	String	Informatica Intelligent Cloud Services user who created the user account.
updatedBy	String	Informatica Intelligent Cloud Services user who last updated the user account.
sfUsername	String	Salesforce user name. Included when user is configured to authenticate through Salesforce.
password	String	Salesforce user password. Included when user is configured to authenticate through Salesforce.
firstName	String	First name for the user account.
lastName	String	Last name for the user account.

Field	Type	Description
title	String	Title of the user.
phone	String	Phone number for the user.
securityQuestion	String	Security question. Returns one of the following codes: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String	Answer to the security question.
roles		Object that includes a role object for each role assigned to the user.
name	String	Included in role object. Role name. Returns one of the following codes: - Service Consumer - Designer - Admin
description	String	Included in role object. Role description.
emails	String	Email address to be notified when the user changes the account password.
timezone	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
serverUrl	String	Informatica Intelligent Cloud Services URL for the organization the user belongs to. Use the serverUrl as a base for most version 2 REST API resource URIs.
spiUrl	String	This field is no longer applicable and has been deprecated.
uuId	String	Unique identifier for the user.
icSessionId	String	IDMC session ID for version 2 REST API session. Use in most version 2 REST API request headers. Maximum length of 16,000 characters.
forceChangePassword	Boolean	Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.

POST Request

You must be logged in as an administrator in order to create users or update user details. To update the details of an existing user account, use the user account ID in the following URI.

```
/api/v2/user/<id>
```

To create a new IDMC user account, omit the optional user account ID in the URI.

To create a SAML single sign-on user account, do not include password.

You can use the following attributes in a **user** object:

Field	Type	Required	Description
orgId	String	Yes	ID of the organization the user will belong to. 22 characters. **Note:** Organizations that were created in legacy Informatica Cloud might have an organization ID of 6 characters. You can find the organization ID using the login resource.
name	String	Yes	IDMC user name. Must be a valid email address when creating a user account using this resource. Maximum length is 255 characters.
sfUsername	String	-	Salesforce user name.
password	String	Yes, unless the user is a SAML single sign-on user.	IDMC password. Do not include if the user is a SAML single sign-on user and the organization is SAML enabled. Maximum length is 255 characters.
firstName	String	Yes	First name for the user account.
lastName	String	Yes	Last name for the user account.
title	String	Yes	Title of the user.
phone	String	Yes	Phone number for the user.
emails	String	-	Email address to be notified when the user changes the account password.
description	String	-	Description of the user.
timezone	String	-	Time zone of the user. Time zone honors Daylight Saving Time. Use the appropriate time zone code. If no valid time zone is passed, IDMC uses America/Los_Angeles by default. For more information, see "Time zone codes" on page 768.
securityQuestion	String	-	Security question. Use one of the following codes to select the security question: - SPOUSE_MEETING_CITY - FIRST_JOB_CITY - CHILDHOOD_FRIEND - MOTHER_MAIDEN_NAME - PET_NAME - CHILDHOOD_NICKNAME - CUSTOM_QUESTION:"<question>"
securityAnswer	String	-	Answer to the security question.
roles		Yes	Object that includes a role object for each role to be assigned to the user.

Field	Type	Required	Description
name	String	Yes	Include in the role object. Role to assign to the user. Use one of the following values: - Service Consumer - Designer - Admin
description	String	-	Include in the role object. Description of the role.
forceChangePassword	String	-	Determines if the user must reset the password after the user logs in for the first time. Includes the following values: - True. The user must reset the password. - False. The user is not forced to reset the password.

POST Response

Returns the user response object for the requested user account. Or, if you requested information for all user accounts, returns the user response object for each user account in the organization.

Returns an error object if errors occur.

DELETE Request

To delete a user, use the user account ID in the following URI.

```
/api/v2/user/<id>
```

DELETE Response

Returns the 200 response code if the request is successful.

Returns an error object if errors occur.

POST Example

To create a new user, you might use the following request:

```
POST <serverUrl>/api/v2/user/<id>
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>

<user>
 <orgId>00342000</orgId>
 <name>username@company.com</name>
 <firstName>User</firstName>
 <lastName>Name</lastName>
 <title>developer</title>
 <password>UserPassword</password>
 <phone>5555555555</phone>
 <email>larry@company.com</email>
 <roles>
    <role>
      <name>Designer</name>
    </role>
 </roles>
 <timezone>America/Chicago</timezone>
</user>
```

CHAPTER 4

Platform REST API version 3 resources

The REST API version 3 resources in this section apply to multiple services under IDMC.

When you use version 3 resources, note the following rules:

- Use JSON format.
- Use the baseApiUrl value from the login response as the base URL. For example:

  ```
  https://na4.dm-us.informaticacloud.com/saas
  ```

- Use the following URI:

  ```
  /public/core/v3/<API name>
  ```

- Use the following request header format:

  ```
  <METHOD> <baseApiUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  INFA-SESSION-ID: <SessionId>
  ```

In the following example, the baseApiUrl is `https://na4.dm-us.informaticacloud.com/saas` and the URI is `/public/core/v3/schedule`:

```
<METHOD> https://na4.dm-us.informaticacloud.com/saas/public/core/v3/schedule HTTP/1.1
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
```

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Elastic runtime environments

Manage an elastic runtime environment, including its environment configuration, images, runtime environment association, supplementary file specification, and tokens.

Environment configurations

Use the ClusterConfig resource to retrieve, create, and update the environment configuration for an elastic runtime environment.

Getting configuration details

You can request the details for a specific configuration.

GET request

To get configuration details, use the following URI:

```
/public/core/v3/ClusterConfig/<config_id>
```

GET response

If successful, returns the following information for a configuration:

Field	Type	Description
id	String	Configuration ID.
orgId	String	ID of the organization the configuration belongs to.
amiId	String	Amazon Machine Image (AMI) ID.
infaManaged	Boolean	Whether the configuration is managed by Informatica.
clusterName	String	Name of the configuration.
description	String	Description of the configuration.
cloudPlatform	String	Cloud platform hosting the configuration.
haEnabled	Boolean	Whether high availability is enabled.
region	String	Region in which the configuration is located.
subnets	Array	Subnets used within the network.
masterNodeInstanceType	String	Instance type to host the master node.
maxWorkerNodes	Integer	Maximum number of worker nodes to use.
minWorkerNodes	Integer	Minimum number of worker nodes to use.
workerNodeIdleTimeout	Integer	Amount of time in minutes before a worker node times out.
workerNodeInstanceType	String	Instance type to host a worker node.
workerNodeVolumeSize	Integer	Volume size of a worker node.
systemDiskConfig	Escaped string representation of JSON	System storage properties, if configured. Includes the file system ID, access point ID, source file path, and projected file path.
dataDisksConfig	Escaped string representation of JSON	Data storage properties, if configured. Includes the file system ID, access point ID, source file path, and projected file path.
initScriptPath	String	Not used. An elastic runtime environment doesn't use initialization scripts.

Field	Type	Description
masterNodeIAMRole	String	IAM role for the master node.
workerNodeIAMRole	String	IAM role for the worker nodes.
imageRegistryHost	String	Domain name or IP address of the registry hosting the container images.
imageRegistryUser	String	User name to log into the image registry host.
imageRegistryPassword	String	Password to log into the image registry host.
dateDeployed	Date	Date when the image was deployed.
miscTags	Escaped string representation of JSON	Tags associated with the cloud ecosystem.

GET response example

To get configuration details, use the following request:

```
GET <baseApiUrl>/public/core/v3/ClusterConfig/<config_id>
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a response like the following example:

```
[
   {
    "id": "5MdLmj0YXoce2osMD2mT0r",
    "orgId": "dx7DSOIGiiPh6XQoZKpAmC",
    "amiId": "ami-08d3ca04cc1a1b2c3",
    "infaManaged": false,
    "clusterName": "test-cluster",
    "description": "Description of the cluster",
    "cloudPlatform": "AWS",
    "haEnabled": false,
    "region": "us-west-1",
    "subnets": [
        "subnet-1",
        "subnet-2"
    ],
    "masterNodeInstanceType": "m5.large",
    "maxWorkerNodes": 10,
    "minWorkerNodes": 1,
    "workerNodeIdleTimeout": 5,
    "workerNodeInstanceType": "m5.xlarge",
    "workerNodeVolumeSize": 100,
    "systemDiskConfig": "{\"id\": \"\", \"sourceFilePath\": \"\", \"accessPoint\":
\"\"}",
    "dataDisksConfig": "[{\"id\": \"\", \"sourceFilePath\": \"\", \"projectedFilePath\":
\"\", \"accessPoint\": \"\"}]",
    "initScriptPath": "/path/to/script",
    "masterNodeIAMRole": "masterRole",
    "workerNodeIAMRole": "workerRole",
    "imageRegistryHost": "registry.example.com",
    "imageRegistryUser": null,
    "imageRegistryPassword": null,
    "dateDeployed": null,
    "miscTags": "{\"cloudEcosystemTags\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}],\"runtimeProperties\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}]}"
```

```
    }
]
```

Creating a configuration

If you have administrator privileges, you can use the ClusterConfig resource to create a configuration.

POST request

To create a configuration, send a POST request using the following URI:

```
/public/core/v3/ClusterConfig
```

Include the following information:

Field	Type	Required	Description
orgId	String	Yes	ID of the organization the configuration belongs to.
amiId	String	Yes	Amazon Machine Image (AMI) ID.
infaManaged	Boolean	Yes	Whether the configuration is managed by Informatica. Set to false.
clusterName	String	Yes	Name of the configuration.
description	String	-	Description of the configuration.
cloudPlatform	String	Yes	Cloud platform hosting the configuration. Set to AWS.
haEnabled	Boolean	Yes	Whether high availability is enabled.
region	String	Yes	Region in which the configuration is located.
subnets	Array	Yes	Subnets used within the network. Enter the subnet name, not the subnet ID. **Note:** The subnets field is dependent on the haEnabled field: - If haEnabled = true, subnets should have two values. - If haEnabled = false, subnets should be empty or null.
masterNodeInstanceType	String	Yes	Leave this field empty.
maxWorkerNodes	Integer	Yes	Maximum number of worker nodes to use.
minWorkerNodes	Integer	Yes	Minimum number of worker nodes to use.
workerNodeIdleTimeout	Integer	Yes	Amount of time in minutes before a worker node times out.
workerNodeInstanceType	String	Yes	Instance type to host a worker node.
workerNodeVolumeSize	Integer	Yes	Volume size of a worker node.

Field	Type	Required	Description
systemDiskConfig	Escaped string representation of JSON	Yes	System storage properties, if configured. Includes the file system ID, access point ID, source file path, and projected file path. For system storage, leave the projected file path empty.
dataDisksConfig	Escaped string representation of JSON	Yes	Data storage properties, if configured. Includes the file system ID, access point ID, source file path, and projected file path. The projected file path is optional. If empty, the runtime environment uses the source file path.
initScriptPath	String	Yes	Not used. An elastic runtime environment doesn't use initialization scripts.
masterNodeIAMRole	String	Yes	IAM role for the master node.
workerNodeIAMRole	String	-	Not used.
imageRegistryHost	String	-	Not used.
imageRegistryUser	String	-	Not used.
imageRegistryPassword	String	-	Not used.
dateDeployed	Date	-	Leave this field empty.
miscTags	Escaped string representation of JSON	Yes	Cloud ecosystem tags and runtime properties. Each tag category is required, but their values can be empty. For example: `"miscTags": "{\"cloudEcosystemTags\": [],\"runtimeProperties\":[]}"`

POST response

If successful, returns the ClusterConfig object in the POST request.

POST example

To create a configuration, send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/ClusterConfig
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "orgId": "dx7DSOIGiiPh6XQoZKpAmC",
    "amiId": "ami-08d3ca04cc1a1b2c3",
    "infaManaged": false,
    "clusterName": "test-cluster-102",
    "description": "Description of the cluster",
    "cloudPlatform": "AWS",
    "haEnabled": false,
    "region": "ap-south-1",
    "subnets": [
        "subnet-name1",
        "subnet-name2"
    ],
```

```
    "masterNodeInstanceType": "",
    "maxWorkerNodes": 10,
    "minWorkerNodes": 1,
    "workerNodeIdleTimeout": 5,
    "workerNodeInstanceType": "c4.2xlarge",
    "workerNodeVolumeSize": 100,
    "systemDiskConfig": "{\"id\": \"\", \"sourceFilePath\": \"\", \"accessPoint\":
\"\"}",
    "dataDisksConfig": "[{\"id\": \"\", \"sourceFilePath\": \"\", \"projectedFilePath\":
\"\", \"accessPoint\": \"\"}]",
    "initScriptPath": "/path/to/script",
    "masterNodeIAMRole": "masterRole",
    "workerNodeIAMRole": "workerRole",
    "imageRegistryHost": "registry.example.com",
    "imageRegistryUser": "user",
    "imageRegistryPassword": "password",
    "dateDeployed": null,
    "miscTags": "{\"cloudEcosystemTags\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}],\"runtimeProperties\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}]}"
}
```

If successful, you might receive a response like the following example:

```
{
    "id": "89Dnw937Al30sN40ia9Oat",
    "orgId": "dx7DSOIGiiPh6XQoZKpAmC",
    "amiId": "ami-08d3ca04cc1a1b2c3",
    "infaManaged": false,
    "clusterName": "test-cluster-102",
    "description": "Description of the cluster",
    "cloudPlatform": "AWS",
    "haEnabled": false,
    "region": "ap-south-1",
    "subnets": [
        "subnet-name1",
        "subnet-name2"
    ],
    "masterNodeInstanceType": "",
    "maxWorkerNodes": 10,
    "minWorkerNodes": 1,
    "workerNodeIdleTimeout": 5,
    "workerNodeInstanceType": "c4.2xlarge",
    "workerNodeVolumeSize": 100,
    "systemDiskConfig": "{\"id\": \"\", \"sourceFilePath\": \"\", \"accessPoint\":
\"\"}",
    "dataDisksConfig": "[{\"id\": \"\", \"sourceFilePath\": \"\", \"projectedFilePath\":
\"\", \"accessPoint\": \"\"}]",
    "initScriptPath": "/path/to/script",
    "masterNodeIAMRole": "masterRole",
    "workerNodeIAMRole": "workerRole",
    "imageRegistryHost": "registry.example.com",
    "imageRegistryUser": "user",
    "imageRegistryPassword": "password",
    "dateDeployed": null,
    "miscTags": "{\"cloudEcosystemTags\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}],\"runtimeProperties\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}]}"
}
```

Updating a configuration

If you have administrator privileges, you can use the ClusterConfig resource to update a configuration.

PUT request

To update a configuration, send a PUT request using the following URI:

```
/public/core/v3/ClusterConfig/<advanced_config_ID>
```

Include the following information:

Field	Type	Required	Description
ID	String	Yes	Configuration ID.
orgId	String	Yes	ID of the organization the configuration belongs to.
amiId	String	Yes	Amazon Machine Image (AMI) ID.
infaManaged	Boolean	Yes	Whether the configuration is managed by Informatica. Set to false.
clusterName	String	Yes	Name of the configuration.
description	String	-	Description of the configuration.
cloudPlatform	String	Yes	Cloud platform hosting the configuration. Set to AWS.
haEnabled	Boolean	Yes	Whether high availability is enabled.
region	String	Yes	Region in which the configuration is located.
subnets	Array	Yes	Subnets used within the network. Enter the subnet name, not the subnet ID. **Note:** The subnets field is dependent on the haEnabled field: - If haEnabled = true, subnets should have two values. - If haEnabled = false, subnets should be empty or null.
masterNodeInstanceType	String	Yes	Leave this field empty.
maxWorkerNodes	Integer	Yes	Maximum number of worker nodes to use.
minWorkerNodes	Integer	Yes	Minimum number of worker nodes to use.
workerNodeIdleTimeout	Integer	Yes	Amount of time in minutes before a worker node times out.
workerNodeInstanceType	String	Yes	Instance type to host a worker node.
workerNodeVolumeSize	Integer	Yes	Volume size of a worker node.
systemDiskConfig	Escaped string representation of JSON	Yes	System storage properties, if configured. Includes the file system ID, access point ID, source file path, and projected file path. For system storage, leave the projected file path empty.
dataDisksConfig	Escaped string representation of JSON	Yes	Data storage properties, if configured. Includes the file system ID, access point ID, source file path, and projected file path. The projected file path is optional. If empty, the runtime environment uses the source file path.

Field	Type	Required	Description
initScriptPath	String	Yes	Not used. An elastic runtime environment doesn't use initialization scripts.
masterNodeIAMRole	String	Yes	IAM role for the master node.
workerNodeIAMRole	String	-	Not used.
imageRegistryHost	String	-	Not used.
imageRegistryUser	String	-	Not used.
imageRegistryPassword	String	-	Not used.
dateDeployed	Date	-	Leave this field empty.
miscTags	Escaped string representation of JSON	Yes	Cloud ecosystem tags and runtime properties. Each tag category is required, but their values can be empty. For example: `"miscTags": "{\"cloudEcosystemTags\": [],\"runtimeProperties\":[]}"`

PUT response

If successful, returns the ClusterConfig object in the PUT request.

PUT example

To update a configuration, send a request like the following example:

```
POST <baseApiUrl>/public/core/v3/ClusterConfig/<config_ID>
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "id": "89Dnw937Al30sN40iaabcd",
    "orgId": "dx7DSOIGiiPh6XQoZKabcd",
    "amiId": "ami-08d3ca04cc1a1b2c3",
    "infaManaged": false,
    "clusterName": "test-cluster-102",
    "description": "Description of the cluster",
    "cloudPlatform": "AWS",
    "haEnabled": false,
    "region": "ap-south-1",
    "subnets": [
        "subnet-name1",
        "subnet-name2"
    ],
    "masterNodeInstanceType": "",
    "maxWorkerNodes": 10,
    "minWorkerNodes": 1,
    "workerNodeIdleTimeout": 5,
    "workerNodeInstanceType": "c4.2xlarge",
    "workerNodeVolumeSize": 100,
    "systemDiskConfig": "{\"id\": \"\", \"sourceFilePath\": \"\", \"accessPoint\":
\"\"}",
    "dataDisksConfig": "[{\"id\": \"\", \"sourceFilePath\": \"\", \"projectedFilePath\":
\"\", \"accessPoint\": \"\"}]",
    "initScriptPath": "/path/to/script",
    "masterNodeIAMRole": "masterRole",
    "workerNodeIAMRole": "workerRole",
```

```
    "imageRegistryHost": "registry.example.com",
    "imageRegistryUser": null,
    "imageRegistryPassword": "null",
    "dateDeployed": null,
    "miscTags": "{\"cloudEcosystemTags\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}],\"runtimeProperties\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}]}"
}
```

If successful, you receive a response like the following example:

```
{
    "id": "89Dnw937Al30sN40iaabcd",
    "orgId": "dx7DSOIGiiPh6XQoZKabcd",
    "amiId": "ami-08d3ca04cc1a1b2c3",
    "infaManaged": false,
    "clusterName": "test-cluster-102",
    "description": "Description of the cluster",
    "cloudPlatform": "AWS",
    "haEnabled": false,
    "region": "ap-south-1",
    "subnets": [
        "subnet-name1",
        "subnet-name2"
    ],
    "masterNodeInstanceType": "",
    "maxWorkerNodes": 10,
    "minWorkerNodes": 1,
    "workerNodeIdleTimeout": 5,
    "workerNodeInstanceType": "c4.2xlarge",
    "workerNodeVolumeSize": 100,
    "systemDiskConfig": "{\"id\": \"\", \"sourceFilePath\": \"\", \"accessPoint\":
\"\"}",
    "dataDisksConfig": "[{\"id\": \"\", \"sourceFilePath\": \"\", \"projectedFilePath\":
\"\", \"accessPoint\": \"\"}]",
    "initScriptPath": "/path/to/script",
    "masterNodeIAMRole": "masterRole",
    "workerNodeIAMRole": "workerRole",
    "imageRegistryHost": "registry.example.com",
    "imageRegistryUser": null,
    "imageRegistryPassword": "null",
    "dateDeployed": null,
    "miscTags": "{\"cloudEcosystemTags\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}],\"runtimeProperties\":[{\"key\":\"k1\",\"val\":\"v1\"},{\"key
\":\"k2\",\"val\":\"v2\"}]}"
}
```

Images

Use the RuntimeApplicationImage resource to list the images for an elastic runtime environment.

GET request

To list all available images, use the following URI:

```
/public/core/v3/ais/RuntimeApplicationImage?
runtimeEnvironmentId=<rteId>&includeAllImageStates=<true or false>
```

Include the following parameter:

Parameter	Type	Description
rteId	String	Runtime environment ID from which images are downloaded.
includeAllImageStates	Boolean	Returns the current stage of the image download until it's complete.

The following table lists the potential error codes for a request:

HTTP status code	Description
401	Unauthenticated or unauthorized.
403	Privilege get.k8s.repository.token is required for accessing this API.

GET response

If successful, a list of available images is returned.

GET response examples

To list available images for download, use the following request:

```
GET <baseApiUrl>/public/core/v3/RuntimeApplicationImage?
runtimeEnvironmentId=<rteId>&includeAllImageStates=<true or false>
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a "200 OK" response like the following example:

```
[
    {
        "appSpecName": "Data_Integration",
        "appSpecVersion": "64.0",
        "dependencies": "package-Administrator_R1.226",
        "imageName": "Data_Integration",
        "imageVersion": "64.0",
        "imageRepositoryPath": "infacloud-k8s-agent-docker-dev.jfrog.io/
3SLs6FMAlJ0lGGyI0pMK0g/rteId1/DataIntegration:64.0",
        "rteGroupId": "rteId1",
        "orgId": "3SLs6FMAlJ0lGGyI0pMK0g",
        "imageState": "IMAGE_BAKE_COMPLETE",
        "endTime": "2022-10-31T07:06:59.000Z",
        "helmChartPath": "helmChartPath"
    },
    {
        "appSpecName": "Data_Integration",
        "appSpecVersion": "64.1",
        "dependencies": "package-Administrator_R1.226,
        "imageName": "Data_Integration,
        "imageVersion": "64.1",
        "imageRepositoryPath": "infacloud-k8s-agent-docker-dev.jfrog.io/
3SLs6FMAlJ0lGGyI0pMK0g/rteId1/DataIntegration:64.1",
        "rteGroupId": "rteId1",
        "orgId": "3SLs6FMAlJ0lGGyI0pMK0g",
        "imageState": "IMAGE_BAKE_COMPLETE",
        "endTime": "2022-10-31T07:06:59.000Z",
        "helmChartPath": "helmChartPath"
    }
]
```

If you have insufficient privileges, you might receive a "403 Forbidden" response like the following example:

```
{
    "error": {
        "code": "AIS_007",
        "message": "Privilege - view.k8s.agent.config required for accessing this API.",
        "debugMessage": "Privilege - view.k8s.agent.config required for accessing this
API.",
        "requestId": "l2EpwkFoqkEjrEJURclPw2",
        "details": null
    }
}
```

Runtime environment associations

Use the RuntimeEnvironment resource to manage the association between an environment configuration and an elastic runtime environment.

Reading a runtime environment association by elastic runtime environment identifier

You can request details about the association between a cluster and the elastic runtime environment using the runtime environment identifier.

GET request

To get the association between the configuration and the runtime environment, use the following URI:

```
/public/core/v3/RuntimeEnvironment/<rte_id>/Cluster
```

Where `<rte_id>` is the runtime environment identifier.

GET response

If successful, returns the following information for the association:

Field	Type	Description
rteId	String	Runtime environment ID.
clusterId	String	Configuration ID.
namespace	String	Namespace used.
createdBy	String	Name of the user who created the association.

GET response example

To get the association between the configuration and runtime environment, use the following request:

```
GET <baseApiUrl>/public/core/v3/RuntimeEnvironment/<rte_id>/Cluster
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a response like the following example:

```
{
    "rteId": "01B0IV2500000000035Y",
    "clusterId": "5gic8zWc1G7fSDQVJRpUEh",
    "namespace": "test-namespace-1",
    "createdBy": "test-user-1"
}
```

Reading a runtime environment association by cluster identifier

You can request details about the association between a cluster and the elastic runtime environment using the configuration identifier.

GET request

To get the association between the configuration and the runtime environment, use the following URI:

```
/public/core/v3/RuntimeEnvironment/<cluster_id>/Cluster
```

Where <cluster_id> is the configuration identifier.

GET response

If successful, returns the following information for the association:

Field	Type	Description
rteId	String	Runtime environment ID.
clusterId	String	Configuration ID.
namespace	String	Namespace used.
createdBy	String	Name of the user who created the association.

GET response example

To get the association between the configuration and runtime environment, use the following request:

```
GET <baseApiUrl>/public/core/v3/RuntimeEnvironment/<cluster_id>/Cluster
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a response like the following example:

```
{
    "rteId": "01B0IV2500000000035Y",
    "clusterId": "5gic8zWc1G7fSDQVJRpUEh",
    "namespace": "test-namespace-1",
    "createdBy": "test-user-1"
}
```

Associating a configuration with a runtime environment

You can associate a cluster with a runtime environment.

POST request

To associate a configuration with a runtime environment, use the following URI:

```
/public/core/v3/RuntimeEnvironment/<rte_id>/Cluster/<cluster_id>
```

Where <rte_id> is the runtime identifier identifier and <cluster_id> is the configuration identifier.

Include the following information:

Field	Type	Required	Description
namespace	String	-	Namespace of the configuration.

POST response

If successful, returns the following information:

Field	Type	Description
rteId	String	Runtime environment ID.
clusterId	String	Configuration ID.
namespace	String	Namespace used.
createdBy	String	Name of the user who created the association.

POST response example

To associate a configuration and runtime environment, use the following request:

```
GET <baseApiUrl>/public/core/v3/RuntimeEnvironment/<rte_id>/Cluster/<cluster_id>
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you receive a response similar to the following example:

```
{
    "rteId": "01B0IV2500000000035Y",
    "clusterId": "5gic8zWc1G7fSDQVJRpUEh",
    "namespace": "test-namespace-1",
    "createdBy": "test-user-1"
}
```

Supplementary files

Use the RuntimeEnvironment resource to get, update, and delete the supplementary file specification for an elastic runtime environment.

Getting the supplementary file specification

Get the supplementary file specification to view the supplementary files that are available to an elastic runtime environment.

GET request

Use the following URI:

```
/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
```

GET response

If successful, returns the supplementary file specification. The response includes the following fields:

Field	Type	Description
rteId	String	Runtime environment ID.
specification	Object	Supplementary file specification.

For information about the fields in the specification, see "Updating the supplementary file specification" on page 154.

If the elastic runtime environment doesn't have a supplementary file specification, returns an empty specification.

GET request example

The following sample request gets the supplementary file specification for an elastic runtime environment:

```
GET <base URL>/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

Updating the supplementary file specification

Update the supplementary files that are available to an elastic runtime environment by updating the specification.

After you update the supplementary file specification, all affected Secure Agent services automatically restart and use the updated specification.

POST request

Use the following URI:

```
/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
```

Store supplementary files under the folder with the same name as the elastic runtime environment ID. Then, use the subdirectory structure as the source path in the supplementary file specification.

For example:

- File location under the EFS mount point: `/mnt/system_disk/0141GU25000000000002/jdbc/common1.jar`
- Source path in the supplementary file specification: `/jdbc/common1.jar`

For more information about uploading supplementary files to system storage, see *Runtime Environments* in the Administrator help.

Include the following fields in the request:

Field	Type	Description
rteId	String	Runtime environment ID.
specification	Object	Supplementary file specification.
agent	Object	Secure Agent configuration.
specification.agent.cdqDirectory	Object	Data Quality files.
specification.agent.cdqDirectory.sourcePath	String	Path to the Data Quality address verifier license file.
specification.agent.databaseIngestion	Object	Data Ingestion and Replication files. List each JAR file individually. Includes the following details: - jdbcDrivers - oracle

Field	Type	Description
specification.agent.databaseIngestion.jdbcDrivers	Array of objects	JDBC drivers for Data Ingestion and Replication.
specification.agent.databaseIngestion.jdbcDrivers[].sourcePath	String	Path to a JDBC driver JAR file.
specification.agent.databaseIngestion.oracle	Object	Oracle drivers and version information for Data Ingestion and Replication. Includes the following details: - jdbcDrivers - ociDrivers - version
specification.agent.databaseIngestion.oracle.jdbcDrivers	Array of objects	Oracle JDBC drivers.
specification.agent.databaseIngestion.oracle.jdbcDrivers[].sourcePath	String	Path to an Oracle JDBC driver JAR file.
specification.agent.databaseIngestion.oracle.ociDrivers	Array of objects	Oracle OCI drivers.
specification.agent.databaseIngestion.oracle.ociDrivers[].sourcePath	String	Path to an Oracle OCI driver file.
specification.agent.databaseIngestion.oracle.version	String	Oracle version.
specification.agent.dataIntegrationServer	Object	Data Integration Server files. Includes the following details: - jdbcv2 - jdbcDrivers - odbc - odbcInst - mysql - restv2 - sap - ssls - wsdls
specification.agent.dataIntegrationServer.jdbcv2	Object	JDBC V2 drivers for the Data Integration Server. List each JAR file individually. Includes the following driver types: - common - spark
specification.agent.dataIntegrationServer.jdbcv2.common	Array of objects	Common JDBC drivers.
specification.agent.dataIntegrationServer.jdbcv2.common[].sourcePath	String	Path to a common JDBC driver JAR file.

Field	Type	Description
specification.agent.dataIntegrationServer.jdbcv2.spark	Array of objects	Spark-specific JDBC drivers.
specification.agent.dataIntegrationServer.jdbcv2.spark[].sourcePath	String	Path to a Spark-specific JDBC driver JAR file.
specification.agent.dataIntegrationServer.jdbcDrivers	Array of objects	Additional JDBC drivers for the Data Integration Server. List each JAR file individually.
specification.agent.dataIntegrationServer.jdbcDrivers.sourcePath	String	Path to an additional JDBC driver JAR file.
specification.agent.dataIntegrationServer.mysql	Object	MySQL drivers and version information for the Data Integration Server. List each JAR file individually. Includes the following details: - jdbcDrivers - odbcDrivers - version
specification.agent.dataIntegrationServer.mysql.jdbcDrivers	Array of objects	MySQL JDBC drivers.
specification.agent.dataIntegrationServer.mysql.jdbcDrivers[].sourcePath	String	Path to a MySQL JDBC driver JAR file.
specification.agent.dataIntegrationServer.mysql.odbcDrivers	Array of objects	MySQL ODBC drivers.
specification.agent.dataIntegrationServer.mysql.odbcDrivers[].sourcePath	String	Path to a MySQL ODBC driver file.
specification.agent.dataIntegrationServer.mysql.version	String	MySQL version.
specification.agent.dataIntegrationServer.odbc	Object	ODBC drivers and DSNs for the Data Integration Server. Includes the following details: - drivers - dsns
specification.agent.dataIntegrationServer.odbc.drivers	Array of objects	ODBC drivers.
specification.agent.dataIntegrationServer.odbc.drivers[].sourcePath	String	Path to an ODBC driver file.

Field	Type	Description
specification.agent.dataIntegrationServer.odbc.dsns	Array of objects	ODBC DSN entries. Each entry is written to the `odbc.ini` file and must include all required components. Includes the following details: - name - entries as key-value pairs
specification.agent.dataIntegrationServer.odbc.dsns[].name	String	Name of the ODBC DSN in the `odbc.ini` file.
specification.agent.dataIntegrationServer.odbc.dsns[].entries	Array of objects	Entries as key-value pairs in the `odbc.ini` file.
specification.agent.dataIntegrationServer.odbc.dsns[].entries[].key	String	Key of the DSN entry.
specification.agent.dataIntegrationServer.odbc.dsns[].entries[].value	String	Value of the DSN entry.
specification.agent.dataIntegrationServer.odbcInst	Object	ODBCINST drivers and DSNs for the Data Integration Server. Includes the following details: - drivers - dsns
specification.agent.dataIntegrationServer.odbcInst.drivers	Array of objects	ODBCINST drivers.
specification.agent.dataIntegrationServer.odbcInst.drivers[].sourcePath	String	Path to an ODBCINST driver file.
specification.agent.dataIntegrationServer.odbcInst.dsns	Array of objects	ODBCINST DSN entries. Each entry is written to the `odbcinst.ini` file and must include all required components. Includes the following details: - name - entries as key-value pairs
specification.agent.dataIntegrationServer.odbcInst.dsns[].name	String	Name of the ODBCINST DSN in the `odbcinst.ini` file.
specification.agent.dataIntegrationServer.odbcInst.dsns[].entries	Array of objects	Entries as key-value pairs in the `odbcinst.ini` file.
specification.agent.dataIntegrationServer.odbcInst.dsns[].entries[].key	String	Key of the DSN entry.
specification.agent.dataIntegrationServer.odbcInst.dsns[].entries[].value	String	Value of the DSN entry.

Field	Type	Description
specification.agent.dataIntegrationServer.restv2	Object	REST V2 files for the Data Integration Server. Includes the following details: - swaggers - keystores - truststores
specification.agent.dataIntegrationServer.restv2.swaggers	Array of objects	Swagger definition files.
specification.agent.dataIntegrationServer.restv2.swaggers[].sourcePath	String	Path to a Swagger JSON definition file.
specification.agent.dataIntegrationServer.restv2.keystores	Array of objects	Keystore files for REST.
specification.agent.dataIntegrationServer.restv2.keystores[].sourcePath	String	Path to a REST keystore file.
specification.agent.dataIntegrationServer.restv2.truststores	Array of objects	Truststore files for REST.
specification.agent.dataIntegrationServer.restv2.truststores[].sourcePath	String	Path to a REST truststore file.
specification.agent.dataIntegrationServer.sap	Object	SAP details for the Data Integration Server. Includes the following details: - jcos - nwrfcs - hanas
specification.agent.dataIntegrationServer.sap.jcos	Array of objects	SAP JCo library files.
specification.agent.dataIntegrationServer.sap.jcos[].sourcePath	String	Path to an SAP JCo library file.
specification.agent.dataIntegrationServer.sap.nwrfcs	Array of objects	SAP NetWeaver RFC library files.
specification.agent.dataIntegrationServer.sap.nwrfcs[].sourcePath	String	Path to an SAP NetWeaver RFC library file.
specification.agent.dataIntegrationServer.sap.hanas	Array of objects	SAP HANA library files.
specification.agent.dataIntegrationServer.sap.hanas[].sourcePath	String	Path to an SAP HANA library file.
specification.agent.dataIntegrationServer.ssls	Array of objects	SSL details for the Data Integration Server. Includes the following details: - fileCopy - importCerts

Field	Type	Description
specification.agent.dataIntegrationServer.ssls[].fileCopy	Object	SSL keystore/truststore file.
specification.agent.dataIntegrationServer.ssls[].fileCopy.sourcePath	String	Path to an SSL keystore/ truststore file.
specification.agent.dataIntegrationServer.ssls[].importCerts	Object	Certificate import details. Includes the following details: - certName - alias
specification.agent.dataIntegrationServer.ssls[].importCerts.certName	String	Certificate name to import.
specification.agent.dataIntegrationServer.ssls[].importCerts.alias	String	Alias for the imported certificate in the keystore.
specification.agent.dataIntegrationServer.wsdls	Array of objects	WSDL files for web services for the Data Integration Server.
specification.agent.dataIntegrationServer.wsdls[].sourcePath	String	Path to a WSDL file.
specification.agent.elasticServer	Object	Elastic Server files. Includes the following details: - javaTxResources - jdbcv2 - nativeBinResources - nativeLibResources - pythonTxResources
specification.agent.elasticServer.javaTxResources	Array of objects	Java transformation resource files for the Elastic Server.
specification.agent.elasticServer.javaTxResources[].sourcePath	String	Path to a Java transformation resource file.
specification.agent.elasticServer.jdbcv2	Object	JDBC V2 drivers for the Elastic Server. List each JAR file individually. Includes the following driver types: - common - spark
specification.agent.elasticServer.jdbcv2.common	Array of objects	Common JDBC drivers.
specification.agent.elasticServer.jdbcv2.common[].sourcePath	String	Path to a common JDBC driver JAR file for theElastic Server.
specification.agent.elasticServer.jdbcv2.spark	Array of objects	Spark-specific JDBC drivers.

Field	Type	Description
specification.agent.elasticServer.jdbcv2.spark[].sourcePath	String	Path to a Spark-specific JDBC driver JAR file for the Elastic Server.
specification.agent.elasticServer.nativeBinResources	Array of objects	Native binary resource files for the Elastic Server.
specification.agent.elasticServer.nativeBinResources[].sourcePath	String	Path to a native binary resource file.
specification.agent.elasticServer.nativeLibResources	Array of objects	Native library resource files for the Elastic Server.
specification.agent.elasticServer.nativeLibResources[].sourcePath	String	Path to a native library resource file.
specification.agent.elasticServer.pythonTxResources	Array of objects	Python transformation resource files for the Elastic Server.
specification.agent.elasticServer.pythonTxResources[].sourcePath	String	Path to a Python transformation resource file.
specification.agent.executableScript	Object	Executable scripts. Includes the following details: - scriptPath - scriptArgs - currentDirectory
specification.agent.executableScript.scriptPath	String	Path to the script. The script runs on the master node.
specification.agent.executableScript.scriptArgs	Array of strings	Arguments to pass to the script when it runs.
specification.agent.executableScript.currentDirectory	String	Working directory that the script runs in.
specification.agent.jdk	Object	JDK policy.
specification.agent.jdk.policyJars	Array of strings	JDK policy JAR files. List each JAR file individually.
specification.agent.sslStore	Array of objects	SSL store files.
specification.agent.sslStore[].sourcePath	String	Path to an SSL store file.

POST response

If successful, returns the updated supplementary file specification.

POST request example

The following sample POST request updates a supplementary file specification:

```
POST <base URL>/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
Content-Type: application/json
```

```
Accept: application/json
INFA-SESSION-ID: <SessionId>

{
  "rteId": "rte-12345",
  "specification": {
    "agent": {
      "databaseIngestion": {
        "jdbcDrivers": [{"sourcePath": "/dbingest/jdbc1.jar"}],
        "oracle": {
          "jdbcDrivers": [{"sourcePath": "/oracle/jdbc1.jar"}],
          "ociDrivers": [{"sourcePath": "/oracle/oci1.so"}],
          "version": "19c"
        }
      },
      "dataIntegrationServer": {
        "jdbcv2": {
          "common": [{"sourcePath": "/jdbc/common1.jar"}],
          "spark": [{"sourcePath": "/jdbc/spark1.jar"}]
        },
        "jdbcDrivers": [{"sourcePath": "/jdbc/driver1.jar"}],
        "mysql": {
          "jdbcDrivers": [{"sourcePath": "/mysql/jdbc1.jar"}],
          "odbcDrivers": [{"sourcePath": "/mysql/odbc1.so"}],
          "version": "8.0"
        },
        "odbc": {
          "drivers": [{"sourcePath": "/odbc/driver1.so"}],
          "dsns": [{"name": "dsn1", "entries": [{"key": "Server", "value":
"localhost"}]}]
        },
        "odbcInst": {
          "drivers": [{"sourcePath": "/odbcinst/driver2.so"}],
          "dsns": [{"name": "dsn2", "entries": [{"key": "Port", "value": "1234"}]}]
        },
        "sap": {
          "jcos": [{"sourcePath": "/sap/jco1"}],
          "nwrfcs": [{"sourcePath": "/sap/nwrfc1"}],
          "hanas": [{"sourcePath": "/sap/hana1"}]
        },
        "ssls": [
          {
            "fileCopy": {"sourcePath": "/ssl/keystore.jks"},
            "importCerts": {"certName": "mycert", "alias": "myalias"}
          }
        ]
      },
      "elasticServer": {
        "javaTxResources": [{"sourcePath": "/elastic/javaTxRes.jar"}],
        "jdbcv2": {
          "common": [{"sourcePath": "/elastic/jdbc/common2.jar"}],
          "spark": [{"sourcePath": "/elastic/jdbc/spark2.jar"}]
        },
        "nativeLibResources": [{"sourcePath": "/elastic/nativeLib.so"}],
        "nativeBinResources": [{"sourcePath": "/elastic/nativeBin"}]
      },
      "executableScript": {
        "scriptPath": "/scripts/start.sh",
        "scriptArgs": ["--env", "prod"],
        "currentDirectory": "/scripts"
      },
      "jdk": {
        "policyJars": [
          "/datadisk/jdk/policy/unlimited/US_export_policy.jar",
          "/datadisk/jdk/policy/unlimited/local_policy.jar"
        ]
      },
      "sslStore": [{"sourcePath": "/ssl/store.jks"}]
    }
  }
}
```

Deleting the supplementary file specification

Delete a supplementary file specification so that an elastic runtime environment no longer uses the supplementary files.

After you delete the supplementary file specification, all affected Secure Agent services automatically restart and no longer use the supplementary files.

POST request

Use the following URI:

```
/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
```

Include the following fields in the request:

Field	Type	Description
rteId	String	Runtime environment ID.
specification	Object	Supplementary file specification set to null.

POST response

If successful, returns an empty specification.

POST example

The following sample POST request deletes a supplementary file specification:

```
POST <base URL>/api/v3/RuntimeEnvironment/<runtime environment ID>/ElasticConfig
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>

{
  "rteId": "<runtime environment ID>",
  "specification": null
}
```

Tokens

Use the containerImageToken resource to manage your organization's tokens for elastic runtime environments.

Getting a new token

If you have Kubernetes DevOps engineers privileges, you can request a token that you can use to access and download images from the artifactory.

GET request

To get a new token, use the following URI:

```
/public/core/v3/containerimagetoken/create
```

The following table lists the potential error codes for a request:

HTTP status code	Description
401	Unauthenticated or unauthorized.
403	Insufficient privilege. The get.k8s.repository.token privilege is required to access this API.

GET response

If successful, returns the token ID and the token value.

GET response examples

To get a new token, use the following request:

```
GET <baseApiUrl>/public/core/v3/containerimagetoken/create
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a "200 OK" response like the following example:

```
{
    "tokenId":"<token ID>",
    "tokenValue":"<token value>"
}
```

If you have insufficient privileges, you might receive a "403 Forbidden" response like the following example:

```
{
    "error": {
        "code": "AIS_007",
        "message": "Privilege - view.k8s.agent.config required for accessing this API.",
        "debugMessage": "Privilege - view.k8s.agent.config required for accessing this
API.",
        "requestId": "l2EpwkFoqkEjrEJURclPw2",
        "details": null
    }
}
```

If the token has been revoked, you might receive a "400 Bad Request" response like the following example:

```
{
    "error": {
        "code": "AIS_014",
        "message": "Token with id:<token ID> already revoked.",
        "debugMessage": "Token with id:<token ID> already revoked.",
        "requestId": "iVdlwEoaFiZd3vb0LvLVmp",
        "details": null
    }
}
```

Revoking a token

If you have Kubernetes DevOps engineers privileges, you can revoke a token.

DELETE request

To revoke a token, use the following URI:

```
/public/core/v3/containerImageToken/revoke/<tokenId>
```

Include the following parameter:

Parameter	Type	Description
tokenId	String	ID of the token to be revoked.

The following table lists the potential error codes for a request:

HTTP status code	Description
400	Token with id:{tokenId} already revoked.
400	User:{0} is not authorized to revoke this token.
401	Unauthenticated or unauthorized.
403	Privilege get.k8s.repository.token is required for accessing this API.

DELETE response

If successful, the token is revoked.

DELETE response examples

To revoke a token, use the following request:

```
DELETE <baseApiUrl>/public/core/v3/containerImageToken/revoke/<tokenId>
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you receive a "200 OK" response.

If you have insufficient privileges, you might receive a "403 Forbidden" response like the following example:

```
{
    "error": {
        "code": "AIS_007",
        "message": "Privilege - view.k8s.agent.config required for accessing this API.",
        "debugMessage": "Privilege - view.k8s.agent.config required for accessing this
API.",
        "requestId": "l2EpwkFoqkEjrEJURclPw2",
        "details": null
    }
}
}
```

If the token has already been revoked, you might receive a "400 Bad Request" response like the following example:

```
{
    "error": {
        "code": "AIS_014",
        "message": "Token with id:<token ID> already revoked.",
        "debugMessage": "Token with id:<token ID> already revoked.",
        "requestId": "iVdlwEoaFiZd3vb0LvLVmp",
        "details": null
    }
}
}
```

If you are not authorized to revoke the token, you might receive a "400 Bad Request" response like the following example:

```
{
    "error": {
        "code": "AIS_013",
        "message": "User:k8s is not authorized to revoke this token :<token ID>.",
        "debugMessage": "User:k8s is not authorized to revoke this token :<token ID>.",
        "requestId": "iLhZ616EF6Ddb3jICTGxoj",
        "details": null
    }
}
```

Getting all tokens for an organization

If you have Kubernetes DevOps engineers privileges, you can list all the tokens for the organization.

GET request

To list all tokens for the organization, use the following URI:

```
/public/core/v3/containerImageToken
```

Include the following parameter:

Parameter	Type	Description
orgId	String	Organization ID to see the generated tokens.

The following table lists the potential error codes for a request:

HTTP status code	Description
401	Unauthenticated or unauthorized.
403	Privilege get.k8s.repository.token is required for accessing this API.

GET response

If successful, a list of all the tokens for the organization is returned.

GET response examples

To list available images for download, use the following request:

```
GET <baseApiUrl>/public/core/v3/containerImageToken
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a "200 OK" response like the following example:

```
[
    {
        "orgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "userId": "admin",
        "tokenId": "<token ID>",
        "expirationTime": "2022-10-31T07:06:59.000Z"
    },
    {
        "orgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "userId": "admin",
        "tokenId": "<token ID>",
```

```
        "expirationTime": "2022-10-31T07:06:59.000Z"
    }
]
```

If you have insufficient privileges, you might receive a "403 Forbidden" response like the following example:

```
{
    "error": {
        "code": "AIS_007",
        "message": "Privilege - view.k8s.agent.config required for accessing this API.",
        "debugMessage": "Privilege - view.k8s.agent.config required for accessing this
API.",
        "requestId": "l2EpwkFoqkEjrEJURclPw2",
        "details": null
    }
}
```

Export and import

Use the export and import resources to migrate assets and other objects from one organization to another.

To use the export and import resources, the source and target organizations must have the appropriate license.

To migrate objects, you export them from the source organization and then import them into the target organization. The target organization must use the same version or a newer version of IDMC as the source organization. The versions might differ temporarily if the organizations aren't on the same POD (Point of Delivery) during an IDMC upgrade.

You can include up to 1000 objects in an export job or import job.

When you export assets, you can choose whether to include dependent objects. During the import operation, you can choose which assets to import.

IDMC does not include schedule information when you export an asset. After the import operation, you can associate the imported assets with schedules. Also, when you export and import schedules, the schedules are not associated with any assets.

The export and import resources do not migrate the associated state of the objects from the source organization to the target organization. To migrate the state of the objects that you migrate, use the fetchState and loadState resources.

Secure Agent configuration

You can export the configuration of a Secure Agent and import the configuration at the Secure Agent or Secure Agent group level. You might want to migrate the configuration of a Secure Agent to apply the same configuration to individual Secure Agents or all Secure Agents in a Secure Agent group.

After you export the Secure Agent configuration, you can make revisions to the configuration in the JSON file that's included in the export package before you import it.

Data Integration objects

For Data Integration, you can export and import the following types of objects:

- Mappings
- Tasks
- Advanced taskflows

- Linear taskflows
- Business services
- Fixed-width configuration files
- Hierarchical schemas
- Mapplets
- Saved queries
- Connections
- Schedules
- Secure Agent configuration

Application Integration objects

For Application Integration, you can export and import the following types of objects:

- Processes
- Guides
- Connections
- Service connectors
- Process objects
- Secure Agent configuration

Data Quality objects

For Data Quality, you can export and import the following types of objects:

- CLEANSE
- DEDUPLICATE
- DICTIONARY
- EXCEPTION
- LABELER
- PARSE
- RULE_SPECIFICATION
- VERIFIER

MDM SaaS assets

For MDM SaaS, you can export and import the following types of assets:

- Predefined and custom business entities
- Reference data sets, code lists, and crosswalks
- Hierarchies
- Relationships
- Job definitions
- Authorization
- Business events
- Report sets
- Reports

- Business applications
- Custom pages
- Predefined and custom source systems
- Components
- Dynamic pools

Exporting objects

Use this resource with the import resource to migrate objects from one organization to another.

Exporting objects includes a series of requests and responses. The end result is a ZIP file that contains the exported objects. To export objects, you perform the following tasks:

1. Log in to the source organization.
2. Send an objects GET request with query parameters to get a list of objects to export. Or, if you already know which objects you want to export, send a lookup GET request to get the object IDs for the objects that you want to export.
   IDMC returns the object IDs.

   See "Objects" on page 236 and "Lookup" on page 202.
3. Send an export POST request to start the export job, using the object IDs returned in the objects or lookup response.
   IDMC returns the job ID for the export job.

   See "Starting an export job" on page 168.
4. Send an export GET request to get the status of the export job, using the export job ID for the export package.
   IDMC returns the job ID and status. The response can also include a list of the objects in the export package.

   See "Getting the export job status" on page 171.
5. Send an export GET request to download the export package.
   IDMC returns the export package in a ZIP file.

   See "Downloading an export package" on page 175.

Note: This resource uses a dynamic rate limit. When the system experiences a large volume or size of requests, responses might be slow or fail with the error message, "too many requests."

Starting an export job

Use a POST request to start an export job.

POST request

You can export objects such as assets, connections, Secure Agent configurations, and schedules. To specify the objects to export and start the export job, use the following URI:

```
/public/core/v3/export
```

Include the following fields in the request:

Field	Type	Required	Description
name	String		Name of the export job. If a name is not specified, the default name will be used in the following format: job-<currentTimeInMilliseconds>
objects	Collection <complex type>	Yes	Object IDs for objects to export. **Note:** Informatica recommends that you include no more than 1000 objects in an export file.
id	String	Yes	Include in the objects object. Global unique identifier for the export object. This can be a project, folder, or asset ID. To find the object ID, see "Objects" on page 236 or "Lookup" on page 202.
includeDependencies	Boolean		Include in the objects object. Determines whether to include dependent objects for the assets in the export. Default is True.

If an asset includes tags, you can export the tags when you export the asset. To export asset tags, include the includeTagInformation request parameter in the POST request.

Use the following URI:

```
/public/core/v3/export?includeTagInformation =true
```

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/export
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "name" : "testJob1",
    "objects" : [
        {
            "id": "l7bgB85m5oGiXObDxwnvK9",
            "includeDependencies" : true
        },
        {
            "id": "1MW0GDAE1sFgnvWkvom7mK",
            "includeDependencies" : false
        },
        {
            "id": "iIVBNZSpUKFg4N6g2PKUox"
        }
    ]
}
```

POST response

If successful, returns the following information for the export job:

Field	Type	Description
id	String	ID of the export job.
createTime	String	Time export package was created.
updateTime	String	Time export package was last updated.
name	String	Name of the import job.
startTime	String	Time the export job was started.
endTime	String	Time the export job ended.
status	Complex type	Status of the export.
state	String	Returned in the status object. Status of the export job, such as In Progress, Success, or Failed.
message	String	Returned in the status object. Export job status message.
objects	Collection	Collection of objects. Returns null if blank.

POST response examples

If successful, you might receive a response similar to the following example:

```
{
  "id": "7evG9CokA1whk8ehF3opKM",
  "createTime": "2017-10-26T08:15:48.502Z",
  "updateTime": "2017-10-26T08:15:48.502Z",
  "name": "testJob1",
  "startTime": "2017-10-26T08:15:48.501Z",
  "endTime": null,
  "status": {
    "state": "IN_PROGRESS",
    "message": "In Progress"
  },
  "objects": null
}
```

If you receive an error, you might see a response similar to the following example:

```
{
  "error": {
    "code": "MigrationSvc_034",
    "message": "Invalid object id/s [[242973wgfscbwasd23]]. Object resolution failed.",
    "requestId": "2ataXVlgw3ydI1Yb2MA4sq"
  }
}
```

Getting the export job status

Use a GET request to get the status of an export job or download an export job log.

GET request

To obtain status of the export job, use one of the following URIs:

- To receive status of the export job, use the following URI, where <id> is the export job ID:

  ```
  /public/core/v3/export/<id>
  ```

- To receive status for each object in the export job, use the following URI:

  ```
  /public/core/v3/export/<id>?expand=objects
  ```

Continue polling the request until the state is SUCCESSFUL.

To download the export job log, use the following URI:

```
/public/core/v3/export/<id>/log
```

GET response

A request for an export job log returns the log in a text file.

A request for status returns the following export status information:

Field	Type	Description
id	String	ID of the export job.
createTime	String	Time the export job was created.
updateTime	String	Last time the export job was updated.
name	String	Name of the export job.
startTime	String	Start time of the export job.
endTime	String	End time of the export job.
status	Complex type	Status of the export job.
state	String	Returned in the status object. State of the export job, such as In Progress, Success, or Failed.
message	String	Returned in the status object. Export job status message.
objects	Collection	Objects in the export job. Returned only when the URI includes `?expand=objects`
id	String	Returned in the objects object. Global unique identifier for the export object requested.
name	String	Returned in the objects object. Name of the object to export.
path	String	Returned in the objects object. Complete path of the object to export.

Field	Type	Description
description	String	Returned in the objects object. Description of the object to export.
status	Complex type	Returned in the objects object. Export status of the individual object.
state	String	Returned in the status object. Export state of the individual object, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the status object. Export status message for the individual object.

GET request example

To get the status of the export job, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/export/7evG9CokA1whk8ehF3opKM
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

To get the status for an individual object in the export job, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/export/7evG9CokA1whk8ehF3opKM?expand=objects
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

To get the export job log, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/export/iklHoZTokKAiNO95Cw9NG3/log
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If your request for an export job's status is successful, you might receive a response similar to the following example:

```
{
  "id": "7evG9CokA1whk8ehF3opKM",
  "createTime": "2017-10-26T08:15:48.502Z",
  "updateTime": "2017-10-26T08:15:48.502Z",
  "name": "testJob1",
  "startTime": "2017-10-26T08:15:48.501Z",
  "endTime": null,
  "status": {
    "state": "IN_PROGRESS",
    "message": "In Progress."
  },
  "objects": null
}
```

If your request included import status for individual objects, a successful response might be similar to the following example:

```
{
  "id": "7evG9CokA1whk8ehF3opKM",
  "createTime": "2017-10-26T08:15:49.000Z",
  "updateTime": "2017-10-26T08:15:50.000Z",
  "name": "testJob1",
  "startTime": "2017-10-26T08:15:49.000Z",
```

```
"endTime": "2017-10-26T08:15:50.000Z",
"status": {
  "state": "SUCCESSFUL",
  "message": "Export completed successfully."
},
"objects": [
  {
    "id": "1MW0GDAE1sFgnvWkvom7mK",
    "name": "Linear Taskflow",
    "path": "/ICS Taskflow",
    "type": "SAAS_LINEAR_TASKFLOW",
    "description": null,
    "status": {
      "state": "SUCCESSFUL",
      "message": null
    }
  },
  {
    "id": "1SuZ9Gf8LtphrJn9EdHCod",
    "name": "SQL Server",
    "path": "/DSS",
    "type": "Folder",
    "description": "",
    "status": {
      "state": "SUCCESSFUL",
      "message": null
    }
  },
  {
    "id": "1Uf9PTj6kTjbsVYMk55OC6",
    "name": "Synchronization Task Multi Source",
    "path": "/Default/SQL Server",
    "type": "SAAS_DSS",
    "description": "",
    "status": {
      "state": "SUCCESSFUL",
      "message": null
    }
  },
  {
    "id": "2UL9ZO9Z3OJeuxbL2cYbaX",
    "name": "Synchronization Task Simple Filter",
    "path": "/Default/SQL Server",
    "type": "SAAS_DSS",
    "description": "",
    "status": {
      "state": "SUCCESSFUL",
      "message": null
    }
  },
  {
    "id": "31SzqpeEEKacy7OaXXCfaD",
    "name": "Synchronization Task Multi Source",
    "path": "/DSS/SQL Server",
    "type": "SAAS_DSS",
    "description": "",
    "status": {
      "state": "SUCCESSFUL",
      "message": null
    }
  },
  {
    "id": "5FA0DnMzeuDbYZnn3hdto9",
    "name": "Default",
    "path": "/",
    "type": "Project",
    "description": "Auto-generated Default Project",
    "status": {
      "state": "SUCCESSFUL",
      "message": null
```

```
  }
},
{
  "id": "5V5VpaoJGTNkWCB2f2t4MG",
  "name": "Synchronization Task Simple Filter",
  "path": "/DSS/SQL Server",
  "type": "SAAS_DSS",
  "description": "",
  "status": {
    "state": "SUCCESSFUL",
    "message": null
  }
},
{
  "id": "7udJJF48H5Iizzry8gjUAb",
  "name": "SQL Server",
  "path": "/Default",
  "type": "Folder",
  "description": "",
  "status": {
    "state": "SUCCESSFUL",
    "message": null
  }
},
{
  "id": "fIQLvhNnsqBjXKNfjyZFaH",
  "name": "ICS Taskflow",
  "path": "/",
  "type": "Project",
  "description": "",
  "status": {
    "state": "SUCCESSFUL",
    "message": null
  }
},
{
  "id": "hGrgtrajWMUjNIsnLKQCAi",
  "name": "SQL Server Linux",
  "path": null,
  "type": "SAAS_CONNECTION",
  "description": null,
  "status": {
    "state": "SUCCESSFUL",
    "message": null
  }
},
{
  "id": "iIVBNZSpUKFg4N6g2PKUox",
  "name": "abc_map",
  "path": "/Default",
  "type": "MAPPING",
  "description": "",
  "status": {
    "state": "SUCCESSFUL",
    "message": null
  }
},
{
  "id": "l7bgB85m5oGiXObDxwnvK9",
  "name": "DSS",
  "path": "/",
  "type": "Project",
  "description": "",
  "status": {
    "state": "SUCCESSFUL",
    "message": null
  }
},
{
  "id": "lOqsFQE4OSWeyg77AeWwK2",
```

```
      "name": "Linux",
      "path": null,
      "type": "SAAS_RUNTIME_ENVIRONMENT",
      "description": null,
      "status": {
        "state": "SUCCESSFUL",
        "message": null
      }
    }
  ]
}
```

If you requested an export job log, the contents of the text file might be similar to the following example:

```
> OIE_002 INFO 2019-02-05T22:50:08.788Z Starting export operation.
Execution Client: API
Job Name: m_RegionTotalNew-1549407002393
Organization: infa2.doc
RequestId: iklHoZTokKAiNO95Cw9NG3
User: janer2
> OIE_004 INFO 2019-02-05T22:50:09.042Z Successfully exported object [/SYS/
_SYSTEM_PROJECT] of type [Project] id [5UrdDrgV5yKerYgtJAA4IU]> OIE_004 INFO
2019-02-05T22:50:09.042Z Successfully exported object [/Explore/Accounts] of type
[Project] id [8Uyq1wiZ9lye2Sou5OCqOa]
> OIE_004 INFO 2019-02-05T22:50:09.126Z Successfully exported object [/SYS/
_SYSTEM_FOLDER] of type [Folder] id [b98UuC0ADGEkXxF9EIlUCZ]
> OIE_004 INFO 2019-02-05T22:50:09.126Z Successfully exported object [/Explore/Accounts/
February2018] of type [Folder] id [cojSZpHcqcafFy6YkCBgIl]
> OIE_004 INFO 2019-02-05T22:50:09.354Z Successfully exported object [/SYS/TMS26W0864]
of type [SAAS_RUNTIME_ENVIRONMENT] id [6TKTNZ3wfIIjV5yBTJmYWO]
> OIE_004 INFO 2019-02-05T22:50:09.504Z Successfully exported object [/SYS/ff] of type
[SAAS_CONNECTION] id [7GgahDJzE9GbYb75xQ35GM]
> OIE_004 INFO 2019-02-05T22:50:09.765Z Successfully exported object [/Explore/Accounts/
February2018/m_RegionTotalNew] of type [MAPPING] id [4LiKwGKgegAixI2awqWgK1]
> OIE_003 INFO 2019-02-05T22:50:09.843Z Finished export operation.
Job Name: m_RegionTotalNew-1549407002393
Start Time: 2019-02-05T22:50:03.000Z
End Time: 2019-02-05T22:50:09.765Z
Started by: janer2
Start Method: API
Source Organization: infa.doc
Status: SUCCESSFUL
```

Downloading an export package

Use a GET request to download an export package.

GET request

To download the export package, use the following URI:

```
/public/core/v3/export/<id>/package
```

The <id> is the export job ID.

GET response

If successful, you receive the ZIP stream in the response body and the response type will be application/zip.

If unsuccessful, you might receive a response similar to the following example:

```
{
  "error": {
    "code": "MigrationSvc_017",
    "message": "Export request with identifier [asdasduguyvasd8347] doesn't exist.",
    "requestId": "2ataXVlgw3ydI1Yb2MA4sq"
  }
}
```

Identity providers

You can use a JSON web token (JWT) as an OAuth access token to log in to IDMC. To log in using a JWT access token, your organization must have a registered identity provider. Use the IdentityProviders resource to register and manage your identity provider.

You can use the IdentityProviders resource to accomplish the following tasks:

- Register an identity provider.
- Get details about an identity provider.
- Update an identity provider.
- Delete an identity provider.

Registering an identity provider

Use a POST request to register an identity provider.

Note: An organization can have no more than one registered identity provider.

POST request

To register an identity provider for an organization, use the following URI:

```
/public/core/v3/Orgs/<orgId>/IdentityProviders
```

Include the following fields in the request:

Field	Type	Description
type	String	Type of identity provider. Supported type is OIDC.
endPoints	Object	Object that includes the URLs for the identity provider issuer and the JWT tokens.
issuer	String	Include in the endPoints object. Absolute URL of the identity provider issuer. Must use the same HTTPS scheme as the key URL and be a subset of the key URL. Maximum length is 255 characters.
keys	String	Include in the endPoints object. Absolute URL of the JWT tokens. Must use the same HTTPS scheme as the issuer URL. Maximum length is 255 characters.
accountPolicy	Object	Object that defines the account policy.
link	String	Include in the accountPolicy object. Object that includes properties for identifying the user.
tokenClaim	String	Optional. Include in the link object. Name of the claim to be used to identify the user for JWT validation. Default is sub. Maximum length is 64 characters.

Field	Type	Description
matchType	String	Include in the link object. The Informatica Cloud attribute name to identify the Informatica Intelligent Cloud Services user. Use one of the following values: - aliasName - uid Maximum length is 64 characters.
signingAlgorithm	String	Optional. Token signing algorithm. Use one of the following values: - HS256 - HS 384 - HS512 - RS256 - RS384 - RS512 - ES256 - ES384 - ES412 - PS256 - PS384 - PS512 - EdDSA - ES256K Default is RS256.

POST response

If unsuccessful, returns an error object. If successful, returns the following information:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to.
type	String	Type of identity provider. Supported type is OIDC.
endPoints	Object	Object that includes the URLs for the identity provider issues and the JWT tokens.
issuer	String	Included in the endPoints object. Absolute URL of the identity provider issuer.
keys	String	Included in the endPoints object. Absolute URL of the JWT tokens.
accountPolicy	Object	Object that defines the account policy.
link	String	Included in the accountPolicy object. Object that includes properties for identifying the user.
tokenClaim	String	Included in the link object. Name of the claim to be used to identify the user for JWT validation.

Field	Type	Description
matchType	String	Included in the link object. The Informatica Cloud attribute name to identify the Informatica Intelligent Cloud Services user.
signingAlgorithm	String	Token signing algorithm.
createTime	String	When the identity provider was registered.
createdBy	String	IDMC user who registered the identity provider.
updateTime	String	When the identity provider was last updated.
updatedBy	String	IDMC user who last updated the identity provider.

POST request example

You might use a request similar to the following example:

```
POST <BaseApiUrl>/public/core/v3/Orgs/ppbg1kOl2Jo13b/IdentityProviders HTTP/<HTTP
version>
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>

https://na1.dm-us.informaticacloud.com/saas/public/core/v3/Orgs/ppbg1kOl2Jo13b/
IdentityProviders
{
  "type": "OIDC",
  "endPoints": {
    "issuer": "https://myidp.mycompany.com/oauth2/",
    "keys": "https://myidp.mycompany.com/oauth2/keys"
  }
  {
   "accountPolicy": {
      "link": {
           "tokenClaim": "sub",
           "matchType": "uid"
       }
  }
  "signingAlgorithm": "HS256"
}
```

POST response example

If successful, you might receive a response similar to the following example:

```
{
  "id" : "4aoljyi4ppbg1kOl2Jo13b",
  "orgId" : "ppbg1kOl2Jo13b"
  "type": "OIDC",
  "endPoints": {
    "issuer": "https://myidp.mycompany.com/oauth2/",
    "keys": "https://myidp.mycompany.com/oauth2/keys"
  }    {
  "accountPolicy": {
      "link": {
           "tokenClaim": "sub",
           "matchType": "uid"
       }
  }
  "signingAlgorithm": "HS256",
  "createTime": "2019-03-06T22:04:00.000Z",
  "createdBy": "a@abc.com",
```

```
  "updateTime": "2019-03-06T22:04:00.000Z",
  "updatedBy": "a@abc.com"
}
```

Getting identity provider details

Use a GET request to get the information about an identity provider.

GET request

To get information about the identity provider for an organization, use the following URI:

```
/public/core/v3/Orgs/<orgId>/IdentityProviders
```

GET response

If unsuccessful, returns an error object. If successful, returns the following information for the identity provider:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to.
type	String	Type of identity provider. Supported type is OIDC.
endPoints	Object	Object that includes the URLs for the identity provider issuer and the JWT tokens.
issuer	String	Included in the endPoints object. Absolute URL of the identity provider issuer.
keys	String	Included in the endPoints object. Absolute URL of the JWT tokens.
accountPolicy	Object	Object that defines the account policy.
link	String	Included in the accountPolicy object. Object that includes properties for identifying the user.
tokenClaim	String	Included in the link object. Name of the claim to be used to identify the user for JWT validation. Default is sub.
matchType	String	Included in the link object. The Informatica Cloud attribute name to identify the Informatica Intelligent Cloud Services user.
signingAlgorithm	String	Token signing algorithm.
createTime	String	When the identity provider was registered.
createdBy	String	IDMC user who registered the identity provider.

Field	Type	Description
updateTime	String	When the identity provider was last updated.
updatedBy	String	IDMC user who last updated the identity provider.

GET request example

To get information about the identity provider for an organization, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/Orgs/ppbg1kOl2Jo13b/IdentityProviders
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If successful, you might receive a response similar to the following example:

```
[
 {
  "id" : "4aoljyi4ppbg1kOl2Jo13b",
  "orgId" : "ppbg1kOl2Jo13b"
  "type": "OIDC",
  "endPoints": {
    "issuer": "https://myidp.mycompany.com/oauth2/",
    "keys": "https://myidp.mycompany.com/oauth2/keys"
  }    {
  "accountPolicy": {
      "link": {
           "tokenClaim": "sub",
           "matchType": "aliasName"
       }
  }
  "signingAlgorithm": "HS256",
  "createTime": "2019-03-06T22:04:00.000Z",
  "createdBy": "a@abc.com",
  "updateTime": "2019-03-06T22:04:00.000Z",
  "updatedBy": "a@abc.com"
 },
]
```

Updating an identity provider

Use a PUT request to update an identity provider.

PUT request

To update an identity provider, use the following URI:

```
/public/core/v3/Orgs/<orgId>/IdentityProviders/<identity provider ID>
```

You can include the following fields in the request:

Field	Type	Description
endPoints	Object	Object that includes the URLs for the identity provider issuer and the JWT tokens.
issuer	String	Include in the endPoints object. Absolute URL of the identity provider issuer. Must use the same HTTPS scheme as the key URL and be a subset of the key URL. Maximum length is 255 characters.
keys	String	Include in the endPoints object. Absolute URL of the JWT tokens. Must use the same HTTPS scheme as the issuer URL. Maximum length is 255 characters.
accountPolicy	Object	Object that defines the account policy.
link	String	Include in the accountPolicy object. Object that includes properties for identifying the user.
tokenClaim	String	Optional. Include in the link object. Name of the claim to be used to identify the user for JWT validation. Default is sub. Maximum length is 64 characters.
matchType	String	Include in the link object. The Informatica Cloud attribute name to identify the Informatica Intelligent Cloud Services user. Use one of the following values: - aliasName - uid Maximum length is 64 characters.
signingAlgorithm	String	Optional. Token signing algorithm. Use one of the following values: - HS256 - HS 384 - HS512 - RS256 - RS384 - RS512 - ES256 - ES384 - ES412 - PS256 - PS384 - PS512 - EdDSA - ES256K Default is RS256.

Returns the 204 response code if successful. Returns an error object if errors occurs.

Note: When you update an identity provider for an organization, it might take a negligible amount of time before JWTs that conform to the updated configuration are accepted.

PUT request example

You might send a request similar to the following example:

```
PUT <BaseApiUrl>/public/core/v3/Orgs/<orgId>/IdentityProviders/<identity provider ID>
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>

https://na1.dm-us.informaticacloud.com/saas/public/core/v3/Orgs/ppbg1kOl2Jo13b/
IdentityProviders/6qnnXazBltUbOcUTYgyWO1
{
  "endPoints": {
    "issuer": "https://myidp.mycompany.com/oauth2/",
    "keys": "https://myidp.mycompany.com/oauth2/keys"
  },
  "accountPolicy": {
      "link": {
           "tokenClaim": "user",
           "matchType": "uid"
       }
  }
 "signingAlgorithm": "RS512",
}
```

Deleting an identity provider

To delete an identity provider, include the identity provider ID in a DELETE request.

To delete an identity provider, use the following URI:

```
/public/core/v3/Orgs/<orgId>/IdentityProviders/<identity provider ID>
```

For example,

```
DELETE http://na1.dm-us.informaticacloud.com/saas/public/core/v3/Orgs/ppbg1mOj8Jo14c/
IdentityProviders/6qnnXdzBdtUbObUTYhyWO1
```

Returns the 204 response code if successful. Returns an error object if errors occurs.

Note: When you delete an identity provider for an organization, it might take a negligible amount of time before the JWTs that conform to the deleted identity provider are rejected.

Importing objects

Use this resource with the export resource to migrate objects from one organization to another.

Importing objects includes a series of requests and responses. To import objects, you perform the following tasks:

1. Log in to the target organization.
2. Send an import POST request to upload the ZIP file.
   IDMC returns the job ID for the import job.

   See "Uploading an import package" on page 183.
3. Send an import POST request to import objects.
   IDMC returns the status of the import such as In Progress or Success, or returns an error message. The response also includes the source organization ID for the organization that created the export package.

   See "Starting an import job" on page 184.

4. Send an import GET request to get the status of the import job. You can also request status at the object level.
   IDMC returns the status of the import job and if requested, status of each object in the package.

   See "Getting the import job status" on page 188.

Uploading an import package

Use a POST request to upload an import package.

POST request

To upload the import package, use the following URI:

```
/public/core/v3/import/package
```


For Content-Type, use

```
multipart/form-data
```

In the request body, include a part with the name of `package`. For its content, use the export ZIP file that you want to import.

By default, IDMC uses checksum validation to verify that no changes were made to the contents of the export ZIP file after it was created. If you want to upload an import package that contains a modified export ZIP file, include the relaxChecksum parameter and set the value to True.

The following image shows an example of the request body in Postman:

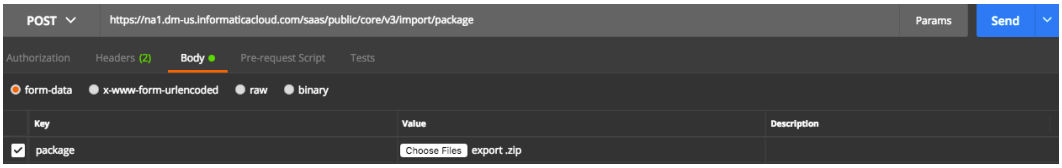

POST response

If successful, returns the following information for the import job:

Field	Type	Description
jobId	String	ID of the import job.
jobStatus	Collection	Status of the package upload.
state	String	Returned in the status object. Status of the import job, such as In Progress, Success, or Failed.
message	String	Returned in the status object. Import job status message.
checksumValid	Boolean	Indicates whether the import package has valid checksum.

POST request example

To upload the import package, you might use the following response:

```
POST <BaseApiUrl>/public/core/v3/import/package
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

POST response example

You might receive a response similar to the following example:

```
{
  "jobId": "2oZb7vFI2QQg4ncd4AyCGn",
  "jobStatus": {
    "state": "NOT_STARTED",
    "message": null
  }
  "checksumValid": true
}
```

Starting an import job

Use a POST request to specify and start an import job. You can import objects such as assets, connections, Secure Agent configurations, and schedules.

POST request

In the request, include a list of objects to import and parameters to resolve any conflict resolution that might occur. An example of a conflict resolution might be if you try to import an asset that has the same name as another asset in the target organization.

You can specify a runtime environment that exists in the target organization to use instead of the source runtime environment provided that the connector types and versions are the same. To find a list of the runtime environments in the target organization, you can use the lookup resource.

When you import a Data Integration shared sequence or a mapping task that contains in-out parameters or sequences, you can choose to retain, reset, or overwrite persisted values.

To specify the import objects and start the import job, use the following URI:

```
/public/core/v3/import/<id>
```

The <id> is the import job ID received in the POST response for the import package upload.

To get the object IDs that you want to include in the request, you can use the lookup resource. For more information, see "Lookup" on page 202.

Include the following fields in the request:

Field	Type	Required	Description
name	String	Yes	Name of the import job. Default name is job-<currentTimeInMilliseconds>
importSpecification	Complex type	-	Used to specify import specifications. By default, the import includes all objects in the import package with default conflict resolution settings.

Field	Type	Required	Description
defaultConflictResolution	String	-	Include in the importSpecification object. Whether to overwrite existing objects with all of the objects in the import file. Includes the following options: - OVERWRITE. Overwrite the existing objects with the objects in the import file. Default value for assets. - REUSE. Use the existing objects. If an object doesn't exist, it is created. Default value for connections, runtime environments, projects, folders, and schedules.
includeObjects	Collection<String>	-	Include in the importSpecification object. Objects to include in the import. You can use the lookup resource to find the object IDs. By default, the import includes all objects in the import package. If the specified object is a project, the import includes all assets that belong to the project and all dependent objects that are not already present in the target organization. If the specified object is an asset, the import creates the asset's containers (project, folder) if they do not already exist. **Note:** Informatica recommends that you include no more than 1000 objects in an import job.
objectSpecification	Collection <complex type>	-	Include in the importSpecification object. Specifies the object properties. If properties are not specified for a particular object, the import uses the default conflict resolution settings.
conflictResolution	String	-	Include in the objectSpecification object. Whether to overwrite an existing asset with an asset in the import file. Includes the following options: - OVERWRITE. Overwrite the existing asset with the asset in the import file. - REUSE. Use the existing object. If the object doesn't exist, it is created. Applicable to assets, for example, Data Integration mapping tasks, Application Integration guides, B2B Gateway suppliers, and Data Quality dictionaries. Do not use for projects, folders, runtime environments, or connections. **Note:** The import includes connections and runtime environments associated with the asset if they do not exist in the target organization.
sourceObjectId	String	Yes	Include in the objectSpecification object. The object ID in the export package file. Required if objectSpecification is present.

Field	Type	Required	Description
targetObjectId	String	-	Include in the objectSpecification object. Used for Container to Container mapping, as well as some asset to asset mappings. Use to specify a connection or runtime environment that exists in the target organization. The target object must use the same connector type and version that is used in the source object.
mergeTags	Boolean	-	Include in the objectSpecification object. Determines whether to merge incoming asset tags with asset tags in the target project. Default is False.
additionalProviderFlags	Collection <complex type>	-	Additional object specifications. Use key-value pairs to retain, reset, or overwrite persisted values when you import a Data Integration shared sequence or a mapping task that contains in-out parameters or sequences. For new assets, use the key, "mapping_conflict_policy_new" and one of the following values: - RESET. Creates the asset using the initial, default values as defined in the source. - RETAIN. Creates the asset using the current values from the source. For existing assets, use the key, "mapping_conflict_policy_existing" and one of the following values: - RESET. Resets persisted values to the initial, default value. - RETAIN. Ignores the values coming from the source. - REPLACE. Overwrites persisted values in the target with values from the source.

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/import/2oZb7vFI2QQg4ncd4AyCGn
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{   "name" : "testImportName",
    "importSpecification" : {
        "defaultConflictResolution" : "REUSE",
        "includeObjects" : [
            "jJGyAmd8Q8odiyvToQhhAQ",
            "kDjmdtmJlkvfnAlWYaSe2S",
            "9pJkLYz9B3ucEj4wpXjqg2",
            "0VHocWvMryobgyuGUsObMJ",
            "71ggUXTyXQxhb81D57aKs0"
        ],
        "objectSpecification" : [{
            "sourceObjectId" : "jJGyAmd8Q8odiyvToQhhAQ",
            "conflictResolution" : "OVERWRITE",
            "additionalProviderFlags":[
            {
                "key":"mapping_conflict_policy_new",
```

```
                "value":"RESET"
            }
        ]
        },
        {
            "sourceObjectId": "kDjmdtmJlkvfnAlWYaSe2S",
            "conflictResolution": "OVERWRITE"
        },
        {
            "sourceObjectId": "9pJkLYz9B3ucEj4wpXjqg2",
            "conflictResolution": "REUSE"
        },
        {
            "sourceObjectId": "0VHocWvMryobgyuGUsObMJ",
            "conflictResolution": "REUSE"
        },
        {
            "sourceObjectId": "71ggUXTyXQxhb81D57aKs0",
            "conflictResolution": "REUSE"
        }]
    }
}
}
```

POST response

If successful, returns the following information for the import job:

Field	Type	Description
jobId	String	ID of the import job.
createTime	String	Time the import job was created.
updateTime	String	last time the import job was updated.
name	String	Name of the import job.
startTime	String	Start time of the import job.
endTime	String	End time of the import job.
status	Collection	Status of the package upload.
state	String	Returned in the status object. Import state of the individual object, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the status object. Import job status message.
objects	Collection	Objects included in the import job.
sourceOrgId	String	Organization ID of the organization that created the export package that was imported.

POST response examples

If successful, you might receive a response similar to the following example:

```
{
  "id": "2oZb7vFI2QQg4ncd4AyCGn",
  "createTime": "2024-02-26T08:40:09.000Z",
  "updateTime": "2024-02-26T08:55:53.238Z",
```

```
  "name": "ImportName",
  "startTime": "2024-02-26T08:55:53.232Z",
  "endTime": "2024-02-26T08:53:03.000Z",
  "status": {
    "state": "IN_PROGRESS",
    "message": "In Progress."
  },
  "objects": null,
  "sourceOrgId": "0VOx1gScNH7dlDyA4tD8yX"
}
```

If you receive an error, you might see a response similar to the following example:

```
{
  "error": {
    "code": "MigrationSvc_040",
    "message": "User does not have required permissions.",
    "requestId": "2ataXVlgw3ydI1Yb2MA4sq"
  }
}
```

Getting the import job status

Use a GET request to get the status of an import job or download an import job log.

GET request

To obtain status of the import job, use one of the following URIs, where <id> is the import job ID:

- To receive status of the import job, use the following URI:

  ```
  /public/core/v3/import/<id>
  ```

- To receive status for each object in the import job, use the following URI:

  ```
  /public/core/v3/import/<id>?expand=objects
  ```

To download the import job log, use the following URI:

```
/public/core/v3/import/<id>/log
```

GET response

A request for an import job log returns the log in a text file.

A request for status returns the following import status information:

Field	Type	Description
id	String	ID of the import job.
createTime	String	Time the import job was created.
updateTime	String	Last time the import job was updated.
name	String	Name of the import job.
startTime	String	Start time of the import job.
endTime	String	End time of the import job.
status	Complex type	Status of the package upload.

Field	Type	Description
state	String	Returned in the status object. Status of the import job, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the status object. Import job status message.
sourceOrgId	String	ID of the organization that created the export package that was imported.
objects	Collection	Objects included in the import.
sourceObject	Collection	Returned in the objects object. Object included in the import.
id	String	Returned in the sourceObject object. Global unique identifier for the object included in the import.
name	String	Returned in the sourceObject object. Name of the objectincluded in the import.
path	String	Returned in the sourceObject object. Complete path of the object included in the import.
type	String	Returned in the sourceObject object. Type of object included in the import.
description	String	Returned in the sourceObject object. Description of object included in the import.
targetObject	Collection	Returned in the objects object. Target object.
id	String	Returned in the targetObject object. Global unique identifier for the target object.
name	String	Returned in the targetObject object. Name of the target object.
path	String	Returned in the targetObject object. Complete path of the target object.
type	String	Returned in the targetObject object. Type of target object.
description	String	Returned in the targetObject object. Description of target object.
status	String	Returned in the targetObject object. Status of the target object.

Field	Type	Description
status	Complex type	Returned in the objects object. Import status of the individual object.
state	String	Returned in the status object. Import state of the individual object, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the status object. Import status message for the individual object.

GET request example

To receive status of an import job, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/import/2oZb7vFI2QQg4ncd4AyCGn
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

To receive status for each object in the import job, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/import/2oZb7vFI2QQg4ncd4AyCGn?expand=objects
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

To download the import job log, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/import/<id>/log
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If your request for an import job's status is successful, you might receive a response similar to the following example:

```
{
  "id": "2oZb7vFI2QQg4ncd4AyCGn",
  "createTime": "2017-10-26T08:40:09.000Z",
  "updateTime": "2017-10-26T08:55:56.000Z",
  "name": "ImportName",
  "startTime": "2017-10-26T08:55:53.000Z",
  "endTime": "2017-10-26T08:55:56.000Z",
  "status": {
    "state": "SUCCESSFUL",
    "message": "Import completed successfully."
  },
  "objects": null,
  "sourceOrgId": "0VOx1gScNH7dlDyA4tD8yX"
}
```

If your request included import status for individual objects, a successful response might be similar to the following example:

```
{
  "id": "2oZb7vFI2QQg4ncd4AyCGn",
  "createTime": "2017-10-26T08:40:09.000Z",
  "updateTime": "2017-10-26T08:55:56.000Z",
  "name": "ImportName",
  "startTime": "2017-10-26T08:55:53.000Z",
  "endTime": "2017-10-26T08:55:56.000Z",
  "status": {
    "state": "SUCCESSFUL",
```

```
    "message": "Import completed successfully."
  },
  "objects": [
    {
      "sourceObject": {
        "id": "ejZY66c19YUccBdbGwKG4P",
        "name": "M1",
        "path": "/Default",
        "type": "MAPPING",
        "description": "ab"
      },
      "targetObject": {
        "id": null,
        "name": "M1",
        "path": "/default1",
        "type": "MAPPING",
        "description": null,
        "status": null
      },
      "status": {
        "state": "SUCCESSFUL",
        "message": "Reuse existing."
      }
    },
    {
      "sourceObject": {
        "id": "iIVBNZSpUKFg4N6g2PKUox",
        "name": "abc_map",
        "path": "/Default",
        "type": "MAPPING",
        "description": ""
      },
      "targetObject": {
        "id": null,
        "name": "abc_map",
        "path": "/default1",
        "type": "MAPPING",
        "description": null,
        "status": null
      },
      "status": {
        "state": "SUCCESSFUL",
        "message": "Overwrite existing."
      }
    }
  ],
  "sourceOrgId": "0VOx1gScNH7dlDyA4tD8yX"
}
```


If you requested an import job log, the contents of the text file might be similar to the following example:

```
> OIE_002 INFO 2019-02-07T01:02:24.986Z Starting import operation.
Execution Client: API
Job Name: ImportExportMapping2-1541009746833
Organization: infa.doc
RequestId: 68srkYNhdSkdKCKfLBGxyd
User: janer2
> OIE_006 INFO 2019-02-07T01:02:25.416Z Successfully imported object [/Explore/
ImportExport] of type [Project] id [3z0FL8tjqEbizNwVBV9LWR] to [/Explore/ImportExport]
> OIE_006 INFO 2019-02-07T01:02:25.931Z Successfully imported object [/SYS/CustFF] of
type [SAAS_CONNECTION] id [76c7oud5pBzlyAC3tdfVK2] to [/SYS/CustFF]
> OIE_006 INFO 2019-02-07T01:02:26.598Z Successfully imported object [/Explore/
ImportExport/ImportExportMapping2] of type [MAPPING] id [09wsnChCzUYl9OWCy6PKIe] to [/
Explore/ImportExport/ImportExportMapping2]
> OIE_003 INFO 2019-02-07T01:02:26.598Z Finished import operation.
Job Name: ImportExportMapping2-1541009746833
Start Time: 2019-02-07T01:02:24.915Z
End Time: 2019-02-07T01:02:26.598Z
Started by: janer2
Start Method: API
```

```
Source Organization: infadoc2
Status: SUCCESSFUL
```

IP addresses

Use the Orgs resource to get a list of trusted IP address ranges and add trusted IP address ranges. You can also enable or disable trusted IP address filtering.

Note: A sub-organization's trusted IP ranges are independent of the parent organization's trusted IP ranges.

GET request

To request a list of trusted IP address ranges for an organization or a sub-organization, use the following URI:

```
/public/core/v3/Orgs/<organization ID>/TrustedIP
```

GET response

If the request is successful, the response includes the following information for the organization:

Field	Type	Description
orgId	String	Organization ID.
enableIP	Boolean	Whether IP address filtering is enabled.
ipRanges	List	Trusted IP address ranges for the organization.
startIP	String	Included in the ipRanges object. The first IP address in a range of trusted IP addresses.
endIP	String	Included in the ipRanges object. The last IP address in a range of trusted IP addresses.

GET example

To get a list of trusted IP ranges for an organization, you might send a request similar to the following example:

```
GET <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfUuCCCLICcI/TrustedIP
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

You might receive a response similar to the following example:

```
{
    "id": "6MRgiMIfvdRfUuCCCLICcI",
    "enableIP": false,
    "ipRanges": [
        {
            "startIP": "10.29.5.1",
            "endIP": "10.29.5.2"
        }
    ]
}
```

PUT request

To add values of trusted IP ranges for an organization or a sub-organization and enable or disable trusted IP ranges, send a PUT request using the following URI:

```
/public/core/v3/Orgs/<organization ID>/TrustedIP
```

Note: If you add trusted IP address ranges for an organization, existing trusted IP address ranges are overwritten.

Include the following information:

Field	Type	Required	Description
enableIP	Boolean	No	Whether to enable IP address filtering. If enabled, at least one IP address range must be specified.
ipRanges	List	No	IP address ranges for the organization.
startIP	String	No	Include in the ipRanges object. The first IP address in a range of trusted IP addresses.
endIP	String	No	Include in the ipRanges object. The last IP address in a range of trusted IP addresses.

PUT response

If the request is successful, the response includes trusted IP address information for the specified organization.

PUT request example

To enable the trusted IP addresses feature for an organization and add a range of trusted IP addresses, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfUuCCCLICcI/TrustedIP
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
{
    "enableIP": true,
    "ipRanges": [
        {
            "startIP": "10.29.4.5",
            "endIP": "10.29.5.2"
        }
    ]
}
```

You might receive a response similar to the following example:

```
{
    "id": "6MRgiMIfvdRfUuCCCLICcI",
    "enableIP": true,
    "ipRanges": [
        {
            "startIP": "10.29.4.5",
            "endIP": "10.29.5.2"
        }
    ]
}
```

To add multiple ranges of trusted IP addresses, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfUuCCCLICcI/TrustedIP
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
{
    "enableIP": true,
    "ipRanges": [{"startIP": "10.29.4.5", "endIP":"10.29.5.2"}, {"startIP":
"10.29.10.1", "endIP":"10.29.10.5"}, {"startIP": "10.29.11.1", "endIP":"10.29.11.5"}]
}
```

You might receive a response similar to the following example:

```
{
     "id": "6MRgiMIfvdRfUuCCCLICcI",
     "enableIP": true,
     "ipRanges": [
            {
                 "startIP": "10.29.4.5",
                 "endIP": "10.29.5.2"
            },
            {
                 "startIP": "10.29.10.1",
                 "endIP": "10.29.10.5"
            }},
            {
                 "startIP": "10.29.11.1",
                 "endIP": "10.29.11.5"
            }
      ]
}
```

Key rotation

Use the key resource to get information about the organization's encryption key rotation settings and to change the settings.

You must have the Key Admin role to view or change key rotation settings.

Getting key rotation interval settings

You can use the key resource to see the current key rotation interval for your organization and valid key rotation intervals.

GET request

To get key rotation interval details, use the following URI:

```
/public/core/v3/key/rotationSettings
```

GET response

If successful, returns the following information:

Field	Type	Description
orgId	String	ID of the organization the user belongs to.
validRotationIntervals	List <String>	Valid key rotation intervals. To change the current key rotation interval to one of these values, send a PATCH request.
rotationInterval	String	The current key rotation interval used for the organization.

GET request example

To get key interval rotation details, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/key/rotationSettings
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If successful, you might receive a response similar to the following example:

```
{
    "orgId": "52ZSTB0IDK6dXxaEQLUaQu",
    "validRotationIntervals": [
        "90_DAYS",
        "120_DAYS",
        "180_DAYS",
        "365_DAYS"
    ],
    "rotationInterval": "365_DAYS"
}
```

Changing key rotation intervals

You can use the key resource to change the key rotation interval for the organization.

PATCH request

To change the key rotation interval, send a PATCH request using the following URI:

```
/public/core/v3/key/rotationSettings
```

Include the following information:

Field	Type	Required	Description
rotationInterval	String	Yes	The key rotation interval to use for the organization. Use one of the following values: - 90_DAYS - 120_DAYS - 180_DAYS - 365_DAYS Default is 365_DAYS.

PATCH response

Returns a success code if successful or an error object if errors occur.

PATCH example

To change the key rotation interval for an organization, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/key/rotationSettings
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "rotationInterval": "120_DAYS"
}
```

Licenses

Use the license resource to get license information about organizations and assign licenses to sub-organizations. In order to assign licenses to a sub-organization, you must log in to the parent organization as an administrator.

You can use the license resource to send the following requests:

- GET request to obtain an organization's editions, custom licenses, and custom limits.
- PUT request to update a sub-organization's license information.

Getting license details

Use a GET request to obtain an organization's editions, custom licenses, and custom limits.

GET request

To request license information for an organization or sub-organization, use the following URI:

```
/public/core/v3/license/org/<orgId>
```

GET response

Returns requested license information if successful or an error object if errors occur.

If successful, returns the following license information for the specified organization ID:

Field	Type	Description
customLicenses	List	Information about the organization's custom licenses.
licenseDef	String	Included in the customLicenses object. The unique identifier for the custom license.
expirationDate	String	Included in the customLicenses object. Time at which the license expires.

Field	Type	Description
licenseType		Included in the custom license object. Type of license. Includes the following values: - TRIAL - SUBSCRIPTION - FREE - NONE
assignedEditions	List	Information about the organization's editions in the edition object.
edition	String	Included in the edition object. Unique identifier for the limit.
expirationDate	String	Included in the edition object. Expiration date for the edition.
customLimits	List	Information about the organization's custom limits.
limitDefinition	String	Included in the customLimit object. Unique identifier for the limit.
value	Integer	Included in the customLimit object. Maximum uses of the limit. Use `-1` to indicate there is no maximum for the limit.

GET example

The following example shows a request for an organization's license information:

```
GET <baseApiUrl>/public/core/v3/license/org/1ax3wad2FEsz35asd2892s
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

The response includes license information for the organization as shown in the following example:

```
{
    "id": "1ax3wad2FEsz35asd2892s",
    "parentOrg": null,
    "customLicenses": [
        {
            "licenseType": "SUBSCRIPTION",
            "expirationDate": "2017-11-05T18:01:24Z",
            "licenseDef": "a5Xjp3VF3sjcyZUDa6UaWh"
        }
    ],
    "assignedEditions": [
        {
            "expirationDate": "2017-11-05T18:01:24Z",
            "edition": "4sdvnCrYEjfcKjTvAoigEF"
        },
        {
            "expirationDate": "2018-10-06T18:00:08Z",
            "edition": "5SPzPwEFvBEds8LzVwXX4K"
        }
    ],
    "customLimits": [
        {
            "value": -1,
            "limitDefinition": "09cX4Tmi1qSfrS997ORMYl"
```

```
        }
    ]
}
```

Updating a sub-organization's licenses

Use a PUT request to update a sub-organization's license information.

PUT request

In order to update licenses for a sub-organization, you must log in to the parent organization as an administrator.

This request overwrites the sub-organization's licenses with the licenses in the request. To make changes to a sub-organization's licenses, first request license information for the sub-organization, make your modifications in the object, and then use it as the request body.

To update license information for a sub-organization, use the following URI:

```
/public/core/v3/license/org/<orgId>
```

PUT response

Returns a success code if successful or an error object if errors occur.

PUT example

To change a sub-organization's licenses, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/license/org/<orgId>
Content-Type: application/json
Accept:application/json
INFA-SESSION-ID: <sessionId>

{
    "customLicenses": [
        {
            "licenseType": "SUBSCRIPTION",
            "expirationDate": "2017-11-05T18:01:24Z",
            "licenseDef": "a5Xjp3VF3sjcyZUDa6UaWh"
        }
    ],
    "assignedEditions": [
        {
            "expirationDate": "2017-11-05T18:01:24Z",
            "edition": "4sdvnCrYEjfcKjTvAoigEF"
        },
        {
            "expirationDate": "2018-10-06T18:00:08Z",
            "edition": "5SPzPwEFvBEds8LzVwXX4K"
        }
    ],
    "customLimits": [
        {
            "value": -1,
            "limitDefinition": "09cX4Tmi1qSfrS997ORMYl"
        }
    ]
}
```

Login

Use the login resource to log in to IDMC to use version 3 REST API resources.

The login response includes the session ID and base URL that you need to include in the REST API calls that you make during the session.

Use values from the following fields that are returned in the login response:

- sessionId. A REST API session ID or JWT that you include in the header for REST API calls.
  For more information about session IDs, see "Session IDs" on page 22.
- baseApiUrl. The base URL that you use in all version 3 resource URIs except for login, for example:
  `<baseApiUrl>/public/core/v3/<resource>`

Note: Your team might use multiple organizations such as an organization for development and an organization for testing. The user credentials that you use to log in determine the organization that you access.

POST request

To log in, use the following URL:

```
https://<cloud provider>-<region>.informaticacloud.com/saas/public/core/v3/login
```

The values for cloud provider and region correspond to the name of the POD (Point of Deployment) that your organization uses. The following table lists the POD names and the corresponding cloud provider and region to use in the login URL

POD name	Cloud provider-region
USW1	dm-us
USE2	dm-us
USW3	dm-us
USE4	dm-us
USW5	dm-us
USE6	dm-us
USW1-1	dm1-us
USW3-1	dm1-us
USW1-2	dm2-us
CAC1	dm-na
APSE1	dm-ap
APSE2	dm1-apse
APNE1	dm1-ap

POD name	Cloud provider-region
APNE2	dm-apne
APAUC1	dm1-apau
EMW1	dm-em
EMC1	dm1-em
UK1	dm-uk

For example, if your organization uses the APNE1 POD, use the following URL:

```
https://dm1-ap.informaticacloud.com/saas/public/core/v3/login
```

If you don't know the name of the POD that your organization uses, contact your organization administrator or Informatica Global Customer Support.

For more information about the POD names and corresponding cloud providers and regions, see the Product Availability Matrix (PAM) for IDMC on the Knowledge Base.

Use the following fields in a login object:

Field	Type	Required	Description
username	String	Yes	IDMC user name for the organization that you want to log in to. Maximum length is 255 characters.
password	String	Yes	IDMC password. Maximum length is 255 characters.

POST response

Returns user information if the request is successful. Returns the error object if errors occur.

Use the base URL and session ID returned in the response for subsequent requests during this session.

A successful request returns the following objects:

Field	Type	Description
products	Collection	Subscribed Informatica products.
name	String	Product name.
baseApiUrl	String	Returned in the product object. Base API URL for the product. Use in REST API requests.
userInfo	Collection	User information.
sessionId	String	Returned in the userInfo object. REST API session ID for the current session. Use in most REST API request headers. Maximum length of 16,000 characters.

Field	Type	Description
id	String	Returned in the userInfo object. User ID.
name	String	User name.
parentOrgId	String	Organization ID for the parent organization.
orgId	String	Returned in the userInfo object. ID of the organization the user belongs to. 22 characters.
orgName	String	Returned in the userInfo object. Organization name.
groups	Collection	User group information for the user.
status	String	Status of the user. Returns one of the following values: - Active - Inactive

POST example

To log in to your IDMC organization, you might use the following request:

```
POST https://dm-us.informaticacloud.com/saas/public/core/v3/login
Content-Type: application/json
Accept: application/json

{
    "username": "user@informatica.com",
    "password": "mypassword"
}
```

If successful, the response includes the products and userInfo objects which contain the baseApiUrl and sessionId values to use in subsequent calls, as shown in the following example:

```
{
     "products": [
         {
             "name": "Integration Cloud",
             "baseApiUrl": "https://usw3.dm-us.informaticacloud.com/saas"
         }
     ],
     "userInfo": {
         "sessionId": "9KA11tLGqxVcGeul8SABC1"
         "id": "9L1GFroXSDHe2IIg7QhXyZ",
         "name": "user",
         "parentOrgId": "52ZSTB0IDK6dXxaEXYZaQu",
         "orgId": "0cuQSDTq5xyzvN7x8r1xm1",
         "orgName": "MyOrg_INFA",
         "groups": {},
         "status": "Active"
     }
}
```

Using the session ID and base URL values in the above response as an example, to send a GET request to obtain license information, you might use the following request:

```
GET https://usw3.dm-us.informaticacloud.com/saas/public/core/v3/license/org/
0cuQSDTq5sikvN7x8r1xm1
```

```
Content-Type: application/json
Accept: application/json
```

Logout

Use the logout resource to log out of an organization and end the version 3 REST API session specified in the request.

Don't log out of a REST API session until all the requests that you've sent have been executed.

POST request

To log out of an organization and end the version 3 REST API session, include the session ID in the request header with the following URI:

```
https://<cloud provider>-<region>.informaticacloud.com/saas/public/core/v3/logout
```

POST response

Returns the 200 response code if the request is successful or an error object if errors occur.

POST example

To log out of your organization, use the following request:

```
POST https://dm-us.informaticacloud.com/saas/public/core/v3/logout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

Lookup

Use the lookup resource to look up an object's ID, name, path, or type attributes.

POST request

This resource is usually used to obtain an object's ID to use in an export request or job request. When you use this resource to obtain an object's ID, include the object path and type in the lookup request.

For a job request, use the value of the id field returned in the lookup response for the federated task ID field in the job request.

To request lookup information, use the following URI:

```
/public/core/v3/lookup
```

You can use the following fields in the objects object:

Field	Type	Required	Description
id	String	Required if object path and type not included.	Global unique identifier for the object.
path	String	Required with type if object ID not included.	Full path of the object including project, folder, and object name.
type	String	Required with path if object ID not included.	Type of object. Use one of the following values: - PROJECT - FOLDER Or use one of the following asset types: For Data Integration, the object can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DTT. Data transfer task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - CONNECTION. - AGENT. Secure Agent. - AGENTGROUP. Runtime environment. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_FILE_LISTENER. File listener. - MI_TASK. File Ingestion and Replication. - DBMI_TASK. Database Ingestion and Replication - APPMI_TASK. Application Ingestion and Replication. - WORKFLOW. Linear taskflow. - SCHEDULE - SCHEDULE_JOB - SCHEDULE_BLACKOUT. Schedule blackout period. - TASKFLOW - UDF. User-defined function. For Application Integration, the object can be one of the following types: - PROCESS - GUIDE - AI_CONNECTION - AI_SERVICE_CONNECTOR - PROCESS_OBJECT For Data Quality, the object can be one of the following types: - CLEANSE - DEDUPLICATE - DICTIONARY - EXCEPTION - LABELER - PARSE - RULE_SPECIFICATION - VERIFIER For B2B Gateway, the object can be one of the following types: - B2BGW_MONITOR

Field	Type	Required	Description
			- B2BGW_CUSTOMER - B2BGW_SUPPLIER Object types are not case sensitive.

POST response

Returns object information if successful or an error object if errors occur.

If successful, returns the following lookup information for each object:

Field	Type	Description
objects	Collection	Collection of objects for which lookup is requested.
id	String	Global unique identifier for the object. Use the value of this field as the value for taskFederatedId when you submit a job request.
path	String	Full path of the object including project, folder, and object name.
type	String	Type of object.
description	String	Description of the object.
updatedBy	String	User who updated the object.
updateTime	String	Last time the object was modified.

POST example

The following example shows a lookup request for eight objects:

```
POST <baseApiUrl>/public/core/v3/lookup
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3

{
    "objects": [{
        "id" : "2iXOKghGpySlgv6ifQImyl"
    }, {
        "path" : "Default/Synchronization Task1",
        "type" : "DSS"
    }, {
        "id" : "hTrrjm1kawScIm1BGEj6UV"
    }, {
        "path" : "My Project",
        "type" : "Project"
    }, {
        "path" : "My Project/DSS Tasks Folder",
        "type" : "Folder"
    }, {
        "path": "USW1R90FPZXD",
        "type": "Agent"
    }, {
        "path": "USW1R90FPZXD",
        "type": "AgentGroup"
    }, {
        "path": "FF_Conn_1",
        "type": "Connection"
```

```
    }]
}
```

The response includes lookup information for each object as shown in the following example:

```
{
    "objects": [
        {
            "id": "2iXOKghGpySlgv6ifQImyl",
            "path": "Default/Mapping1",
            "type": "DTEMPLATE",
            "description": "My Mapping 1",
            "updateTime": "2018-04-13T20:44:37Z"
        },
        {
            "id": "1fOqrwpFvLkimAkFFvIiwl",
            "path": "Default/Synchronization Task1",
            "type": "DSS",
            "description": "Sync Data Task",
            "updateTime": "2018-04-13T20:45:44Z"
        },
        {
            "id": "hTrrjm1kawScIm1BGEj6UV",
            "path": "My Project/Linear Taskflow1",
            "type": "WORKFLOW",
            "description": null,
            "updateTime": "2018-04-13T20:50:31Z"
        },
        {
            "id": "0EzsUXQ1RnkbKD6VyOukCb",
            "path": "My Project",
            "type": "Project",
            "description": "",
            "updateTime": "2018-04-13T20:40:07Z"
        },
        {
            "id": "dRNcMcUVou5lh5kihmEAWl",
            "path": "My Project/DSS Tasks Folder",
            "type": "Folder",
            "description": "DSS Tasks",
            "updateTime": "2018-04-13T20:49:17Z"
        },
        {
            "id": "1a8moeCNtm4fh5vGcUhxOj",
            "path": "USW1R90FPZXD",
            "type": "AGENT",
            "description": null,
            "updateTime": "2018-04-12T19:01:16Z"
        },
        {
            "id": "9iJP8TdBOMujA7eH2CTm8l",
            "path": "USW1R90FPZXD",
            "type": "AgentGroup",
            "description": null,
            "updateTime": "2018-04-12T19:01:17Z"
        },
        {
            "id": "5VkwOw6Jd8RglXEkxDu0ya",
            "path": "FF_Conn_1",
            "type": "Connection",
            "description": null,
            "updateTime": "2018-04-12T21:34:11Z"
        }
    ]
}
```

Metering data

If your organization has the Intelligent Cloud Data Management feature, you can download metering usage data using the REST API.

To download the metering data, you send an export job request, check the job status, and then download a ZIP file that contains the data. The ZIP file can't exceed 50 KB.

You can download the following data:

Summary IPU usage data

You can download summary IPU usage data for production organizations, additional production organizations, sub-organizations, and sandbox organizations for a specified date range. The ZIP file includes data for the requesting organization and the organizations under it.

For example, if the requesting organization is the production organization, the ZIP file contains data for the production organization and its additional production organizations, sub-organizations, and sandbox organizations. If the requesting organization is an additional production organization that has a sub-organization, the ZIP file contains data for the additional production organization and its sub-organization.

You can request usage information for all organizations in one CSV file, or you can receive individual CSV files for each organization.

Project-level details

You can download metering data by project and folder for a specified date range.

By default, the ZIP file includes data only for the requesting organization. You can request to receive data for the requesting organization and its sub-organizations.

You can request usage information for all organizations in one CSV file, or you can receive individual CSV files for each organization.

Asset-level details

You can download metering data by asset for a specified date range. You can specify a meter ID in the request to receive usage information for a specific meter.

Job-level details

You can specify a meter ID in the request to receive usage information for a specific meter.

If a service supports job-level detail reports, you can download job-level details for a specified date range. You can request job-level details for a particular meter or for all meters. The ZIP file includes data for the requesting organization.

Note: An organization can have a maximum of 5 active jobs. A job is active when the status is CREATED or PROCESSING.

Requesting summary IPU usage data

You can run a job to export summary IPU usage data for the parent organization and its linked organizations such as additional production organizations, sub-organizations, and sandbox organizations for a specified date range.

To request and receive summary IPU usage data, you must have access rights to the parent organization and all of the linked organizations.

After the job starts, you can check the job status. For more information, see "Getting the metering data export job status" on page 217.

When the job completes successfully, you can send a request to download the data in a ZIP file.

The data file includes the following columns:

- OrgId
- MeterId
- MeterName
- Date
- BillingPeriodStartDate
- BillingPeriodEndDate
- MeterUsage
- IPU
- Scalar
- MetricCategory
- OrgName
- OrgType
- IPURate

Note: There are two REST API resources available to request summary IPU usage data. The resources return the same data.

Request summary data with the new REST API resource

Use the ExportMeteringData resource for all new export requests.

POST request

To send an export job request, use the following URI:

```
/public/core/v3/license/metering/ExportMeteringData
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
startDate	String	Yes	Start of the date range in ISO 8601 format. For example, `2022-08-12T00:00:00Z`
endDate	String	Yes	End of the date range in ISO 8601 format. When you request summary data, the range can be a maximum of 180 days.
jobType	String	Yes	Type of metering data to export. Use SUMMARY.
combinedMeterUsage	Boolean	-	Indicates whether to return usage information for all organizations in one CSV file. Include one of the following values: - TRUE. Return usage information for all organizations in one CSV file. - FALSE. Return usage information for each organization in a separate CSV file. Default is FALSE.

Field	Type	Required	Description
allLinkedOrgs	String	-	Indicates whether to return usage information from the parent organization and all its linked organizations. Include one of the following values: - TRUE. Return usage information for the parent organization and all linked organizations. - FALSE. Return usage information for the parent organization only. Default is FALSE.
callbackUrl	String	-	A valid, publicly available URL where the service posts the job status.

Note: When you send a request with both allLinkedOrgs and combinedMeterUsage set to "true," the response excludes internal organization roll-up meters from the IPU usage total. This makes the IPU usage total match the usage total shown in the Administrator UI. For any other combination of values for these two fields, roll-up meters are included in the total. IDMC uses the roll-up meters to display the Organizations IPU Usage, Sub-Organizations IPU Usage, and Additional Production Organizations IPU Usage totals in Administrator.

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/license/metering/ExportMeteringData
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "startDate":"2024-08-12T00:00:00Z",
    "endDate":"2024-09-12T00:00:00Z",
    "jobType":"SUMMARY",
    "combinedMeterUsage":"TRUE",
    "allLinkedOrgs":"TRUE",
    "callbackUrl":"https://MyExportJobStatus.com"
}
```

POST response

The following table describes the response fields:

Field	Type	Description
jobID	String	ID of the export job.
status	String	Status of the export job.
orgId	String	Organization ID for the requesting organization.
userId	String	ID of the user who sent the request.
selectedOrgId	String	Organization ID for the requesting organization.
meterId	String	Meter ID.
startDate	String	Start of the date range.
endDate	String	End of the date range.

Field	Type	Description
callbackUrl	String	URL that the service uses to post the job status.
createTime	String	Time the export job was created.
updateTime	String	Time the export job was last updated.

POST response example

If successful, you might receive a response similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "CREATED",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "meterId": null,
    "startDate": "2024-08-12T00:00:00Z",
    "endDate": "2024-09-12T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": "2024-09-12T23:22:20Z",
    "updateTime": "2024-09-12T23:22:20Z"
}
```

Request summary data with the older REST API resource

You can continue to use the ExportMeteringDataAllLinkedOrgsAcrossRegion resource for existing export requests.

POST request

To send an export job request, use the following URI:

```
/public/core/v3/license/metering/ExportMeteringDataAllLinkedOrgsAcrossRegion
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
startDate	Date/time	Yes	Start of the date range.
endDate	Date/time	Yes	End of the date range. The range can be a maximum of 180 days.
combinedMeterUsage	Boolean	-	Indicates whether to return usage information for all organizations in one CSV file. Include one of the following values: - TRUE. Return usage information for all organizations in one CSV file. - FALSE. Return usage information for each organization in a separate CSV file. Default is FALSE.
callbackUrl	String	-	A valid, publicly available URL where the service posts the job status.

Note: When you send a request with combinedMeterUsage set to "true," the response excludes internal organization roll-up meters from the IPU usage total. This makes the IPU usage total match the usage total

shown in the Administrator UI. If the combinedMeterUsage value is set to "false," roll-up meters are included in the total. IDMC uses the roll-up meters to display the Organizations IPU Usage, Sub-Organizations IPU Usage, and Additional Production Organizations IPU Usage totals in Administrator.

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/license/metering/
ExportMeteringDataAllLinkedOrgsAcrossRegion
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "startDate":"2022-08-12T00:00:00Z",
    "endDate":"2022-10-25T00:00:00Z",
    "combinedMeterUsage":"FALSE",
    "callbackUrl":"https://MyExportJobStatus.com"
}
```

POST response

The following table describes the response fields:

Field	Type	Description
jobID	String	ID of the export job.
status	String	Status of the export job.
errorMessage	String	Error message, if any, that is associated with the job.
orgId	String	Organization ID for the requesting organization.
userId	String	ID of the user who sent the request.
selectedOrgId	String	Organization ID for the requesting organization.
startDate	Date/time	Start of the date range.
endDate	Date/time	End of the date range.
callbackUrl	String	URL that the service uses to post the job status.
createTime	String	Time the export job was created.
updateTime	String	Time the export job was last updated.
combinedMeterUsage	Boolean	Whether usage data for all organizations is returned in one CSV file.

POST response example

If successful, you might receive a response similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "CREATED",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "startDate": "2020-01-01T10:00:00Z",
```

```
    "endDate": "2022-12-31T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": null,
    "updateTime": null,
    "combinedMeterUsage":"FALSE"
}
```

If an error occurs, the response might be similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "FAILED",
    "errorMessage": "Exception occurred while processing request for org:
4wMFqGlxAKVlIFTixlTSOY.\ncom.informatica.cloud.errorutil.MicroServiceException: Get
meter usage request failed with exception: I/O error on POST request",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "startDate": "2020-01-01T10:00:00Z",
    "endDate": "2022-12-31T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": null,
    "updateTime": null
    "combinedMeterUsage":"FALSE"
}
```

Requesting project-level metering data

You can run a job to export IPU consumption data by project and folder.

After the job starts, you can check the job status. For more information, see "Getting the metering data export job status" on page 217.

When the job completes successfully, you can send a request to download the data. The data file includes the following columns:

- Date
- Project
- Folder
- Org ID
- Org Type
- Consumption (IPUs)

Note: The data file only includes product meter usage, such as Data Integration.

POST request

To send the export job request, use the following URI:

```
/public/core/v3/license/metering/ExportMeteringData
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
startDate	String	Yes	Start of the date range in ISO 8601 format. For example, `2022-08-12T00:00:00Z`
endDate	String	Yes	End of the date range in ISO 8601 format. When you request project-level data, the range can be a maximum of 30 days.

Field	Type	Required	Description
jobType	String	Yes	Type of metering data to export. Use PROJECT_FOLDER.
combinedMeterUsage	String	-	Indicates whether to return usage information for all organizations in one CSV file. Include one of the following values: - TRUE. Return usage information for all organizations in one CSV file. - FALSE. Return usage information for each organization in a separate CSV file. Default is FALSE.
allLinkedOrgs	String	-	Indicates whether to return usage information from the parent organization and all its linked organizations. Include one of the following values: - TRUE. Return usage information for the parent organization and all linked organizations. - FALSE. Return usage information for the parent organization only. Default is FALSE.
callbackUrl	String	-	A valid, publicly available URL where the service posts the job status.

POST request example

To send the export job request, you might use a request similar to the following example:

```
POST <BaseApiUrl>/public/core/v3/license/metering/ExportMeteringData
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>

{
    "startDate":"2024-08-12T00:00:00Z",
    "endDate":"2024-09-12T00:00:00Z",
    "jobType":"PROJECT_FOLDER",
    "combinedMeterUsage":"TRUE",
    "allLinkedOrgs":"TRUE",
    "callbackUrl":"https://MyExportJobStatus.com"
}
```

POST response

The following table describes the response fields:

Field	Type	Description
jobID	String	ID of the export job.
status	String	Status of the export job.
orgId	String	Organization ID for the requesting organization.
userId	String	ID of the user who sent the request.
selectedOrgId	String	Organization ID for the requesting organization.
meterId	String	Meter ID.

Field	Type	Description
startDate	String	Start of the date range.
endDate	String	End of the date range.
callbackUrl	String	URL that the service uses to post the job status.
createTime	String	Time the export job was created.
updateTime	String	Time the export job was last updated.

POST response example

If successful, you might receive a response similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "CREATED",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "meterId": null,
    "startDate": "2024-08-12T00:00:00Z",
    "endDate": "2024-09-12T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": "2024-09-12T23:21:19Z",
    "updateTime": "2024-09-12T23:21:19Z"
}
```

Requesting asset-level data

You can run a job to export metering data by asset.

After the job starts, you can check the job status. For more information, see "Getting the metering data export job status" on page 217.

When the job completes successfully, you can send a request to download the data. The data file includes the following columns:

- Meter ID
- Meter Name
- Date
- Asset Name
- Asset Type
- Project
- Folder
- Org ID
- Org Type
- Environment Name
- Environment Type
- Tier
- IPU Per Unit

Usage

Consumption (IPUs)

POST request

To send the export job request, use the following URI:

```
/public/core/v3/license/metering/ExportMeteringData
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
startDate	String	Yes	Start of the date range in ISO 8601 format. For example, `2022-08-12T00:00:00Z`
endDate	String	Yes	End of the date range in ISO 8601 format. When you request asset-level data, the range can be a maximum of 30 days.
meterId	String	-	Meter ID to request data for a single meter. If you don't specify a meter ID, data for all meters is included. For valid values, see "Meter IDs" on page 221.
jobType	String	Yes	Type of metering data to export. Use ASSET.
callbackUrl	String	-	A valid, publicly available URL where the service posts the job status.

POST request example

To send the export job, you might use a request similar to the following example:

```
POST <BaseApiUrl>/public/core/v3/license/metering/ExportMeteringData
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>

{
    "startDate":"2024-08-12T00:00:00Z",
    "endDate":"2024-09-12T00:00:00Z",
    "meterId":"a2nB20h1o0lc7k3P9xtWS8",
    "jobType":"ASSET",
    "callbackUrl":"https://MyExportJobStatus.com"
}
```

POST response

The following table describes the response fields:

Field	Type	Description
jobID	String	ID of the export job.
status	String	Status of the export job.
orgId	String	Organization ID for the requesting organization.
userId	String	ID of the user who sent the request.

Field	Type	Description
selectedOrgId	String	Organization ID for the requesting organization.
meterId	String	Meter ID.
startDate	String	Start of the date range.
endDate	String	End of the date range.
callbackUrl	String	URL that the service uses to post the job status.
createTime	String	Time the export job was created.
updateTime	String	Time the export job was last updated.

POST response example

If successful, you might receive a response similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "CREATED",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "meterId": "a2nB20h1o0lc7k3P9xtWS8",
    "startDate": "2024-08-12T00:00:00Z",
    "endDate": "2024-09-12T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": "2024-09-12T23:19:21Z",
    "updateTime": "2024-09-12T23:19:21Z"
}
```

Requesting job-level metering data

For certain meters, you can run a job to export job-level details for a particular service and meter for a specified date range.

After the job starts, you can check the job status. When the job completes successfully, you can send a request to download the data. For more information, see "Getting the metering data export job status" on page 217.

POST request

To send the export job request, use the following URI:

```
/public/core/v3/license/metering/ExportServiceJobLevelMeteringData
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
startDate	Date/time	Yes	Start of the date range.
endDate	Date/time	Yes	End of the date range. The range can be a maximum of 180 days.

Field	Type	Required	Description
allMeters	Boolean	Required when meterId is blank.	Indicates whether to return usage information for all meters. Include one of the following values: - TRUE. Return usage information for all meters. - FALSE. Return usage information for meter specified in meterId field. Default is FALSE.
meterId	String	Required when allMeters is FALSE.	Meter ID. For valid values, see "Meter IDs" on page 221.
callbackUrl	String	-	A valid, publicly available URL where the service posts the job status.

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/license/metering/ExportServiceJobLevelMeteringData
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "startDate":"2022-08-12T00:00:00Z",
    "endDate":"2022-10-25T00:00:00Z",
    "allMeters":"FALSE",
    "meterId":"3TaYTMo6BFYeNIABfVmH0n",
    "callbackUrl":"https://MyExportJobStatus.com"
}
```

POST response

The following table describes the response fields:

Field	Type	Description
jobID	String	ID of the export job.
status	String	Status of the export job.
errorMessage	String	Error message, if any, that is associated with the job.
orgId	String	Organization ID for the requesting organization.
userId	String	ID of the user who sent the request.
selectedOrgId	String	Organization ID for the requesting organization.
allMeters	Boolean	Whether usage information for all meters is included.
meterId	String	Meter ID.
startDate	Date/time	Start of the date range.
endDate	Date/time	End of the date range.

Field	Type	Description
callbackUrl	String	URL that the service uses to post the job status.
createTime	String	Time the export job was created.
updateTIme	String	Time the export job was last updated.

POST response example

If successful, you might receive a response similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "CREATED",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "allMeters":"FALSE",
    "meterId": 3TaYTMo6BFYeNIABfVmH0n,
    "startDate": "2020-01-01T10:00:00Z",
    "endDate": "2022-12-31T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": null,
    "updateTime": null
}
```

If an error occurs, the response might be similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "FAILED",
    "errorMessage": "Exception occurred while processing request for org:
4wMFqGlxAKVlIFTixlTSOY.\ncom.informatica.cloud.errorutil.MicroServiceException: Get
meter usage request failed with exception: I/O error on POST request",
    "orgId": "3TaYTMo6BFYeNIABfVmH0n",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "3TaYTMo6BFYeNIABfVmH0n",
    "allMeters":"FALSE",
    "meterId": 3TaYTMo6BFYeNIABfVmH0n,
    "startDate": "2020-01-01T10:00:00Z",
    "endDate": "2022-12-31T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": null,
    "updateTime": null
}
```

Getting the metering data export job status

Use a GET request to get the status of an export job for metering data.

GET request

To get the status of the export job, use the following URI:

```
/public/core/v3/license/metering/ExportMeteringData/<jobId>
```

GET response

The response includes the following fields:

Field	Type	Description
jobID	String	ID of the export job.
status	String	Status of the export job. One of the following values can be returned: - CREATED - PROCESSING - SUCCESS - FAILED - PARTIAL_SUCCESS If the status is PARTIAL_SUCCESS, the job completed but data couldn't be collected for all of the linked organizations due to errors.
errorMessage	String	Error message, if any, that is associated with the job.
orgId	String	Organization ID for the requesting organization.
userId	String	ID of the user who sent the request.
selectedOrgId	String	Organization ID for the requesting organization.
meterId	String	Meter ID. Applicable for jobs requesting job-level details.
startDate	Date/time	Start of the date range.
endDate	Date/time	End of the date range.
callbackUrl	String	The URL that the service uses to post the job status.
createTime	String	Time the export job was created.
updateTIme	String	Time the export job was last updated.

GET request example

To get the status of an export job, you might use the following request:

```
GET <BaseApiUrl>//public/core/v3/license/metering/ExportMeteringData/
4l1eKlA9ngChmu6gdv3FKs
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If successful, you might receive a response similar to the following example:

```
{
    "jobId": "4l1eKlA9ngChmu6gdv3FKs",
    "status": "SUCCESS",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "meterId": null,
    "startDate": "2022-08-01T10:00:00Z",
    "endDate": "2022-12-31T00:00:00Z",
```

```
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": "2022-11-23T10:04:37Z",
    "updateTime": "2022-11-23T10:04:37Z"
}
```

If the job is partially successful, the response might be similar to the following example:

```
{
    "jobId": "cYjwJNEF7OckWEmkSC1tSI",
    "status": "PARTIAL_SUCCESS",
    "errorMessage": "Short error message: [fetchEligibleJobForExecution] Exception in
executing
job. org.springframework.web.client.HttpServerErrorException$ServiceUnavailable: 503
Service
Unavailable: \"<html><body><h1>503 Service Unavailable</h1><EOL>No server is available
to handle
this request.<EOL></body></html><EOL>\",
    "orgId": "4wMFqGlxAKVlIFTixlTSOY",
    "userId": "aMxRLnYzdWtlkJvDbtPZOr",
    "selectedOrgId": "4wMFqGlxAKVlIFTixlTSOY",
    "meterId": null,
    "startDate": "2020-01-01T10:00:00Z",
    "endDate": "2022-12-31T00:00:00Z",
    "callbackUrl": "https://MyExportJobStatus.com",
    "createTime": null,
    "updateTime": null
}
```

Getting custom IPU alert configurations

Use a GET request to get the custom IPU alert thresholds that you configured for organizations or tags.

GET request

To get the custom IPU alert configurations for your organization, use the following URI:

```
/public/core/v3/metering/ipuAlert/org('<organization Id>')
```

To get the custom IPU alert configurations for your tags, use the following URI:

```
/public/core/v3/metering/ipuAlert/org('<organization Id>')/viewTagsPreference
```

GET response

The response includes the following fields for organization configurations:

Field	Type	Description
orgName	String	Name of the organizaiton.
orgId	String	ID of the organization.
parentOrgId	String	ID of the parent organization. This field only applies to sub-organizations. Otherwise, it's NULL.
thresholdValue	Integer	Threshold value configured.

Field	Type	Description
ipuConsumed	BigDecimal	Specifies how many IPUs are consumed. This field's value relates to the ipuThresholdPrefType field and displays either an absolute value or a percentage.
ipuThresholdPrefType	String	Type of threshold. Returns one of the following values: - ABSOLUTE. - PERCENTAGE.

The response includes the following fields for tag configurations:

Field	Type	Description
orgId	String	ID of the organization.
projectName	String	Name of the project.
folderName	String	Name of the folder. For project based thresholds, the folder name is NULL.
thresholdValue	Integer	Threshold value.
currentConsumption	BigDecimal	Specifies how many IPUs are consumed. This field's value relates to the ipuThresholdPrefType field and displays either an absolute value or a percentage.
ipuThresholdPrefType	String	Type of threshold. Returns one of the following values: - ABSOLUTE. - PERCENTAGE.

GET request example

To get the custom IPU alert configurations for your organization, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/metering/ipuAlert/org('3nqii4jGTiLda0M3ympy4E')
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

To get the custom IPU alert configurations for your tags, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/metering/ipuAlert/org('3nqii4jGTiLda0M3ympy4E')/
viewTagsPreference
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If succesful, you might receive a response similar to the following for organization configurations:

```
{
   "orgName": "Infa",
   "orgId": "3nqii4jGTiLda0M3ympy4E",
   "parentOrgId": null,
   "thresholdValue": 35,
   "ipuConsumed": 100,
   "ipuThresholdPrefType": "ABSOLUTE"
}
```

A succesful response for tag configurations would look like the following:

```
{
   "orgId": "3nqii4jGTiLda0M3ympy4E",
   "projectName": "My Project",
   "folderName": "Mapping Jobs",
   "thresholdValue": 20,
   "currentConsumption": 10,
   "ipuThresholdPrefType": "PERCENTAGE"
}
```

Downloading the metering data

When the export job completes successfully, use a GET request to download a ZIP file that contains the requested metering data.

The ZIP file can't exceed 50 KB. The file is available to download for 3 days after the job completes with a status of SUCCESS or PARTIAL_SUCCESS.

Note: You can download the ZIP file when the status of the job is PARTIAL_SUCCESS. However, the data in the ZIP file might be not be complete.


GET request

To download the ZIP file, use the following URI:

```
public/core/v3/license/metering/ExportMeteringData/<jobId>/download
```

GET response

If successful, you receive the ZIP stream in the response body and the response type will be application/zip. To download the file, save the response to a file as shown in the following image using Postman:

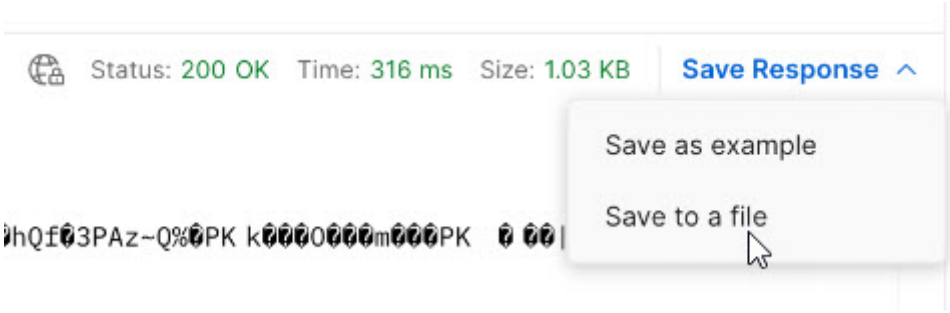

If the ZIP file exceeds 50 KB, the response is an error.

Meter IDs

When you create a request to export job-level or asset-level data, you can include a meter ID in the request to get data for a single meter.

The following table lists the meter IDs that you can use for each type of request:

Meter name	Request type	Meter ID
Advanced Data Integration	Asset and job	3TaYTMo6BFYeNIABfVmH0n
Advanced Data Integration with Advanced Serverless	Asset and job	8tXWie0ZQLWlG1cyxxLwQM

Meter name	Request type	Meter ID
Advanced Data Quality	Asset and job	3qh0uqEkx2KjCOnnPoB786
Advanced Data Quality with Advanced Serverless	Asset	gzNg8hRHqusd8TkG3qOpws
Advanced Pushdown Optimization	Asset and job	dMN0VeTW4cThHyPovp4GEX
Application Integration	Job	**Classic mode** - 3ulRkIV5Rt9lBbAPzeR5Kj **Turbo mode** - 4610adb7f5e945e98da246
Application Integration with Advanced Serverless	Job	**Classic mode** - bN6mes5n4GGciiMkuoDlCz **Turbo mode** - 4c6fec02782546879713aa
B2B Gateway	Asset	4136oNHy3dPeKfhCDzv9sl You can use this IPU meter to view the metering information for B2B Gateway prior to the October 2025 release.
B2B & Industry Solutions	Asset	68c4cbf9f1d84b6fb52e9f You can use this IPU meter to view the metering information for both B2B Gateway and Industry Solutions from the October 2025 release.
Cloud Data Integration for PowerCenter	Asset and job	eNYBoIrr3KDgtDN9E6lXid
Cloud Data Integration for PowerCenter - Change Data Capture and Real-Time	Asset and job	5rtHwmyoQ6HjmJt8mqXTwc
Cloud Data Integration for PowerCenter - Pushdown Optimization	Asset and job	8y72urWKS85gGBRVi6tJGA
Data Access Management - Rows Processed	Asset	8tJNWEJFAhojeO8ZAx6ZGT
Data Integration	Asset and job	a2nB20h1o0Ic7k3P9xtWS8
Data Integration with Advanced Serverless	Asset and job	35m9fB23Tykj4Fb3rN5q2J
Data Integration - Change Data Capture	Asset and job	0sDTANKFZBSbqjzKaXKImB
Data Loader	Asset	aBNLpHvKynqb33VYVDl3y2
Data Masking	Asset	1gUb7oRmAAXbpqeR8uRyye

Meter name	Request type	Meter ID
Data Quality	Asset	cPnPIT3XYAziLqIoXtd0KC
Data Quality with Advanced Serverless	Asset	kFBW9yYl4QHfru384cRMmp
Data Validation	Asset and job	2qJ9COoAhfMrsH7mCyh86M
Industry Solutions	Asset	7a2Fd4622Da044a38b7EB1 You can use this IPU meter to view the metering information for Industry Solutions prior to the October 2025 release.
Integration Hub	Asset and job	fqttkiGnSaHeXW255z4IcD
Mass Ingestion Application	Asset and job	i3H6LcmMIYjhUKa9VCi7CI
Mass Ingestion Application - Change Data Capture	Asset and job	4cPkZ5cZxjzc4SK2RHoqgy
Mass Ingestion Database	Asset and job	24WXkCWzeSHjFlQvLPDegF
Mass Ingestion Database - Change Data Capture	Asset and job	aluxJ8jOKmzdXwD0JuHRS1
Mass Ingestion Files	Asset and job	lCwc4CfL7EEhv9773egFC8
Mass Ingestion Streaming	Job	hr7GsCwFFmyfvfZQFn8v81
MDM Data Integration	Asset	jRkQw2YQksQjLqowj7Mveq
MDM Data Quality	Asset	2uzMPlZJYORjVW2JoVSl41
PC2CDI Modernization Service Assessment	Job	8y72urVKS85gSSRVi6tJGA
PC2CDI Modernization Service Conversion	Job	7y82urUWS85gGBRVi6tJGA

Object state synchronization

If you migrate an object from one organization to another, you can use the fetchState and loadState resources to synchronize the object states and run time attributes between the organizations.

For example, in Organization A, a mapping task with a Sequence Generator transformation has a NEXTVAL value of 3270. The same task was migrated to Organization B, however the NEXTVAL value in Organization B is 0. You want to synchronize the task's state between Organization A and Organization B so that the NEXTVAL value in both organizations has a value of 3270. You use the fetchState and loadState resources to synchronize the NEXTVAL value so that you can run the task in Organization B while preserving the sequence of numbers.

You can make up to 100 fetchState and 100 loadState calls each day.

The process of synchronizing object states is similar to the process of migrating objects. To synchronize object states, you fetch the states in the primary organization using the fetchState resource, and you load them into the target organization using the loadState resource.

fetchState

Use this resource with the loadState resource to synchronize object states across organizations.

Use the fetchState resource to create an object states package that you upload into other organizations using the loadState resource.

Creating the object states package includes a series of requests and responses, similar to the process of exporting assets. The end result is a ZIP file that contains the object states that you want to load to other organizations. To create the object states package, you perform the following tasks:

1. Send a lookup GET request to receive the object IDs for the object states you want to synchronize.
   IDMC returns the object IDs.

   See "Lookup" on page 202.
2. Send a fetchState POST request to start the job, using the object IDs returned in the lookup response.
   IDMC returns the job ID for the fetchState job.

   See "Starting a fetchState job" on page 225.
3. Send a fetchState GET request to get the status of the job, using the fetchState job ID for the object state package.
   IDMC returns the job ID and status. The response can also include a list of the object IDs and associated object states that are in the package.

   See "Getting the fetchState job status" on page 227.
4. Send a fetchState GET request to download the package.
   IDMC returns the package in a ZIP file.

   See "Downloading an object states package" on page 230.

The object states package contains state information in a JSON file for each object. Each file name uses the following format:

```
<task name>.<task type>.runtime.json
```

For example, a file with the name of `mt_MappingTask106.MTT.runtime.json` might contain the following data:

```
{
  "taskRun" : {
    "lastRuntime" : "2018-12-13T09:05:17.000Z"
  },
  "taskStateVariables" : [ {
    "category" : "TX_VARIABLE",
    "name" : "Sequence",
    "value" : "26908"
  } ]
}
```

You can change the following attributes in an object state file if required:

- lastRuntime in the taskRun object
- value in the taskStateVariables object (for mapping tasks only)

Other changes to the files in the package can cause unexpected behavior or errors.

Starting a fetchState job

Use a POST request to start a fetchState job.

POST request

To start the job, use the following URI:

```
/public/core/v3/fetchState
```

Include the following fields in the request:

Field	Type	Required	Description
name	String		Name of the fetchState job. If blank, default is job-<currentTimeInMilliseconds>
objects	Collection <complex type>	Yes	Object IDs for the states to include in the object state package. **Note:** Informatica recommends that you include no more than 1000 objects in a package.
id	String	Yes	Included in the objects object. Global unique identifier for the object for which the state is requested. This can be a project, folder, or asset ID.
includeDependencies	Boolean		Included in the objects object. Determines whether to include the dependent objects' states. Default is True.

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/fetchstate
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "name" : "fetchStateJob1",
    "objects" : [
        {
            "id": "17bgB85m5oGiXObDxwnvK9",
            "includeDependencies" : true
        },
        {
            "id": "1MW0GDAE1sFgnvWkvom7mK",
            "includeDependencies" : false
        },
        {
            "id": "iIVBNZSpUKFg4N6g2PKUox"
        }
    ]
}
```

POST response

If successful, returns the following information for the fetchState job:

Field	Type	Description
id	String	ID of the fetchState job.
createTime	String	Time object state package was created.
updateTime	String	Time object state package was last updated.
name	String	Name of the fetchState job.
startTime	String	Time the fetchState job was started.
endTime	String	Time the fetchState job ended.
status	Complex type	Status of the job.
state	String	Returned in the status object. Status of the fetchState job, such as In Progress, Success, or Failed.
message	String	Returned in the status object. Job status message.
objects	Collection	Collection of objects and object level status. Returns null if blank.

POST response examples

If successful, you might receive a response similar to the following example:

```
{
  "id": "7evG9CokA1whk8ehF3opKM",
  "createTime": "2018-10-26T08:15:48.502Z",
  "updateTime": "2018-10-26T08:15:48.502Z",
  "name": "fetchStateJob1",
  "startTime": "2018-10-26T08:15:48.501Z",
  "endTime": null,
  "status": {
    "state": "IN_PROGRESS",
    "message": "In Progress"
  },
  "objects": null
}
```

If you receive an error, you might see a response similar to the following example:

```
{
  "error": {
    "code": "MigrationSvc_034",
    "message": "User does not have required permissions.",
    "requestId": "2ataXVlgw3ydI1Yb2MA4sq"
  }
}
```

Getting the fetchState job status

Use a GET request to get the status of a fetchState job.

GET request

To get status of the fetchState job, use one of the following URIs:

- To receive status of the fetchState job, use the following URI, where <id> is the fetchState job ID:

  ```
  /public/core/v3/fetchState/<job id>
  ```

- To receive status for each object's state in the fetchState job, use the following URI:

  ```
  /public/core/v3/fetchState/<job id>?expand=objects
  ```

Continue polling the request until the state is SUCCESSFUL.

GET response

A request for status returns the following status information:

Field	Type	Description
id	String	ID of the fetchState job.
createTime	String	Time the fetchState job was created.
updateTime	String	Last time the fetchState job was updated.
name	String	Name of the fetchState job.
startTime	String	Start time of the fetchState job.
endTime	String	End time of the fetchState job.
status	Complex type	Status of the fetchState job.
state	String	Returned in the status object. State of the fetchState job, such as In Progress, Success, or Failed.
message	String	Returned in the status object. Job status message.
objects	Collection	Objects in the fetchState job. Returned when the URI includes `?expand=objects`
id	String	Returned in the objects object. Global unique identifier for the object requested.
name	String	Returned in the objects object. Name of the object..
path	String	Returned in the objects object. Complete path of the object.
description	String	Returned in the objects object. Description of the object.

Field	Type	Description
status	Complex type	Returned in the objects object. Status of the object.
state	String	Returned in the objects.status object. Status of the object, such as IN PROGRESS, SUCCESS, FAILED, or SKIPPED.
message	String	Returned in the objects.status object. Status message for the object.

GET request example

To receive the status of a fetchState job, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/fetchState/7evG9CokA1whk8ehF3opKM
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

To receive the status for each object's state in the fetchState job, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/fetchState/7evG9CokA1whk8ehF3opKM?expand=objects
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If your request for a fetchState job's status is successful, you might receive a response similar to the following example:

```
{
  "id": "7evG9CokA1whk8ehF3opKM",
  "createTime": "2018-10-26T08:15:48.502Z",
  "updateTime": "2018-10-26T08:15:48.502Z",
  "name": "fetchStateJob1",
  "startTime": "2018-10-26T08:15:48.501Z",
  "endTime": "2018-10-26T08:15:49.501Z",
  "status": {
    "state": "SUCCESSFUL",
    "message": "Export completed successfully."
  },
  "objects": null
}
```

If your request included status for individual objects, a successful response might be similar to the following example:

```
{
  "id": "7evG9CokA1whk8ehF3opKM",
  "createTime": "2017-10-26T08:15:49.000Z",
  "updateTime": "2017-10-26T08:15:50.000Z",
  "name": "fetchStateJob1",
  "startTime": "2018-10-26T08:15:49.000Z",
  "endTime": "2018-10-26T08:15:50.000Z",
  "status": {
    "state": "SUCCESSFUL",
    "message": "Export completed successfully."
  },
  "objects": [
    {
      "id": "1YmwRT083ZtfO04mUABaGF",
      "name": "Mapping1",
      "path": "/Mappings",
      "type": "DTEMPLATE",
```

```
      "description": "",
      "status": {
        "state": "SKIPPED",
        "message": null
      }
    },
    {
      "id": "46MhQv9oxrgbOD6qtosF8t",
      "name": "MappingTask1",
      "path": "/Tasks",
      "type": "MTT",
      "description": "",
      "status": {
        "state": "SUCCESSFUL",
        "message": null
      }
    },
    {
      "id": "7rM2ll1YjWYgHz4xiqRQO3",
      "name": "Default",
      "path": "/",
      "type": "Project",
      "description": "Auto-generated Default Project",
      "status": {
        "state": "SKIPPED",
        "message": null
      }
    },
    {
      "id": "8suj2pxCujqh5Vtmv0DsyP",
      "name": "Destination",
      "path": "null",
      "type": "Connection",
      "description": "Dst Connection",
      "status": {
        "state": "SKIPPED",
        "message": null
      }
    },
    {
            "id": "cpnxnIQMIYvkDOemLhFJ2q",
            "name": "03",
            "path": null,
            "type": "AgentGroup",
            "description": null,
            "status": {
                "state": "SKIPPED",
                "message": null
            }
        },
        {
            "id": "gJvuKZZuBifk9MfZFxtPAb",
            "name": "Source",
            "path": null,
            "type": "Connection",
            "description": "Src Connection",
            "status": {
                "state": "SKIPPED",
                "message": null
            }
        }
    ]
}
```

Downloading an object states package

Use a GET request to download an object states package.

GET request

To download the object states package, use the following URI:

```
/public/core/v3/fetchState/<id>/package
```

The <id> is the fetchState job ID.

GET response

If successful, you receive the ZIP stream in the response body and the response type is application/zip.

If unsuccessful, you might receive a response similar to the following example:

```
{
    "error": {
        "code": "MigrationSvc_017",
        "message": "Export request with identifier [6GnKs0tkLHdE6Hpd5nsWD] doesnt
exist.",
        "debugMessage": "Export request with identifier [6GnKs0tkLHdE6Hpd5nsWD] doesnt
exist.",
        "requestId": "0FrZZzXiEoafqCZUPqJsYd"
    }
}
```

loadState

Use this resource with the fetchState resource to synchronize object states across multiple organizations.

Loading object states includes a series of requests and responses. To load states into an organization, you perform the following tasks:

1. Send a loadState POST request to upload the ZIP file.
   IDMC returns the job ID for the loadState job.

   See "Uploading an object states package" on page 230.
2. Send a loadState POST request to load the object states. The request includes the loadState job ID and a list of object IDs associated with the states you want to load.
   IDMC returns the status of the job such as IN PROGRESS or SUCCESS, or returns an error message. The response also includes the source organization ID for the organization that created the object states package.

   See "Starting a loadState job" on page 231.
3. Send a loadState GET request to get the status of the job. You can also request status at the object level.
   IDMC returns the status of the job and if requested, status of each object in the package.

   See "Getting the loadState job status" on page 234.

Uploading an object states package

Use a POST request to upload an object states package.

POST request

To upload the object states package, use the following URI:

```
/public/core/v3/loadState/package
```

For Content-Type, use

```
multipart/form-data
```

In the request body, include a part with the name of `package`. For its content, use the object states ZIP file that you want to upload.

POST response

If successful, returns the following information for the loadState job:

Field	Type	Description
jobId	String	ID of the loadState job.
jobStatus	Collection	Status of the package upload.
state	String	Returned in the status object. Status of the loadState job, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the status object. Job status message.
checksumValid	Boolean	Indicates whether the object states package has valid checksum.

POST request example

To upload the object states package, you might use the following request:

```
POST <BaseApiUrl>/public/core/v3/loadState/package
Content-Type: multipart/form-data
Accept: multipart/form-data
INFA-SESSION-ID: <SessionId>
```

POST response example

You might receive a response similar to the following example:

```
{
    "jobId": "hUV9Uq1cKYtf8niqF09CWC",
    "jobStatus": {
        "state": "NOT_STARTED",
        "message": null
    },
    "checksumValid": true
}
```

Starting a loadState job

Use a POST request to specify and start a loadState job.

POST request

To specify the objects and start the loadState job, use the following URI:

```
/public/core/v3/loadState/<id>
```

The <id> is the loadState job ID received in the POST response for the object states package upload.

Include the following fields in the request:

Field	Type	Required	Description
name	String		Name of the loadState job. Default name is job-<currentTimeInMilliseconds>
importSpecification	Complex type		Used to specify the objects to include.
includeObjects	Collection<String>		Include in the importSpecification object. Objects to load. If not specified, the load includes all states in the object states package. If the specified object is a project, the load includes state of all objects that belong to the project and all dependent objects.
objectSpecification	Collection <complex type>		Include in the importSpecification object. Specifies the object properties.
sourceObjectId	String	Yes	Include in the objectSpecification object. The container ID in the object states package file. Required if objectSpecification is present.
targetObjectId	String	Yes	Include in the objectSpecification object. Used for Container to Container mapping. Required if objectSpecification is present.

POST request example

You might use a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/loadState/2oZb7vFI2QQg4ncd4AyCGn HTTP/1.1
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "name" : "stateImportJob",
    "importSpecification" : {
        "includeObjects" : ["iIVBNZSpUKFg4N6g2PKUox","ejZY66c19YUccBdbGwKG4P"],
        "objectSpecification" : [{
            "sourceObjectId" : "iIVBNZSpUKFg4N6g2PKUox"
        },
        {
            "sourceObjectId" : "5FA0DnMzeuDbYZnn3hdto9",
            "targetObjectId" : "5KgUiEkW95NkjLRRefWKiG"
        }]
    }
}
```

POST response

If successful, returns the following information for the loadState job:

Field	Type	Description
Id	String	ID of the loadState job.
createTime	String	Time the loadState job was created.
updateTime	String	Last time the loadState job was updated.
name	String	Name of the loadState job.
startTime	String	Start time of the loadState job.
endTime	String	End time of the loadState job.
status	Collection	Status of the package upload.
state	String	Returned in the status object. Load state for each individual object, such as IN PROGRESS, SUCCESS, FAILED, or SKIPPED.
message	String	Returned in the status object. Job status message.
objects	Collection	Objects included in the loadState job and object level status.
sourceOrgId	String	Organization ID of the organization that created the object states package.
checksumValid	Boolean	Indicates whether the import package has valid checksum.

POST response examples

If successful, you might receive a response similar to the following example:

```
{
    "id": "a7oaBNCyc8DdhxQD4mY4ul",
    "createTime": "2019-01-10T01:35:45.000Z",
    "updateTime": "2019-01-10T21:08:41.398Z",
    "name": "job-1547154520680",
    "startTime": "2019-01-10T21:08:41.389Z",
    "endTime": null,
    "status": {
        "state": "IN_PROGRESS",
        "message": "In Progress"
    },
    "objects": null,
    "sourceOrgId": "2wy21a5fkUphzTVNKaPowg",
    "checksumValid": true
}
```

If you receive an error, you might see a response similar to the following example:

```
{
    "error": {
        "message": "Import request with identifier [a7oaBNCyc8DdhxQD4mY4u] doesnt
exist.",
        "requestId": "9MopwrDFAOGbuMM9utiTqJ"
    }
}
```

Getting the loadState job status

Use a GET request to get the status of a loadState job.

GET request

To get status of the loadState job, use one of the following URIs, where <id> is the loadState job ID:

- To receive status of the loadState job, use the following URI:

  ```
  /public/core/v3/loadState/<id>
  ```

- To receive status for each object in the loadState job, use the following URI:

  ```
  /public/core/v3/loadState/<id>?expand=objects
  ```

GET response

A request for status returns the following import status information:

Field	Type	Description
id	String	ID of the loadState job.
createTime	String	Time the object states package was created.
updateTime	String	Last time the object states package was updated.
name	String	Name of the loadState job.
startTime	String	Start time of the loadState job.
endTime	String	End time of the loadState job.
status	Complex type	Status of the package upload.
state	String	Returned in the status object. Status of the loadState job, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the status object. Job status message.
sourceOrgId	String	ID of the organization that created the object states package.
objects	Collection	Objects included in the import.
sourceObject	Collection	Returned in the objects object. Object included in the import.
id	String	Returned in the objects.sourceObject object. Global unique identifier for the object included in the import.
name	String	Returned in the objects.sourceObject object. Name of the object included in the import.
path	String	Returned in the objects.sourceObject object. Complete path of the object included in the import.

Field	Type	Description
type	String	Returned in the objects.sourceObject object. Type of object included in the import.
description	String	Returned in the objects.sourceObject object. Description of the object included in the import.
targetObject	Collection	Returned in the objects object. Target object.
id	String	Returned in the objects.targetObject object. Global unique identifier for the target object.
name	String	Returned in the objects.targetObject object. Name of the target object.
path	String	Returned in the objects.targetObject object. Complete path of the target object.
type	String	Returned in the objects.targetObject object. Type of target object.
description	String	Returned in the objects.targetObject object. Description of target object.
status	String	Returned in the objects.targetObject object. Status of the target object.
status	Complex type	Returned in the objects object. Load status of the object.
state	String	Returned in the objects.status object. Load state of the object, such as IN PROGRESS, SUCCESS, or FAILED.
message	String	Returned in the objects.status object. Status message for the object.
checksumValid	Boolean	Returned in the objects.status object. Whether the checksum of the object was valid or not.

GET response example

If your request for a loadState job's status is successful, you might receive a response similar to the following example:

```
{
  "id": "2oZb7vFI2QQg4ncd4AyCGn",
  "createTime": "2017-10-26T08:40:09.000Z",
  "updateTime": "2017-10-26T08:55:56.000Z",
  "name": "stateImportJob",
  "startTime": "2017-10-26T08:55:53.000Z",
  "endTime": "2017-10-26T08:55:56.000Z",
  "status": {
    "state": "SUCCESSFUL",
    "message": "Import completed successfully."
```

```
  },
  "objects": null,
  "sourceOrgId": "2wy21a5fkUphzTVNKaPowg",
  "checksumValid": true
}
```

If your request included load status for individual objects, a successful response might be similar to the following example:

```
{
    "id": "3OpbyDU36UgkUhXXtvGsYA",
    "createTime": "2019-01-10T21:35:33.000Z",
    "updateTime": "2019-01-10T21:35:39.000Z",
    "name": "job-1547156138681",
    "startTime": "2019-01-10T21:35:39.000Z",
    "endTime": "2019-01-10T21:35:39.000Z",
    "status": {
        "state": "SUCCESSFUL",
        "message": "Import completed successfully."
    },
    "objects": [
        {
            "sourceObject": {
                "id": "46MhQv9oxrgbOD6qtosF8t",
                "name": "MappingTask",
                "path": "/Default",
                "type": "MTT",
                "description": ""
            },
            "targetObject": {
                "id": null,
                "name": "MappingTask",
                "path": "/Default",
                "type": "MTT",
                "description": null,
                "status": null
            },
            "status": {
                "state": "SUCCESSFUL",
                "message": "Overwrite existing."
            }
        }
    ],
    "sourceOrgId": "2wy21a5fkUphzTVNKaPowg",
    "checksumValid": true
}
```

Objects

Use the objects resource to get a list of an organization's assets. You might use this resource to find assets to export.

You can also use this resource to find object dependencies for an asset.

Note: This resource uses a dynamic rate limit. When the system experiences a large volume or size of requests, responses might be slow or fail with the error message, "too many requests."

Finding an asset

Use the objects resource to find assets in an organization using query parameters.

Query parameters include filters for asset type, tag, folder location, last update time, the user who last updated the asset, and source control metadata. Query parameters also include the maximum number of assets to return and the number of elements to skip.

The response can include up to 200 assets. If a request uses query parameters that result in more than 200 assets, you can send an additional request using the skip parameter to skip the assets that you received in the previous response.

The response does not include assets that you do not have privileges to read.

GET request

To request a list of assets, use the following URI:

```
/public/core/v3/objects?<query parameters>
```

You can use the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter.
limit	Int	Maximum number of assets to return, up to 200.
skip	Int	Number of elements to skip. For example, a value of 4 excludes the first four assets in the list.

You can use the following fields to define the query filter:

Field	Type	Operators	Description
type	String	== !=	Asset type. Type can be project, folder, or one of the following asset types: For Data Integration, the object can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_TASK. Mass ingestion task. - WORKFLOW. Linear taskflow. - TASKFLOW - UDF. User-defined function. - PROJECT - FOLDER For Application Integration, the object can be one of the following types: - PROCESS - GUIDE - AI_CONNECTION - AI_SERVICE_CONNECTOR - PROCESS_OBJECT For B2B Gateway, the object can be one of the following types: - B2BGW_MONITOR - B2BGW_CUSTOMER - B2BGW_SUPPLIER For MDM SaaS, the object can be one of the following types: - MDM_BUSINESS_ENTITY - MDM_REFERENCE_ENTITY - MDM_HIERARCHY - MDM_RELATIONSHIP - MDM_JOB_DEFINITION - MDM_AUTHORIZATION - MDM_BUSINESS_EVENT - MDM_REPORT_SET - MDM_REPORT - MDM_DYNAMIC_POOL - MDM_APPLICATION - MDM_SRC_SYSTEM - MDM_APP_COMPONENT - MDM_APP_PAGE For Data Quality, the object can be one of the following types: - CLEANSE - DEDUPLICATE - DICTIONARY - EXCEPTION

Field	Type	Operators	Description
			- LABELER - PARSE - RULE_SPECIFICATION - VERIFIER For Data Profiling, the object can be of the PROFILE type. Object types are not case sensitive.
location	String	==	The project and folder path where the assets are located, such as Default/Sales.
updateTime	Date	< <= == => > !=	The last time the assets were updated.
updatedBy	String	== !=	The user who last updated the assets. Use the userName value for the user.
tag	String	==	The tag associated with the assets.
sourceControl.checkedOutBy	String	==, !=	User who checked out the asset.
sourceControl.checkedOutTime	Date	<,<=,==,=>,>, !=	Time the asset was checked out.
sourceControl.hash	String	==, !=	Source control hash. Supports partial hash using a wildcard (*).
sourceControl.lastCheckinBy	String	==, !=	User who last checked in the asset.
sourceControl.lastCheckinTime	Date	<,<=,==,=>,>, !=	The last time the asset was checked in.
sourceControl.lastPullTime	Date	<,<=,==,=>,>, !=	The last time the asset was pulled.
sourceControl.sourceControlled	Boolean	==, !=	Whether the asset is source controlled.
customAttributes.publishedBy	String	==, !=	User who published the asset. Applicable to Application Integration.
customAttributes.publicationDate	Date	<,<=,==,=>,>, !=	Date the asset was published. Applicable to Application Integration.

GET request examples

The following examples show how you can use query parameters to request a list of assets:

- To request a list of Data Integration mapping tasks that were last updated November 21, 2018 or later, you might use the following URI:

```
/public/core/v3/objects?q=type=='MTT' and updateTime>=2018-11-21T12:00:00Z
```

- To request a list of Data Integration mapping tasks that were last updated November 21, 2018 or later, you might use the following URI:

  ```
  /public/core/v3/objects?q=type=='MTT' and updateTime>=2018-11-21T12:00:00Z
  ```

- To request a list of assets located in the Default/SalesOpps folder that were last updated before March 27, 2018, you might use the following URI:

  ```
  /public/core/v3/objects?q=location=='Default/SalesOpps' and
  updateTime<2018-03-27T12:00:00Z
  ```

- To request a list of assets associated with the UpsellOpps tag that were last updated January 10, 2018 or later, you might use the following URI:

  ```
  /public/core/v3/objects?q=tag=='UpsellOpps' and updateTime>=2018-01-10T12:00:00Z
  ```

- To request a list of up to 150 assets that were last updated December 30, 2017, excluding Data Integration mappings, you might use the following URI:

  ```
  /public/core/v3/objects?q=type!='MAPPING' and updateTime=2017-12-30T12:00:00Z&max=150
  ```

- To request a list of assets over the limit of 200, you might use the following URI in an additional request:

  ```
  /public/core/v3/objects?limit=200&skip=200
  ```

GET response

If successful, returns a list of assets and a count of the assets based on the query results. If errors occur, returns an error object.

Note: If the result size is large, for example, over 1000 objects, the count returned in the response might not be precise for up to 90 seconds. The fetch list returns all the results using the top and limit parameters included in the request, even though the returned count in the API might not have changed. Also, the count field might not be the first field in the response.

A successful response includes the following information:

Field	Type	Description
count	String	Number of assets matching the filter query.
objects	-	Contains information for each of the assets.
id	String	Global unique identifier for the asset. Use the value of this field as the value for taskFederatedId when you submit a job request.
path	String	Full path of the asset including project, folder, and object name.
type	String	Type of asset.
description	String	Description of the asset.
updatedBy	String	User name of the user who last updated the asset. If the asset is a system-created object such as the Default project and the Add-On Bundles folder, the value for this field is `Informatica`.
updateTime	String	Last time the asset was modified.
tag	String	Tags associated with the asset.
sourceControl	-	Contains source control metadata for the asset.
sourceControl.checkedOutBy	String	User who checked out the object.

Field	Type	Description
sourceControl.checkedOutTime	Date	Time the asset was checked out.
sourceControl.hash	String	Source control hash for the asset.
sourceControl.lastCheckinBy	String	User who checked out the object.
sourceControl.lastCheckinTime	Date	Time that the asset was checked in last.
sourceControl.lastPullTime	Date	Time that the asset was pulled last.
sourceControl.sourceControlled	Boolean	Whether the asset is source controlled.
customAttributes	-	Contains publishing metadata for the Application Integration asset.
customAttributes.publishedBy	String	Included in the customAttributes object. User who published the asset. Applicable to Application Integration.
customAttributes.publicationDate	Date	Included in the customAttributes object. Date that the asset was published. Applicable to Application Integration.

GET example

The following example shows a request to receive a list of assets that are in the P1 folder and limit the response to two assets:

```
GET /saas/public/core/v3/objects?q=location=='P1'&limit=2
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 3H05q5PicfolyDXnp3N06c
```

The response includes information for the first two assets as shown in the following example:

```
{
    "count": 4,
    "objects": [
        {
            "id": "1a3TnUrT2cfiwQGtkWQEUy",
            "path": "P1/F1",
            "type": "Folder",
            "description": "",
            "updatedBy": "mma@infa.com",
            "updateTime": "2018-12-17T00:29:29Z"
            "tags": [
                "tag3",
                "tag4"
             ],
            "sourceControl": {
                "checkedOutBy": "mma@infa.com",
                "checkedOutTime": "2020-05-05T17:37:13Z",
                "hash": "3e082fb9bcb2349e9f0a4fb516c739610c869391",
                "lastCheckinTime": "2020-05-05T04:51:09Z",
                "lastCheckinBy": "mma@infa.com",
                "lastPullTime": null,
                "sourceControlled": true
            },
            "customAttributes": {
                "publishedBy": "mma@infa.com"
            }
```

```
        },
        {
            "id": "0dGB1jBDWcuhrTxG9Gy1Kh",
            "path": "P1/Mapping1",
            "type": "DTEMPLATE",
            "description": "",
            "updatedBy": "mma@infa.com",
            "updateTime": "2018-12-10T02:25:14Z"
            "tags": [
                "tag3",
                "tag4"
            ],
            "sourceControl": {
                "checkedOutBy": null,
                "checkedOutTime": null,
                "hash": "a98327e09883bb30583574b48113bf1d3ab9d494",
                "lastCheckinTime": "2020-05-27T20:43:05Z",
                "lastCheckinBy": "mma@infa.com",
                "lastPullTime": null,
                "sourceControlled": true
            },
            "customAttributes": {
                "publishedBy": "mma@infa.com",
                "publicationDate": "2020-05-25T11:43:12Z"
            }
        }
    ]
}
```

Finding asset dependencies

Use the objects resource to get a list of dependencies for an asset. You can receive a list of objects that the asset uses or a list of objects that use the asset.

GET request

To request a list of dependencies for an asset, use the following URI:

```
/public/core/v3/objects/<objectId>/references?<parameters>
```

You can use the following parameters in the URI:

Parameter	Type	Required	Description
refType	Enum	Yes	Whether to list objects that the asset uses or objects that use the asset. Use one of the following values: - uses. Objects that the asset uses. - usedBy. Objects that use the asset. One reference type can be included in a request.
limit	Int	-	Maximum number of objects to return, up to 50. Default is 25.
skip	Int	-	Number of elements to skip from the beginning.. Default is 0.

GET response

If successful, returns a list of dependent objects and a count of the of the dependent objects based on the query results. If errors occur, returns an error object.

Note: If the result size is large, for example, over 1000 objects, the count returned in the response might not be precise for up to 90 seconds. The fetch list returns all the results using the top and limit parameters included in the request, even though the returned count in the API might not have changed. Also, the count field might not be the first field in the response.

A successful response returns the following information:

Field	Type	Description
id		Global unique identifier for the asset.
count		Number of dependent objects.
references	Collection <complex type>	Includes information for each object that uses or is used by the asset.
id	String	Included in the references object. Global unique identifier for the object.
appContextId	String	Included in the references object. ID of the object in context. To get details or make changes to the object, you can use the appContextId value as the object or task ID in a service-specific REST API call. Applicable only to Data Ingestion and Replication and Data Integration.

Field	Type	Description
path	String	Included in the references object. Full path of the object including project, folder, and object name.
type	String	Included in the references object. Type of object.
description	String	Included in the references object. Description of the object.
updateTime	String	Included in the references object. Last time the object was modified.

GET example

The following example is a request to receive a list of objects that an asset uses with a limit of 25 objects in the response:

```
GET /saas/public/core/v3/objects/1a3TnUrT2cfiwQGtkWQEUy/references?
refType=Uses&skip=0&limit=25
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 3H05q5PicfolyDXnp3N06c
```

The response includes a list of objects that the asset uses, as shown in the following example:

```
{
  "id": "1a3TnUrT2cfiwQGtkWQEUy",
  "count": 2,
  "references": [
    {
      "id": "2iXOKghGpySlgv6ifQImyl",
      "appContextId": "N0A1700000000001J",
      "path": "Default/Mapping1",
      "type": "DTEMPLATE",
      "description": "My Mapping 1",
      "updateTime": "2018-04-12T21:34:11Z"
    }
    {
      "id": "1fOqrwpFvLkimAkFFvIiwl",
      "appContextId": "N0A1700000000001K",
      "path": "FF_Conn_1",
      "type": "Connection",
      "description": null,
      "updateTime": "2018-04-12T21:33:11Z"
    }
  ]
}
```

Object permissions

Use the objects resource to configure user and user group permissions to objects such as assets, folders, and projects.

To configure permissions for an object, create an access control list (ACL) for each user or user group that might interact with the object. Each ACL specifies a user or user group and their access rights for the object.

For example, you want the NorthDevTeam and WestDevTeam user groups to have read/write access to the NorthwestAccounts project. You create an ACL to specify the NorthDevTeam's access rights to the NorthwestAccounts project, and then create an ACL to specify the WestDevTeam's access rights to the NorthwestAccounts project.

You can use the objects resource to perform the following tasks to manage permissions:

- Create ACLs for an object
- Update ACLs for an object
- Delete ACLs configured for an object
- Get permission details for a user or user group and an object
- Get your permission details for an object

Creating permissions

Create an access control list (ACL) for each user or user group and object pair.

POST request

To create an ACL, send a POST request using the following URI:

```
/public/core/v3/objects/<object ID/permissions
```

Include the following information:

Field	Type	Required	Description
principal	Object	Yes	Whether the ACL is defined for a user or user group and the name of the user or user group.
type	String	Yes	Include in principal object. Use one of the following values: - USER - GROUP
name	String	Yes	Include in principal object. Name of the object.
permissions	Object	Yes	Object permissions to assign to the user or group.
read	Boolean	Yes	Include in permissions object. Whether to allow the user or group to view the object.
delete	Boolean	Yes	Include in permissions object. Whether to allow the user or group to delete the object.
execute	Boolean	Yes	Include in permissions object. Whether to allow the user to run the task.
changePermission	Boolean	Yes	Include in permissions object. Whether to allow the user or group to change the permissions for the object.

POST response

If successful, returns the object with the details you included in the POST request plus the ACL ID.

POST example

To create user permissions for an object, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/objects/9EcgvBYZ9GGflOYr98GzOH/permissions
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "principal": {
        "type":"USER",
        "name":"larry@infa.com"
    },
    "permissions" : {
        "read" : true,
        "update" : true,
        "delete" : true,
        "execute" : true,
        "changePermission" : true
    }
}
```

You might receive a response similar to the following example:

```
[
    {
        "id": "0dXigiEiWRbb5rKLgPfFCe",
        "principal": {
            "type": "USER",
            "name": "larry@infa.com"
        },
        "permissions": {
            "read": true,
            "update": true,
            "delete": true,
            "execute": true,
            "changePermission": true
        }
    }
]
```

Updating permissions

You can update an access control list (ACL) to change the access rights that a user or user group has for an object.

PUT request

To update an ACL, send a PUT request using the following URI:

```
/public/core/v3/objects/<object ID>/permissions/<ACL ID>
```

Include the following information:

Field	Type	Required	Description
principal	Object	Yes	Whether the permission is defined for a user or user group and the name of the user or user group.
type	String	Yes	Include in principal object. Use one of the following values: - USER - GROUP

Field	Type	Required	Description
name	String	Yes	Include in principal object. Name of the object.
permissions	Object	Yes	Object permissions to assign to the user or group.
read	Boolean	Yes	Include in permissions object. Whether to allow the user or group to view the object.
delete	Boolean	Yes	Include in permissions object. Whether to allow the user or group to delete the object.
execute	Boolean	Yes	Include in permissions object. Whether to allow the user to run the task.
changePermission	Boolean	Yes	Include in permissions object. Whether to allow the user or group to change the permissions for the object.

PUT response

Returns a success code if successful or an error object if errors occur.

PUT example

To update user permissions for an object, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/objects/9EcgvBYZ9GGflOYr98GzOH/permissions/
4eMlUawPcahhK4eKBmDLsI
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "principal": {
        "type":"USER",
        "name":"scotty@infa.com"
    },
    "permissions" : {
        "read" : true,
        "update" : true,
        "delete" : true,
        "execute" : false,
        "changePermission" : true
    }
}
```

Deleting permissions

You can delete the permissions that a user or user group has for an object or delete all of the permissions configured for an object.

To delete the permissions that a user or user group has for an object, send a DELETE request using the following URI:

```
/public/core/v3/objects/<object ID>/permissions/<ACL ID>
```

To delete all of the permissions configured for an object, send a DELETE request using the following URI:

```
/public/core/v3/objects/<object ID>/permissions
```

For example, to delete all of the permissions for an object, you might send a request similar to the following request:

```
DELETE <baseApiUrl>/public/core/v3/objects/9EcgvBYZ9GGflOYr98GzOH/permissions
```

Getting permission details

You can get permission details for particular ACL ID or get the details for all permissions on an object.

GET request

To get the details for a particular ACL ID, send a GET request using the following URI:

```
/public/core/v3/objects/<object ID>/permissions/<ACL ID>
```

To get the details for all permissions on an object, send a GET request using the following URI:

```
/public/core/v3/objects/<object ID>/permissions
```

GET response

If successful, returns the following information for an ACL ID:

Field	Type	Description
id	String	ACL ID
principal	Object	Information about the user or group.
type	String	Whether the principal is a user or group.
name	String	User name or name of the user group.
permissions	Object	Object permissions for the user or group.
read	Boolean	Whether the user or group can view the object.
update	Boolean	Whether the user or group can update the object.
delete	Boolean	Whether the user or group can delete the object.
execute	Boolean	Whether the user or group can run the task.
changePermission	Boolean	Whether the user or group can change the permissions for the object.

Get example

To get the details for all permissions on a object, you might send a request that's similiar to the following example:

```
GET <BaseApiUrl>/public/core/v3/objects/2ymkhUZCl7XbUmN7dsq6Wc/permissions
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

You might receive a response similar to the following example:

```
[
    {
        "id": "4D6ER3yic8cjjE1GmxEKEi",
        "principal": {
            "type": "USER",
```

```
            "name": "saki@infa.com"
        },
        "permissions": {
            "read": true,
            "update": true,
            "delete": true,
            "execute": true,
            "changePermission": true
        }
    },
    {
        "id": "6g51tCtEX08bldfh8k6cgz",
        "principal": {
            "type": "GROUP",
            "name": "Everyone"
        },
        "permissions": {
            "read": false,
            "update": true,
            "delete": true,
            "execute": false,
            "changePermission": true
        }
    }
]
```

Checking permissions

You can send a request to check your access rights for a particular object or asset type. The response is based on the permissions and privileges for the user who started the current session.

You might want to check your access rights before you attempt to create an asset in a project or folder. If you don't have permissions for the project or folder, the value of "false" will show for each permission type.

GET request

To get your access rights for an object, send a GET request using the following URI:

```
/public/core/v3/objects/<object ID>/permissions/checkAccess
```

The response includes your access rights for the given object ID.

To find out if you can create a particular type of asset in a project or folder, send a GET request that includes the project or folder ID and the asset type. Use the following URI:

```
/public/core/v3/objects/<object ID>/permissions/checkAccess?type=<asset type>
```

For a list of asset types, see "Finding an asset" on page 237.

GET examples

To check your access rights for an object, you might send a request similar to the following example:

```
GET <baseApiUrl>/public/core/v3/objects/2ymkhUZCl7XbUmN7dsq6Wc/permissions/checkAccess
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

You might receive a response similar to the following example:

```
{
    "permissions": {
        "create": true,
        "read": true,
        "update": true,
        "delete": true,
        "execute": false,
        "changePermission": true
```

```
    }
}
```

To see if you have permissions to create a Data Integration mapping in a project, you might send a request similar to the following example:

```
GET <baseApiUrl>/public/core/v3/objects/2ymkhUZCl7XbUmN7dsq6Wc/permissions/checkAccess?
type=DTEMPLATE
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

You might receive a response similar to the following example:

```
{
    "permissions": {
        "create": true,
        "read": true,
        "update": true,
        "delete": true,
        "execute": true,
        "changePermission": true
    }
}
```

Passwords

You can manage passwords using the IDMC REST API.

You can perform the following tasks:

- Change your IDMC password if your current password has not expired. If you have administrator privileges, you can change other users' passwords.
- Reset a password if it has expired or if you forgot your password.

Changing a password

You can change your IDMC password if your current password has not expired. If you have administrator privileges, you can change other users' passwords.

POST request

To change your password, use the following URI:

```
/public/core/v3/Users/ChangePassword
```

Include the following information in the request:

Field	Type	Required	Description
newPassword	String	Yes	New password.
oldPassword	String	Required if you are changing your own password.	Current password.
userId	String	Required if an administrator is changing the password for another user.	IDMC user ID.

POST example

To change your password, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/Users/ChangePassword
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "newPassword" : "<new password>",
    "oldPassword" : "<old password>"
}
```

A successful request will not return a response. An unsuccessful request will return an error.

Resetting a password

You can reset a password if it has expired or if you forgot your password. To reset a password, you must include the security answer in the request.

POST request

To reset your password, include the security answer in the request. Use the following URI:

```
/public/core/v3/Users/ResetPassword
```

Include the following information in the request:

Field	Type	Required	Description
userId	String	Yes	IDMC user ID.
securityAnswer	String	Yes	Security answer to the user's security question.
newPassword	String	Yes	New password for the user.

POST example

To reset your password, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/Users/ResetPassword
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "userId" : "5N9JGth6pRYfOGjGKv3Q2D",
    "securityAnswer" : "Simba",
    "newPassword" : "<password>"
}
```

A successful request will not return a response. An unsuccessful request will return an error.

Privileges

Use the privileges resource to obtain a list of privileges that you can use for custom roles.

For information on adding and updating privileges in custom roles, see “Roles” on page 258

GET request

You can request a list of the privileges that you are currently licensed to use. Or, you can request a list of all of the privileges, including the privileges that are disabled due to expired licenses.

To request a list of enabled and default privileges, use the following URI:

```
/public/core/v3/privileges
```

To request a complete list of privileges that includes enabled, disabled, default, and unassigned privileges, include a query parameter in the URI as shown in this example:

```
/public/core/v3/privileges?q=status==All
```

GET response

If successful, returns the following information for each privilege:

Field	Type	Description
id	String	Privilege ID.
name	String	Name of the privilege.
description	String	Description of the privilege.
service	String	The IDMC service that applies to the privilege.
status	String	Status of the privilege. Returns one of the following values: - Enabled. License to use the privilege is valid. - Disabled. License to use the privilege has expired. - Unassigned. No license to use this privilege. - Default. Privilege included by default.

GET request example

To request a complete list of privileges, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/privileges?q=status==All
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response example

If you send a request to get all privileges, you might receive a response similar to the following example:

```
[
    {
        "id": "0aoGhY1lAG0iS0PUeLMwoz",
        "name": "changeperm.bservice",
        "description": "",
        "service": "DI",
        "status": "Enabled"
    },
    {
        "id": "0bsvE8I4soacaMt8RHx1yT",
        "name": "update.RULE_SPECIFICATION",
        "description": "update RULE_SPECIFICATION",
        "service": "DQ",
        "status": "Unassigned"
    },
    {
        "id": "0CFJVGBp7Cae8o9EVFakYz",
        "name": "view.RULE_SPECIFICATION",
        "description": "view RULE_SPECIFICATION",
```

```
        "service": "DQ",
        "status": "Disabled"
    },
    {
        "id": "11Ai6CJ2PU8jaJwiAwyR0I",
        "name": "changeperm.folder",
        "description": "Change Permission Folder",
        "service": "Admin",
        "status": "Default"
    },
    {
        "id": "11ertBcF3aUkT7vqmn23a3",
        "name": "view.auditLog",
        "description": "view audit log",
        "service": "Admin",
        "status": "Default"
    },
....
]
```

Projects and folders

You can create, update, and delete projects and folders through REST API calls.

Note: If a project or folder name contains special characters, space characters, or international characters, use URL encoding in the URI so that the server can properly decode the name. For example, for a project named "My Project," include the following text in the URI:

```
My%20Project
```

You can't use the following characters:

```
# ? ' | { } " ^ & [ ] / \
```

Creating a project

Create projects to organize your assets.

POST request

To create a project, send a POST request using the following URI:

```
/public/core/v3/projects
```

Note: You can create a maximum of 500 projects usingIDMC REST API.

Include the following information:

Field	Type	Required	Description
name	String	Yes	Name of the project.
description	String	-	Description of the project.

POST response

If successful, returns the projects object with the following details:

Field	Type	Description
id	String	Project ID.
name	String	Project name.
description	String	Project description.
updatedBy	String	User who created the project.
updateTime	String	Date and time the project was created.

POST example

To create a project, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/projects
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name":"Orders",
    "description": "Orders from all regions"
}
```

You might receive a response similar to the following example:

```
{
    "id": "kTKQG4Kv3uhgQleaOoUbWu",
    "name": "Orders",
    "description": "Orders from all regions",
    "updatedBy": "scotty@infa.com",
    "updateTime": "2022-04-12T23:40:40.395Z"
}
```

Updating a project

You can change a project's name or description if you have update permission for the project.

PATCH request

To update a project, send a PATCH request using one of the following URIs:

```
/public/core/v3/projects/<project ID>
```

```
/public/core/v3/projects/name/<project name>
```

Include the following information:

Field	Type	Required	Description
name	String	-	Name of the project.
description	String	-	Description of the project.

PATCH response

Returns a success code if successful or an error object if errors occur.

PATCH example

To update a project, you might send a request similar to the following example:

```
PATCH <baseApiUrl>/public/core/v3/projects/kTKQG4Kv3uhgQleaOoUbWu
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name":"Requests",
    "description": "Orders from all regions"
}
```

Deleting a project

You can delete a project from your organization if it doesn't contain any folders or assets and if you have delete permission for the project.

DELETE request

To delete a project, use one of the following URIs:

```
/public/core/v3/projects/<project ID>
```

```
/public/core/v3/projects/name/<project name>
```

DELETE example

To delete a project named "All Orders," you might send the following request:

```
DELETE <baseApiUrl>/public/core/v3/projects/name/All%20Orders
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

Creating a folder

You can create a folder in the Default project or specify a different project.

Note: You can create a maximum of 5000 folders usingIDMC REST API.

POST request

To create a folder in the Default project, use the following URI:

```
/public/core/v3/folders
```

To create a folder in a project other than the Default project, use one of the following URIs:

```
/public/core/v3/projects/<project ID>/folders
```

```
/public/core/v3/projects/name/<project name>/folders
```

Include the following information:

Field	Type	Required	Description
name	String	Yes	Name of the folder.
description	String	-	Description of the folder .

POST response

If successful, returns the folder object with the following details:

Field	Type	Description
id	String	Folder ID.
name	String	Folder name.
description	String	Folder description.
updatedBy	String	User who created the folder.
updateTime	String	Date and time the folder was created.

POST example

To create a folder in the Orders project, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/projects/name/Orders/folders
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name":"Northwest Orders",
    "description": "Orders from northwest offices"
}
```

You might receive a response similar to the following example:

```
{
    "id": "kTrYZ8fInr1Uw3ugQbOuWe",
    "name": "Northwest Orders",
    "description": "Orders from northwest offices",
    "updatedBy": "scotty@infa.com",
    "updateTime": "2022-04-13T18:20:40.325Z"
}
```

Updating a folder

You can change a folder's name or description if you have update permission for the folder.

PATCH request

To update a folder that's in the Default project, send a PATCH request using the following URI:

```
/public/core/v3/folders/<folder ID>
```

To update a folder that's in a project other than the Default project, use one of the following URIs:

```
/public/core/v3/projects/<project ID>/folders/<folder ID>
```

```
/public/core/v3/projects/name/<project name>/folders/name/<folder name>
```

Note: You can include project and folder IDs or project and folder names in a URI, but you can't include an ID and a name in a URI. For example, you can't include the project ID and the folder name.

Include the following information:

Field	Type	Required	Description
name	String	-	Name of the folder.
description	String	-	Description of the folder.

PATCH response

Returns a success code if successful or an error object if errors occur.

PATCH example

To change the name and description of the Northeast Orders folder, you might send a request similar to the following example:

```
PATCH <baseApiUrl>/public/core/v3/projects/name/Orders/folders/name/Northeast%20Orders
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name":"Northeast Requests",
    "description": "Requests from the northeast offices"
}
```

Deleting a folder

You can delete a folder if it is empty and you have delete permission for the folder. If the folder contains assets, you must delete or move the assets before you can delete it.

DELETE request

To delete a folder that's in the Default project, use the following URI:

```
/public/core/v3/projects/<folder ID>
```

To delete a folder that's in a project other than the Default project, use one of the following URIs:

```
/public/core/v3/projects/<project ID>/folders/<folder ID>
```

```
/public/core/v3/projects/name/<project name>/folders/name/<folder name>
```

Note: You can include project and folder IDs or project and folder names in a URI, but you can't include an ID and a name in a URI. For example, you can't include the project ID and the folder name.

DELETE example

To delete a folder named "Orders:West Coast," you might send the following request:

```
DELETE <baseApiUrl>/public/core/v3/projects/name/Orders/folders/name/Orders%3AWest
%20Coast
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

Roles

A role is a collection of privileges that you can assign to users and groups. Use the roles resource to get the details for roles in your organization. You can also use this resource to create, update, and delete custom roles.

Note: This resource uses a dynamic rate limit. When the system experiences a large volume or size of requests, responses might be slow or fail with the error message, "too many requests."

The number of users, user groups, and roles combined cannot exceed 1000 for an organization when using API calls. This limit doesn't apply when you create users, user groups, and roles in the user interface. If you need to change the limit for API calls, contact Informatica Global Customer Support.

Getting role details

You can request the details for all of your organization's roles or request the details for a particular role.

GET request

To get role details, use the following URI:

```
/public/core/v3/roles
```

To get the details for a particular role, you can include the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter. You can filter using one of the following fields: - roleId. Unique identifier for the role. - roleName. Name of the role.
expand	String	Returns the privileges associated with the role specified in the query filter. Include the following phrase in the query: `expand=privileges`

For example, to get details for the Business Manager role including privileges, you might use the following request:

```
/public/core/v3/roles?q=roleName=="Business Manager"&expand=privileges
```

GET response

If successful, returns the following information for each role:

Field	Type	Description
id	String	Role ID.
orgId	String	ID of the organization the role belongs to.
createdBy	String	User who created the role.
updatedBy	String	User who last updated the role.
createTime	String	Date and time the role was created.

Field	Type	Description
updateTime	String	Date and time the role was last updated.
roleName	String	Name of the role.
description	String	Description of the role.
displayName	String	Role name displayed in the user interface.
displayDescription	String	Description displayed in the user interface.
systemRole	Boolean	Whether the role is a system-defined role. Returns one of the following values: - True. Role is a system-defined role. - False. Role is a custom role.
status	String	Whether the organization's license to use the role is valid or has expired. Returns one of the following values: - Enabled - Disabled
privileges	Array	Privileges assigned to the role. Returned only when the URI includes `?expand=privileges` in a query.
id	String	Included in the privileges object. Privilege ID.
name	String	Included in the privileges object. Privilege name.
description	String	Included in the privileges object. Description of the privilege.
service	String	Included in the privileges object. The IDMC service that uses the privilege.
status	String	Included in the privileges object. Whether the organization's license to use the privilege is valid or has expired. Returns one of the following values: - Enabled - Disabled

GET request example

To get role details, you might use the following request:

```
GET <BaseApiUrl>/public/core/v3/roles
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID <SessionId>
```

GET response example

You might receive a response similar to the following example:

```
[
    {
        "id": "7EjAMAHsiOTcg8v29z0Gsl",
        "orgId": "52ZSTB0IDK6dXxaEQLUaQu",
```

```
            "createdBy": "ops-post-deploy-user",
            "updatedBy": "ops-post-deploy-user",
            "createTime": "2019-03-22T21:26:46.000Z",
            "updateTime": "2019-03-22T21:26:52.000Z",
            "roleName": "Business Manager",
            "description": "Role used for business managers",
            "displayName": "Application Integration Business Manager",
            "displayDescription": "Role used for business managers",
            "systemRole": true,
            "status": "Disabled",
            "privileges": [
                {
                    "id": "5Cgp0GcsmRejyxIgV4eXy1",
                    "name": "view.ai.console",
                    "description": "View application integration console",
                    "service": "ApplicationIntegration",
                    "status": "Disabled"
                },
                {
                    "id": "aReU2uciLYglcq0Ntvc2Ob",
                    "name": "view.ai.assets",
                    "description": "View  application integration assets",
                    "service": "ApplicationIntegration",
                    "status": "Disabled"
                },
                {
                    "id": "8zDel5v89cKfeMtM2FHFEw",
                    "name": "view.ai.designer",
                    "description": "View application integration designer",
                    "service": "ApplicationIntegration",
                    "status": "Disabled"
                }
            ]
        }
    ]
```


Creating a role

You can create custom roles for your organization.

POST request

To create a custom role, send a POST request using the following URI:

```
/public/core/v3/roles
```

Note: The number of users, user groups, and roles combined cannot exceed 1000 for an organization.

Include the following information:

Field	Type	Required	Description
name	String	Yes	Name of the role.
description	String	-	Description of the role.
privileges	Array	Yes	IDs of the privileges to assign to the role. A role must have at least one privilege assigned to it.

POST response

If successful, returns the roles object with the details you included in the POST request.

POST example

To create a custom role, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/roles
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name" : "CAIviewer",
    "description": "A role to view Application Integration designer and assets",
    "privileges" : ["aQwUdcM8RcQewA1yWphZ4F", "0nTOXl8dzEwlSFoM0cO8gI"]
}
```

You might receive a response similar to the following example:

```
{
    "id": "8j2MPlr8ubZgteIOwleSCk",
    "orgId": "cPYWk02I4aBeuLEvYRtaMS",
    "createdBy": "a@abc.com",
    "updatedBy": "a@abc.com",
    "createTime": "2019-03-20T18:33:33.361Z",
    "updateTime": "2019-03-20T18:33:33.428Z",
    "roleName": "CAIviewer",
    "description": "A role to view Application Integration designer and assets",
    "displayName": "CAIviewer",
    "displayDescription": "A role to view Application Integration designer and assets",
    "systemRole": false,
    "status": "Enabled",
    "privileges": [
        {
            "id": "0nTOXl8dzEwlSFoM0cO8gI",
            "name": "view.ai.designer",
            "description": "View application integration designer"
        },
        {
            "id": "aQwUdcM8RcQewA1yWphZ4F",
            "name": "view.ai.assets",
            "description": "View  application integration assets"
        }
    ]
}
```

Updating a role

You can add or remove privileges for custom roles.

Add privileges

To add privileges to a custom role, send a PUT request using one of the following URIs:

```
/public/core/v3/roles/<role ID>/addPrivileges
```

```
/public/core/v3/roles/name/<role name>/addPrivileges
```

Include an array of privilege names for the custom role.

For example, to give a role create and delete privileges for data transfer tasks, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/roles/cPYWk02I4aBeuLEvYRtaMS/addPrivileges
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "privileges" : ["create.data.transfer.task", "delete.data.transfer.task"]
}
```

You can use the privileges resource to get a list of privilege names that you can use. For more information, see "Privileges" on page 251.

Remove privileges

To remove privileges from a custom role, send a PUT request using one of the following URIs:

```
/public/core/v3/roles/<role ID>/removePrivileges
```

```
/public/core/v3/roles/name/<role name>/removePrivileges
```

You can't remove all of the privileges from a role. A role must have at least one privilege assigned to it.

Include an array of privilege names to remove for the custom role.

For example, to remove create and delete privileges for API collection from a role, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/roles/cPYWk053KnrUerLvYRtaMS/removePrivileges
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "privileges" : ["create.api.collection", "delete.api.collection"]
}
```

Deleting a role

You can delete custom roles from your organization.

To delete a role, send a DELETE request using the following URI:

```
/public/core/v3/roles/<role ID>
```

SAML group and role mapping

If your organization uses SAML single sign-on (SSO) for authentication and authorization, use the Orgs resource to map SAML roles and groups to IDMC roles. You can also use the Orgs resource to get details about SAML role and group mappings for an organization.

You can map up to 200 SAML groups or roles to an IDMC role. To find a list of IDMC roles, you can use the "Roles" on page 258 resource.

Before you map SAML groups and roles, ensure that the **Map SAML Groups and Roles** option is enabled in Administrator.

After you map SAML groups and roles to IDMC roles, you cannot configure user roles or groups for SAML SSO users individually in Administrator or through the IDMC REST API.

For more information about using SAML SSO, see *User Administration* in the Administrator help.

Adding SAML group mappings

Add SAML group mappings that map SAML groups to IDMC roles.

Note: You cannot map a SAML group or role that contains one of the following characters in the name:

- Pipe (|)

- Semicolon (;)
- Comma (,)

PUT request

To add a mapping between an IDMC role and SAML groups, use the following URI:

```
/public/core/v3/Orgs/<organization ID>/addSamlGroupMappings
```

If you map a SAML group that doesn't exist in IDMC, IDMC creates the group. If a group with the same name exists in IDMC, you can specify whether to reuse the group or create a new group. By default, IDMC creates a new group with _EXT appended to the name.

Include the following information:

Field	Type	Required	Description
groupMappings	Array	yes	Object that defines the IDMC role and SAML group mappings.
roleName	String	yes	Include in the groupMappings object. Display name of the IDMC role.
samlGroupNames	String	yes	Include in the groupMappings object Names of the SAML groups to map to the IDMC role.
reuseGroup	Boolean	--	Whether to use the existing IDMC group if the group name is the same as the SAML group name. If false, IDMC creates a new group. Default is false.

Returns the 204 response code if successful. Returns an error object if errors occurs.

PUT examples

To map the IDMC Admin role to the Security and Dev-Managers SAML groups, and map the IDMC Designer role to the Developers SAML group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfCCLITrLCcI/addSamlGroupMappings
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
{
    "groupMappings": [
        {
            "roleName": "Admin",
            "samlGroupNames": ["Security","Dev-Managers"]
        },
        {
            "roleName": "Designer",
            "samlGroupNames": "Developers"
        }
     ],
     "reuseGroup": "true"

}
```

To add another group mapping to map the IDMC Admin role to the Administrators SAML group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfCCLITrLCcI/addSamlGroupMappings
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
```

```
{
    "groupMappings": [
        {
            "roleName": "Admin",
            "samlGroupNames": "Administrators"
        }
    ],
     "reuseGroup": "true"
}
```

Now the IDMC Admin role is mapped to the Security, Dev-Managers, and Administrators SAML groups.

Adding SAML role mappings

Add SAML role mappings that map SAML roles to IDMC roles.

Note: You cannot map a SAML group or role that contains one of the following characters in the name:

- Pipe (|)
- Semicolon (;)
- Comma (,)

PUT request

To add a mapping between IDMC roles and SAML roles, use the following URI:

```
/public/core/v3/Orgs/<organization ID>/addSamlRoleMappings
```

Include the following information:

Field	Type	Required	Description
roleMappings	Array	yes	Object that defines the IDMC role and SAML role mappings.
roleName	String	yes	Include in the roleMappings object. Name of the IDMC role.
samlRoleNames	List	yes	Include in the roleMappings object Names of the SAML roles to map to the IDMC role.

Returns the 204 response code if successful. Returns an error object if errors occurs.

PUT example

To map the IDMC Developer role to the Data Designer and MS Deployer SAML roles, and map the IDMC Admin role to the Operator SAML role, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfCCLITrLCcI/addSamlRoleMappings
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
{
    "roleMappings": [
        {
            "roleName": "Developer",
            "samlRoleNames": ["Data Designer","MS Deployer"]
        },
        {
            "roleName": "Admin",
            "samlRoleNames": "Operator"
        }
```

```
    ]
}
```

Removing SAML group mappings

Remove SAML group mappings that map SAML groups to IDMC roles.

PUT request

To remove a SAML group mapping, send a PUT request using the following URI:

```
/public/core/v3/Orgs/<organization ID>/removeGroupMappings
```

Include the following information:

Field	Type	Required	Description
groupMappings	Array	yes	Object that defines the IDMC role and SAML group mappings.
roleName	String	yes	Include in the groupMappings object. Name of the IDMC role.
samlGroupNames	String	yes	Include in the groupMappings object. Names of the SAML groups to remove.

PUT example

If you want to remove the mapping between the IDMC Admin role and the Administrators SAML group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfCCLITrLCcI/removeSamlGroupMappings
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
{
    "groupMappings": [
        {
            "roleName": "Admin",
            "samlGroupNames": "Administrators"
        }
    ]
}
```

Removing SAML role mappings

Remove SAML role mappings that map SAML roles to IDMC roles.

PUT request

To remove a SAML role mapping, send a PUT request using the following URI:

```
/public/core/v3/Orgs/<organization ID>/removeSamlRoleMappings
```

Include the following information:

Field	Type	Required	Description
roleMappings	Array	yes	Object that defines the IDMC role and SAML role mapping.
roleName	String	yes	Include in the roleMappings object. Name of the IDMC role.
samlRoleNames	String	yes	Include in the roleMappings object. Names of the SAML roles to remove.

PUT example

If you want to remove the mapping between the IDMC Admin role and the Operator SAML role, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/Orgs/6MRgiMIfvdRfCCLITrLCcI/removeSamlRoleMappings
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
{
    "roleMappings": [
        {
            "roleName": "Admin",
            "samlRoleNames": "Operator"
        }
    ]
}
```

Getting SAML group mapping details

You can get the details for all the group mappings for an organization or use a filter to get group mapping details for a particular IDMC role or SAML group.

GET request

To get details for group mappings, use the following URI:

```
public/core/v3/Orgs/<organization ID>/SAMLConfig/groupMappings?<query parameters>
```

To get all the group mapping details for the organization, omit the query parameters.

To get details for a particular role or SAML group, you can include the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter string. You can filter using one of the following fields: - roleId - roleName - samlGroupNames
limit	Int	Maximum number of mappings to return. Default is 200.
skip	Int	Number of mappings to skip in the results. For example, a value of 4 excludes the first four mappings. Default is 0.

You can use the following fields to define the query filter:

Field	Type	Operators	Description
roleId	String	==	ID of the IDMC role.
roleName	String	==	Name of the IDMC role.
samlGroupNames	String	==	Name of the SAML group.

GET request example

To get the group mapping details for a particular IDMC role ID, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/Orgs/<organization ID>/SAMLConfig/groupMappings?
q=roleId=="94207429"
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response

Returns the group mapping details. Returns an error if errors occur.

If the **Map SAML Groups and Roles** option is enabled but no mappings exist, the response is empty.

If successful, returns a count of the available group mappings and the following information for each group mapping:

Field	Type	Description
count	String	Number of group mappings available.
groupMappings	-	Contains mapping information for each group mapping.
roleId	String	ID of the IDMC role.
roleName	String	Name of the IDMC role.
samlGroupNames	String	Names of the SAML groups.

GET response example

If successful, you might receive a response similar to the following example:

```
{
    "count": 2,
    "groupMappings": [
        {
            "roleId":"94207429",
            "roleName:"Admin",
            "samlGroupNames": [
                "Security", "Dev-Managers"
            ]
        },
        {
            "roleId":"149021",
            "roleName:"Monitor",
            "samlGroupNames": "Developers"
        }
    ]
}
```

Getting SAML role mapping details

You can get the details for all the role mappings for an organization or use a filter to get role mapping details for a particular IDMC role or SAML role.

GET request

To get details for role mappings, use the following URI:

```
public/core/v3/Orgs/<organization ID>/SAMLConfig/roleMappings?<query parameters>
```

To get all the role mapping details for the organization, omit the query parameters.

To get details for a particular role or SAML role, you can include the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter string. You can filter using one of the following fields: - roleId - roleName - samlRoleNames
limit	Int	Maximum number of mappings to return. Default is 200.
skip	Int	Number of mappings to skip in the results. For example, a value of 4 excludes the first four mappings. Default is 0.

You can use the following fields to define the query filter:

Field	Type	Operators	Description
roleId	String	==	ID of the IDMC role.
roleName	String	==	Name of the IDMC role.
samlRoleNames	String	==	Name of the SAML role.

GET request example

To get the role mapping details for a particular IDMC role ID, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/Orgs/03kEYNeduIJkVv0Qvq8NgY/SAMLConfig/roleMappings?
q=roleId=="94247429"
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

GET response

Returns the role mapping details. Returns an error if errors occur.

If the **Map SAML Groups and Roles** option is enabled but no mappings exist, the response is empty.

If successful, returns a count of the available role mappings and the following information for each role mapping:

Field	Type	Description
count	String	Number of role mappings available.
roleMappings	-	Contains mapping information for each role mapping.
roleId	String	ID of the IDMC role.
roleName	String	Name of the IDMC role.
samlRoleNames	String	Names of the SAML roles.

GET response example

If successful, you might receive a response similar to the following example:

```
{
    "count": 2,
    "roleMappings": [
        {
            "roleId":"94247429",
            "roleName:"Developer",
            "samlRoleNames": [
                "Data Designer", "MS Deployer"
            ]
        },
        {
            "roleId":"142321",
            "roleName:"Admin",
            "samlRoleNames": "Operator"
        }
    ]
}
```

Schedules

Use the schedule resource to request details of the schedules in the organization. You can also use this resource to create, update, or delete schedules.

You can use the following request methods:

- To get schedule details, use a GET request.
- To create a schedule, use a POST request.
- To update a schedule, use a PATCH request.
- To delete a schedule, use a DELETE request.

Note: To leverage full scheduling capabilities, use this resource instead of the REST API version 2 schedule resource.

Getting schedule details

Use the schedule resource to request details about the schedules in the organization.

GET request

To get the details of all schedules in the organization, use the following URI:

```
/public/core/v3/schedule
```

To get the details of a schedule using the schedule ID, use the following URI:

```
/public/core/v3/schedule/<id>
```

You can use a query parameter to get the details for specific schedules. For example, to get the details of all disabled schedules created by the user jdoe, you might use the following URI:

```
/public/core/v3/schedule?q=status=='Disabled' and createdBy=='jdoe'
```

You can use the following query parameters in the URI:

Parameter	Type	Description
status	Boolean	Status of the schedule. You can use the following operators: - == - !=
id	String	Schedule ID. Use the == operator.
scheduleFederatedId	String	Global unique identifier for the schedule. Use the == operator.
name	String	Schedule name. Use the == operator. If the schedule name includes a space, replace the space with `%20`
updateTime	Date	Last time the schedule was updated, in UTC format. You can use the following operators: - < - <= - == - => - > - !=
updatedBy	String	User who updated the schedule. Use the == operator.

Parameter	Type	Description
createdBy	String	User who created the schedule. Use the == operator.
interval	String	Interval or repeat frequency at which the schedule runs. You can use the following values: - None - Minutely - Hourly - Daily - Weekly - Biweekly - Monthly You can use the following operators: - == - !=

GET response

If successful, returns the schedules object for the requested schedule. If you request the details for all schedules, the schedules object contains details for each schedule in the organization.

Returns the error object if errors occur.

The schedules object includes the following attributes:

Field	Type	Description
id	String	Schedule ID.
scheduleFederatedId	String	Global unique identifier for the schedule.
name	String	Schedule name.
status	String	Status of the schedule. Returns one of the following values: - enabled - disabled
description	String	Description of the schedule.
createTime	Date/time	Time the schedule was created.
updateTime	Date/time	Last time the schedule was updated.
createdBy	String	User who created the schedule.
updatedBy	String	User who last updated the schedule.
startTime	Date/time	Date and time when the schedule starts running, in UTC format.
endTime	Date/time	Date and time when the schedule stops running.

Field	Type	Description
interval	String	Interval or repeat frequency at which the schedule runs tasks. Returns one of the following codes: - None. The schedule does not repeat. - Minutely. Tasks run on an interval based on the specified number of minutes, days, and time range. - Hourly. Tasks run on an hourly interval based on the start time of the schedule. - Daily. Tasks run on a daily interval based on the start time of the schedule. - Weekly. Tasks run on a weekly interval based on the start time of the schedule. - Biweekly. Tasks run every two weeks based on the start time of the schedule. - Monthly. Tasks run on a monthly interval based on the start time of the schedule.
frequency	Int	Frequency that the schedule runs for the specified interval. For example, if the interval is Hourly, a frequency of 2 means the task runs every 2 hours. Returned for Minutely, Hourly, and Daily intervals only.
rangeStartTime	Date/time	The start of the time range within a day that tasks run. Returned for Minutely and Hourly intervals only.
rangeEndTime	Date/time	The end of the time range within a day that tasks run. Returned for Minutely and Hourly intervals only.
sun	Boolean	Tasks run on Sunday. Returns one of the following codes: - true - false Returned for Minutely, Hourly, Weekly, and Biweekly intervals only.
mon	Boolean	Tasks run on Monday. See description for sun.
tue	Boolean	Tasks run on Tuesday. See description for sun.
wed	Boolean	Tasks run on Wednesday. See description for sun.
thu	Boolean	Tasks run on Thursday. See description for sun.
fri	Boolean	Tasks run on Friday. See description for sun.
sat	Boolean	Tasks run on Saturday. See description for sun.
weekDay	Boolean	Tasks run on weekdays only. Returns one of the following codes: - true - false Returned for the Daily interval only.
dayOfMonth	Int	Date of the month that tasks run. Returns a date between 1-28. Returned for the Monthly interval only.

Field	Type	Description
weekOfMonth	String	Week of the month that tasks run. Returns one of the following codes: - First. The tasks run in the first week of the month. - Second. The tasks run in the second week of the month. - Third. The tasks run in the third week of the month. - Fourth. The tasks run in the fourth week of the month. - Last. The tasks run in the last week of the month. Returned for the Monthly interval only.
dayOfWeek	String	Day of the week that tasks run. Returns one of the following codes: - Day. Tasks run on the first day or last day of the month, based on the selected weekOfMonth option. - Sunday - Monday - Tuesday - Wednesday - Thursday - Friday - Saturday Returned for the Monthly interval only.
timeZoneId	String	Time zone used for the day of the week, day of the month, or week of the month that the tasks run.

GET example

To request information about a schedule using the schedule ID, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/schedule/0An1v84VPL3k6kypOlxq06D0000000000003
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

A successful response might look like the following example:

```
{

"id": "0An1v84VPL3k6kypOlxq06D0000000000003",
"scheduleFederatedId" : "24bDtKg6d9SbaNlqDolHSR",
"name": "MI_FILE_LISTENER_10107",
"status":"enabled",
"createTime": "2018-12-03T17:34:45.000Z",
"updateTime": "2019-05-09T12:13:34.000Z",
"createdBy": "clouddemo",
"updatedBy": "vnath",
"startTime": "2020-06-09T00:15:55.000Z",
"interval": "Minutely",
"frequency": 5,
"rangeStartTime" : "",
"rangeEndTime" : "",
"mon": true,
"tue": true,
"wed": true,
"thu": true,
"fri": true,
"sat": true,
"sun": true,
"weekDay": false,
"dayOfMonth": 0,
"weekOfMonth": null,
"dayOfWeek": null,
"timeZoneId": "America/Los Angeles"

}
```

Creating a schedule

Use the schedule resource to create a schedule for the organization.

POST request

To create a schedule, use the following URI:

```
/public/core/v3/schedule
```

You can use the following fields in a schedules object:

Field	Type	Required	Description
name	String	Yes	Schedule name.
description	String	-	Description of the schedule.
status	String	-	Status of the schedule. Use one of the following values: - enabled - disabled Default is enabled.
startTime	Date/time	Yes	Date and time when the schedule starts running, in UTC format.
endTime	Date/time	-	Date and time when the schedule stops running. If you do not use this parameter, the schedule runs indefinitely.

Field	Type	Required	Description
interval	String	Yes	Interval or repeat frequency at which the schedule runs tasks. Use one of the following options: - None. Tasks run at the schedule start time. The schedule does not repeat. - Minutely. Tasks run on an interval based on the specified number of minutes, days, and time range. You can use the following parameters: - frequency. Frequency in minutes that tasks run. - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - startTimeRange and endTimeRange. The time range within a day tasks should run. Do not use if you want tasks to run all day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Hourly. Tasks run on an hourly interval based on the start time of the schedule. You can use the following parameters: - frequency. Frequency in hours that tasks run. - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - startTimeRange and endTimeRange. The time range within a day tasks should run. Do not use if you want tasks to run all day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Daily. Tasks run on a daily interval based on the start time configured for the schedule. You can use the following parameters: - frequency. Frequency in days that tasks run. - weekDay. Runs the tasks every weekday. Do not use if you want the tasks to run every day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Weekly. Tasks run on a weekly interval based on the start time of the schedule. You can use the following parameters: - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Biweekly. Tasks run every two weeks based on the start time of the schedule. You can use the following parameters: - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Monthly. Tasks run on a monthly interval based on the start time of the schedule. You can use the following parameters: - dayOfMonth. Day of the month when you want tasks to run, between 1-28. - dayOfWeek. Day of the week when you want tasks to run. - weekOfMonth. Week of the month when you want tasks to run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. To indicate when tasks should run, use dayOfWeek with weekOfMonth, such as the First Monday. Or use dayOfMonth, such as 1. Tip: To run tasks on the last day of the month, use the Last weekOfMonth parameter with the Day dayOfWeek parameter. Default is no interval.

Field	Type	Required	Description
frequency	Int	Yes	Repeat frequency for tasks. Use one of the following values: - For Minutely intervals, use one of the following options: 5, 10, 15, 20, 30, 45. Default is 5. - For Hourly intervals, use one of the following options: 1, 2, 3, 4, 6, 8, 12. Default is 1. - For Daily intervals, use number of days between 1 -30. Default is 1. Use with Minutely, Hourly, and Daily intervals only.
rangeStartTime	Date/time	-	The start of the time range within a day that you want tasks to run. Enter a date and time using standard date/time format. Only the time portion is used. Use with Minutely, Hourly, and Daily intervals only.
rangeEndTime	Date/time	-	The end of the time range within a day that you want tasks to run. Enter a date and time using standard date/time format. Only the time portion is used. Use with Minutely, Hourly, and Daily intervals only.
sun	Boolean	-	Runs tasks on Sunday at the configured time. You can use the sun - sat parameters to run tasks on several days of the week. Use with Minutely, Hourly, Weekly, and Biweekly intervals only.
mon	Boolean	-	Runs tasks on Monday at the configured time. See description for sun.
tue	Boolean	-	Runs tasks on Tuesday at the configured time. See description for sun.
wed	Boolean	-	Runs tasks on Wednesday at the configured time. See description for sun.
thu	Boolean	-	Runs tasks on Thursday at the configured time. See description for sun.
fri	Boolean	-	Runs tasks on Friday at the configured time. See description for sun.
sat	Boolean	-	Runs tasks on Saturday at the configured time. See description for sun.
weekDay	Boolean	-	Runs tasks on weekdays. Use one of the following options: - True. Run tasks on Monday through Friday. Does not run tasks on the weekend. - False. Run tasks every day. Use with the Daily interval only.

Field	Type	Required	Description
dayOfMonth	Int	-	Date of the month that tasks should run. Use a date between 1-28. Use with the Monthly interval only. Tip: To run tasks on the last day of the month, use the Last weekOfMonth parameter with the Day dayOfWeek parameter.
weekOfMonth	String	-	Week of the month that tasks should run. Use with dayOfWeek to specify the day and week of the month that tasks should run. For example, the First Day or the Last Wednesday of the month. Use one of the following options: - First - Second - Third - Fourth - Last Use with the Monthly interval only.
dayOfWeek	String	-	Day of the week that tasks should run. Use with weekOfMonth to specify the day and week of the month that tasks should run. For example, the First Day or the Last Wednesday of the month. Use one of the following options: - Day - Sunday - Monday - Tuesday - Wednesday - Thursday - Friday - Saturday Use with the Monthly interval only.
timeZoneId	String	-	Time zone that the schedule uses for the dayOfMonth, weekOfMonth, and dayOfWeek fields. Default is UTC. For more information, see Appendix A, "Time zone codes" on page 768

POST request example

To create a schedule, your request might look something like the following example:

```
POST <baseApiUrl>/public/core/v3/schedule
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
  "name": "my_schedule_1",
  "startTime" : "2023-09-18T22:00:00.000Z",
  "interval" : "Minutely",
  "frequency" : 5,
  "mon" : true,
  "wed" : true,
  "status" : "enabled"
}
```

POST response

Returns the schedules response object for the schedule that you created or updated.

Returns an error object if errors occur.

A successful response might look like the following example:


```
{
    "id": "8oKIw0ib9qMg1lGIWNPzkdD000000000000H",
    "createTime": "2023-09-10T11:48:28.000Z",
    "updateTime": "2023-09-10T11:48:28.000Z",
    "createdBy": "dev_scott",
    "updatedBy": "dev_scott",
    "name": "my_schedule_1",
    "rangeStartTime": null,
    "rangeEndTime": null,
    "status": "enabled",
    "frequency": 5,
    "description": null,
    "mon": true,
    "tue": false,
    "wed": true,
    "thu": false,
    "fri": false,
    "sat": false,
    "sun": false,
    "weekDay": false,
    "dayOfMonth": 0,
    "weekOfMonth": null,
    "dayOfWeek": null,
    "scheduleFederatedId": "1BrVocfYMAzeQHwXaaMWe7",
    "startTime": "2020-12-25T12:00:00.000Z",
    "endTime": null,
    "interval": "Minutely",
    "timeZoneId": "America/Los Angeles"
}
```


Updating a schedule

Use the schedule resource to update, enable, or disable a schedule.

PATCH request

Use the following URI:

```
/public/core/v3/schedule/<id>
```

Include the following fields in the request body:

Field	Type	Required	Description
name	String	-	Schedule name.
id	String	Yes	Schedule ID. You cannot update the schedule ID.
scheduleFederatedId	String	Yes	Global unique identifier for the schedule. You cannot update the federated schedule ID.
description	String	-	Description of the schedule.
status	String	-	Status of the schedule. Use one of the following values: - enabled - disabled Default is enabled.

Field	Type	Required	Description
startTime	Date/time	-	Date and time when the schedule starts running the tasks, in UTC format.
endTime	Date/time	-	Date and time when the schedule stops running the tasks. If you do not use this parameter, the schedule runs indefinitely.

Field	Type	Required	Description
interval	String	-	Interval or repeat frequency at which the schedule runs tasks. Use one of the following options: - None. Tasks run at the schedule start time. The schedule does not repeat. - Minutely. Tasks run on an interval based on the specified number of minutes, days, and time range. You can use the following parameters: - frequency. Frequency in minutes that tasks run. - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - startTimeRange and endTimeRange. The time range within a day tasks should run. Do not use if you want tasks to run all day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Hourly. Tasks run on an hourly interval based on the start time of the schedule. You can use the following parameters: - frequency. Frequency in hours that tasks run. - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - startTimeRange and endTimeRange. The time range within a day tasks should run. Do not use if you want tasks to run all day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Daily. Tasks run on a daily interval on the start time configured for the schedule. You can use the following parameters: - frequency. Frequency in days that tasks run. - weekDay. Runs the tasks every weekday. Do not use if you want the tasks to run every day. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Weekly. Tasks run on a weekly interval based on the start time of the schedule. You can use the following parameters: - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Biweekly. Tasks run every two weeks based on the start time of the schedule. You can use the following parameters: - sun, mon, tue, wed, thu, fri, sat. The days of the week that tasks run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. - Monthly. Tasks run on a monthly interval based on the start time of the schedule. You can use the following parameters: - dayOfMonth. Day of the month when you want tasks to run, between 1-28. - dayOfWeek. Day of the week when you want tasks to run. - weekOfMonth. Week of the month when you want tasks to run. - endTime. When the schedule should stop running. Do not use if you want the schedule to run indefinitely. To indicate when tasks should run, use dayOfWeek with weekOfMonth, such as the First Monday. Or use dayOfMonth, such as 1. Tip: To run tasks on the last day of the month, use the Last weekOfMonth parameter with the Day dayOfWeek parameter. Default is no interval.

Field	Type	Required	Description
frequency	Int	-	Repeat frequency for tasks. Use one of the following values: - For Minutely intervals, use one of the following options: 5, 10, 15, 20, 30, 45. Default is 5. - For Hourly intervals, use one of the following options: 1, 2, 3, 4, 6, 8, 12. Default is 1. - For Daily intervals, use number of days between 1 -30. Default is 1. Use with Minutely and Hourly intervals only.
rangeStartTime	Date/time	-	The start of the time range within a day that you want tasks to run. Enter a date and time using standard date/time format. Only the time portion is used. Use with Minutely and Hourly intervals only.
rangeEndTime	Date/time	-	The end of the time range within a day that you want tasks to run. Enter a date and time using standard date/time format. Only the time portion is used. Use with Minutely and Hourly intervals only.
sun	Boolean	-	Runs tasks on Sunday at the configured time. You can use the sun - sat parameters to run tasks on several days of the week. Use with Minutely, Hourly, Weekly, and Biweekly intervals only.
mon	Boolean	-	Runs tasks on Monday at the configured time. See description for sun.
tue	Boolean	-	Runs tasks on Tuesday at the configured time. See description for sun.
wed	Boolean	-	Runs tasks on Wednesday at the configured time. See description for sun.
thu	Boolean	-	Runs tasks on Thursday at the configured time. See description for sun.
fri	Boolean	-	Runs tasks on Friday at the configured time. See description for sun.
sat	Boolean	-	Runs tasks on Saturday at the configured time. See description for sun.
weekDay	Boolean	-	Runs tasks on weekdays. Use one of the following options: - True. Run tasks on Monday through Friday. Does not run tasks on the weekend. - False. Run tasks every day. Use with the Daily interval only.

Field	Type	Required	Description
dayOfMonth	Int	-	Date of the month that tasks should run. Use a date between 1-28. Use with the Monthly interval only. Tip: To run tasks on the last day of the month, use the Last weekOfMonth parameter with the Day dayOfWeek parameter.
weekOfMonth	String	-	Week of the month that tasks should run. Use with dayOfWeek to specify the day and week of the month that tasks should run. For example, the First Day or the Last Wednesday of the month. Use one of the following options: - First - Second - Third - Fourth - Last Use with the Monthly interval only.
dayOfWeek	String	-	Day of the week that tasks should run. Use with weekOfMonth to specify the day and week of the month that tasks should run. For example, the First Day or the Last Wednesday of the month. Use one of the following options: - Day - Sunday - Monday - Tuesday - Wednesday - Thursday - Friday - Saturday Use with the Monthly interval only.
timeZoneId	String	-	Time zone that the schedule uses for the dayOfMonth, weekOfMonth, and dayOfWeek fields. Default is UTC. For more information, see Appendix A, "Time zone codes" on page 768

PATCH example

To update a schedule, your request might look something like the following example:

```
PATCH <baseApiUrl>/public/core/v3/schedule/0An1v84VPL3k6kypOlxq06D0000000000003
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "schedules": [
        {
            "id": "0An1v84VPL3k6kypOlxq06D0000000000003",
            "scheduleFederatedId": "1KiAwzRVIOTlAtCjPtzV4H",
            "name": "V3_Test_CreateSchedule_1569944878",
            "status": "disabled",
            "description": "Update version 2",
            "sat": true
        }
    ]
}
```

A successful response might look like the following example:

```
{
    "id": "0An1v84VPL3k6kypOlxq06D0000000000003",
    "createTime": "2022-09-24T15:34:36.000Z",
    "updateTime": "2022-10-01T15:47:59.442Z",
    "createdBy": "dev_larry",
    "updatedBy": "dev_larry",
    "name": "V3_Test_CreateSchedule_1569944878",
    "rangeStartTime": null,
    "rangeEndTime": null,
    "status": "disabled",
    "frequency": 1,
    "description": "Update version 2",
    "mon": false,
    "tue": false,
    "wed": true,
    "thu": false,
    "fri": false,
    "sat": true,
    "sun": false,
    "weekDay": false,
    "dayOfMonth": 0,
    "weekOfMonth": null,
    "dayOfWeek": null,
    "scheduleFederatedId": "1KiAwzRVIOTlAtCjPtzV4H",
    "startTime": "2022-12-25T12:00:00.000Z",
    "endTime": null,
    "interval": "Hourly",
    "timeZoneId": "America/Los Angeles"
}
```

Deleting a schedule

Use the schedule resource to delete a schedule.

To delete a schedule, send a DELETE request using the following URI:

```
/public/core/v3/schedule/<id>
```

A successful response returns the 204 response code. If errors occur, an error object is returned.

SCIM

If your organization pushes user and group information to IDMC using SCIM 2.0, you can manage SCIM tokens and use a SCIM token to get SCIM-managed users and groups.

Before you can modify SCIM tokens, ensure that the **Map SAML Groups and Roles** and **Enable IdP to push users/groups using SCIM 2.0** options are enabled in Administrator. Your user role must also have privileges to read and update organizations.

For more information about using SCIM 2.0 and about Administrator asset privileges, see *User Administration* in the Administrator help.

Managing SCIM tokens

List, create, and delete SCIM tokens.

Listing SCIM tokens

Use the scimTokens resource to request details about the SCIM tokens that you created.

GET request

To get a list of the SCIM tokens you created, use the following URI:

```
/public/core/v3/scimTokens
```

GET response

If successful, returns each SCIM token that you created and its expiration date.

Returns the error object if errors occur.

GET example

To list the SCIM tokens you created, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/scimTokens
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

A successful response might look like the following example:

```
[
    {
        "id": "im2hLfwsRCvl6WG64Geqi0",
        "value": "8fiXOaFR**************",
        "expiry": "2025-04-28T21:05:31.000Z",
        "status": "active"
    }
]
```

Creating a SCIM token

Use the scimTokens resource to create a SCIM token. If you already have two tokens, you'll need to delete one before you can create a new token, even if one or both tokens are expired.

POST request

To create a SCIM token, use the following URI:

```
/public/core/v3/scimTokens
```

POST request example

To create a token, your request might look something like the following example:

```
POST <baseApiUrl>/public/core/v3/scimTokens
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

POST response

Returns the token response object for the token that you created.

Returns an error object if errors occur.

A successful response might look like the following example:

```
{
    "id": "hTc5rzwEFKMh761VofJoG1",
    "value":
"k7UxoAAAACMAAAACAQAAAAEBAgAAAAyufel1d7nvOzJh5khiVmxxXrnYJl1iR23aBQtVPKPLTiB0qqLCp-
davEg50diXElP4-Q==0s3URI0up6Ebu4sLzgtSGC",
    "expiry": "2025-05-06T04:54:53.594Z",
    "status": "active"
}
```

Deleting a SCIM token

Use the scimTokens resource to delete a SCIM token.

To delete a SCIM token, send a DELETE request using the following URI:

```
/public/core/v3/scimTokens/<token_id>
```

A successful response returns the 204 response code. If errors occur, an error object is returned.

Getting SCIM-managed user details

Get details for a SCIM-managed user based on their user name.

GET request

To get details for a SCIM-managed user, use the following URI:

```
/scim-service/Users?filter=userName eq \"<user name>\"
```

The following table describes the request headers:

Request header	Description
Content-Type	Media type of the request body. Use application/scim+json.
Authorization	SCIM token to authenticate to the request.

The following table describes optional fields in the request body:

Field	Type	Description
startIndex	Integer	Index of the first result to return using 1-based indexing.
count	Integer	Number of users to return.
sortOrder	String	Order to sort results. Use "asc" for ascending and "desc" for descending.
schemas	Array of Strings	List of schema URIs for user types.

GET response

If successful, returns details for the SCIM-managed user.

GET example

The following sample request gets details for a SCIM-managed user:

```
GET <serverUrl>/scim-service/Users?filter=userName eq \"scim_user\"
Content-Type: application/scim+json
Authorization: <SCIM token>
```

```
{
  "startIndex": 1,
  "count": 1000,
  "sortOrder": "asc",
  "schemas": [
    "urn:ietf:params:scim:schemas:core:2.0:User",
    "urn:ietf:params:scim:schemas:extension:enterprise:2.0:User"
  ]
}
```

A successful response might look like the following example:

```
{
  "schemas": [
    "urn:ietf:params:scim:api:messages:2.0:ListResponse"
  ],
  "totalResults": 1,
  "itemsPerPage": 1,
  "startIndex": 1,
  "Resources": [
    {
      "id": "0123abcd4567efgh8901ij",
      "externalId": "scim_user",
      "userName": "scim_user@informatica.onmicrosoft.com",
      "displayName": "scim_user",
      "title": "Software Engineer",
      "active": true,
      "emails": [
        {
          "value": "scim_user@informatica.onmicrosoft.com",
          "type": "work",
          "primary": true
        }
      ],
      "phoneNumbers": [
        {
          "value": "123456789",
          "type": "work",
          "primary": true
        }
      ],
      "addresses": [
        {
          "locality": "Austin",
          "country": "US",
          "type": "work",
          "primary": true
        }
      ],
      "schemas": [
        "urn:ietf:params:scim:schemas:core:2.0:User",
        "urn:ietf:params:scim:schemas:extension:enterprise:2.0:User"
      ],
      "urn:ietf:params:scim:schemas:extension:enterprise:2.0:User": {
        "department": "Software Development"
      },
      "meta": {
        "resourceType": "User",
        "created": "2025-01-15T13:22:56.000Z",
        "lastModified": "2025-01-25T22:06:24.000Z",
        "location": "http://dm-em.informaticacloud.com:443/scim-service/Users/
0123abcd4567efgh8901ij"
      }
    }
  ]
}
```

Getting SCIM-managed groups

Get details for SCIM-managed groups.

GET request

To get details for SCIM-managed groups, use the following URI:

```
/scim-service/Groups
```

The following table describes the request headers:

Header	Description
Content-Type	Media type of the request body. Use application/scim+json.
Authorization	SCIM token to authenticate to the request.

The following table describes optional fields in the request body:

Field	Type	Description
startIndex	Integer	Index of the first result to return using 1-based indexing.
count	Integer	Number of groups to return.
sortOrder	String	Order to sort results. Use "asc" for ascending and "desc" for descending.
schemas	Array of Strings	List of schema URIs for user types.

GET response

If successful, returns the SCIM-managed groups.

GET example

The following sample request gets details for SCIM-managed groups:

```
GET <serverUrl>/scim-service/Groups
Content-Type: application/scim+json
Authorization: <SCIM token>

{
  "startIndex": 1,
  "count": 1000,
  "sortOrder": "asc",
  "schemas": [
    "urn:ietf:params:scim:schemas:core:2.0:User",
    "urn:ietf:params:scim:schemas:extension:enterprise:2.0:User"
  ]
}
```

A successful response might look like the following example:

```
{
  "schemas": [
    "urn:ietf:params:scim:api:messages:2.0:ListResponse"
  ],
  "totalResults": 2,
  "itemsPerPage": 2,
  "startIndex": 1,
  "Resources": [
    {
      "id": "1234efgh5678ijkl9012mn",
```

```
      "externalId": "ee622900-a8cb-48e3-894a-81009876b9b7",
      "displayName": "IDMC Users",
      "schemas": [
        "urn:ietf:params:scim:schemas:core:2.0:Group"
      ],
      "meta": {
        "resourceType": "Group",
        "created": "2024-03-15T15:51:13.000Z",
        "lastModified": "2024-09-09T15:55:37.000Z",
        "location": "http://dm-em.informaticacloud.com:443/scim-service/Groups/
1234efgh5678ijkl9012mn"
      }
    },
    {
      "id": "4567mnop7890qrst2345uv",
      "externalId": "1eb94628-9e9c-4b4d-ad3f-a36d8586ab87",
      "displayName": "GroupTwo",
      "schemas": [
        "urn:ietf:params:scim:schemas:core:2.0:Group"
      ],
      "meta": {
        "resourceType": "Group",
        "created": "2024-11-29T09:56:11.000Z",
        "lastModified": "2025-01-25T18:36:57.000Z",
        "location": "http://dm-em.informaticacloud.com:443/scim-service/Groups/
4567mnop7890qrst2345uv"
      }
    }
  ]
}
```

Secure Agent services

Use the agentservice resource to stop or start a Secure Agent service.

You can check the status of a service using the REST API V2 agent resource.

POST request

To stop or start a Secure Agent service, use the following URI:

```
public/core/v3/agent/service
```

Include the following fields in the request:

Field	Type	Required	Description
serviceName	String	Yes	Display name of the Secure Agent service to start or stop.
serviceAction	String	Yes	Action to perform on the Secure Agent service. Include one of the following values: - start. Start the latest version of the Secure Agent service. - stop. Stop all versions of the Secure Agent service.
agentId	String	Yes	The ID of the agent on which the Secure Agent service is located. To find the ID, send a lookup POST request that includes the agent path.

POST response

If the request is successful, the response includes one of the following states for the service:

State	Description
NEED_RUNNING	The start process has been initiated.
NEED_STOP	The stop process has been initiated.
DEPLOYING	The service is being provisioned.
DEPLOYED	The service is deployed and will be running soon.
UNKNOWN	Status is unknown. Check the status using the REST API version 2 agent resource. To find the status, send a lookup POST request that includes the agent path.
ERROR	The service is in a error state.
STARTING	The service is starting up.
RUNNING	The service is running and ready to accept jobs.
RESTARTING	The service is restarting and will be running soon.
STOPPING	The service is shutting down.
USER_STOPPED	The service has been stopped by a user.

POST request example

To start a Secure Agent service, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/agent/service
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "serviceName":"Data Integration Server",
    "serviceAction":"start",
    "agentId":"kiphQJoRWWJfaC3enJ1smP"
}
```

POST response example

If a request is successful, you might receive a response similar to the following example:

```
{
    "serviceState":"STARTING",
    "message":"Successfully initiated start action. Note that only the latest version of
the service will be started. Send a GET request to  /v2/agent/details API to check the
updated status of the service."
}
```

Security logs

Use the securityLog resource to receive security log entries. Security logs include information about events such as login actions and creating, updating, and deleting users, user groups, and roles. To use this resource, you must be logged in with an administrator role.

GET request

To request entries for the last 24 hours with a maximum of 200 entries, use the following URI.

```
/public/core/v3/securityLog
```

Alternatively, you can use query parameters to specify which entries to return. For example, the following URI returns entries created on July 26, 2019 between 8:00AM and 5:00PM:

```
/public/core/v3/securityLog?
q=entryTime>="2019-07-26T08:00:00.000Z";entryTime<="2019-07-26T17:00:00.000Z"
```

You can include the following query parameters in the URI:

Parameter	Type	Description
entryTime	String	Start time or end time of the entry in UTC format. Use one of the following formats: - yyyy-MM-dd'T'HH:mm:ss'Z' - yyyy-MM-dd'T'HH:mm:ssZ - yyyy-MM-dd'T'HH:mm:ss.SSS'Z' - yyyy-MM-dd'T'HH:mm:ss.SSSZ The maximum date range is 14 days. You can use the following operators: - <= - => - > - == - != Default is to return entries for the last 24 hours with a maximum of 200.
actionCategory	String	Category of the security log entry. You can use the following operators: - == - != To use this query parameter, you must also include a valid time range using the entryTime query parameter.
actor	String	User name who performed the action. You can use the following operators: - == - != To use this query parameter, you must also include a valid time range using the entryTime query parameter.
objectName	String	Name of the object acted upon. You can use the following operators: - == - != To use this query parameter, you must also include a valid time range using the entryTime query parameter.

Parameter	Type	Description
skip	Int	Number of records to skip. To use this query parameter, you must also include a valid time range using the entryTime query parameter. Default is 0.
limit	Int	Number of entries to include in the response. You can specify a minimum of 100 and maximum of 1000. Default is 200.

GET response

Returns a securityLogEntry object for each security log entry returned. Returns the error object if errors occur.

The securityLogEntry object includes the following attributes:

Field	Type	Description
id	String	Security log entry ID.
orgId	String	Organization ID.
actor	String	User who performed the action.
entryTime	Timestamp	Time the action occurred.
objectId	String	ID of the object used.
objectName	String	Name of the object used.

Field	Type	Description
actionCategory	String	Category of the security log entry. Returns one of the following codes: - Agent - Authentication - Group - Organization - Organization-Access-Config - Preference - Privilege - Privilege-Category - Role - SAML-Config - Sub-organization - User
actionEvent	String	Type of action performed. Returns one of the following codes: - ACCESS_DISABLED - ACCESS_ENABLED - ADMIN_ROLE_ASSIGNED - ADMIN_ROLE_UNASSIGNED - AGENT_LOGIN - CREATE - DELETE - DISABLE - GENERATE_MFA - LOGOUT - MFA_DISABLED - MFA_ENABLED - PASSWORD_RESET - PASSWORD_UPDATE - SCIM_TOKEN_EXPIRY_NOTIFICATION - TEMP_ACCESS_DISABLED - TEMP_ACCESS_ENABLED - UPDATE - USAGE_TYPE_CHANGED - USER_LOGIN - VERIFY_MFA_FAILURE - VERIFY_MFA_SUCCESS

GET example

To view entries for the actions that the user "admin" performed on July 26, 2019 between 8:00AM and 5:00PM, you might use the following URI:

```
GET <baseApiUrl>/public/core/v3/securityLog?
q=entryTime>="2019-07-26T08:00:00.000Z";entryTime<="2019-07-26T17:00:00.000Z";actor=='adm
in'
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

The response might look similar to the following example:

```
{
    "entries": [
        {
        "id": "1AoqT9lYsrUhu7kl49kGsx",
        "orgId": "9l10ywsSnqadMx1NtEEbKT",
        "actor": "admin",
        "entryTime": "2019-07-23T22:28:07.000Z",
        "objectId": "9l10ywsSnqadMx1NtEEbKT",
        "objectName": "idsv3_org_1563920884151",
        "actionCategory": "Organization",
```

```
            "actionEvent": "CREATE"
            },
            {
            "id": "595EZai5YqFi6X8GIpVVu0",
            "orgId": "9110ywsSnqadMx1NtEEbKT",
            "actor": "admin",
            "entryTime": "2019-07-23T22:28:13.000Z",
            "objectId": "9pieratUfEWkhFHnzY1r49",
            "objectName": "idsv3_user_1563920884151",
            "actionCategory": "User",
            "actionEvent": "CREATE"
             }
        ]
}
```


Source control

You can use a Git source control repository to manage and track changes made to IDMC objects such as projects, folders, and assets.

You can use the global Git repository for your organization. If the organization administrator enables project-level repositories, you can use repositories that are configured at the project level or use the global repository.

You can use the following resources:

- pull. Load objects to the IDMC organization.
- pullByCommitHash. Retrieve objects that were modified by a particular commit and load them into your organization.
- checkout. Check objects out of the repository.
- undoCheckout. Undo the checkout of specified objects or undo the checkout of all objects that were included in a checkout operation.
- checkin. Check updated objects in to the repository.
- commit. Retrieve details about a commit from your repository.
- commitHistory. Receive commit history for a specific object or all of the objects in the organization.
- compare. Compare two versions of an object to see what's changed between the versions.
- repositoryConnection. Get the repository connection ID for a project-level repository.
- sourceControlAction. Get the status of a source control operation.

Pulling objects

Use the pull resource to retrieve objects such as assets and projects from your repository and load them into your organization.

When you pull a project, all of the source-controlled assets in the project and the project's folders are included in the pull. If the assets already exist in the target organization, their contents are overwritten to match the assets' state at the specified commit hash. If the project and the project's folders already exist in the target organization, they're reused.

You can pull objects at the global repository or project level. The objects that you pull determine which repository is used. For example, if Project A is linked to Repo1, the pull is from Repo1. If Project B isn't linked to a project-level repository, the pull will be done from the global repository.

Dependent objects that are located in other projects are not included in the pull. If dependent objects are missing in the pull request, the response includes an error message that lists the missing dependent objects.

If an asset's connections, runtime environments, or schedule exist in the target organization, they're reused. If you want an asset to use a different connection or runtime environment in the target organization, you can map the connection or runtime environment to a connection or runtime environment in your organization using the objectSpecification object.

For example, an asset uses the SecureAgent_dev runtime environment in the dev organization and uses the SecureAgent_test runtime environment in the test organization. You can use the objectSpecification object to map the SecureAgent_dev runtime environment to the SecureAgent_test runtime environment.

Note: Informatica recommends that you include less than 1000 objects in a pull request.

POST request

To load the latest version of objects from your repository to your organization, use the following URI:

```
/public/core/v3/pull
```

Note: You might receive a response to the POST request before the pull operation completes.

You can include the following fields in the request:

Field	Type	Required	Description
commitHash	String	Yes	Unique commit hash. The commit hash is validated during the operation. If you use a GitHub repository, you can include a partial hash in the request by sending the first 7 characters of the hash instead of the full string.
relaxObjectSpecificationValidation	Boolean	No	Whether the sources specified in the objectSpecification object must exist in the assets being pulled. Use one of the following values: - true. The objectSpecification objects are ignored if the sources don't exist in the assets that are included in the pull. - false. An error occurs when an objectSpecification source doesn't exist in the assets that are included in the pull. Default is false.
objects	List<Object>	Yes	Contains a list of all the objects to be pulled.

Field	Type	Required	Description
path	List<String>	Yes, if ID is not included	Include in the objects object. Full path of the object to be pulled.
id	String	Yes, if path is not included	Include in the objects object. ID of the object.
type	String	-	Include in the objects object. Type of asset to be pulled. If not specified, default is project. Can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_TASK. Mass ingestion task. - WORKFLOW. Linear taskflow. - TASKFLOW - UDF. User-defined function.
objectSpecification	List<Object>	-	Object specification for connection and runtime environments.
source	Object	Yes, if objectSpecification object is included and relaxObjectSpecificationValidation value is not true	Include in the objectSpecification object. Contains information about the source object.

Field	Type	Required	Description
path	List<String>	Yes, if objectSpecification object is included	Include in the source object. Full path of the connection or runtime environment in the repository.
type	String	Yes, if objectSpecification object is included	Include in the source object. Asset type. Use one of the following values: - Connection - AgentGroup
target	Object	Yes, if objectSpecification object is included	Include in the objectSpecification object. Contains information about the target object. Include path and type or include ID. If path, type, and ID are included, ID takes precedence.
path	List<String>	Yes, if ID is not included	Include in the target object. Path of the connection or runtime environment that is being mapped. Use with type.
type	String	Yes, if ID is not included	Include in the target object. Asset type. Use with path. Use one of the following values: - Connection - AgentGroup
id	String	Yes, if path and type are not included	Include in the target object. ID of the target object.
additionalProviderFlags	Collection <complex type>	No	Additional object specifications. Use key-value pairs to specify additional object specifications, such as in-out parameter values and sequence generator values.

POST response

If successful, a POST request returns the following information:

Field	Type	Description
pullActionId	String	ID for the pull operation.
status	Object	Status of the pull operation.
state	String	Returned in the status object. Initial state of the pull operation. For a successful request, value will always be NOT_STARTED. To see the status after the operation begins, use the "Getting the status of a source control operation" on page 325 resource.
message	String	Returned in the status object Descriptive status message for the pull operation.

POST request examples for projects

You can request a pull operation for one or more assets or projects in a single POST request. To request a pull operation for multiple projects using the path field to specify the projects to pull, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pull
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "commitHash": "7c525831c247cf792f595d1663396d1ae2c85033",
     "objects": [
        {
            "path": ["Project2"]
        },
        {
            "path": ["Default"]
        }
    ]
}
```

To request a pull operation for the projects using project IDs, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pull
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "commitHash": "7c525831c247cf792f595d1663396d1ae2c85033",
     "objects": [
        {
            "id": "4gmWUVziA1qe7zXbyN1l6E"
        },
        {
            "id": "4TjbmrAGrk2eal3DOwdIk8"
        }
    ]
}
```

POST request examples for assets

You can request a pull operation for one or more assets in a POST request. To request a pull operation for an asset using the path field to specify the asset to pull, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pull
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "commitHash": "1013f61bf318758cccec08f2165f59bbbb41e8f0",
     "objects": [
        {
            "path": ["Default","Test_Mapping"],
            "type": "DTEMPLATE"
        }
    ]
}
```

To request a pull operation using the asset ID, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pull
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "commitHash": "1013f61bf318758cccec08f2165f59bbbb41e8f0",
     "objects": [
        {
            "id": "6wLjSK4tS4rdjKq5uGuC0T"
        }
    ]
}
```

To request a pull operation using the asset ID and include the connections, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pull
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{

    "commitHash": "1013f61bf318758cccec08f2165f59bbbb41e8f0",
     "objects": [
        {
            "id": "6wLjSK4tS4rdjKq5uGuC0T"
        }
    ],
    "objectSpecification":[
     {
        "source":
        {
            "path":["ff"],
            "type":"Connection"
        },
        "target":
        {
            "path":["target_connection"],
            "type":"Connection"
        }
     }
   ]
}
```

To request a pull operation using the asset ID, the source runtime environment, and the target ID, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pull
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{

    "commitHash": "1013f61bf318758cccec08f2165f59bbbb41e8f0",
     "objects": [
        {
            "id": "6wLjSK4tS4rdjKq5uGuC0T"
        }
    ],
    "objectSpecification":[
     {
        "source":
        {
            "path":["USW1MJ02YNFB"],
            "type":"AgentGroup"
        },
        "target":
        {
            "id":"7UPtJVbrESTj0VkCBYAcUv"
        }
     }
   ]
}
```

POST response example

For a successful POST request, the POST response might look like the following example:

```
{
    "pullActionId": "awRrziMMWXol7i42aTm1ih",
    "status": {
        "state": "NOT_STARTED",
        "message": "Initialized"
    }
}
```

Pulling objects in a commit

Use the pullByCommitHash resource to retrieve objects that were modified by a particular commit and load them into your organization. If you want to pull objects by path or object ID, use the pull resource instead.

When you use the pullByCommitHash resource, you include a commit hash in the request. The objects that changed in the commit are included in the pull. If any dependent objects are missing in the target environment, such as the project folder or other referenced assets, the pull operation will fail.

If you use project-level repositories, include the repoConnectionId field in a pullByCommitHash request. You can find the repoConnectionId for projects by sending a repositoryConnection request. For more information about finding the repoConnectionId, see “Getting repository connection details” on page 324.

If you want an asset to use a different connection or runtime environment, you can map the connection or runtime environment to a connection or runtime environment in your organization using the objectSpecification object.

Note: Informatica recommends that you include less than 1000 objects in a pull request.

POST request

To load the objects that changed in a particular commit from your repository to your organization, use the following URI:

```
/public/core/v3/pullByCommitHash
```

Note: You might receive a response to the POST request before the pull operation completes.

You can include the following fields in the request:

Field	Type	Required	Description
commitHash	String	Yes	Unique commit hash. The commit hash is validated during the operation. If you use a GitHub repository, you can include a partial hash by sending the first 7 characters of the commit hash. For other repositories, include the full 40-character commit hash.
searchCustomRepositories	Boolean	No	Whether to search project-level repositories if the commit hash wasn't found for the global repository.
repoConnectionId	String	No	Connection ID of the project-level repository to search. If not specified, the global repository is searched.
relaxObjectSpecificationValidation	Boolean	No	Whether the sources specified in the objectSpecification object must exist in the assets being pulled. Use one of the following values: - true. The objectSpecification objects are ignored if the sources don't exist in the assets that are included in the pull. - false. An error occurs when an objectSpecification source doesn't exist in the assets that are included in the pull. Default is false.
objectSpecification	List<Object>	No	Object specification for connection and runtime environments.
source	Object	Yes, if objectSpecification object is included	Include in the objectSpecification object. Contains information about the source object.
path	List<String>	Yes, if objectSpecification object is included	Include in the source object. Name of the connection or runtime environment in the repository.

Field	Type	Required	Description
type	String	Yes, if objectSpecification object is included	Include in the source object. Asset type. Use one of the following values: - Connection - AgentGroup
target	Object	Yes, if objectSpecification object is included	Include in the objectSpecification object. Contains information about the target object. Include path and type or include ID. If path, type, and ID are included, ID takes precedence.
path	List<String>	Yes, if ID is not included	Include in the target object. Name of the connection or runtime environment. Use with type.
type	String	Yes, if ID is not included	Include in the target object. Asset type. Use with path. Use one of the following values: - Connection - AgentGroup
id	String	Yes, if path and type are not included	Include in the target object. ID of the target object.
additionalProviderFlags	Collection <complex type>	No	Additional object specifications. Use key-value pairs to specify additional object specifications, such as in-out parameter values and sequence generator values.

POST response

If successful, a POST request returns the following information:

Field	Type	Description
pullActionId	String	ID for the pull operation.
status	Object	Status of the pull operation.

Field	Type	Description
state	String	Returned in the status object. Initial state of the pull operation. For a successful request, value will always be NOT_STARTED. To see the status after the operation begins, use the "Getting the status of a source control operation" on page 325 resource.
message	String	Returned in the status object Descriptive status message for the pull operation.

POST request examples

To request a pull operation for all changed assets in a commit, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pullByCommitHash
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "commitHash": "7c525831c247cf792f595d1663396d1ae2c85033"
}
```

To request a pull operation for all changed assets in a commit made to a project-level repository, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pullByCommitHash
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
    "commitHash": "7c525831c247cf792f595d1663396d1ae2c85033",
    "searchCustomRepositories": true
}
```

To request a pull operation for all changed assets in a commit and include connections and runtime environments, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/pullByCommitHash
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{

    "commitHash": "1013f61bf318758cccec08f2165f59bbbb41e8f0",
    "objectSpecification":[
     {
        "source":
        {
            "path":["ff"],
            "type":"Connection"
        },
        "target":
        {
            "path":["target_connection"],
            "type":"Connection"
        }
     },
     {
        "source": {
            "path": ["USW1MJ02YNFB"],
```

```
            "type": "AgentGroup"
        },
        "target": {
            "id": "2ga6h3hRNZCf9Br0ZWB7EF"
        }
      }
    ]
}
```

POST response example

For a successful POST request, the response might look like the following example:

```
{
    "pullActionId": "iW5TmGqUjmUcdZKk4c4VQH",
    "status": {
        "state": "NOT_STARTED",
        "message": "Initialized"
    }
}
```

Checking out objects

Use the checkout resource to check out a source-controlled object so that you can make changes to it. When you check out an object, the object is locked so that other users can't make changes to it.

You can check out multiple projects, folders, or assets in one request.

If multiple objects are included in the checkout and the checkout fails for any of them, none of the objects will be checked out. The objects that would have been successful will have a status of CANCELLED.

For more information about the checkout status, see "Getting the status of a source control operation" on page 325.

POST request

To check objects out of the repository, use the following URI:

```
/public/core/v3/checkout
```

In the request, you must provide either the object ID or the full path and object type.

You can include the following fields in the request:

Field	Type	Required	Description
objects	List<Object>	Yes	Contains a list of all the objects to be checked out.
id	String	Yes, if path and type are not included	Include in the objects object. ID of the object.
path	List<String>	Yes, if ID is not included	Include in the objects object. Full path of the object to be checked out.

Field	Type	Required	Description
type	String	Yes, if ID is not included	Include in the objects object. Type of asset to be checked out. Can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_TASK. Mass ingestion task. - WORKFLOW. Linear taskflow. - TASKFLOW - UDF. User-defined function. - PROCESS. Application Integration process. - AI_CONNECTION. Application Integration app connection. - AI_SERVICE_CONNECTOR. Application Integration service connector. - GUIDE. Application Integration guide. - PROCESS_OBJECT. Application Integration process object. - HUMAN_TASK. Application Integration human task.
includeContainerAssets	Boolean	-	Include in the objects object. Whether all objects in a project or folder are included in the check-in. Use one of the following values: - true. Include all objects in the project or folder. - false. Do not include objects in the project or folder. Default is false.

POST response

If successful, a POST request returns the following information:

Field	Type	Description
Id	String	ID for the checkout operation.
status	Object	Status of the checkout operation.

Field	Type	Description
state	String	Returned in the status object. Initial state of the checkout operation. For a successful request, value will always be NOT_STARTED. To see the status after the operation begins, use the "Getting the status of a source control operation" on page 325 resource.
message	String	Returned in the status object Descriptive status message for the checkout operation.

POST request examples

To request a checkout operation for a project and include all of the assets in the project, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
      "id": "ejZY66c19YUccBdbGwKG4P",
      "includeContainerAssets": true
    }
  ]
}
```

To request a checkout operation for a project and include two of the assets in the project, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
      "id": "iIVBNZSpUKFg4N6g2PKUox",
      "includeContainerAssets": false
    },
    {
      "id": "l7bgB85m5oGiXObDxwnvK9"
    },
    {
      "id": "1MW0GDAE1sFgnvWkvom7mK"
    }
  ]
}
```

To request a checkout operation for an asset named Test_Mapping that's in the Default project, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
```

```
      "path": [
        "Default",
        "Test_Mapping"
      ],
      "type": "DTEMPLATE"
    }
  ]
}
```

To request a checkout operation using the asset ID, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
      "id": "3iWWHkLbM2giVppBmJmZgV"
    }
  ]
}
```

POST response example

You might receive a response similar to the following example:

```
{
    "id": "awRrziMMWXol7i42aTm1ih",
    "status": {
        "state": "NOT_STARTED",
        "message": "Initialized"
    }
}
```

Undoing a checkout

Use the undoCheckout resource to undo a checkout. The object will revert to the last version that was pulled.

You can undo the checkout of an asset, project, or folder. You can also undo a checkout for all objects that were included in a checkout. If you are logged in as an administrator, you can undo a checkout performed by another user.

POST request

To undo a checkout, use the following URI:

```
/public/core/v3/undoCheckout
```

In the request, include the ID or the path and type for each object that you want to perform the undo checkout operation. Or, include a checkout operation ID to undo the checkout for all objects that were included in a checkout operation.

Note: Source control logs are retained for seven days. If the checkout occurred more than seven days ago, the checkout operation ID no longer exists so it can't be used in an undo checkout operation.

If you want an asset to use a different connection or runtime environment, you can map the connection or runtime environment to a connection or runtime environment in your organization using the objectSpecification object.

You can include the following fields in the request:

Field	Type	Required	Description
checkoutOperationId	String	No	Checkout operation ID. If specified, all assets that were included in the checkout operation will revert to their original state.
objects	List<Object>	No	Contains a list of all the objects to be included in the undo checkout operation.
id	String	Yes, if the object's path and type are not included and checkoutOperation ID is not included	Include in the objects object. ID of the object.
path	List<String>	Yes, if the object's ID is not included and checkoutOperation ID is not included	Include in the objects object. Full path of the object.
type	String	Yes, if the object's ID is not included and checkoutOperation ID is not included	Include in the objects object. Type of asset. Can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_TASK. Mass ingestion task. - WORKFLOW. Linear taskflow. - TASKFLOW - UDF. User-defined function. - PROCESS. Application Integration process. - AI_CONNECTION. Application Integration app connection. - AI_SERVICE_CONNECTOR. Application Integration service connector. - GUIDE. Application Integration guide. - PROCESS_OBJECT. Application Integration process object. - HUMAN_TASK. Application Integration human task.

Field	Type	Required	Description
includeContainerAssets	Boolean	No	Include in the objects object. Applicable to projects and folders. Whether all objects in a project or folder are included in the undo checkout operation. Use one of the following values: - true. Include all objects in the project or folder. - false. Do not include objects in the project or folder. Default is false.
objectSpecification	List<Object>	No	Object specification for connection and runtime environments.
source	Object	Yes, if objectSpecification object is included	Include in the objectSpecification object. Contains information about the source object.
path	List<String>	Yes, if objectSpecification object is included	Include in the source object. Full path of the connection or runtime environment in the repository.
type	String	Yes, if objectSpecification object is included	Include in the source object. Asset type. Use one of the following values: - Connection - AgentGroup
target	Object	Yes, if objectSpecification object is included	Include in the objectSpecification object. Contains information about the target object. Include path and type or include ID. If path, type, and ID are included, ID takes precedence.
path	List<String>	Yes, if ID is not included	Include in the target object. Path of the connection or runtime environment. Use with type.
type	String	Yes, if ID is not included	Include in the target object. Asset type. Use with path. Use one of the following values: - Connection - AgentGroup

Field	Type	Required	Description
id	String	Yes, if path and type are not included	Include in the target object. ID of the target object.
additionalProviderFlags	Collection <complex type>	No	Additional object specifications. Use key-value pairs to specify additional object specifications, such as in-out parameter values and sequence generator values.

POST response

If successful, a POST request returns the following information:

Field	Type	Description
id	String	ID for the undo checkout operation.
status	Object	Status of the undo checkout operation.
state	String	Returned in the status object. Initial state of the undo checkout operation. For a successful request, value will always be NOT_STARTED. To see the status after the operation begins, use the "Getting the status of a source control operation" on page 325 resource.
message	String	Returned in the status object. Descriptive status message for the undo checkout operation.

POST request examples

To request an undoCheckout operation using asset IDs, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/undoCheckout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
     "objects": [
        {
            "id": "4gmWUVziA1qe7zXbyN1l6E"
        },
        {
            "id": "4TjbmrAGrk2eal3DOwdIk8"
        }
    ]
}
```

To request an undo checkout operation for assets by path, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/undoCheckout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

```
{
     "objects": [
        {
            "path": ["Default","Test_Mapping1"],
            "type": "DTEMPLATE"
        },
        {
            "path": ["Default","Test_Mapping2"],
            "type": "DTEMPLATE"
        }
    ]
}
```

To request an undoCheckout operation for an asset and map the source connection and runtime environment to the target connection and runtime environment, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/undoCheckout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
     "objects": [
        {
            "id": "6wLjSK4tS4rdjKq5uGuC0T"
        }
    ],
    "objectSpecification":[
     {
        "source":
        {
            "path":["ff"],
            "type":"Connection"
        },
        "target":
        {
            "path":["target_connection"],
            "type":"Connection"
        }
     },
     {
        "source": {
            "path": ["USW1MJ02YNFB"],
            "type": "AgentGroup"
        },
        "target": {
            "id": "2ga6h3hRNZCf9Br0ZWB7EF"
        }
     }
   ]
}
```

To request an undoCheckout operation using the checkout operation ID, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/undoCheckout
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
   "checkoutOperationId": "<checkout operation ID>"
}
```

POST response example

For any of the request examples, you might receive a response similar to the following example:

```
{
    "id": "awRrziMMWXol7i42aTm1ih",
```

```
    "status": {
        "state": "NOT_STARTED",
        "message": "Initialized"
    }
}
```

Checking in objects

Use the checkin resource to check updated objects in to the repository.

POST request

To check objects in to the repository, use the following URI:

```
/public/core/v3/checkin
```

In the request, you must provide either the object ID or the full path and object type.

You can include the following fields in the request:

Field	Type	Required	Description
objects	List<Object>	Yes	Contains a list of all the objects to be checked in. You can check in a single asset or check in any number of projects or folders.
id	String	Yes, if path and type are not included	Include in the objects object. ID of the object.
path	List<String>	Yes, if ID is not included	Include in the objects object. Full path of the object to be checked in.

Field	Type	Required	Description
type	String	Yes, if ID is not included	Include in the objects object. Type of asset to be checked in. Can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_TASK. Mass ingestion task. - WORKFLOW. Linear taskflow. - TASKFLOW - UDF. User-defined function. - PROCESS. Application Integration process. - AI_CONNECTION. Application Integration app connection. - AI_SERVICE_CONNECTOR. Application Integration service connector. - GUIDE. Application Integration guide. - PROCESS_OBJECT. Application Integration process object. - HUMAN_TASK. Application Integration human task.
includeContainerAssets	Boolean	-	Include in the objects object. Whether all objects in a project or folder are included in the check-in. Use one of the following values: - true. Include all objects in the project or folder. - false. Do not include objects in the project or folder. Default is false.
summary	String	Yes	Summary of the check-in. Maximum length is 255 characters.
description	String	-	Description of the check-in.

POST response

If successful, a POST request returns the following information:

Field	Type	Description
Id	String	ID for the check-in operation.
status	Object	Status of the check-in operation.

Field	Type	Description
state	String	Returned in the status object. Initial state of the check-in operation. For a successful request, value will always be NOT_STARTED. To see the status after the operation begins, use the sourceControlAction resource.
message	String	Returned in the status object Descriptive status message for the check-in operation.

POST request examples for projects

You can request a check-in operation for one or more projects in a single POST request. To request a check-in operation for a project and include all of the assets in the project, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkin
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
      "id": "3iWWHkLbM2giVppBmJmZgV",
      "includeContainerAssets": true
    }
  ],
  "summary": "Revised mappings",
  "description": "Revised m_custArch and m_custNew"
}
```

To request a check-in operation for an asset using the path and object type, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkin
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
      "path": [
        "Default",
        "Test_Mapping"
      ],
      "type": "DTEMPLATE"
    }
  ]
}
```

POST request examples for assets

You can request a check-in operation for one asset in a POST request. To request a check-in operation for an asset named Test_Mapping that's in the Default project, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkin
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
```

```
  "objects": [
    {
      "path": [
        "Default",
        "Test_Mapping"
      ],
      "type": "DTEMPLATE"
    }
  ]
}
```

To request a check-in operation using the asset ID, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/checkin
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

{
  "objects": [
    {
      "id": "3iWWHkLbM2giVppBmJmZgV"
    }
  ],
  "summary": "Revised Revised m_custArch"
}
```

POST response example

A POST response might look like the following example:

```
{
    "Id": "awRrziMMWXol7i42aTm1ih",
    "status": {
        "state": "NOT_STARTED",
        "message": "Initialized"
    }
}
```

Getting commit details

Use the commit resource to retrieve details about a commit from your repository.

GET request

To get the details for a commit, use the following URI:

```
/public/core/v3/commit/<commitHash>
```

If you use project-level repositories, include one or both of the following parameters in the URI:

Field	Type	Required	Description
searchCustomRepositories	Boolean	-	Whether to search project-level repositories if the commit hash wasn't found for the global repository.
repoConnectionId	String	-	Connection ID of the project-level repository to search. To find the repository connection ID, you can send a repositoryConnection request. For more information, see "Getting repository connection details" on page 324

GET response

If successful, a GET request returns the following information:

Field	Type	Description
hash	String	Unique identifier for the commit. You can use this value in a pullByCommitHash request.
summary	String	Summary associated with the commit hash.
description	String	Detailed description associated with the commit hash.
username	String	Name of the user who performed the commit.
email	String	Email address of the user who performed the commit.
date	Date	The timestamp when the commit was submitted in the following format: `yyyy-MM-dd'T'HH:mm:ss.SSSZ`
committer	String	The Git user who filed the commit.
changes	List <Object>	Contains change details for each object included in the commit.
id	String	Included in the changes object. Global unique identifier for the object. Included if the object currently exists in your organization.
appContextId	String	Included in the changes object. ID of the object in context, used in REST API version 2 calls. Included if the object currently exists in your organization.
name	String	Included in the changes object. Name of the asset, project, or folder.
type	String	Included in the changes object. Type of object.
path	List <String>	Included in the changes object. Full path of the object.
oldPath	List <String>	Included in the changes object. Remote repository path for the object before the commit. Included when the object was moved or renamed.
action	String	Included in the changes object. Indicates the type of changes made to the object during the commit. Includes one of the following values: - ADDED - DELETED - MODIFIED - MOVED

GET request examples

If you use a global repository, a GET request might look like the following example:

```
GET <baseApiUrl>/public/core/v3/commit/aca30f6c44de9bef23db59ed16967653481c5e23
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

If you use project-level repositories, a GET request might look like the following example:

```
GET <baseApiUrl>/public/core/v3/commit/aca30f6c44de9bef23db59ed16967653481c5e23
?searchCustomRepositories=true
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

If you use project-level repositories and you want to include the repository connection ID, a GET request might look like the following example:

```
GET <baseApiUrl>/public/core/v3/commit/aca30f6c44de9bef23db59ed16967653481c5e23?
repoConnectionId=6ub6oUKHJ8Dkr3QXbGG9Sm
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

GET response example

A GET response might look like the following example:

```
{
    "hash": "aca30f6c44de9bef23db59ed16967653481c5e23",
    "summary": "Update. ",
    "description": "Restructured and updated.",
    "username": "testuser",
    "email": "user@gmail.com",
    "date": "2019-05-13T17:50:46.000Z"
    "committer": "Alexander Freeman",
    "changes": [
        {
            "id": "5G15DJ19Fw3j20XGL6oooL",
            "appContextId": "N0A1700000000001J",
            "name": "Mapping1",
            "type": "DTEMPLATE",
            "path": ["Versioned_Project2","Mapping1"],
            "action": "MODIFIED"
        },
        {
            "id": "2jFxl7stzKgi3lKAtVpWi3",
            "appContextId": "N0A17000000003A02",
            "name": "Versioned_Project",
            "type": "Project",
            "path": ["Versioned_Project"],
            "action": "ADDED"
        },
        {
            "id": "k3SYVglqhAafSWHuQuZdm1",
            "appContextId": "N0F17000000000291",
            "name": "Versioned_Folder",
            "type": "Folder",
            "path": ["Versioned_Project", "Versioned_Folder"],
            "oldPath": ["Versioned_Project", "Test_Folder"],
            "action": "MOVED"
        },
        {
            "id": null,
            "appContextId": null,
            "name": "Mapping2",
            "type": "DTEMPLATE",
            "path": ["Versioned_Project2","Mapping2"],
            "action": "DELETED"
        }
```

```
        ]
    }
```

Getting commit history

Use the commitHistory resource to get commit history for source-controlled objects in your organization.

You can request commit history for all source-controlled objects, specific projects or folders, or specific assets. You can also use query parameters to request commit history for all objects on a particular Explore page or a specified number of pages.

GET request

You can request the commit history for all of your organization's projects and assets or request the history for a particular project or asset.

To get commit history, use the following URI:

```
/public/core/v3/commitHistory?<query parameters>
```

To get the commit history for all objects in the organization, omit the query parameters.

To get the commit history for a particular project or asset, you can include the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter string. Include an object ID, project or folder name, or asset type.
perPage	String	Number of entries to include per page. Maximum of entries is 100. Default is 100.
page	String	Show a specific page of results. Default is page 1.

You can use the following fields to define the query filter:

Field	Type	Operators	Description
id	String	==	ID of the project, folder, or asset.
path	String	==	Project or path where the assets are located.

Field	Type	Operators	Description
type	String	==	Asset type. Required to receive commit history for an asset. Can be one of the following types: - DTEMPLATE. Mapping. - MTT. Mapping task. - DSS. Synchronization task. - DMASK. Masking task. - DRS. Replication task. - DMAPPLET. Mapplet created in Data Integration. - MAPPLET. PowerCenter mapplet. - BSERVICE. Business service definition. - HSCHEMA. Hierarchical schema. - PCS. PowerCenter task. - FWCONFIG. Fixed width configuration. - CUSTOMSOURCE. Saved query. - MI_TASK. Mass ingestion task. - WORKFLOW. Linear taskflow. - TASKFLOW - UDF. User-defined function. - PROCESS. Application Integration process. - AI_CONNECTION. Application Integration app connection. - AI_SERVICE_CONNECTOR. Application Integration service connector. - GUIDE. Application Integration guide. - PROCESS_OBJECT. Application Integration process object. - HUMAN_TASK. Application Integration human task.
branch	String	==	Repository branch, if different from the branch that's configured for the organization.

Query examples

The following examples show how you can use query parameters to get commit history for certain objects.

- Commit history for a single asset or folder using IDs:

```
GET /public/core/v3/commitHistory?q=id=='23546'
```

- Commit history for two projects using IDs:

```
GET /public/core/v3/commitHistory?q=id=='23423' and id=='5645esf'
```

- Commit history for two projects using paths:

```
GET /public/core/v3/commitHistory?q=path=='project name 1' and path=='project name 2'
```

- Commit history for an asset using the path:

```
GET /public/core/v3/commitHistory?q=path=='ProjectName/FolderName/AssetName1' and
type=='DTEMPLATE'
```

GET response

Returns a list of commits with the latest commit listed first. Returns an error if errors occur.

If successful, returns the following information for each commit in the commits object:

Field	Type	Description
commits	List<Object>	List of all of the commits.
hash	String	Unique identifier for the commit.
summary	String	Summary associated with the commit hash.

Field	Type	Description
description	String	Detailed description associated with the commit hash.
username	String	Name of the user who performed the commit.
email	String	Email address of the user who performed the commit.
date	Date	The timestamp when the commit was submitted in the following format: `yyyy-MM-dd'T'HH:mm:ss.SSSZ`
committer	String	The Git user who filed the commit.
pagination	Object	Page information.
pageSize	Int	Number of elements on the page.
currentPage	Int	Current page number.
hasNext	Boolean	Whether there is another page after the current page. **Note:** If you use GitLab or GitHub, the hasNext flag might erroneously return a value of "true" when the page size is equal to the total size or the last page contains entries that are the same as the page size.

GET response example

To get commit history, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/commitHistory?<query parameters>
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

If successful, you might receive a response similar to the following example:

```
{
    "commits": [
        {
            "hash": "b0bdc63a7fb9047db6c3bc29ad67d5ecbf7d1d47",
            "summary": "Default Project v1",
            "description": "Default Project v1",
            "username": "testuser@gmail.com",
            "email": "testuser@gmail.com",
            "date": "2020-03-30T22:30:19.000Z",
            "committer": "testuserinfa"
        },
        {
            "hash": "fc6fcc318ad1b4aec17017d053bc2f0d1f605096",
            "summary": "Synchronization Task1 - Copy 1 v1",
            "description": "Synchronization Task1 - Copy 1 v1",
            "username": "testuser@gmail.com",
            "email": "testuser@gmail.com",
            "date": "2020-03-30T22:22:02.000Z",
            "committer": "testuserinfa"
        },
        {
            "hash": "74d776c574dad3bc5cf7a44b22195cf423560fe9",
            "summary": "Project2 Folder1 v1",
            "description": null,
            "username": "testuser@gmail.com",
            "email": "testuser@gmail.com",
            "date": "2020-03-30T22:17:48.000Z",
            "committer": "testuserinfa"
        },
```

```
            {
                "hash": "02c8b5950df4ef2110288ba7f77a220bc6f05b0a",
                "summary": "v1 of project2",
                "description": "v1 of project2",
                "username": "testuser@gmail.com",
                "email": "testuser@gmail.com",
                "date": "2020-03-24T23:41:52.000Z",
                "committer": "testuserinfa"
            },
        ],
        "pagination": null
    }
```


Comparing object versions

Use the compare resource to compare two versions of an object to find what's changed between the versions.

You must have pull privileges to compare object versions.

POST request

To compare two versions of an object, use the following URI:

```
/public/core/v3/compare/<asset ID>
```

You can specify whether to receive the response in JSON format or as text using the Git diff format.

Include the following fields in the request:

Field	Type	Required	Description
source	String	Yes	The base version of the asset to compare. Use one of the following values: - If the asset version to compare is checked in to the repository, use the commit hash for the value. - If the asset version to compare hasn't been checked in, use the following value: CURRENT-VERSION
destination	String	Yes	The asset version to compare to the base version. - If the asset version is checked in to the repository, use the commit hash for the value. - If the asset version hasn't been checked in, use the following value: CURRENT-VERSION
outputFormat	String	Yes	Response format. Use one of the following values: - JSON - TEXT

POST response

If the response body is TXT and the response is successful, the asset information and changes are recorded in Git diff response format.

If the response body is JSON and the response is successful, a POST request returns the following information:

Field	Type	Description
source	Object	Base version of asset that the updated version is compared with.
name	String	Name of the asset.
path	String	Full path to the asset.
updatedOn	String	The timestamp when the commit was submitted in the following format: `yyyy-MM-dd'T'HH:mm:ss.SSSZ`
updatedBy	String	User who updated the object.
commitHash	String	Commit hash of the file retrieved from the commit. Use one of the following values: - The commit hash number. Included if the asset version has been committed to the repository. - CURRENT-VERSION. The current version of the asset. Included if the version hasn't been committed to the repository.
destination	Object	Version of the asset that's being compared to the source version.
name	String	Name of the asset.
path	String	Full path to the asset.
updatedOn	String	The timestamp when the commit was submitted in the following format: `yyyy-MM-dd'T'HH:mm:ss.SSSZ`
updatedBy	String	User who updated the object.
commitHash	String	Commit hash of the file retrieved from the commit. Can be one of the following values: - The commit hash number. Included if the asset version was committed to the repository. - CURRENT-VERSION. The current version of the asset. Included if the version hasn't been committed to the repository.
action	String	Action performed on the asset. Can be one of the following values: - CREATE - DELETE - UPDATE - MOVE - MOVE_UPDATE - RENAME - NO_ACTION
objectId	String	Global unique identifier of the object.
lineGroup	Array <Object>	Object that describes the changes made to the source version and destination version.
oldChange		Object that lists the lines with removed changes.
startPosition	Int	Initial line number of the removed changes.

Field	Type	Description
noOfLinesAffected	Int	Total lines impacted.
newChange		Object that lists the lines with added changes.
startPosition	Int	Initial line number of the added changes.
noOfLinesAffected	Int	Total lines impacted.
unmodifiedLinesBefore	List <String>	Lines before affected lines that are unmodified. Maximum of 3.
unmodifiedLinesAfter	List <String>	Lines after affected lines that are unmodified. Maximum of 3.
oldChanges	List <String>	Lines removed from asset file. Inline removal of words are represented between <remove-txt>.
newChanges	List <String>	New lines added into asset file. Inline addition of words are represented between <add-txt>.

POST request examples

To request a comparison of an asset that you have checked out to an older version of the asset and receive the comparison in JSON format, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/compare/jn94HPOUK4zlEoO07eGfEq
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
  "source": "CURRENT-VERSION",
  "destination": "aca30f6c44de9bef23db59ed16967653481c5e23",
  "outputFormat": "JSON"
}
```

To request a comparison of two versions that are checked in to the repository and receive the comparison in text format, you might send a request that's similar to the following example:

```
POST <baseApiUrl>/public/core/v3/compare/2tDSXSjd2Fkg1AFPSWops3
Content-Type: application/json
Accept: application/text
INFA-SESSION-ID: <sessionId>
{
  "source": "b0bdc63a7fb9047db6c3bc29ad67d5ecbf7d1d47",
  "destination": "fc6fcc318ad1b4aec17017d053bc2f0d1f605096",
  "outputFormat": "TEXT"
}
```

POST response examples

If you requested a comparison of an asset that you have checked out to an older version of the asset and receive the response in JSON format, you might receive a response similar to the following example:

```
{
 "source": {
    "name": "TestMapping",
    "path": "Test",
    "updatedOn": null,
    "updatedBy": null,
    "commitHash": "CURRENT-VERSION"
 },
 "destination": {
    "name": "TestMapping",
    "path": "Test",
```

```
    "updatedOn": "2025-05-08T02:15:17.842Z",
    "updatedBy": null,
    "commitHash": "95983a4fe44ee21df1933c5c4b4a5c565c68b832"
 },
 "id": "2tDSXSjd2Fkg1AFPSWops3",
 "action": "UPDATE",
 "lineGroup": [
   {
    "oldChange": {
       "startPosition": 85,
       "noOfLinesAffected": 1
    },
    "newChange": {
       "startPosition": 85,
       "noOfLinesAffected": 1
    },
    "unmodifiedLinesBefore": [
       "      }",
       "    ]",
       "  },"
    ],
    "unmodifiedLinesAfter": [
       "}"
    ],
     "oldChanges": [
       "  \"vcsExportTime\" : \"2025-05-<remove-text>08<remove-text> <remove-
text>09:46:09<remove-text> PDT\""
    ],
    "newChanges": [
       "  \"vcsExportTime\" : \"2025-05-<add-text>07<add-text> <add-text>19:15:17<add-
text> PDT\""
    ]
  }
 ]
}
```

If you requested a comparison of two versions of an asset that are checked in to the repository and receive the response in text format, you might receive a response similar to the following example:

```
id: 2tDSXSjd2Fkg1AFPSWops3
action: UPDATE
source: {name='TestMapping', path='Test', updatedOn=Thu May 08 02: 14: 35 UTC 2025,
updatedBy='null', version='ed08ed8f845fe1602006130a734d4416b7b72436'
}
destination: {name='TestMapping', path='Test', updatedOn=Thu May 08 02: 15: 17 UTC 2025,
updatedBy='null', version='95983a4fe44ee21df1933c5c4b4a5c565c68b832'
}
changes:
@@ -2,
0 +2,
0 @@
{
    "content": {
+    "description": "This mapping is used for testing",
       "allowMaxFieldLength": "false",
       "bigIntConvertType": "ONLY_BIGINT",
       "documentType": "MAPPING",

@@ -84,
       1 +85,
       1 @@
    }
]
},
-  "vcsExportTime": "2025-05-07 <remove-text>19:14:35<remove-text> PDT"
+  "vcsExportTime": "2025-05-07 <add-text>19:15:17<add-text> PDT"
}
```

Getting repository connection details

Use the repositoryConnection resource to get repository details such as the repository connection ID for a given project ID or project name. You can get the repository details for one or more projects in one request.

Use the repository connection ID that's included in the response to send a pullByCommitHash request for objects in project-level repositories.

GET request

To get details about the repository connection for a given project, use the following URL:

```
/public/core/v3/repositoryConnection
```

You can include the following fields in the request:

Field	Type	Required	Description
projectIds	List of String	-	Project ID that you want to find the repository connection details for.
projectNames	List of String	-	Project name that you want to find the repository connection details for.

GET response

If successful, a GET request returns the following information:

Field	Type	Description
pullActionId	String	ID for the pull operation.
projectRepoConnections	List <Object>	Object that contains repository details for each project ID or project name included in the request.
projectId	String	Returned in the projectRepoConnections object. ID of the project. Included when the project ID was included in the request.
projectNames	String	Returned in the projectRepoConnections object. Name of the project. Included when the project name was included in the request.
gitRepositoryURL	String	Git repository URL.
gitRepositoryBranch	String	Git repository branch.
globalRepository	Boolean	Whether project is configured with a global Git repository. If true, repoConnectionId is null.
repoConnectionId	String	Repository connection ID for the project. Null if the project isn't configured with a project-level Git repository.

GET request example

To request repository connection details for two project using project ID, the request might look like the following example:

```
GET https://{{pod_link}}/saas/public/core/v3/repositoryConnection?
projectIds=6ub6oUKHJ8Dkr3QXbGG9Sm,5FmdSKPASroei2vyeXwFeT
```

```
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

GET response example

For a successful GET request, the response might look like the following example:

```
{
    "projectRepoConnections": [
        {
            "projectId": "6ub6oUKHJ8Dkr3QXbGG9Sm",
            "projectNames": "customProject2",
            "globalRepository": false,
            "gitRepositoryURL": "https://priraj@dev.azure.com/priraj/infa-cloud-vcs-
azure/_git/infa-cloud-vcs-azure",
            "gitRepositoryBranch": "main",
            "repoConnectionId": "1rMeeN2te0TetGYVtRS3GS"
        },
        {
            "projectId": "5FmdSKPASroei2vyeXwFeT",
            "projectNames": "TestProject",
            "globalRepository": true,
            "gitRepositoryURL": "https://priraj@dev.azure.com/priraj/infa-cloud-vcs/_git/
infa-cloud-vcs",
            "gitRepositoryBranch": "main",
            "repoConnectionId": null
        }
    ]
}
```

Getting the status of a source control operation

Use the sourceControlAction resource to get the status of a source control operation.

You can request the status of a source control operation.

GET request

To receive the status of a source control operation, include the action ID in the following URI::

```
/public/core/v3/sourceControlAction/<action ID>
```

To receive the status for each object in the source control operation, use the following URI:

```
/public/core/v3/sourceControlAction/<action ID>?expand=objects
```

GET response

Returns the following information for the source control operation:

Field	Type	Description
id	String	ID of the source control operation.
action	String	Type of operation. Returns one of the following values: - CHECKIN - CHECKOUT - PULL - UNLINK - UNDO_CHECKOUT
commitHash	String	Unique commit hash. Included when the request is for checkin and pull operations.

Field	Type	Description
startTime	TimeStamp	Start time of the operation.
endTime	TimeStamp	End time of the operation.
status	Object	Includes status information for the operation.
state	String	Included in the status object. Status of the operation. Returns one of the following values: - NOT_STARTED - IN_PROGRESS - SUCCESSFUL - FAILED - WARNING
message	String	Included in the status object. Descriptive status message for the operation.
objects	List<Object>	Lists each object included in the operation. Returned when expand=objects is included in the URI.
target	Object	Included in the objects object. Target object
id	String	Included in the target object. ID of the target object.
path	List<String>	Included in the target object. Complete path of the target object. For example, "Default" , "mt_MappingTask1".
type	String	Included in the target object. Asset type of the target object.
status	Object	Included in the target object. Status information for the target object.
state	String	Included in the status object. Status of the operation. Returns one of the following values: - NOT_STARTED - IN_PROGRESS - SUCCSSFUL - FAILED - SKIPPED - CANCELLED - WARNING
message	String	Included in the status object. Descriptive status message for the operation.

GET response example

To receive the status for each object in the source control operation, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/sourceControlAction/<action ID>?expand=objects
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

If successful, you might receive a response similar to the following example:

```
{
  "id": "drLV4N8PFiuhAbcprrur2W",
  "action": "CHECKIN"
  "commitHash": "1234567abcdefg"
  "startTime": "2020-03-24T22:07:44Z",
  "endTime": "2020-03-24T22:08:14Z",
  "status": {
    "state": "SUCCESSFUL",
    "message": "Checkin Successful"
  },
  "objects": [
    {
      "target": {
        "path": [
          "Versioned_Project",
          "Versioned_Folder",
          "Versioned Mapping - Rename"
        ],
        "id": "2CefbUuBsYxhG6eeKXvGmh",
        "type": "MAPPING"
      },
      "status": {
        "state": "SUCCESSFUL",
        "message": "Checkin Successful"
      }
    },
    {
      "target": {
        "path": [
          "Versioned_Project",
          "Versioned_Folder",
          "Versioned Mapping - Edit"
        ],
        "id": "2CefbUuBsYxhG6eeKXvGmh",
        "type": "MAPPING"
      },
      "status": {
        "state": "FAILED",
        "message": "Checkin Failed."
      }
  ]
}
```

Tags

A tag is an asset property that you can use to group assets.

You can use the following resources:

- TagObjects. Use this resource to assign tags to an asset.
- UntagObjects. Use this resource to remove tags from an asset.

Assigning tags

Use the TagObjects resource to assign tags to an asset.

POST request

To assign a tag to an asset, use the following URI:

```
/public/core/v3/TagObjects
```

You can assign tags to a maximum of 100 assets in a request.

Include the following information for each asset:

Field	Type	Required	Description
id	String	Yes	Global unique identifier for the object.
tags	List	Yes	List of tags to assign to the object.

POST example

To assign tags to two assets, you might use a POST request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/TagObjects
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

[{
    "id":"5kuZuAC3Os0dycZuqGpqmM",
    "tags": ["R12 Tag", "DevQA"]

}, {
    "id":"7feHjtC50mLb44CTW4Xmon",
    "tags": ["Prod", "DevQA", "R12 Tag"]

}]
```

Returns the 204 response code if the request is successful. Returns errors if the request is unsuccessful. If the request is partially successful, returns information for the successful and unsuccessful transactions, as shown in the following example:

```
[{
    "id": "9WfGCcHsygueFigGhAdWqh",
    "status": "FAILED",
    "msg": "Object: 9WfGCcHsygueFigGhAdWqh skipped, missing READ/UPDATE permissions."
}, {
    "id": "0cLD48xB4TOgm8cNjP2kmJ",
    "status": "SUCCESS",
    "msg": "Object: 0cLD48xB4TOgm8cNjP2kmJ Operation Message: [Tag assignment succeeded
for artifact 0cLD48xB4TOgm8cNjP2kmJ.]"
}]
```

Removing tags

Use the UntagObjects to remove tags from an asset.

POST request

To remove a tag from an asset, use the following URI:

```
/public/core/v3/UntagObjects
```

You can remove tags from a maximum of 100 assets in a request.

Include the following information for each asset:

Field	Type	Required	Description
id	String	Yes	Global unique identifier for the object.
tags	List	Yes	List of tags to remove from the object.

POST example

To remove tags from two assets, you might use a POST request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/UntagObjects
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>

[{
    "id":"5kuZuAC3Os0dycZuqGpqmM",
    "tags": ["R12 Tag", "DevQA"]

}, {
    "id":"7feHjtC50mLb44CTW4Xmon",
    "tags": ["DevQA", "R12 Tag"]

}]
```

Returns the 204 response code if the request is successful. Returns errors if the request is unsuccessful. If the request is partially successful, returns information for the successful and unsuccessful transactions, as shown in the following example:

```
[{
    "id": "9WfGCcHsygueFigGhAdWqh",
    "status": "FAILED",
    "msg": "Object: 9WfGCcHsygueFigGhAdWqh skipped, missing READ/UPDATE permissions."
}, {
    "id": "0cLD48xB4TOgm8cNjP2kmJ",
    "status": "SUCCESS",
    "msg": "Object: 0cLD48xB4TOgm8cNjP2kmJ Operation Message: [Tag assignment succeeded
for artifact 0cLD48xB4TOgm8cNjP2kmJ.]"
}]
```

Users

Use the users resource to request IDMC user details, create users, update role and user group assignments, and delete users.

Note: This resource uses a dynamic rate limit. When the system experiences a large volume or size of requests, responses might be slow or fail with the error message, "too many requests."

The number of users, user groups, and roles combined cannot exceed 1000 for an organization when using API calls. This limit doesn't apply when you create users, user groups, and roles in the user interface. If you need to change the limit for API calls, contact Informatica Global Customer Support.

Use the users resource along with the userGroups and roles resources to manage user privileges for IDMC tasks and assets. Users and groups can perform tasks and access assets based on the roles that you assign to them.

For information about using the userGroups and roles REST API resources, see the following topics:

- "Roles" on page 258
- "User groups" on page 338

For general information about users, user groups, and roles, see the Administrator help.

Getting user details

Use the users resource to request IDMC user details. You can request the details for all users in the organization or request the details for a particular user.

GET request

To get user details, use the following URI:

```
/public/core/v3/users
```

To get the details for a particular user, you can include the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter. You can filter using one of the following fields: - userId. Unique identifier for the user. - userName. IDMC user name.
limit	Int	Maximum number of users to return. Maximum of 200. Default is 100.
skip	Int	Amount to offset the list of results. Default is 0.

For example, to get details for a particular user based on the user's ID, you might use the following request:

```
/public/core/v3/users?q=userId==5N9JGth6pRYfOGjGKv3Q2D &limit=1 &skip=0
```

GET response

If successful, returns the following information for each user:

Field	Type	Description
id	String	User ID.
orgId	String	ID of the organization the user belongs to.
createdBy	String	User who created the user account.
updatedBy	String	User who last updated the user account.
createTime	String	Date and time the user was created.
updateTime	String	Date and time the user was last updated.
userName	String	User name for the user account.
firstName	String	First name for the user account.

Field	Type	Description
lastName	String	Last name for the user account.
description	String	User description.
title	String	Job title of the user.
phone	String	Phone number for the user.
email	String	Email address for the user.
state	String	State of the user account. Returns one of the following values: - Active. User account exists and user has activated the account. - Provisioned. User account exists but the user has not activated the account. - Disabled. User account is disabled because the user exceeded the maximum number of login attempts. **Note:** If the user's password is expired, the value is null.
timeZoneId	String	Time zone of the user. For more information, see "Time zone codes" on page 768.
maxLoginAttempts	Int	Number of times a user can attempt to log in before the account is locked.
authentication	String	Whether the user accesses IDMC through single sign-in (SAML). Returns one of the following values: - 0. Native. - 1. SAML.
forcePasswordChange	Boolean	Whether the user must reset the password after the user logs in for the first time.
lastLoginTime	String	The date and time that the user last logged in.
lastLoginMode	String	Whether the user logged in through a REST API call or through the UI.
roles	Array	Roles assigned to the user account.
id	String	Included in the roles object. Role ID.
roleName	String	Included in the roles object. Role name.
description	String	Included in the roles object. Description of the role.
displayName	String	Included in the roles object. Role name that is displayed in the user interface.
displayDescription	String	Included in the roles object. Role description that is displayed in the user interface.
groups	Array	Group in which the user account is a member.

Field	Type	Description
id	String	Included in the groups object. User group ID.
userGroupName	String	Included in the groups object. User group name.
description	String	Included in the groups object. Description of the user group.

GET response example

To get user details, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/users
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

If successful, you might receive a response similar to the following example:

```
[
    {
        "id": "5N9JGth6pRYfOGjGKv3Q2D",
        "orgId": "cPYWk02I4aBeuLEvYRtaMS",
        "createdBy": "ma",
        "updatedBy": "a@abc.com",
        "createTime": "2019-03-06T22:04:00.000Z",
        "updateTime": "2019-03-18T22:34:53.000Z",
        "userName": "a@abc.com",
        "firstName": "a",
        "lastName": "jones",
        "description": "",
        "title": "dev",
        "phone": "1112221111",
        "email": "a@abc.com",
        "state": "Enabled",
        "timeZoneId": "America/Los_Angeles",
        "maxLoginAttempts": "10",
        "authentication": "Native",
        "forcePasswordChange": false,
        "lastLoginTime": "2020-07-31T21:50:10Z",
        "lastLoginMode": "API",
        "roles": [
            {
                "id": "9c2XrdpAz80hg29yXDBPEN",
                "roleName": "Data Preview",
                "description": "Role to preview data"
                "displayName": "Data Preview",
                "displayDescription": "Role to preview data"
            },
            {
                "id": "1VfnsgZiCT1fi25VAupQg1",
                "roleName": "Designer",
                "description": "Role for creating assets, ... and runtime environments.
Has access to the Application Integration Console."
                "displayName": "Designer",
                "displayDescription": "Role for creating assets, ... and runtime
environments. Has access to the Application Integration Console."
            }
        ],
        "groups": [
            {
                "id": "a6x85hoMvH2kWUIlcIRBEh",
                "userGroupName": "group_a",
```

```
                "description": ""
            }
        ]
    },
    {
        "id": "aNJWtppg613c1YbXvRRHcV",
        "orgId": "cPYWk02I4aBeuLEvYRtaMS",
        "createdBy": "a@abc.com",
        "updatedBy": "a@abc.com",
        "createTime": "2019-03-13T20:15:58.000Z",
        "updateTime": "2019-03-13T20:15:58.000Z",
        "userName": "b@abc.com",
        "firstName": "b",
        "lastName": "smith",
        "description": "",
        "title": "cs",
        "phone": "1112223333",
        "email": "b@abc.com",
        "state": "Provisioned",
        "timeZoneId": "America/Los_Angeles",
        "maxLoginAttempts": "10",
        "authentication": "Native",
        "forcePasswordChange": false,
        "lastLoginTime": "2020-07-31T21:50:10Z",
        "lastLoginMode": "API",
         "roles": [
            {
                "id": "9c2XrdpAz80hg29yXDBPEN",
                "roleName": "Data Preview",
                "description": "Role to preview data"
                "displayName": "Data Preview",
                "displayDescription": "Role to preview data"
            }
        ],
        "groups": [
            {
                "id": "a6x85hoMvH2kWUIlcIRBEh",
                "userGroupName": "group_a",
                "description": ""
            }
        ]
    }
]
```


Creating a user

If you have administrator privileges, you can use the users resource to create a user.

POST request

To create a user, send a POST request using the following URI:

```
/public/core/v3/users
```

Note: The number of users, user groups, and roles combined cannot exceed 1000 for an organization.

Include the following information:

Field	Type	Required	Description
name	String	Yes	IDMC user name. Must be either a valid email address or contain only alphanumeric characters, hyphens, underscores, periods, and apostrophes. Maximum length is 255 characters.
firstName	String	Yes	First name for the user account. Must contain only alphanumeric characters, hyphens, underscores, periods, and apostrophes.
lastName	String	Yes	Last name for the user account. Must contain only alphanumeric characters, hyphens, underscores, periods, and apostrophes.
password	String	-	IDMC password. If password is empty, the user receives an activation email. Maximum length is 255 characters.
description	String	-	Description of the user.
email	String	Yes	Email address for the user.
title	String	-	Job title of the user. Must contain only alphanumeric characters, hyphens, underscores, periods, and apostrophes.
phone	String	-	Phone number for the user.
forcePasswordChange	Boolean	-	Determines whether the user must reset the password after the user logs in for the first time.
maxLoginAttempts	Int	-	Number of times a user can attempt to log in before the account is locked.
authentication	Int	-	Determines whether the user accesses IDMC through single sign-in (SAML). Use one of the following values: - 0. Native. - 1. SAML.
aliasName	String	Required when authentication is not 0.	The user identifier or user name in the 3rd party system.
roles	Array	Required when no group IDs are included.	IDs of the roles to assign to the user.

Field	Type	Required	Description
groups	Array	Required when no role IDs are included.	IDs of the user groups to assign to the user.
identityType	Int	Required when multi-factor authentication is enabled.	Identity type of the user. Use one of the following values: - 1. A human who logs in to IDMC to interact with services. - 2. A user account for non-human software, integrations, automated processes, and APIs that access services without human interaction.

POST response

If successful, returns the users object with the details you included in the POST request.

POST example

To create a user, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/users
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name" : "c@abc.com",
    "firstName" : "c",
    "lastName" : "smith",
    "email" : "c@abc.com",
    "authentication" : 0,
    "roles" : ["5IPgtye09EbiWqz5XXuzwC", "9gedBDoYQoQibNMohf5KCh"],
    "groups" : ["a6x85hoMvH2kWUIlcIRBEh"]
}
```

You might receive a response similar to the following example:

```
{
    "id": "9EcgvBYZ9GGflOYr98GzOH",
    "orgId": "cPYWk02I4aBeuLEvYRtaMS",
    "createdBy": "a@abc.com",
    "updatedBy": "a@abc.com",
    "createTime": "2020-08-20T18:29:19.987Z",
    "updateTime": "2020-08-20T18:29:20.653Z",
    "userName": "c@abc.com",
    "firstName": "c",
    "lastName": "smith",
    "description": null,
    "title": "dev",
    "phone": null,
    "email": "c@abc.com",
    "state": "Provisioned",
    "timeZoneId": "America/Los_Angeles",
    "maxLoginAttempts": "10",
    "authentication": "Native",
    "forcePasswordChange": false,
    "lastLoginTime": null,
    "lastLoginMode": "None",
    "roles": [
        {
            "id": "5IPgtye09EbiWqz5XXuzwC",
            "roleName": "test",
            "description": ""
        },
        {
            "id": "9gedBDoYQoQibNMohf5KCh",
            "roleName": "Admin",
```

```
            "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
        }
    ],
    "groups": [
        {
            "id": "a6x85hoMvH2kWUIlcIRBEh",
            "userGroupName": "group_a",
            "description": ""
        }
    ]
}
```

Updating role assignments

You can add or remove role assignments for a user.

You cannot update a user's role assigments if your organization enabled the Map SAML Groups and Roles option for SAML single sign-on. For more information, see *User Administration* in the Administrator help.

Assign roles

To assign a role to a user, send a PUT request using one of the following URIs:

```
/public/core/v3/users/<user ID>/addRoles
```

```
/public/core/v3/users/name/<user name>/addRoles
```

Include an array of the roles that you want to assign to the user.

For example, to assign the Admin and Business Manager roles to a user, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/users/cPYWk02I4aBeuLEvYRtaMS/addRoles
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "roles" : ["Admin", "Business Manager"]
}
```

You can use the roles resource to get a list of roles that you can assign. For more information, see "Roles" on page 258.

The response includes a success code if successful or an error object if errors occur.

Remove roles

To remove a role assignment from a user, send a PUT request using one of the following URIs:

```
/public/core/v3/users/<user ID>/removeRoles
```

```
/public/core/v3/users/name/<user name>/removeRoles
```

Include an array of roles to unassign.

For example, to remove the Designer role assignment from a user, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/users/cPYWk02I4aBeuLEvYRtaMS/removeRoles
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "roles" : "Designer"
}
```

Updating user group assignments

You can add or remove user group assignments for a user.

You cannot update a user's user group assignments if your organization enabled the Map SAML Groups and Roles option for SAML single sign-on. For more information, see *User Administration* in the Administrator help.

Assign user groups

To assign a user group to a user, send a PUT request using one of the following URIs:

```
/public/core/v3/users/<user ID>/addGroups
```

```
/public/core/v3/users/name/<user name>/addGroups
```

Include an array of the user groups that you want to assign to the user.

For example, to assign the Workflow Manager and MDM Admin user groups to a user, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/users/cPYWk02I4aBeuLEvYRtaMS/addGroups
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "groups" : ["Workflow Manager", "MDM Admin"]
}
```

You can use the userGroups resource to get a list of user groups that you can assign. For more information, see "User groups" on page 338.

The response includes a success code if successful or an error object if errors occur.

Remove user group assignments

To remove a user group assignment, send a PUT request using one of the following URIs:

```
/public/core/v3/users/<user ID>/removeGroups
```

```
/public/core/v3/users/name/<user name>/removeGroups
```

Include an array of user group assignments to remove from the user.

For example, to remove the MDM Admin user group assignment, you might use the following request:

```
PUT <baseApiUrl>/public/core/v3/users/name/LarryR/removeGroups
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "groups" : ["MDM Admin"]
}
```

Deleting a user

If you have administrator privileges, you can use the users resource to delete a user.

DELETE request

To delete a user account, use the following URI:

```
/public/core/v3/users/<userId>
```

For example, you might send a request similar to the following example:

```
DELETE <baseApiUrl>/public/core/v3/users/5N9JGth6pRYfOGdGKv3Q2D
Content-type: application/json
```

```
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

User groups

Use this resource to create, update, and delete user groups.

Use the userGroups resource along with the users and roles resources to manage user privileges. Users and groups can perform tasks and access assets based on the roles that you assign to them.

You can send the following requests:

- To get details about all of the user groups or a particular user group, send a GET request.
- To create a user group, use a POST request.
- To add roles or users to a user group, use a PUT request.
- To delete a user group, use a DELETE request.

Note: This resource uses a dynamic rate limit. When the system experiences a large volume or size of requests, responses might be slow or fail with the error message, "too many requests."

The number of users, user groups, and roles combined cannot exceed 1000 for an organization when using API calls. This limit doesn't apply when you create users, user groups, and roles in the user interface. If you need to change the limit for API calls, contact Informatica Global Customer Support.

For information about using the users and roles REST API resources, see the following topics:

- "Users" on page 329
- "Roles" on page 258

For general information about users, user groups, and roles, see the Administrator Administrator help.

Note:

Getting user group details

You can request the details for all user groups in the organization or request the details for a particular user group.

GET request

You can request the details for all user groups in the organization or request the details for a particular user group.

To get user group details, use the following URI:

```
/public/core/v3/userGroups
```

To get the details for a particular user group, you can include the following query parameters in the URI:

Parameter	Type	Description
q	String	Query filter. You can filter using one of the following fields: - userGroupId. Unique identifier for the user group. - userGroupName. Name of the user group.
limit	Int	Maximum number of user groups to return. Default is 100.
skip	Int	Amount to offset the list of results. Default is 0.

For example, to get details for a particular user group using the user group's name, you might use the following request:

```
public/core/v3/userGroups?q=userGroupName=="group_a"
```

GET response

If successful, returns the following information for each user group:

Field	Type	Description
id	String	User group ID.
orgId	String	ID of the organization the user group belongs to.
createdBy	String	User who created the user account.
updatedBy	String	User who last updated the user account.
createTime	String	Date and time the user group was created.
updateTime	String	Date and time the user group was last updated.
userGroupName	String	Name of the user group.
description	String	Description of the user group.
roles	Array	Roles assigned to the user group.
id	String	Included in the roles object. Role ID.
roleName	String	Included in the roles object. Role name.
description	String	Included in the roles object. Description of the role.
displayName	String	Included in the roles object. Role name that is displayed in the user interface.

Field	Type	Description
displayDescription	String	Included in the roles object. Role description that is displayed in the user interface.
users	Array	Users assigned to the user group.
id	String	Included in the users object. User ID.
userName	String	Included in the users object. User name.
description	String	Included in the users object. Description of the user.

GET response example

To get user group details, you might use the following request:

```
GET <baseApiUrl>/public/core/v3/userGroups
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
```

If successful, you might receive a response similar to the following example:

```
[
    {
        "id": "a6x85hoMvH2kWUIlcIRBEh",
        "orgId": "cPYWk02I4aBeuLEvYRtaMS",
        "createdBy": "a@abc.com",
        "updatedBy": "a@abc.com",
        "createTime": "2019-03-19T17:27:09.000Z",
        "updateTime": "2019-03-19T17:27:09.000Z",
        "userGroupName": "group_a",
        "description": "",
        "roles": [
            {
                "id": "9gedBDoYQoQibNMohf5KCh",
                "roleName": "Admin",
                "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
                "displayName": "Admin",
                "displayDescription": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
            }
        ],
        "users": [
            {
                "id": "5N9JGth6pRYfOGjGKv3Q2D",
                "userName": "a@abc.com",
                "description": ""
            }
        ]
    }
]
```

Creating a user group

If you have administrator privileges, you can use the userGroups resource to create a user group.

Note: The number of users, user groups, and roles combined cannot exceed 1000 for an organization.

POST request

To create a user group, send a POST request using the following URI:

```
/public/core/v3/userGroups
```

Include the following information:

Field	Type	Required	Description
name	String	Yes	Name of the user group.
description	String	-	Description of the user group.
roles	Array	Yes	IDs of the roles to assign to the user group.
users	Array	-	IDs of the users to assign to the user group.

POST response

If successful, returns the userGroups object with the details you included in the POST request.

POST example

To create a user group, you might send a request similar to the following example:

```
POST <baseApiUrl>/public/core/v3/userGroups
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "name" : "user_group_1",
    "roles" : ["5IPgtye09EbiWqz5XXuzwC", "9gedBDoYQoQibNMohf5KCh"],
    "users" : ["9EcgvBYZ9GGflOYr98GzOH"]
}
```

You might receive a response similar to the following example:

```
{
    "id": "0TLmCMwX0jNdJ5SzlQC2CW",
    "orgId": "cPYWk02I4aBeuLEvYRtaMS",
    "createdBy": "a@abc.com",
    "updatedBy": "a@abc.com",
    "createTime": "2019-03-20T18:30:32.457Z",
    "updateTime": "2019-03-20T18:30:32.472Z",
    "userGroupName": "user_group_1",
    "description": null,
    "roles": [
        {
            "id": "9gedBDoYQoQibNMohf5KCh",
            "roleName": "Admin",
            "description": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
            "displayName": "Admin",
            "displayDescription": "Role for performing administrative tasks for an
organization. Has full access to all licensed services."
        },
        {
            "id": "5IPgtye09EbiWqz5XXuzwC",
            "roleName": "test_user_1",
            "description": ""
```

```
            "roleName": "test_user_1",
            "description": ""
        }
    ],
    "users": [
        {
            "id": "9EcgvBYZ9GGflOYr98GzOH",
            "userName": "test_user_2",
            "description": null
        }
    ]
}
```

Updating a user group

You can add users and roles to user groups and remove users and roles from user groups.

Add roles

To add a role to a user group, send a PUT request using one of the following URIs:

```
/public/core/v3/userGroups/<user group ID>/addRoles
```

```
/public/core/v3/userGroups/name/<user group name>/addRoles
```

Include an array of roles to add to the user group.

To add roles to a user group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/userGroups/cPYWk02I4aBeuLEvYRtaMS/addRoles
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "roles" : ["Admin", "Business Manager"]
}
```

Remove roles

To remove a role from a user group, send a PUT request using one of the following URIs:

```
/public/core/v3/userGroups/<user group ID>/removeRoles
```

```
/public/core/v3/userGroups/name/<user group name>/removeRoles
```

Include an array of roles to remove from the user group.

To remove roles from a user group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/userGroups/cPYWk02I4aBeuLEvYRtaMS/removeRoles
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "roles" : ["Admin", "Business Manager"]
}
```

Add users

To add a user to a user group, send a PUT request using one of the following URIs:

```
/public/core/v3/userGroups/<user group ID>/addUsers
```

```
/public/core/v3/userGroups/name/<user group name>/addUsers
```

Include an array of user names to add to the user group.

To add users to a user group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/userGroups/cPYWk02I4aBeuLEvYRtaMS/addUsers
Content-Type: application/json
```

```
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "users" : ["LarryR", "ScottY"]
}
```

Remove users

To remove a user from a user group, send a PUT request using one of the following URIs:

```
/public/core/v3/userGroups/<user group ID>/removeUsers
```

```
/public/core/v3/userGroups/name/<user group name>/removeUsers
```

Include an array of user names to remove from the user group.

To remove users from a user group, you might send a request similar to the following example:

```
PUT <baseApiUrl>/public/core/v3/userGroups/cPYWk02I4aBeuLEvYRtaMS/removeUsers
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <sessionId>
{
    "users" : ["LarryR", "ScottY"]
}
```

PUT response

Returns a success code if successful or an error object if errors occur.

Deleting a user group

You can delete user groups from your organization.

To delete a user group, use the following URI:

```
/public/core/v3/userGroups/<user group Id>
```

CHAPTER 5

Data Integration REST API

The REST API resources in this section apply specifically to the Data Integration service.

For most calls, use Data Integration REST API version 2 resources. When you use Data Integration REST API version 2 resources, note the following rules:

- Use JSON or XML format.
- Use the following URI:

  ```
  /api/v2/<API name>
  ```

- Use the serverUrl value from the login response as the base URL. For example:

  ```
  https://na4.dm-us.informaticacloud.com/saas
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  icSessionId: <SessionId>
  ```

In the following example, the serverUrl is `https://na4.dm-us.informaticacloud.com/saas` and the URI is `/api/v2/agent`:

```
<METHOD> https://na4.dm-us.informaticacloud.com/saas/api/v2/agent HTTP/1.1
Content-Type: application/json
Accept: application/json
icSessionId: IV4wOrJmd6YUtmKa8t
```

Format rules for resources other than the version 2 resources are included in the appropriate resource topics.

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Code tasks

Use the code task API to submit Spark code written in Scala to an advanced cluster. You can use the CodeTask resource to create, start, and cancel a code task job. You can also access session logs, view job details and job status of a code task.

Consider the following guidelines when you use the code task resource:

- Write your code task in Scala.
- Submit your code in a JAR file using the code task APIs.
- Use an AWS serverless or non-serverless environment.

- Use the following base URL:

```
<server URL>/disnext/api/v1/<API name>
```

- Use the following request header format:

```
<METHOD> <server URL>/<URI> HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <IDS_SESSION_ID>
```

- Ensure that you have the permission to create, execute, and view the code task APIs.
- Use the following persisted variables as needed for the code task APIs:
  - IDS_SESSION_ID
  - ORG_ID
  - CODE_TASK_ID
  - CODE_TASK_JOB_ID

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Complete the following tasks to submit Scala code in a JAR file and manage and monitor code task jobs:

- Send login information to get the session ID using "Login" on page 199.
- Create the code task and get the code task ID using "Create a code task " on page 345.
- Start the code task and get the job ID using "Start a code task" on page 347.
- View code task details using "View a code task" on page 348.
- Check on the job status for the code task using "Status of a code task" on page 350.
- Cancel the code task job using "Cancel a code task" on page 352.
- Access the session logs for the code task using "Session logs for a code task" on page 352.
- Access the Spark task results for the code task using "Spark task results for a code task" on page 353.

Create a code task

Use the CodeTask resource to create a code task. The response includes the code task ID that you can use in subsequent API calls.

POST request

Use the following URI to create a code task:

```
POST <server URL>/disnext/api/v1/CodeTask
```

Use the following fields in the POST request:

Field	Type	Required / Optional	Description
codeTaskName	String	Required	Name of the code task.
runtimeEnvironmentName	String	Optional	Runtime environment used for the code task. Either the runtimeEnvironmentName or the agentGroupId is required. If both are provided, then the agentGroupId is used.

Field	Type	Required / Optional	Description
codeExecutionParameters			Parameters in the code task.
agentGroupId	String	Required	Runtime environment that contains the Secure Agent used to run the code task. Either the runtimeEnvironmentName or the agentGroupId is required. If both are provided, then the agentGroupId is used.
overrideTaskTimeout	Long	Optional	Overrides the code task timeout value for this execution. A value of -1 signifies no timeout.
logLevel	String	Optional	Log level for session logs, agent job log, Spark driver, and executor logs. Valid values are: none, terse, normal, verboseInitialization, or verboseData. The default value is normal.
sparkMainClass	String	Required	Entry point of the Spark application. For example: org.apache.spark.examples.company.SparkExampleApp
sparkMainClassArgs	List <String>	Optional	Ordered arguments sent to the Spark application main class. For example: --appTypeSPARK_PI_FILES_JARS-- classesToLoadcom.company.test.SparkTest1Class
sparkPrimaryResource	String	Required	Scala JAR file that contains the code task.
sparkJars	List <String>	Optional	The directory and file name of the JAR file that is uploaded to the cluster and added to the Spark driver and executor classpaths.
sparkFiles	List <String>	Optional	The directory and file name of the Spark file that is uploaded to the cluster and available under the current working directory.
advancedCustomProperties	String	Optional	Spark properties or other custom properties that Data Integration uses. For example: "{\"spark.driver.memory\": \"2G\", \"spark.executor.instances\": \"4\"}"

POST response

The following variable is set from the response attributes:

Name	Response Value	Note
CODE_TASK_ID	codeTaskId	Used in the start and view code task resources.

POST request example

Use the following sample as a reference to create a code task:

```
POST <server URL>/disnext/api/v1/CodeTask
Content-Type: application/json
```

```
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
{
    "codeTaskName" : "CODETASK_API",
    "runtimeEnvironmentName" : "{{RTE_NAME}}",
     "codeExecutionParameters" : {
        "agentGroupId": "{{AGENT_GROUP_ID}}",
        "logLevel": "normal",
        "sparkMainClass":
"org.apache.spark.examples.infa.sparkdirect.SparkDirectExampleApp",
        "sparkMainClassArgs": ["6"],
        "sparkPrimaryResource": "spark-examples_2.12-3.0.0.jar",
        "sparkJars": [],
        "sparkFiles": [],
        "advancedCustomProperties": "{\"spark.driver.memory\": \"1G\",
\"spark.executor.memory\": \"1G\", \"spark.kubernetes.driverEnv.SPARK_DIRECT_TASK_SLEEP
\": \"600\", \"spark.kubernetes.driverEnv.SPARK_DIRECT_APP_TYPE\": \"SPARK_PI\",
\"spark.kubernetes.driverEnv.SPARK_DIRECT_KMS_ENCRYPTED_PROPS\":
\"spark.sparkdirect.kms.prop\", \"spark.sparkdirect.kms.prop\":
\"5pkOjS0HILDwSaW6eyxtiwB3g2TBYayjKLRFSSyxn5M=0p6v3eCvrtFkw6K78Buwal\",
\"advanced.custom.property\": \"infa.spark.local=false\"}"
    }
}
```

POST response example

A successful POST response returns a summary, the code task ID, and the code task name similar to the following example:

```
{
    "summary": "Code Task created successfully",
    "codeTaskId": 3,
    "codeTaskName": "CODETASK_API"
}
```

Start a code task

Use this POST request to start the code task job. The response includes the code task job ID that you can use in subsequent API calls.

POST request

To start a code task, use the task ID. The code task ID is included in the response when you create a code task. For more information, see “Create a code task ” on page 345.

Use the following URI to start a code task:

```
POST <server URL>/disnext/api/v1/CodeTask/Start
```

Use the following field in the POST request:

Field	Type	Required / Optional	Description
codeTaskId	String	Required	The code task ID from the create resource.

POST response

The following variable is set from the response attributes:

Name	Response Value	Note
CODE_TASK_JOB_ID	jobId	Used to cancel the code task job, or to get job status, session logs, or Spark task status.

POST request example

Use this sample as a reference to start a code task.

```
POST <server URL>/disnext/api/v1/CodeTask/Start
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
{
    "codeTaskId" : {{CODE_TASK_ID}}
}
```

POST response example

A successful POST response returns the code task job ID and other information, similar to the following example:

```
{
    "summary": "Code Task started successfully",
    "jobId": "8zcuMdImeshidZ4XVExs20",
    "codeTaskInstanceName": "Demo-2",
    "sparkCodeTaskResponseBody": {
        "agentGroupId": "01000025000000000003",
        "clusterConfigId": "Default",
        "logLevel": "normal",
        "startRunTime": "2022-04-04T20:23:57.154+00:00",
        "submitTime": "2022-04-04T20:23:57.095+00:00"
    }
}
```

View a code task

Use this GET request to view the code task configuration parameters.

GET request

To request the parameters of a code task, use the task ID. The code task ID is included in the response when you create a code task. For more information, see “Create a code task ” on page 345.

Use the following URI to get the code task parameters:

```
GET <server URL>/disnext/api/v1/CodeTask/<Code task ID>
```

GET response

Returns the code task object for the requested task ID.

Returns the error object if errors occurred.

The following table describes the parameters in the response:

Field	Type	Description
codeTaskName	String	Name of the code task.
codeTaskId	Numeric	The code task identifier.
agentGroupId	String	Runtime environment that contains the Secure Agent used to run the code task.
overrideTaskTimeout	String	Overrides the code task timeout value for this execution. A value of -1 signifies no timeout.
logLevel	String	Log level for session logs, agent job log, Spark driver, and executor logs. Valid values are: none, terse, normal, verboseInitialization, or verboseData. The default value is normal.
sparkMainClass	String	Entry point of the Spark application. For example: org.apache.spark.examples.company.SparkExampleApp
sparkMainClassArgs	List<String>	Ordered arguments sent to the Spark application main class. For example: --appTypeSPARK_PI_FILES_JARS-- classesToLoadcom.company.test.SparkTest1Class
sparkPrimaryResource	String	Scala JAR file that contains the code task.
sparkJars	List <String>	The directory and file name of the JAR file that is uploaded to the cluster and added to the Spark driver and executor classpaths.
sparkFiles	List <String>	The directory and file name of the Spark file that is uploaded to the cluster and available under the current working directory.
advancedCustomProperties	String	Spark properties or other custom properties that Data Integration uses.

GET request example

Use this sample as a reference to get the code task parameters.

```
GET <server URL>/disnext/api/v1/CodeTask/<Code task ID>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
```

GET response example

A successful GET response returns the code task parameters, similar to the following example:

```
{
    "codeTaskName": "CODETASK_API",
    "codeTaskId": 3,
    "agentGroupId": "01000025000000000003",
    "overrideTaskTimeout": null,
    "logLevel": "normal",
    "sparkMainClass": "org.apache.spark.examples.infa.sparkdirect.SparkDirectExampleApp",
    "sparkMainClassArgs": ["6"],
    "sparkPrimaryResource": "spark-examples_2.12-3.0.0.jar",
```

```
    "sparkJars": [],
    "sparkFiles": [],
    "advancedCustomProperties": "{\"spark.driver.memory\": \"1G\",
\"spark.executor.memory\": \"1G\", \"spark.kubernetes.driverEnv.SPARK_DIRECT_TASK_SLEEP
\": \"600\", \"spark.kubernetes.driverEnv.SPARK_DIRECT_APP_TYPE\": \"SPARK_PI\",
\"spark.kubernetes.driverEnv.SPARK_DIRECT_KMS_ENCRYPTED_PROPS\":
\"spark.sparkdirect.kms.prop\", \"spark.sparkdirect.kms.prop\":
\"5pkOjS0HILDwSaW6eyxtiwB3g2TBYayjKLRFSSyxn5M=0p6v3eCvrtFkw6K78Buwal\",
\"advanced.custom.property\": \"infa.spark.local=false\"}"
}
```

Status of a code task

Use this GET request to check the code task job status.

GET request

To request the status of a code task job, use the code task job ID. The code task job ID is included in the response when you start a code task. For more information, see "Start a code task" on page 347.

Use the following URI to get the code task job status parameters:

```
GET <server URL>/disnext/api/v1/CodeTask/JobStatus/<Code task job ID>
```

GET response

Returns the code task object for the requested job ID.

Returns the error object if errors occurred.

The following table describes the parameters in the response:

Field	Type	Description
codeTaskName	String	Name of the code task.
codeTaskId	Numeric	The code task identifier.
agentGroupId	String	Runtime environment that contains the Secure Agent used to run the code task.
executionState	String	The state of the job: QUEUED, RUNNING, SUCCEEDED, FAILED, CANCELLED Job status. A job can have one of the following statuses: - Starting. The job is starting. - Running. The job is either queued or running. - Success. The job completed successfully. - Failed. The job did not complete because it encountered errors.
sessionLogUrl	String	URL of the session log file.
assignedServerlessComputeUnits	Double	Number of serverless compute units per hour that the task requested. You can view the number of requested compute units if the task runs in a serverless runtime environment.

Field	Type	Description
consumedServerlessComputeUnits	Double	Total number of serverless compute units that the task consumed. You can view the number of consumed compute units if the task runs in a serverless runtime environment.
firstErrorMessage	String	Error message, if any, that is associated with the job.

GET request example

Use this sample as a reference to get the code task job status.

```
GET <server URL>/disnext/api/v1/CodeTask/JobStatus/<Code task job ID>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
```

GET response example

A successful GET response returns the code task job status, similar to the following example:

```
{
    "status": "RUNNING",
    "startTime": "2022-04-04T20:23:57.000",
    "updateTime": "2022-04-04T20:23:58.000",
    "endTime": null,
    "instanceName": "Demo-2",
    "assetName": "Demo",
    "runId": 2,
    "orgId": "kuJVH54wm6gfhVj4QEdboY",
    "startedBy": "coder@examplecompany.com",
    "runtimeEnvId": "01000025000000000003",
    "codeTaskId": 2,
    "errorMessage": "",
    "sessionLogUrl": "logservice/api/v1/jobs/8zcuMdImeshidZ4XVExs20/logs",
    "agentJobLogUrl": null,
    "advancedLogLocation": null,
    "advancedLogDownloadUrl": null
}
```

An error status GET response returns the code task job status, similar to the following example:

```
{
    "status": "FAILED",
    "startTime": "2022-03-10T17:23:29.000",
    "updateTime": "2022-03-10T17:23:34.000",
    "endTime": "2022-03-10T17:23:34.000",
    "instanceName": "Demo-2",
    "assetName": "Demo",
    "runId": 2,
    "orgId": "4nuRA6NIsI6lvUBYamL76P",
    "startedBy": "coder@examplecompany.com",
    "runtimeEnvId": "01000025000000000003",
    "codeTaskId": 477,
    "errorMessage": "WES_internal_error_Failed to start cluster for
[01000025000000000003]. Error reported while starting cluster [404 {\"code
\":\"CONFIG.NOT_FOUND_id\",\"message\":\"Internal error. Cannot find an advanced
configuration with ID 01000025000000000003. Contact Informatica Global Customer
Support.\",\"debugMessage\":\"Internal error. Cannot find an advanced
configurati[truncated]. For more information about the failure, check the application
log.If the problem persists, contact Informatica Global Customer Support.",
    "sessionLogUrl": "logservice/api/v1//jobs/6pqqt9KTgi3l9jyVnAajei/logs",
    "agentJobLogUrl": null,
    "advancedLogLocation": null,
    "advancedLogDownloadUrl": null
}
```

Cancel a code task

Use this PUT request to cancel the code task job.

PUT request

To cancel a code task job, use the code task job ID. The code task job ID is included in the response when you start a code task. For more information, see "Start a code task" on page 347.

Use the following URI to cancel a code task job:

```
PUT <server URL>/disnext/api/v1/CodeTask/Cancel
```

Use the following field in the PUT request:

Field	Type	Required / Optional	Description
jobId	String	Required	The code task job ID from the start resource.

PUT response

Returns the code task cancellation state for the requested job ID.

Returns the error object if errors occurred.

PUT request example

Use this sample as a reference to cancel a code task job.

```
PUT <server URL>/disnext/api/v1/CodeTask/Cancel
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
{
    "jobId" : {{CODE_TASK_JOB_ID}}
}
```

PUT response example

A successful PUT response returns the code task job cancellation information, similar to the following example:

```
{
    "state": "Code Task marked for cancellation.",
    "jobId": "6pqqt9KTgi3l9jyVnAajei"
}
```

Session logs for a code task

Use the jobs resource to access the code task session logs.

GET request

To access the session logs of a code task, use the code task job ID. The code task job ID is included in the response when you start a code task. For more information, see "Start a code task" on page 347.

Use the following URI to get code task session logs:

```
GET <server URL>/logservice/api/v1/jobs/<Code task job ID>/logs
```

You can use the Postman Send and Download option.

GET response

Returns a link to the code task ZIP file for the requested job ID.

Returns the error object if errors occurred.

GET request example

Use this sample as a reference to access code task session logs.

```
GET <server URL>/logservice/api/v1/jobs/<Code task job ID>/logs
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
```

Spark task results for a code task

Use the jobs resource to access the Spark task results for the code task.

GET request

To access the Spark task results of a code task, use the code task job ID. The code task job ID is included in the response when you start a code task. For more information, see "Start a code task" on page 347.

Use the following URI to access code task Spark task results:

```
GET <server URL>/logservice/api/v1/jobs/<Code task job ID>/callback
```

GET response

Returns the code task Spark task details for the requested job ID.

Returns the error object if errors occurred.

GET request example

Use this sample as a reference to access code task Spark task results.

```
GET <server URL>/logservice/api/v1/jobs/<Code task job ID>/callback
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID:{{IDS_SESSION_ID}}
```

GET response example

A successful GET response returns the code task Spark task results, similar to the following example:

```
{

    "jobId": "73LJ52V0tiNjC2HFb2YggK",

    "callbackBody": "{\"taskId\": \"73LJ52V0tiNjC2HFb2YggK\", \"executionId\":
\"73LJ52V0tiNjC2HFb2YggK\", \"sessionLogUrl\": \"logservice/api/v1/jobs/
73LJ52V0tiNjC2HFb2YggK/logs\", \"executionState\": \"RUNNING\"}"

}
```

Connections

Use this resource to request connection details for an organization. You can also use this resource to create, update, test, and delete a connection.

Details GET Request

You can request the following details using a connection GET request:

- Details of all connections in the organization.
- Details for a particular connection in the organization.
- List of objects that you can use as a source or target with a particular connection.
- List of connections of a specified type associated with a Secure Agent or runtime environment.
- Metadata details for a specified connection.

Note: Do not use connections with names that begin with "DI Data Preview_".

Details of all connections in the organization

To request the details of all connections in the organization, use the following URI:

```
/api/v2/connection
```

Details of a particular connection

To request the details of a particular connection, include the connection ID or name in the URI. Use one of the following URIs:

```
/api/v2/connection/<id>
/api/v2/connection/name/<name>
```

If you use the connection name in the URI and the connection name includes a space, replace the space with `%20`. For example:

```
/api/v2/connection/name/my%20connection
```

List of objects that you can use as a source or target

You can request the objects that you can use as a source or target. To request source or target objects, you can include either the connection ID or connection name in the URI. Use one of the following URIs:

```
/api/v2/connection/source/<id>
/api/v2/connection/target/<id>
/api/v2/connection/source/name/<name>
/api/v2/connection/target/name/<name>
```

If you use the connection name in the URI and the connection name includes a space, replace the space with `%20`. For example:

```
/api/v2/connection/target/name/my%20connection
```

If you expect to receive a large number of objects, you might want to include one of the following parameters:

- searchPattern. Use the searchPattern parameter to filter the results so that only the objects with the specified string in the object name are included in the response. To use the searchPattern parameter, use the following URI:

  ```
  /api/v2/connection/<source or target>/<id>?searchPattern=<pattern>
  ```

For example, the following request returns source objects that include "abc" in the object name:

```
/api/v2/connection/source/002D420000000J?searchPattern=abc
```

- maxRecordsCount. Use the maxRecordsCount parameter to set the maximum number of objects to return. To use the maxRecordsCount, use the following URI:

  ```
  /api/v2/connection/<source or target>/<id>?maxRecordsCount=<max number of objects>
  ```

  For example, the following request returns a maximum of 5000 source objects:

  ```
  /api/v2/connection/source/002D420000000J?maxRecordsCount=5000
  ```

  If you don't include the maxRecordsCount parameter, a maximum of 200 objects can be returned for the request.

List of connections of a specified type associated with a Secure Agent or runtime environment

To request a list of connections by Secure Agent ID and connection type, use the following URI:

```
/api/v2/connection/search?agentId=<agentId>&uiType=<uiType>
```

To request a list of connections by runtime environment ID and connection type, use the following URI:

```
/api/v2/connection/search?runtimeEnvironmentId=<runtimeEnvironmentId>&uiType=<uiType>
```

If you pass both agentId and runtimeEnvironmentId, the service uses runtimeEnvironmentId and ignores agentId. If you pass only agentId, the service translates agentId into its corresponding runtimeEnvironmentId before it saves the resource to the repository.

Metadata details for a specified connection

To request metadata details for a specified connection, use the following URI:

```
/api/v2/connection/source/<connection ID>/metadata
/api/v2/connection/target/<connection ID>/metadata
```

The metadata is returned in the runtimeAttribute object which contains the following attributes:

- name
- dataType
- defaultValue
- label
- mandatory
- maxLength
- sessionVarAllowed
- possibleValues

Use the following connection request URI attributes:

Field	Type	Required	Description
agentId	String	-	Secure Agent ID
runtimeEnvironmentId	String	-	Runtime environment ID.
uiType	String	Yes	Connection type. Use one of the following options: - CSVFile. CSV flat file. - FTP. - MS_ACCESS. - MSD. Microsoft Dynamics CRM. - MySQL. - ODBC. - Oracle. - OCOD. Oracle CRM On Demand. - Salesforce. - SFTP. Secure FTP. - SAP_ALE_IDoc_Reader. SAP IDoc Reader. - SAP_ALE_IDoc_Writer. SAP IDoc Writer. - SqlServer. Microsoft SQL Server 2000. - SqlServer2005. Microsoft SQL Server 2005. - SqlServer2008. Microsoft SQL Server 2008. - SqlServer2012. Microsoft SQL Server 2012. - SqlServer2014. Microsoft SQL Server 2014. - SqlServer2016. Microsoft SQL Server 2016. - SqlServer2017. Microsoft SQL Server 2017. - TOOLKIT. Informatica Cloud Connector. Also use for NetSuite connections. - WebServicesConsumer. Web Service.

Details GET Response

Returns the connection object for the requested connection ID. If you request information for all connections in the organization, returns a connection object for each connection in the organization.

If you request a list of connections based on the runtime environment ID and connection type, returns a connection object for each connection that matches the requirements.

If you request a list of source or target objects available for the requested connection ID, returns the connListItem object for each available object.

Returns the error object if errors occur.

The connection object includes different information based on connection type.

The following table describes attributes included in a connection object:

Field	Type	Description
id	String	Connection ID.
orgId	String	Organization ID.
name	String	Connection name.
description	String	Description of the connection.

Field	Type	Description
createTime	Date/time	Time the connection was created.
updateTime	Date/time	Last time the connection was updated.
createdBy	String	User who created the connection.
updatedBy	String	User who last updated the connection.
agentId	String	Secure Agent ID for Flat File, FTP/SFTP, Microsoft SQL Server, MS Access, MySQL, ODBC, Oracle, and Web Service connections.
runtimeEnvironmentId	String	Runtime environment used by the connection. This is the Runtime Environment field in the user interface. In the response returned to the user interface, this attribute is named agentGroupId.
instanceName	String	Microsoft SQL Server instance name.
host	String	Host name for FTP/SFTP, Microsoft SQL Server, MySQL, and Oracle connections.
domain	String	Domain name for Microsoft Dynamics CRM connections that use IFD or Active Directory authentication, and Web Service connections.
dateFormat		Date format for Flat File, FTP, and SFTP connections.
database	String	Returns the following information: - For Microsoft SQL Server and MySQL connections, returns the database name. - For Flat File connections, returns the directory. - For FTP and SFTP connections, returns the local directory. - For MS Access and ODBC connections, returns the data source name. - For Oracle connections, returns the service name. - For SAP IDoc Writer and Reader connections, returns the destination entry. - For Web Service connections, returns the service URL.
codepage		Code page for Flat File, FTP, SFTP, Microsoft SQL Server, MySQL, MS Access, ODBC, Oracle, and SAP.
clientCode	String	Client code for SAP IDoc Writer connections.
authenticationType	String	Authentication type for Microsoft Dynamics CRM, Microsoft SQL Server, and Web Service connections.
adjustedJdbcHostName	String	Host name. Or host and instance name for Microsoft SQL Server connections.
accountNumber	String	Account ID for NetSuite connections.
languageCode	String	Language code for SAP IDoc Writer connections.
remoteDirectory	String	Remote directory for FTP/SFTP connections.
schema	String	Schema name for Microsoft SQL Server, ODBC, Oracle, and Web Service connections.

Field	Type	Description
serviceUrl	String	Service URL for Microsoft Dynamics CRM, Oracle CRM On Demand, and Salesforce connections.
shortDescription	String	The first 50 letters of the description.
type	String	Connection type returns one of the following responses: - CSVFile. CSV flat file. - FTP. - MS_ACCESS. - MSD. Microsoft Dynamics CRM. - MySQL. - ODBC. - Oracle. - OCOD. Oracle CRM On Demand. - Salesforce. - SFTP. Secure FTP. - SAP_ALE_IDoc_Reader. SAP IDoc Reader. - SAP_ALE_IDoc_Writer. SAP IDoc Writer. - SqlServer. Microsoft SQL Server 2000. - SqlServer2005. Microsoft SQL Server 2005. - SqlServer2008. Microsoft SQL Server 2008. - SqlServer2012. Microsoft SQL Server 2012. - SqlServer2014. Microsoft SQL Server 2014. - SqlServer2016. Microsoft SQL Server 2016. - TOOLKIT. Informatica Cloud Connector. - WebServicesConsumer. Web Service. **Note:** The user interface field name on the Connections page varies depending on the connection. For example, for SQL Server, the user interface field name is SQL Server Version. Also note that for SQL Server, the REST API attribute that populates the value in the user interface is named subType.
port	Int	Port number for FTP/SFTP, Microsoft SQL Server, MySQL, and Oracle connections.
password	String	Password for the connection.
username	String	User name for the connection.
securityToken	String	Security token for a Salesforce connection.
stsUrl	String	Security token service URL for Microsoft Dynamics CRM connections that use Active Directory authentication.
organizationName	String	Organization name for Microsoft Dynamics CRM connections.
timeout	Int	Timeout for Web Service connections.
trustCertificatesFile	String	Trust certificates file name for Web Service connections.
certificateFile	String	Certificates file name for Web Service connections.
certificateFilePassword	String	Certificates file password for Web Service connections.
certificateFileType	String	Certificates file type for Web Service connections.
privateKeyFile	String	Private key file name for Web Service connections.

Field	Type	Description
privateKeyPassword	String	Private key password for Web Service connections.
privateKeyFileType	String	Private key file type for Web Service connections.
connParams	String	Parameters used in the connection. Includes connection attributes in the connParam object for SAP, NetSuite, Oracle CRM On Demand, ODBC, or other Informatica Cloud connectors.
federatedId	String	Global unique identifier for the connection.
internal	Boolean	Indicates whether the connection was created internally for data preview purposes only.
retryNetworkError	Boolean	Used for internal purposes only.
supportsCCIMultiGroup	Boolean	Used for internal purposes only.
connListItem		List of connections included in the connListItem object.
id	String	Included in the connListItem object. Source or target ID.
name	String	Included in the connListItem object. Source or target name.

Test GET Request

To test a connection, use the connection ID in the following URI:

```
/api/v2/connection/test/<id>
```

Test GET Response

Returns the success object if the test succeeds.

Returns the error object if errors occur.

POST Request

You can create or update connections. To update a connection, use the connection ID with the following URI. To create a connection, omit the optional connection ID.

```
/api/v2/connection/<id>
```

You can submit a partial update using partial mode. To submit a request using partial mode, use a JSON request and include the following line in the header:

```
Update-Mode=PARTIAL
```

In a connection POST request, use the additional attributes in the connection object. The attributes used by Informatica Cloud Connector connections vary by connection type.

To create or update an Informatica Cloud Connector connection, consult the Informatica Cloud application for the attributes used by the connection. Enclose any attributes that are not listed in the following tables in a connParam object.

To get a list of connectors that are available to the organization and attribute information for a specific connector type, see "Connectors" on page 378.

For more information about attributes and data types used for creating connections through the REST API, see "Connection user interface fields to REST API attributes mapping" on page 544 and "Connector data types" on page 543.

POST Response

If successful, returns the connection object for the connection that was created or updated.

Returns the error object if errors occur.

DELETE Request

To delete a connection, use the connection ID in the following URI.

```
/api/v2/connection/<id>
```

DELETE Response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST Example

To update an SAP Table connection, you might use the following request, enclosing SAP attributes in the connParam object:

```
POST <serverUrl>/api/v2/connection/0002D420000000J
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>

<connection>
  <id>0002D420000000J</id>
  <orgId>00342000</orgId>
  <name>test dir</name>
  <type>TOOLKIT</type>
  <agentId>00001Y08000000000002</agentId>
  <username>username</username>
  <password>password</password>
  <instanceName>SAPTableConnector</instanceName>
  <connParams>
     <agentId>00001Y08000000000002</agentId>
     <username>username</username>
     <password>password</password>
     <client>800</client>
     <language>EN</language>
     <Saprfc Ini Path>C:\\Windows\\SysWOW64</Saprfc Ini Path>
     <Destination>GE6</Destination>
  </connParams>
  <runtimeEnvironmentId>00000C25000000000002</runtimeEnvironmentId>
</connection>
```

A successful request returns the connection object that you updated.

CSV Flat File Connections

When you create or update a CSV flat file connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for CSV flat file connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use CSVFile.
database	Directory where flat files are stored. In the user interface, this attribute is the Directory field. In the REST API response that populates the value in the user interface, the name of this attribute is dirName.

Attribute	Description
dateFormat	Date format for date fields in the flat file. Use one of the following formats: - MM/dd/yyyy - MM-dd-yyyy - MM.dd.yyyy - dd/MM/yyyy - dd-MM-yyyy - dd.MM.yyyy - MM/dd/yyyy HH:mm - MM-dd-yyyy HH:mm - MM.dd.yyyy HH:mm - dd/MM/yyyy HH:mm - dd-MM-yyyy HH:mm - dd.MM.yyyy HH:mm - MM/dd/yyyy HH:mm:ss - MM-dd-yyyy HH:mm:ss - MM.dd.yyyy HH:mm:ss - dd/MM/yyyy HH:mm:ss - dd-MM-yyyy HH:mm:ss - dd.MM.yyyy HH:mm:ss - yyyy-MM-dd - yyyy-MM-dd HH:mm - yyyy-MM-dd HH:mm:ss - yyyy-MM-ddTHH:mm:ss.SSSZ - yyyy/MM/dd - yyyy/MM/dd HH:mm - yyyy/MM/dd HH:mm:ss - yyyyMMdd - MM/dd/yyyy HH24:mm:ss - MM/dd/yyyy HH24:mm:ss.ms - MM/dd/yyyy HH24:mm:ss.us - MM/dd/yyyy HH24:mm:ss.ns Default is MM/dd/yyyy HH:mm:ss.
codepage	The code page of the system that hosts the flat file. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.

FTP and SFTP Connections

When you create or update an FTP or SFTP connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for FTP or SFTP file connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.

Attribute	Description
name	Connection name.
description	Optional connection description.
type	Connection type. Use FTP or SFTP.
username	User name.
password	Password.
host	Name of the machine hosting the database server or FTP/SFTP host. For a FTP/SFTP connection, enter the host name of IP address.
port	Network port number used to connect to FTP/SFTP connection. Default port is 21 for FTP and 22 for SFTP.
database	Directory on a local machine that stores the local file. In the user interface, this attribute is the Directory field. In the REST API response that populates the value in the user interface, the name of this attribute is dirName. The local machine must also run the Secure Agent used to run the corresponding task. Enter a local directory or use the Browse button to select a local directory.
remoteDirectory	Directory on the FTP/SFTP host that stores the remote flat file. Depending on the FTP/SFTP server, you may have limited options to enter directions. For more information, see the FTP/SFTP server documentation.
dateFormat	Date format for date fields in the flat file. Use one of the following formats: - MM/dd/yyyy - MM-dd-yyyy - MM.dd.yyyy - dd/MM/yyyy - dd-MM-yyyy - dd.MM.yyyy - MM/dd/yyyy HH:mm - MM-dd-yyyy HH:mm - MM.dd.yyyy HH:mm - dd/MM/yyyy HH:mm - dd-MM-yyyy HH:mm - dd.MM.yyyy HH:mm - MM/dd/yyyy HH:mm:ss - MM-dd-yyyy HH:mm:ss - MM.dd.yyyy HH:mm:ss - dd/MM/yyyy HH:mm:ss - dd-MM-yyyy HH:mm:ss - dd.MM.yyyy HH:mm:ss - yyyy-MM-dd - yyyy-MM-dd HH:mm - yyyy-MM-dd HH:mm:ss - yyyy-MM-ddTHH:mm:ss.SSSZ

Attribute	Description
codepage	The code page of the system that hosts the flat file. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent ID.

Microsoft Access Connections

When you create or update a Microsoft Access connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for Microsoft Access connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use MS_ACCESS.
database	Data source name. In the user interface, this is the Data Source Name field.
codepage	The code page compatible with the MS Access database. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent ID.

Microsoft Dynamics CRM Connections

When you create or update a Microsoft Dynamics CRM connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for Microsoft Dynamics CRM connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use MSD.
authenticationType	Authentication type for the connection. Select a valid authentication type. Use one of the following authentication types: - LIVE. Microsoft Live. Use for synchronization tasks or PowerCenter tasks. - IFD. Internet Facing Development (IFD). Use for synchronization tasks or PowerCenter tasks. - AD. Active Directory. Use for PowerCenter tasks only.
username	Microsoft Dynamics CRM user name.
password	Microsoft Dynamics CRM password.
organizationName	Microsoft Dynamics CRM organization name.
domain	Microsoft Dynamics CRM domain name. Required for IFD and Active Directory authetication.
serviceURL	URL of the Microsoft Dynamics CRM service. For Microsoft Live authentication, use the following format: https:// <orgname>.crm.dynamics.com For IFD authentication, use the following format: https://<server.company.com>:<port> For Active Directory, use the following format: http://<server.company.com>:<port>
stsURL	Microsoft Dynamics CRM security token service URL. For example, https:// sts1.company.com. Required for IFD authentication.
agentId	Secure Agent ID. Required for Active Directory authentication only.

Microsoft SQL Server Connections

When you create or update a Microsoft SQL Server connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for Microsoft SQL Server connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use one of the following codes: - SqlServer. Microsoft SQL Server 2000. - SqlServer2005. Microsoft SQL Server 2005. - SqlServer2008. Microsoft SQL Server 2008. - SqlServer2012. Microsoft SQL Server 2012. In the user interface, this attribute is the SQL Server Version field. In the REST API response that populates the value in the user interface, the name of this attribute is subType.
authenticationType	Authentication method for the connection. Use one of the following options: - Windows. Use Microsoft Windows authentication to access Microsoft SQL Server. Available when users access Data Integration on Windows. - SqlServer. Use Microsoft SQL Server authentication to access Microsoft SQL Server.
username	User name for the database login. Use when authenticationType is SqlServer.
password	Password for the database login. Use when authenticationType is SqlServer.
host	Name of the machine hosting the database server.
port	Network port number used to connect to the database server. Default port number is 1433.
instanceName	Instance name of the Microsoft SQL Server database.
database	Database name for the Microsoft SQL Server target. Database name is case sensitive if the database is case sensitive. Maximum length is 100 characters. Database names can include alphanumeric and underscore characters.
schema	Schema used for the target connection.
codepage	The code page of the Microsoft SQL Server database. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent ID.

MySQL Connections

When you create or update a MySQL connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for MySQL connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use MySQL.
username	User name for the database login.
password	Password for the database login.
host	Name of the machine hosting the database server.
port	Network port number used to connect to the database server. Default is 3306.
database	Database name for the MySQL database target. Database name is case sensitive if the database is case sensitive.
codepage	The code page for the database server. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent ID.

NetSuite Connections

When you create or update a NetSuite connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for NetSuite connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.

Attribute	Description
description	Optional connection description.
type	Connection type. Use NetSuite.
username	NetSuite user name.
password	NetSuite password.
accountNumber	NetSuite account ID. To locate your account ID, log in to NetSuite and navigate to Setup > Integration > Web Services Preferences.
serviceURL	WSDL URL. If your NetSuite account does not use the default NetSuite WSDL URL, enter the WSDL URL used by your NetSuite account.

ODBC Connections

When you create or update an ODBC connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for OBDC connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use ODBC.
username	User name for the database login.
password	Password for the database login.
database	Data source name.
schema	Schema used for the target connection. Use uppercase letters when you specify the schema name for an Oracle database. Required to connect to an IBM DB2 database.
codepage	The code page of the database server or flat file defined in the connection. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.

Attribute	Description
agentId	Secure Agent ID.
ODBC_SUBTYPE	The ODBC connection subtype to connect to a specific database. Use one of the following options: - Azure DW - DB2 - Google BigQuery - PostgreSQL - Redshift - SAP IQ - SAP Sybase ASE - Snowflake - Teradata - Other
authenticationType	The authentication method to connect to a database. Required for DB2. Use one of the following options: - Database - Kerberos
kerberosProperties	Additional connection properties to use Kerberos authentication to connect to DB2. If you specify more than one property, separate each key-value pair with a semicolon.

Oracle Connections

When you create or update an Oracle connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for Oracle connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use Oracle.
username	User name for the database login.
password	Password for the database login.
host	Name of the machine hosting the database server.
port	Network port number used to connect to the database server. Default is 1521.
database	Service name that uniquely identifies the Oracle database. This attribute is the Service Name field in the user interface. If the connection fails, contact the database administrator.

Attribute	Description
schema	Schema used for the target connection. Optional.
codepage	The code page of the database server. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent that Data Integration uses to access the database in the local area network.

Oracle CRM On Demand Connections

When you create or update an Oracle CRM On Demand connection, you can configure additional attributes, such as the connection ID and the connection name.

The following tables describes attributes that you can use for Oracle CRM On Demand connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use OCOD.
username	Oracle CRM On Demand user name. Use the following format: <domain>/<user name> For example: domain/jsmith@companyname.com.
password	Oracle CRM On Demand password.
serviceUrl	URL of the Oracle CRM On Demand service. For example: https://securecompany.crmondemand.com.

Salesforce Connections

When you create or update a Salesforce connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for Salesforce connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use Salesforce.
username	User name for the Salesforce account. <domain>/<user name> For example: domain/jsmith@companyname.com.
password	Password for the Salesforce account.
securityToken	Security token associated with the user name and password. Optional.
serviceUrl	URL of the Salesforce service. Maximum length is 100 characters.

SAP IDoc Reader Connections

When you create or update an SAP IDoc Reader connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for SAP IDoc Reader connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use SAP_ALE_IDoc_Reader.
username	SAP user name with authorization on S_DATASET, S_TABU_DIS, S_PROGRAM, and B_BTCH_JOB objects.
password	Password for the SAP user name.
database	Type A DEST entry in the saprfc.ini file. This attribute is the Destination Entry field in the user interface.

Attribute	Description
codepage	The code page compatible with the SAP source. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent ID.

SAP IDoc Writer Connections

When you create or update an SAP IDoc Writer connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for SAP IDoc Writer connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use SAP_ALE_IDoc_Writer.
username	SAP user name with authorization on S_DATASET, S_TABU_DIS, S_PROGRAM, and B_BTCH_JOB objects.
password	Password for the SAP user name.
database	Type A DEST entry in the saprfc.ini file. This attribute is the Connection String field in the user interface.
languageCode	Language code that corresponds to the SAP language. A two-letter code, such as en for English.
clientCode	SAP client number. A three-letter code.
codepage	The code page compatible with the SAP target. Use one of the following options: - UTF-8. Unicode Transformation Format, multibyte. - MS1252. MS Windows Latin 1 (ANSI), superset of Latin 1. - ISO-8859-15. Latin 9, Western European. - ISO-8859-2. Eastern European. - ISO-8859-3. Southeast European. - ISO-8859-5. Cyrillic. - ISO-8859-9. Latin 5, Turkish. - IBM500. IBM EBCDIC International Latin-1.
agentId	Secure Agent ID.

Snowflake Data Cloud connections

Use the connection resource to create or update a Snowflake Data Cloud connection with client credentials authentication.

Client credentials authentication uses an external OAuth authorization server, such as Okta or Microsoft Entra ID, to generate an access token for secure access to Snowflake.

Note: You can't use a connection configured with client credentials authentication in a mapping in advanced mode.

Prerequisites

Before you create or update a Snowflake Data Cloud connection with client credentials authentication using the connection resource, configure an external OAuth endpoint in Snowflake. Additionally, get the access token from the external OAuth authorization server, such as Okta or Microsoft Entra ID.

Complete the following prerequisite tasks:

1. Create a client application that is compatible with OAuth to use with Snowflake.
2. Configure the authorization server with the client credentials grant type.
3. Create a security integration for an external OAuth in Snowflake.
4. Get the access token from the external OAuth authorization server.
5. Pass the access token in the connection resource request payload to create or update the connection.

For more information, see "Client credentials" in the *Prepare for authentication* section of the Snowflake Data Cloud Connector help.

Connection details

Create or update a Snowflake Data Cloud connection with client credentials authentication using the connection resource.

The following table describes the connection properties for client credentials authentication:

Property	Description
id	Connection ID. This property is required only when you update the connection. To get the connection ID, send the following GET request: `GET <serverURL>/api/v2/connection/name/<connection name>`
orgId	Organization ID.
name	Name of the connection.
description	Description of the connection.
type	Type of connection. Set to `TOOLKIT_CCI`.
agentId	ID of the Secure Agent used to access the Snowflake account.
agentGroupId	ID of the Secure Agent group.

Property	Description
authentication	Authentication type. Set to `ClientCredentials`.
account	Snowflake account name.
warehouse	Snowflake warehouse name.
accessTokenURL	URL of the OAuth authorization server endpoint that provides the access token.
clientID	Client ID from the OAuth provider application.
clientSecret	Client secret from the OAuth provider application.
clientAuthentication	Method used to authenticate the client.
scope	Scope that defines the access privileges. To specify multiple scopes, separate them with a space.
accessToken	OAuth access token used to authenticate with Snowflake.
tokenType	Type of token.
accessTokenExpireIn	Duration in seconds after which the access token expires.
accessTokenUpdatedTime	Timestamp in milliseconds when the access token was last updated.
oAuthRefreshUrl	URL used to refresh the OAuth access token.
oAuthRefreshKey	Refresh key used to get a new access token.
oAuthRefreshText	Refresh token text used to get a new access token.

Web Service Connections

When you create or update a Web Service connection, you can configure additional attributes, such as the connection ID and the connection name.

The following table describes attributes that you can use for Web Service connections:

Attribute	Description
id	Connection ID.
orgId	Organization ID.
name	Connection name.
description	Optional connection description.
type	Connection type. Use WebServicesConsumer.
username	SAP user name with authorization on S_DATASET, S_TABU_DIS, S_PROGRAM, and B_BTCH_JOB objects.

Attribute	Description
password	Password for the web service login. If the web service does not require a user name, leave this field empty. Optional.
domain	Domain for authentication. Optional.
serviceUrl	Endpoint URL for the web service that you want to access. The WSDL file specifies this URL in the location element. This attribute is the Endpoint URL field in the user interface. Optional.
timeout	Secure Agent ID. Number of seconds IDMC waits for a connection to the web service provider before it closes the connection and fails the session. Also, the number of seconds the IDMC waits for a SOAP response after sending a SOAP request before it fails the session. Default is 60. Optional.
trustCertificatesFile	File containing the bundle of trusted certificates that IDMC uses when authenticating the SSL certificate of the web services provider. Default is ca-bundle.crt. Optional.
certificateFile	Client certificate that a web service provider uses when authenticating a client. You specify the client certificate file if the web service provider needs to authenticate IDMC. Optional.
certificateFilePassword	Password for the client certificate. You specify the certificate file password if the web service provider needs to authenticate IDMC. Optional.
certificateFileType	File type of the client certificate. You specify the certificate file type if the web service provider needs to authenticate the Integration Service. Use one of the following codes: - PEM - DER Optional.
privateKeyFile	Private key file for the client certificate. You specify the private key file if the web service provider needs to authenticate IDMC. Optional.
privateKeyPassword	Password for the private key of the client certificate. You specify the key password if the web service provider needs to authenticate IDMC. Optional.
privateKeyFileType	File type of the private key of the client certificate. You specify the key file type if the web service provider needs to authenticate IDMC. If necessary, use PEM. Optional.
authenticationType	Authentication type to use when the web service provider does not return an authentication type to IDMC. Use one of the following options: - Auto. The Integration Service attempts to determine the authentication type of the web service provider. - Basic. Based on a non-encrypted user name and password. - Digest. Based on an encrypted user name and password. - NTLM. Based on encrypted user name, password, and domain. Default is Auto. Optional.
agentId	ID for the Secure Agent that IDMC uses to access the database in the local area network.

Connection migration

Use this resource to migrate an old version of the connection in referenced assets to the latest connection version within an organization. The migration creates a copy of the project folder and assets and updates the referenced connection in the assets with the latest version.

You can migrate old connections used in Source, Target, and Lookup transformations from assets such as mappings and tasks. If the connection is used across assets in multiple projects, all the referenced assets are updated to use the current connection version.

POST request

To specify the connections to migrate and start the migrate job, use the following URI:

```
saas/api/v2/connectionMigration/migrate
```

Include the following fields in the request:

Field	Type	Required	Description
icSessionId	String	Yes	Informatica Intelligent Cloud Services session ID.
sourceConn	String	Yes	The name of the source connection that you want to migrate. This is the old version of the connector.
targetConn	String	Yes	The target connection name to which you want to migrate. This is the current version of the connector.
projectName	String	No	The project name contains the referenced assets of the source connection that you want to migrate. If you do not specify the project name, the source connection in all assets are migrated.

POST request example

You can use a request similar to the following example:

```
POST <baseURL>/saas/api/v2/connectionMigration/migrate
Content-Type: application/json
Accept: application/json
icSessionId: <sessionId>

{
  "sourceConn": "Migration_V1",
  "targetConn": "Migration_V2",
  "projectName": "V1_Assets"
}
```

POST response

If successful, returns the following information for the export job:

Field	Type	Description
id	String	Global unique identifier for the migration job.
name	String	Name of the migration job.
count	Integer	Number of dependent objects.

Field	Type	Description
status	Complex type	Status of the migration.
objects	Collection	Objects in the migration job.
name	String	Returned in the objects object. Name of the asset that uses the connector.
type	String	Returned in the objects object. The type of asset.
sourcePath	String	Returned in the objects object. Complete path of the referenced asset in the old connection.
targetPath	String	Returned in the objects object. Complete path of the referenced assets in the current connection. The target folder uses the same name as the source folder, with "_Migration_<migration job ID>" appended to the name for identification.
status	String	Returned in the objects object. State of the connection updated in the asset, such as IN PROGRESS, SUCCESS, or FAILED.

POST response examples

If successful, you might receive a response similar to the following example:

```
{
    "id": "4l1XcURpYFjjxpopb7AJ0L",
    "name": "job-1661702962208",
    "count": "1",
    "status": "SUCCESSFUL",
    "objects": [
        {
            "name": "Mapping_V1",
            "type": "DTEMPLATE",
            "sourcePath": "/AA_Migration_Doc",
            "targetPath": "/AA_Migration_Doc_Migration_4l1XcURpYFjjxpopb7AJ0L",
            "status": "SUCCESSFUL"
        }
    ]
}
```

If you receive an error, you might see a response similar to the following example:

```
{
  "error": {
    "code": "MigrationSvc_034",
    "message": "Invalid object id/s [[242973wgfscbwasd23]]. Object resolution failed.",
    "requestId": "2ataXVlgw3ydI1Yb2MA4sq"
  }
}
```

For more information about using the connectionMigration resource to migrate the connectors to the latest version and for the list of connectors that support migration, see the following How-To Library article: Migrating a connector from previous versions using the Data Integration REST API

Connectors

Use this resource to request a list of connectors that are available to an organization along with connector details. You can also use this resource to get attribute information for a specific connector type. You can use the list of attributes that this resource provides when you create a connection for a specific connector type since you need to provide these attributes when you create a connection of a certain type.

GET Request and Response for Available Connectors

To request a list of connectors available for an organization, submit a GET request using the following URI:

```
/api/v2/connector
```

For example, you might use the following request:

```
GET <serverUrl>/api/v2/connector
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
```

A successful response returns the following attributes in the connector object:

Field	Type	Description
name	String	Name of the connector.
type	String	Type of connector. Includes the following values: - Salesforce - Oracle - SqlServer - MySQL - CSVFile - ODBC - MS_ACCESS - FTP - SAP - WebServicesConsumer - MSD
publisher	String	Name of the entity that published the connector.
connectorVersion	Int	Connector version.
shortName	String	Connector short name.
isPublic	Boolean	Whether the connector is a public or private connector. If you are interested in a connector that is private, contact Informatica Global Customer Support.

GET Request and Response for Connector Metadata

To get metadata for a specific connector type, submit a GET request using the following URI:

```
/api/v2/connector/metadata?connectorName=<connectorName>
```

For example, you might use the following request:

```
GET <serverUrl>/api/v2/connector/metadata?connectorName=SQLServer
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
```

A successful response returns the following attributes in the connectorMetadata object:

Field	Type	Description
type	String	Type of connector, such as Salesforce or Oracle.
isStandardConnType	Boolean	Whether the connector is standard or custom. A "True" value indicates the connector is standard.
attributes		Connector attributes for the specified connector type. Includes information in the attribute object for each connector object.
name	String	Included in the attribute object. Name of the attribute, such as database or codePage.
label	String	Included in the attribute object. Label.
id	String	Included in the attribute object. ID.
value	String	Included in the attribute object. Value of the attribute.
type	Int	Included in the attribute object. Data type. For values, see "Connector data types" on page 543.
isMandatory	Boolean	Included in the attribute object. Whether the attribute is mandatory.
visible	Boolean	Included in the attribute object. Whether the attribute is visible.
list	String	Included in the attribute object. A list of types for the selected connector type. For example, SQL Server includes the types SqlServer2000, SqlServer2005, SqlServer2008, and so on.

Data preview

Use this resource to preview data during mapping design. By default, the response returns up to ten rows of data for the specified object.

GET request

To request preview data, specify the connection ID or connection name and the object name in the URI. Optionally, you can include field format information in the request.

Use one of the following URIs:

- To request source data, use one of the following URIs:

  ```
  /api/v2/connection/source/<id>/datapreview/<objectName>
  /api/v2/connection/source/name/<name>/datapreview/<objectName>
  ```

- To request target data, use one of the following URIs:

  ```
  /api/v2/connection/target/<id>/datapreview/<objectName>
  /api/v2/connection/target/name/<name>/datapreview/<objectName>
  ```

You can receive field metadata in the response for flat file, Avro, Parquet, Orc, or JSON formats. To receive field metadata, include file format information in the request body.

For flat file format, you can include the following information in the flatFileAttrs object:

Field	Type	Required	Description
id	Long	Yes	Field ID.
delimiter	String	Yes	Character used to separate fields.
textQualifier	String	Yes	Quote character that defines the boundaries of text strings.
escapeChar	String	Yes	Character immediately preceding a field delimiter character embedded in an unquoted string, or immediately preceding the quote character in a quoted string.
headerLineNo	Int	Yes	Number of header lines.
firstDataRow	Int	Yes	The row number where the data begins in the file.
rowDelimiter	Int	--	Line break character. Enter the decimal code for an ASCII character between 1 and 32. Default is 10, which is the line feed character.
consecutiveDelimiter	Boolean	--	Indicates whether one or more consecutive delimiters are treated as one. Default is false.
multiDelimitersAsAnd	Boolean	--	If the delimiter you specify is more than one character, indicates whether the characters are treated as a single delimiter or multiple delimiters. Default is true.

For Avro, Parquet, Orc, or JSON formats, include the following information in the dataFormat object:

Field	Type	Required	Description
formatId	String	Yes	Format type, for example, Avro.
schema	String	--	Schema format.

By default, the dataPreview response returns 10 rows. For flat file connections, you can specify the number of rows using the numRows parameter as shown in the following example:

```
/api/v2/connection/source/<id>/datapreview/?objectName=<object name>&numRows=<number of
rows to view>
```

You can also specify the beginning row using the startRowNum parameter as shown in the following example:

```
/api/v2/connection/source/<id>/datapreview/?objectName=<object name>&startRowNum=<row number of row to begin with>
```

Note: If you use the connection name in the URI and the connection name includes a space, replace the space with `%20`. For example:

```
/api/v2/connection/target/name/my%20connection/datapreview/SF_ACCOUNT.csv
```

GET response

Returns the dataPreview object for the requested connection ID or connection name and object name.

The dataPreview object includes the following attributes:

Field	Type	Description
connId	String	Connection ID.
objectName	String	Name of the source or target object.
header	String	Column headers.
fieldName	String	Field name.
fieldBusinessName	String	Business field name.
data		Includes the following attribute in the dataPreviewEntry object.
values	String	Included in the dataPreviewEntry object. Field values from the source or target object.

GET request examples

The following example shows a request to preview data from the `SF_ACCOUNT.csv` object:

```
GET <serverUrl>/api/v2/connection/target/0000010B000000000003/datapreview/SF_ACCOUNT.csv
HTTP/1.1
Accept:application/json
icSessionId: <icSessionId>
```

The following example shows a request to preview data from the `customer.parquet` object.

```
POST <serverUrl>/api/v2/connection/source/0000010B000000000009/datapreview?
objectName=customer.parquet
1.0
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
{
    "@type": "dataFormat",
    "dformatId": "Parquet",
    "schema": "message AllData_root { optional int32 c_custkey; optional binary c_name
(UTF8); optional binary c_address (UTF8); optional int64 c_nationkey; optional binary
c_phone (UTF8); optional double c_acctbal; optional binary c_mktsegment (UTF8); required
binary c_comment (UTF8);}"
}
```

GET response example

You might receive a response similar to the following example:

```
{

   "@type": "dataPreview",
```

```
"connId": "0000010B000000000003",
"objectName": "SF_ACCOUNT.csv",
"header":    [
   "ID",
   "ISDELETED",
   "MASTERRECORDID",
   "NAME",
   "TYPE",
   "PARENTID",
   "BILLINGSTREET",
   "BILLINGCITY",
   "BILLINGSTATE",
   "BILLINGPOSTALCODE",
   "BILLINGCOUNTRY",
   "BILLINGLATITUDE",
   "BILLINGLONGITUDE",
   "SHIPPINGSTREET",
   "SHIPPINGCITY",
   "SHIPPINGSTATE",
   "SHIPPINGPOSTALCODE",
   "SHIPPINGCOUNTRY",
   "SHIPPINGLATITUDE",
   "SHIPPINGLONGITUDE",
   "PHONE",
   "FAX",
   "ACCOUNTNUMBER",
   "WEBSITE"
],

"fieldName":    [
   "ID",
   "ISDELETED",
   "MASTERRECORDID",
   "NAME",
   "TYPE",
   "PARENTID",
   "BILLINGSTREET",
   "BILLINGCITY",
   "BILLINGSTATE",
   "BILLINGPOSTALCODE",
   "BILLINGCOUNTRY",
   "BILLINGLATITUDE",
   "BILLINGLONGITUDE",
   "SHIPPINGSTREET",
   "SHIPPINGCITY",
   "SHIPPINGSTATE",
   "SHIPPINGPOSTALCODE",
   "SHIPPINGCOUNTRY",
   "SHIPPINGLATITUDE",
   "SHIPPINGLONGITUDE",
   "PHONE",
   "FAX",
   "ACCOUNTNUMBER",
   "WEBSITE"
],

"fieldBusinessName":    [
   "ID",
   "ISDELETED",
   "MASTERRECORDID",
   "NAME",
   "TYPE",
   "PARENTID",
   "BILLINGSTREET",
   "BILLINGCITY",
   "BILLINGSTATE",
   "BILLINGPOSTALCODE",
   "BILLINGCOUNTRY",
   "BILLINGLATITUDE",
   "BILLINGLONGITUDE",
   "SHIPPINGSTREET",
```

```
   "SHIPPINGCITY",
   "SHIPPINGSTATE",
   "SHIPPINGPOSTALCODE",
   "SHIPPINGCOUNTRY",
   "SHIPPINGLATITUDE",
   "SHIPPINGLONGITUDE",
   "PHONE",
   "FAX",
   "ACCOUNTNUMBER",
   "WEBSITE"
],

"rows":    [
         {
      "@type": "dataPreviewEntry",
      "values":          [
         "001i000000KIAQGAA5",
         "0",
         "",
         "ABCPoint",
         "Customer - Channel",
         "",
         "345 ABC Park",
         "Mountain View",
         "CA",
         "94063",
         "",
         "",
         "",
         "345 ABC Park",
         "Mountain View",
         "CA",
         "94063",
         "",
         "",
         "",
         "(650) 555-3450",
         "(650) 555-9895",
         "CC978213",
         "www.ABCpoint.com"
      ]
   },

         {
      "@type": "dataPreviewEntry",
      "values":          [
         "001i000000KIAQHAA5",
         "0",
         "",
         "123 United, UK",
         "Customer - Direct",
         "",
         "123 Estate,\nGateshead, Tyne and Wear NE26 3HS\nUnited Kingdom",
         "",
         "UK",
         "94063",
         "",
         "",
         "",
         "123 Estate,\nGateshead, Tyne and Wear NE26 3HS\nUnited Kingdom",
         "",
         "",
         "94063",
         "",
         "",
         "",
         "+44 123 4567899",
         "+44 123 4567899",
         "CD355119-A",
         "http://www.123United.com"
      ]
```

```
}
```

Data services

Use the services resource to run industry data services using Informatica Intelligent Cloud Services REST API.

Industry data services refer to a collection of pre-built data services designed to parse, validate, and serialize industry-specific data standards. These data services are available on the data service repository and you can use REST APIs to run them.

When you use the services resource, use the following request header format:

```
<METHOD><base URL>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

POST request

To run a data service, use the following URI:

```
/DSRepo/rest/api/v1/services/run/<service name>
```

Include the following fields in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	ID of the Secure agent group to process the request.
input			Default input port for the data service.
type	string	Yes	Whether the input is a file or data. Use one of the following values: - FILE: Input is a file. - BUFFER: Input is data.
value	string	Yes	Value of the input type. - If the type is FILE, value of the input file path. - If the type is BUFFER, the value is a text string.
output			Default output port for the data service.
type	String	Yes	Whether the output is provided as data or saved to a target file path. Use one of the following values: - FILE: Output is saved to a target file. - BUFFER: Output is provided data.
value	String	Required when type is FILE	Value of the output file path.
additionalInputs	Array		Additional input ports for the data service.
name	String		Name of the additional input port.

Field	Type	Required	Description
type	String		Whether the additional input is a file or data. Use one of the following values: - FILE: Input is a file. - BUFFER: Input is data.
value	String		Value of the additional input type. - If the type is FILE, the value of the input file path. - If the type is BUFFER, the value is a text string.
additionalOutputs	Array	Required for some data services.	Additional output ports for the data service. For HL7, provide the following additional outputs: - Errors - ErrorsFound . For HIPPA, provide the following additional outputs: - Errors - ErrorsFound - ValidationReport
name	String	Yes	Name of the additional output port.
type	String	Yes	Whether the additional output is provided data or saved to a target file path. Use one of the following values: - FILE: Output is saved to a target file. - BUFFER: Output is provided as data.
value	String	Required when type is FILE	Value of the additional output file path.
serviceParameters	Array		Variables in the service parameter ports.
name	String		Name of the service parameter.
value	String		Value of the service parameter.

POST request example

To run an HL7 data service, you might send a request similar to the following example:

```
POST <serverUrl>/DSRepo/rest/api/v1/services/run/HL7_2_6_ADT_A01_Parser
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
{
    "agentGroupId": "010BM02500000000000K",
    "input": {
        "type": "FILE",
        "value": "/root/TEST/v25_s2.txt"
    },
    "output": {
        "type": "FILE",
        "value":"/root/TEST/"
    },
    "additionalInputs": [],
    "serviceParameters": [],
    "additionalOutputs": [
        {
            "name": "Errors",
```

```
            "type": "FILE",
            "value":"/root/TEST/"
        },
        {
            "name": "ErrorsFound",
            "type": "FILE",
            "value":"/root/TEST/"
        }
    ]
}
```

POST response

When you use a POST request to run a data service, it returns a success response if successful or an error object if an error occurs. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "output": "/root/TEST/HL7_2_6_ADT_A01_Parser_output.xml",
    "additionalOutputs": [
  {
            "type": "file",
            "value": "/root/TEST/HL7_2_6_ADT_A01_Parser_Errors.xml",
            "name": "Errors"
        },
        {
            "type": "file",
            "value": "/root/TEST/HL7_2_6_ADT_A01_Parser_ErrorsFound.xml",
            "name": "ErrorsFound"
        }
    ],
    "message": "Success"
}
```

Dynamic mapping tasks

You can create a dynamic mapping task with the REST API to batch jobs together that are based on the same mapping. You can also run the task and get details about the job.

Use the following resources for dynamic mapping tasks:

- Login. Use to log in to IDMC and get the session ID to use in dynamic task REST API calls.
- dynamictask. Use to create, view, update, or delete a dynamic mapping task.
- job. Use to start, stop, or get details about a dynamic mapping task run instance.

When you use these resources, note the following rules:

- Use JSON format.
- Use the following URL:

  ```
  <serverUrl>/batch-mapping/api/v1/<API name>
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  IDS-SESSION-ID: <SessionId>
  ```

The server URL includes the name and region of the POD that your organization uses and the IDMC domain, informaticacloud.com. If you do not know the name and region of your organization's POD, you can find it by logging in to IDMC through the user interface. The POD information is located in the browser's address bar.

In the following example, https://usw3.dm-us.informaticacloud.com is the server URL:

```
https://usw3.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/home
```

Use the server URL as the base URL in the header of REST API calls.

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Logging in

Use this resource to log into IDMC when you use resources that require the IDS-SESSION-ID in the call header. The IDS-SESSION-ID is included in a successful login response.

POST request

Use the following URL:

```
<login URL>/identity-service/api/v1/Login
```

The login URL includes the region where your organization is located and the IDMC domain, informaticacloud.com. You can find your organization's login region by opening the IDMC log in page. The regional login URL is located in the browser's address bar before you log in to IDMC.

In the following example, https://dm-us.informaticacloud.com, is the region URL:

```
https://dm-us.informaticacloud.com/identity-service/home
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
username	String	Yes	IDMC user name. Maximum length is 255 characters.
password	String	Yes	IDMC password. Maximum length is 255 characters.

POST response

Returns the user object if the request is successful. Returns the error object if errors occur.

Use the session ID returned in the response for subsequent requests.

The user object includes the following attributes:

Field	Type	Description
sessionId	String	REST API session ID for the current session. Use in most REST API request headers.
sessionExpireTime	String	Time the session expires.
id	String	User ID.
name	String	IDMC user name.

Field	Type	Description
currentOrgId	String	Current organization ID.
currentOrgName	String	Name of the current organization.
parentOrgId	String	ID of the parent organization.
orgId	String	ID of the organization the user belongs to.
orgName	String	Name of the organization the user belongs to.
groups	String	User group.
effectiveRoles	String	Roles assigned to the user.
effectivePrivileges	String	Privileges assigned to the user.
status	String	Status of the user.
timeZoneId	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
authenticator	String	User authentication method.

Getting dynamic mapping task details

Use this resource to request the details of a dynamic mapping task. You can also create, update, or delete a dynamic mapping task.

To request details or to update a dynamic task that already exists, you need the task ID. You can get the task ID using the V3 lookup resource. To lookup object details with the V3 lookup resource, use the following URI:

```
/saas/public/core/v3/lookup
```

Include BATCH_MAPPING as the object type as shown in the following example:

```
{
  "objects": [
    {
      "path": "Default/DMT_API",
      "type": "BATCH_MAPPING"
    }
  ]
}
```

The response returns details about the objects in the path as shown in the following example:

```
{
  "objects": [
    {
      "id": "7H67JPHH9Y4g7Hm7JyL5K2",
      "path": "Default/DMT_API",
      "type": "BATCH_MAPPING",
      "description": "",
      "updatedBy": "rl.ma",
      "updateTime": "2021-08-27T23:45:14Z"
    }
  ]
}
```

For more information about using the V3 lookup resource, see "Lookup" on page 202.

You can also find the task ID by opening the task in the Data Integration user interface. In the URL, the last string of characters in the task ID.

For example, in the following URL, the task ID is 771b8ZpTcfreXm8n5RZUQ5:

```
https://na1.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/
dynamicmapping/771b8ZpTcfreXm8n5RZUQ5
```

GET request

To request the details of a dynamic mapping task, use the task ID.

Use the following URI to request the details of a dynamic mapping task:

```
/batch-mapping/api/v1/dynamictask/<id>
```

GET response

Returns the dynamictask object for the requested task ID.

Returns the error object if errors occurred.

The following table describes the attributes in a dynamictask object:

Field	Type	Description
name	String	Name of the dynamic mapping task.
mappingId	String	ID of the mapping used in the task.
mappingDocType	String	Type of mapping used in the task.
runtimeEnvironmentId	String	Runtime environment used for the task.
groups		Groups in the dynamic mapping task.
groupName	String	Included in the group object. Name of the group.
enabled	Boolean	Included in the group object. Whether the group is enabled or not. Returns true when the group is enabled.
parameters		Parameters in the dynamic mapping task.
name	String	Included in the parameter object. Name of the parameter.
type	String	Included in the parameter object. Type of parameter.
txName	String	Included in the parameter object. Name of the transformation that uses the parameter.
uniqueName	String	Included in the parameter object. Transformation name and parameter name. If no transformation name is present, then parameter name.

Field	Type	Description
scope	String	Included in the parameter object. Scope of the parameter, either DEFAULT or LOCAL.
label	String	Included in the parameter object. Parameter label.
description	String	Included in the parameter object. Parameter description.
retentionPolicy	String	Included in the parameter object. Applicable to in-out parameters. Determines when the task retains the current parameter value.
aggregationType	String	Included in the parameter object. Applicable to in-out parameters. Type of calculation the parameter performs.
job		Jobs in the dynamic mapping task.
jobName	String	Included in the job object. Name of the job.
jobType	String	Included in the job object. Type of job, either USER or DEFAULT.
enabled	Boolean	Included in the job object. Determines if the job is enabled. Default is false.
stopOnError	Boolean	Included in the job object. Stops the job when it encounters an error. Default is false.
stopOnWarning	Boolean	Included in the job object. Stops the job when it encounters a warning. Default is false.
preProcessingCmds	Sting	Included in the job object. List of commands to run before the task.
postProcessingCmds	String	Included in the job object. List of commands to run after the task.
advSessionProperties	Map	Included in the job object. Map of the advanced session properties that are set for the job.
group	String	Included in the job object. Name of the group that the job belongs to.

Field	Type	Description
paramValueBindings		Included in the job object. Parameter attributes in the job.
paramDefnRef	Sting	Included in the paramValueBindings object. Unique name of the parameter.
type	String	Included in the paramValueBindings object. Type of parameter. Value can be one of the following types: - Connection - String - Source - Target - INOUT - Sequence
connection		Attributes for connection type parameters.
connectionId	String	Included in the paramValueBindings object. Connection ID.
connectionType	String	Included in the paramValueBindings object. Type of connection.
runtimeAttrs	Map	Included in the paramValueBindings object. Runtime attributes for the connection.
oprRuntimeAttrs	Map	Included in the paramValueBindings object. Read/write runtime attributes.
source		Attributes for source type parameters.
sourceObject	Object	Included in the paramValueBindings object. Source object.
advancedFilterExpression	String	Included in the paramValueBindings object. Advanced filter condition.
filterFields	List of objects	Included in the paramValueBindings object. List of filter fields.
sortFields	List of objects	Included in the paramValueBindings object. List of sort fields.
srcFFAttrs	Object	Included in the paramValueBindings object. Flat file attributes.
ccmDataFormat	Object	Included in the paramValueBindings object. Data format
customQuery	String	Included in the paramValueBindings object. Custom query

Field	Type	Description
handleSpecialChars	Boolean	Included in the paramValueBindings object. Determines if the task can use special characters.
runtimeAttrs	Map	Included in the paramValueBindings object. Runtime Attributes
oprRuntimeAttrs	Map	Included in the paramValueBindings object. Read/write runtime attributes.
string		Attributes for string type parameters.
text	String	Included in the paramValueBindings object. Text value for the parameter.
target		Attributes for target type parameters.
objectName	String	Included in the paramValueBindings object. Name of the existing target object.
objectLabel	String	Included in the paramValueBindings object. Label of the existing target object.
newObjectName	String	Included in the paramValueBindings object. Name of the new target file.
truncateTarget	Boolean	Included in the paramValueBindings object. Determines if Data Integration truncates the target.
bulkApiDBTarget	Boolean	Included in the paramValueBindings object. Determines if bulk API is used.
operationType	String	Included in the paramValueBindings object. Task operation.
tgtFFAttrs	String	Included in the paramValueBindings object. Flat file attributes.
tgtObjectAttributes	Map	Included in the paramValueBindings object. Target object attributes.
runtimeAttrs	Map	Included in the paramValueBindings object. Run time attributes
oprRuntimeAttrs	Map	Included in the paramValueBindings object. Read/write runtime attributes.
ccmDataFormat	Object	Included in the paramValueBindings object. Data format for CCI targets.

Field	Type	Description
dynamicFileName	Boolean	Included in the paramValueBindings object. Determines if the target file name is dynamic.
handleSpecialChars	Boolean	Included in the paramValueBindings object. Determines if the target object handles special characters.
INOUT		Attributes for INOUT type parameters.
initialValue	String	Included in the paramValueBindings object. Initial value of the in-out parameter.
datatype	String	Included in the paramValueBindings object. Data type of the parameter.
precision	String	Included in the paramValueBindings object. Precision of the parameter.
scale	String	Included in the paramValueBindings object. Scale of the parameter.
retentionPolicy	String	Included in the paramValueBindings object. Determines when the task retains the current parameter value.
aggregationType	String	Included in the paramValueBindings object. Type of calculation the parameter performs.
currentValue	String	Included in the paramValueBindings object. Current value of the in-out parameter.
sequence		Attributes for sequence type parameters.
txName	String	Included in the paramValueBindings object. Name of the Sequence transformation.
initialValue	String	Included in the paramValueBindings object. Initial value of the Sequence transformation.
value	String	Included in the paramValueBindings object. Current value of the Sequence transformation.

POST request

To create a dynamic mapping task, use the following URI:

```
/batch-mapping/api/v1/dynamictask
```

If you want to specify a location for the task, include the container ID as a query parameter in the request. If the container ID isn't included in the request, the task is created in the Default folder. You can find the container ID for a project or folder in the Data Integration user interface. On the Explore page, select the folder. In the URL, the last string of characters in the container ID.

For example, in the following URL, the container ID is dH2DuGJYda7ijgW4Sm32sR:

```
https://na1.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/Explore/
dH2DuGJYda7ijgW4Sm32sR
```

The following table describes the attributes you can include in an dynamictask object:

Field	Type	Required	Description
name	String	Yes	Name of the dynamic mapping task.
mappingId	String	Yes	ID of the mapping used in the task.
mappingDocType	String	Yes	Type of mapping used in the task. Include one of the following types: - MAPPING. Use for mappings outside of advanced mode. - AT_SCALE_MAPPING. Use for mappings in advanced mode.
runtimeEnvironmentId	String	Yes	Runtime environment used for the task.
groups			Groups in the dynamic mapping task.
groupName	String	Yes	Include in the group object. Name of the group.
enabled	Boolean		Include in the group object. Determines if the group is enabled or not.
parameters			Parameters in the dynamic mapping task.
name	String	Yes	Include in the parameters object. Name of the parameter in the mapping.
type	String	Yes	Include in the parameters object. Type of parameter. Include one of the following types: - SOURCE_CONNECTION - SOURCE_OBJECT - TARGET_CONNECTION - TARGET_OBJECT - LOOKUP_CONNECTION - LOOKUP_OBJECT - TRANSFORM_CONNECTION - STRING - GROUPBY - FIELD - EXPRESSION - EXPRESSION_FIELDS - CONDITION - FIELD_MAPPING - SORTLIST - INOUT_INT - INOUT_BIGINT - INOUT_STRING - INOUT_TEXT - INOUT_DECIMAL - INOUT_DOUBLE - INOUT_DATETIME - SEQUENCE

Field	Type	Required	Description
txName	String		Include in the parameters object. Name of the transformation that uses the parameter.
uniqueName	String	Yes	Include in the parameters object. Transformation name and parameter name. If no transformation name is present, then parameter name.
Scope	String	Yes	Include in the parameters object. Scope of the parameter, either default or local.
label	String		Include in the parameters object. Parameter label.
description	String		Include in the parameters object. Parameter description.
retentionPolicy	String		Include in the parameters object. Applicable to in-out parameters. Determines when the task retains the current parameter value. Use one of the following values: - ON_SUCCESS_OR_WARNING - ON_SUCCESS - ON_WARNING - NEVER
aggregationType	String		Include in the parameters object. Applicable to in-out parameters. Type of calculation the parameter performs. Use one of the following values: - MAX - MIN - COUNT
job			Jobs in the dynamic mapping task.
jobName	String	Yes	Include in the job object. Name of the job.
jobType	String	Yes	Include in the job object. Type of job. Use either USER or DEFAULT.
enabled	Boolean		Include in the job object. Determines if the job is enabled. Default is false.
stopOnError	Boolean		Include in the job object. Stops the job when it encounters an error. Default is false.
stopOnWarning	Boolean		Include in the job object. Stops the job when it encounters a warning. Default is false.

Field	Type	Required	Description
preProcessingCmds	String		Include in the job object. List of commands to run before the task.
postProcessingCmds	String		Include in the job object. List of commands to run after the task.
advSessionProperties	Map		Include in the job object. Map of the advanced session properties that are set for the job.
group	String	Yes	Include in the job object. Name of the group that the job belongs to.
paramValueBindings			Parameter attributes in each job.
paramDefnRef	Sting	Yes	Include in the paramValueBindings object. Unique name of the parameter.
type	String	Yes	Include in the paramValueBindings object. Type of parameter. Use one of the following types: - Connection - String - Source - Target - INOUT - Sequence
connection			Attributes for connection type parameters.
connectionId	String		Include in the paramValueBindings object. Connection ID.
connectionType	String		Include in the paramValueBindings object. Type of connection. Use one of the following types: - SOURCE - TARGET - LOOKUP - TRANSFORM
runtimeAttrs	Map		Include in the paramValueBindings object. Runtime attributes for the connection.
oprRuntimeAttrs	Map		Include in the paramValueBindings object. Read/write runtime attributes.
source			Attributes for source type parameters.
sourceObject	Object		Include in the paramValueBindings object. Source object.
advancedFilterExpression	String		Include in the paramValueBindings object. Advanced filter condition.

Field	Type	Required	Description
filterFields	List of objects		Include in the paramValueBindings object. List of filter fields.
sortFields	List of objects		Include in the paramValueBindings object. List of sort fields.
srcFFAttrs	Object		Include in the paramValueBindings object. Flat file attributes.
ccmDataFormat	Object		Include in the paramValueBindings object. Data format for CCI sources.
customQuery	String		Include in the paramValueBindings object. Custom query.
handleSpecialChars	Boolean		Include in the paramValueBindings object. Determines if the task can use special characters.
runtimeAttrs	Map		Include in the paramValueBindings object. Runtime attributes for the source.
oprRuntimeAttrs	Map		Include in the paramValueBindings object. Read/write runtime attributes.
string			Attributes for string type parameters.
text	String		Include in the paramValueBindings object. Text value for parameter.
target			Attributes for target type parameters.
objectName	String		Include in the paramValueBindings object. Name of the existing target object.
objectLabel	String		Include in the paramValueBindings object. Label of the existing target object.
newObjectName	String		Include in the paramValueBindings object. Name of the new target file.
truncateTarget	Boolean		Include in the paramValueBindings object. Determines if Data Integration truncates the target.
bulkApiDBTarget	Boolean		Include in the paramValueBindings object. Determines if bulk API is used.
operationType	String		Include in the paramValueBindings object. Task operation.

Field	Type	Required	Description
tgtFFAttrs	String		Include in the paramValueBindings object. Flat file attributes.
tgtObjectAttributes	Map		Include in the paramValueBindings object. Target object attributes.
runtimeAttrs	Map		Include in the paramValueBindings object. Run time attributes.
oprRuntimeAttrs	Map		Include in the paramValueBindings object. Read/write runtime attributes.
ccmDataFormat	Object		Include in the paramValueBindings object. Data format for CCI targets.
dynamicFileName	Boolean		Include in the paramValueBindings object. Determines if the target file name is dynamic.
handleSpecialChars	Boolean		Include in the paramValueBindings object. Determines if the target object handles special characters.
INOUT			Attributes for INOUT type parameters.
initialValue	String		Include in the paramValueBindings object. Initial value of the in-out parameter.
datatype	String		Include in the paramValueBindings object. Data type of the parameter.
precision	String		Include in the paramValueBindings object. Precision of the parameter.
scale	String		Include in the paramValueBindings object. Scale of the parameter.
retentionPolicy	String		Include in the paramValueBindings object. Determines when the task retains the current parameter value. Use one of the following values: - ON_SUCCESS_OR_WARNING - ON_SUCCESS - ON_WARNING - NEVER
aggregationType	String		Include in the paramValueBindings object. Type of calculation the parameter performs. Use one of the following values: - MAX - MIN - COUNT

Field	Type	Required	Description
currentValue	String		Include in the paramValueBindings object. Current value of the in-out parameter.
sequence			Attributes for sequence type parameters.
txName	String		Include in the paramValueBindings object. Name of the Sequence transformation.
initialValue	String		Include in the paramValueBindings object. Initial value of the Sequence transformation.
value	String		Include in the paramValueBindings object. Current value of the Sequence transformation.

POST response

If successful, returns the dynamictask object that you created or updated. Returns the error object if errors occur.

PUT request

To update a dynamic mapping task, include the task ID as shown in the following example:

```
/batch-mapping/api/v1/dynamictask/<Id>
```

When you update a dynamic mapping task, include the same attributes as a POST request.

PUT response

Returns the task ID, state, and any validation errors as shown in the following example:

```
{
  "frsId": "1JVMWZjVPMhKY4SdxcGd60",
  "state": "VALID",
  "validationErrors": []
}
```

DELETE request

To delete a dynamic mapping task, use the task ID in the following URI:

```
/batch-mapping/api/v1/dynamictask/<id>
```

DELETE response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST example

To create a new dynamic mapping task with the REST API, you might use the following request:

```
POST https://na1.dm-us.informaticacloud.com/batch-mapping/api/v1/dynamictask
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: jpaybAKQMsmdt7vLJ02z0s
{
    "orgId": "2ij4X7Pd63ibnquEQyy9wA",
    "name": "DMT_API",
    "description": "",
    "mappingId": "01003Y1700000000005X",
    "mappingDocType": "MAPPING",
```

```
    "runtimeEnvironmentId": "01003Y25000000000004",
    "scheduleId": null,
    "state": "VALID",
    "groups": [
        {
      "groupName": "Group_1",
      "enabled": true
    },
    {
      "groupName": "Group_2",
      "enabled": false
    }
  ],
   "parameters": [
    {
      "uniqueName": "Source:SrcCon",
      "name": "SrcCon",
      "txName": "Source",
      "type": "SOURCE_CONNECTION",
      "scope": "DEFAULT",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "Source:SrcObj",
      "name": "SrcObj",
      "txName": "Source",
      "type": "SOURCE_OBJECT",
      "scope": "LOCAL",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "Target:TrgCon",
      "name": "TrgCon",
      "txName": "Target",
      "type": "TARGET_CONNECTION",
      "scope": "DEFAULT",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "Target:TrgObj",
      "name": "TrgObj",
      "txName": "Target",
      "type": "TARGET_OBJECT",
      "scope": "LOCAL",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "Lookup:Lkcon",
      "name": "Lkcon",
      "txName": "Lookup",
      "type": "LOOKUP_CONNECTION",
      "scope": "DEFAULT",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "Lookup:lkObj",
```

```
      "name": "lkObj",
      "txName": "Lookup",
      "type": "LOOKUP_OBJECT",
      "scope": "DEFAULT",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "Lkp",
      "name": "Lkp",
      "txName": null,
      "type": "EXPRESSION",
      "scope": "LOCAL",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    },
    {
      "uniqueName": "ExParam",
      "name": "ExParam",
      "txName": null,
      "type": "EXPRESSION",
      "scope": "LOCAL",
      "label": null,
      "description": "",
      "retentionPolicy": null,
      "aggregationType": null
    }
  ],
  "jobs": [
    {
      "jobUUID": "ae1lR3k2ccYgXNeFQe4DIT",
      "jobName": "<Default>",
      "jobType": "DEFAULT",
      "enabled": false,
      "stopOnError": false,
      "stopOnWarning": false,
      "preProcessingCmds": [],
      "postProcessingCmds": [],
      "advSessionProperties": {},
      "paramValueBindings": [
        {
          "type": "Connection",
          "paramDefnRef": "Source:SrcCon",
          "connectionId": "01003Y0B000000000006",
          "connectionType": null,
          "runtimeAttrs": {},
          "oprRuntimeAttrs": {}
        },
        {
          "type": "Connection",
          "paramDefnRef": "Target:TrgCon",
          "connectionId": "01003Y0B00000000001Q",
          "connectionType": null,
          "runtimeAttrs": {},
          "oprRuntimeAttrs": {}
        },
        {
          "type": "Connection",
          "paramDefnRef": "Lookup:Lkcon",
          "connectionId": "01003Y0B00000000001Q",
          "connectionType": null,
          "runtimeAttrs": {},
          "oprRuntimeAttrs": {}
        },
        {
          "type": "Source",
          "paramDefnRef": "Lookup:lkObj",
```

```
      "sourceObject": {
        "name": "EMP",
        "label": "EMP",
        "metadataUpdated": false
      },
      "advancedFilterExpression": null,
      "userDefinedJoin": null,
      "filterFields": [],
      "sortFields": [],
      "srcFFAttrs": null,
      "overriddenFields": [],
      "ccmDataFormat": null,
      "customQuery": null,
      "handleSpecialChars": false,
      "runtimeAttrs": {},
      "oprRuntimeAttrs": {}
    }
  ],
  "group": null
},
{
  "jobUUID": "21rswJo8MnOgUTtfCq96AR",
  "jobName": "Job_1",
  "jobType": "USER",
  "enabled": true,
  "stopOnError": false,
  "stopOnWarning": false,
  "preProcessingCmds": [],
  "postProcessingCmds": [],
  "advSessionProperties": {},
  "paramValueBindings": [
    {
      "type": "Source",
      "paramDefnRef": "Source:SrcObj",
      "sourceObject": {
        "name": "employee.csv",
        "label": "employee.csv",
        "metadataUpdated": false
      },
      "advancedFilterExpression": null,
      "userDefinedJoin": null,
      "filterFields": [],
      "sortFields": [],
      "srcFFAttrs": null,
      "overriddenFields": [],
      "ccmDataFormat": null,
      "customQuery": null,
      "handleSpecialChars": false,
      "runtimeAttrs": {},
      "oprRuntimeAttrs": {}
    },
    {
      "type": "Target",
      "paramDefnRef": "Target:TrgObj",
      "objectName": "CONTACT",
      "objectLabel": "CONTACT",
      "newObjectName": null,
      "truncateTarget": false,
      "bulkApiDBTarget": false,
      "operationType": null,
      "tgtFieldRefs": {},
      "targetUpdateColumns": [],
      "tgtFFAttrs": null,
      "tgtObjectAttributes": {},
      "runtimeAttrs": {},
      "oprRuntimeAttrs": {},
      "handleSpecialChars": false,
      "ccmDataFormat": null,
      "dynamicFileName": false
    },
    {
```

```
      "type": "String",
      "paramDefnRef": "Lkp",
      "text": " EMP_ID||EMP_NAME"
    },
    {
      "type": "String",
      "paramDefnRef": "ExParam",
      "text": " IsNull(EMP_ID)"
    }
  ],
  "group": "Group_1"
},
{
  "jobUUID": "6pavcOH4kwZewe1XL1khoF",
  "jobName": "Job_2",
  "jobType": "USER",
  "enabled": true,
  "stopOnError": false,
  "stopOnWarning": false,
  "preProcessingCmds": [],
  "postProcessingCmds": [],
  "advSessionProperties": {},
  "paramValueBindings": [
    {
      "type": "Source",
      "paramDefnRef": "Source:SrcObj",
      "sourceObject": {
        "name": "Boston_Customers.csv",
        "label": "Boston_Customers.csv",
        "metadataUpdated": false
      },
      "advancedFilterExpression": null,
      "userDefinedJoin": null,
      "filterFields": [],
      "sortFields": [],
      "srcFFAttrs": null,
      "overriddenFields": [],
      "ccmDataFormat": null,
      "customQuery": null,
      "handleSpecialChars": false,
      "runtimeAttrs": {},
      "oprRuntimeAttrs": {}
    },
    {
      "type": "Target",
      "paramDefnRef": "Target:TrgObj",
      "objectName": "CUSTINFO_TYPE",
      "objectLabel": "CUSTINFO_TYPE",
      "newObjectName": null,
      "truncateTarget": false,
      "bulkApiDBTarget": false,
      "operationType": null,
      "tgtFieldRefs": {},
      "targetUpdateColumns": [],
      "tgtFFAttrs": null,
      "tgtObjectAttributes": {},
      "runtimeAttrs": {},
      "oprRuntimeAttrs": {},
      "handleSpecialChars": false,
      "ccmDataFormat": null,
      "dynamicFileName": false
    },
    {
      "type": "String",
      "paramDefnRef": "Lkp",
      "text": "NAME=Firstname"
    },
    {
      "type": "String",
      "paramDefnRef": "ExParam",
      "text": "Firstname||Lastname"
```

```
            }
          ],
          "group": "Group_2"
        }
      ]
    }
```

Running a dynamic mapping task

When you use the REST API to run a dynamic mapping task, use the REST API version 1 job resource to start or stop the job. You can also get details about the job.

Do not use the platform REST API version 2 job resource to get the status of a dynamic mapping task.

If your organization uses projects and folders, use the REST API version 3 lookup resource to retrieve the task ID. This ID is the federated task ID, which you must include in the POST request.

GET request

To get details of a dynamic mapping task run, use the following URI:

```
/batch-mapping/api/v1/Job/monitor/task/<Id>/run/<runId>
```

GET response

If successful, returns the job status.

If unsuccessful, the response includes a reason for the failure.

For example, you might get the following response when you request details of a completed dynamic mapping task:

```
{
    "taskId": "jUJNIX39Z6ZbR8KZCm2ieS",
    "taskFrsId": "k2AE77O06oYg6NvrOtKt6t",
    "taskName": "Dynamic Mapping Task2",
    "instanceId": 1,
    "startedBy": "user@informatica.com",
    "startTime": "2021-08-26T16:28:11.000Z",
    "updateTime": "2021-08-26T16:28:35.000Z",
    "endTime": "2021-08-26T16:28:35.000Z",
    "runtimeEnvironment": "test1",
    "runtimeEnvironmentId": "01000025000000000002",
    "status": "COMPLETED",
    "successRows": 3,
    "errorRows": 0,
    "saasMappingId": "01000017000000000007",
    "mappingName": "dsst__copy_data_new_tgt_With_SortList",
    "mappingFrsId": "5A90bRPboO0dpMQ8F2nkgy",
    "mappingDocType": "MAPPING",
    "runContext": "API",
    "scheduleName": null,
    "jobs": [
            {
                    "jobName": "Job_1",
                    "jobUUID": "78OZ7JlUNSCd09kwQWXbUf",
                    "groupName": "Group_1",
                    "saasJobRunId": 52,
                    "saasLogId": "010000C100000000040H",
                    "startTime": "2021-08-26T16:28:18.000Z",
                    "updateTime": "2021-08-26T16:28:33.000Z",
                    "endTime": "2021-08-26T16:28:33.000Z",
                    "errorMessage": null,
                    "status": "COMPLETED",
                    "failedSourceRows": 0,
                    "successSourceRows": 3,
                    "failedTargetRows": 0,
                    "successTargetRows": 3,
```

```
                        "enabled": true,
                        "sessionLogUrl": null
                }
        ]
}
```

Start POST request

To run a dynamic mapping task, use the following URI:

```
/batch-mapping/api/v1/Job
```

Include the federated task ID in the request as in the following example:

```
{
        "taskFrsId": "k2AE77O06oYg6NvrOtKt6t"
}
```

Start POST response

Returns the run ID and the federated task ID.

For example, if you run a dynamic mapping task for the second time, you get the following response:

```
{
        "runId": 2,
        "taskFrsId": "k2AE77O06oYg6NvrOtKt6t"
}
```

Stop POST request

To stop a dynamic mapping task run, use the following URI

```
/batch-mapping/api/v1/Job/stop
```

Include the task ID and the job run ID attributes in the job object as shown in the following example:

```
{
"taskFrsId": "gScmpuSzjSdcbNPFNYbbcg",
"runId": 10
}
```

Stop POST response

Returns the 200 success object if the request is successful. Returns the error object if errors occur.

Fields

A field is a subset of a data structure that represents a single data item. For example, a database table column is a field. You can request and update field details for a source or target object.

Getting field details

Use the fields resource to get field details for a source or target object.

GET request

To get field details for a source object, use one of the following URIs:

- If you want to specify the source connection ID, use `/api/v2/connection/source/<id>/field/<object name>`.
- If you want to specify the source connection name and the source object name, use `/api/v2/connection/source/name/<name>/field/<object name>`.

To get field details for a target object, use one of the following URIs:

- If you want to specify the target connection ID, use `/api/v2/connection/target/<id>/field/<object name>`.
- If you want to specify the target connection name and the target object name, use `/api/v2/connection/target/name/<name>/field/<object name>`.

You can use the following URI if the object name includes a forward slash (/):

```
/api/v2/connection/<source or target>/<id>/fields?objectName=<objectName>
```

If you use the connection name in the URI and the connection name includes a space, replace the space with `%20`. For example:

```
/api/v2/connection/source/name/my%20connection/field/customer
```

Note: The object name is case-sensitive.

GET response

The response returns the field object for each field in the source or target object and an error object if an error occurs.

The following table describes the attributes in the field object that might be returned based on the connection type:

Field	Type	Description
id	Long	Field ID.
name	String	Field name.
type	String	Field type.
label	String	Field label.
parentObject	String	Parent object, if applicable.
precision	Int	Length of the field in bytes.
pcType	String	PowerCenter data type.
scale	Int	Number of digits after the decimal point for numeric values.
columnIndex	Int	Column index.
isKey	Boolean	Whether the field is a used as a key.
isExternalId	Boolean	Whether the field is used as an external ID.
isSfIdLookup	Boolean	Whether the field is used as a Salesforce ID lookup field.
isNullible	Boolean	Whether the field can contain null values.
isUnique	Boolean	Whether the field requires unique values.
isCreateable	Boolean	Whether the field accepts new values.
isCalculated	Boolean	Whether the field is calculated.

Field	Type	Description
isUpdateable	Boolean	Whether the field allows updates.
isFilterable	Boolean	Whether the field can be filtered.
linkedFields	String	For a masking task, the source field mapped to the input field of the mapplet.
relatedInfos		Information about related fields included in a fieldRelatedInfo object for each related field.
fieldId	Long	Included in the fieldRelatedInfo object. Field ID.
referenceObject	String	Included in the fieldRelatedInfo object. Object that includes the field.
relationshipName	String	Included in the fieldRelatedInfo object. Relationship to object.
references		Reference information included in a fieldRelatedInfo object for each related field.
fieldId	Long	Included in the fieldRelatedInfo object. Field ID.
referenceObject	String	Included in the fieldRelatedInfo object. Object that includes the field.
relationshipName	String	Included in the fieldRelatedInfo object. Relationship to object.
javaType	String	Java data type.
showLabel	Boolean	Whether to show the field label.
naturalOrder	Int	Position number of the field in the source.
customProperties		Custom properties for the field.

GET example

To get field details for a Customer source object available through the source connection with ID 0002D420000000J, you might use the following request:

```
GET <serverUrl>/api/v2/connection/source/0002D420000000J/field/Customer
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
```

A successful request returns the fields object for each field in the Customer source object.

Updating fields in flat files

Use the fields resource to update fields in a source or target object from a flat file connection.

POST request

Use one of the following URIs:

- For a source object, use `/api/v2/connection/source/<id>/field/<objectName>`.
- For a target object, use `/api/v2/connection/target/<id>/field/<objectName>`.

When you update the fields in the object, the flat file attributes in the request override the default attributes for the object.

The following table describes the attributes you can include in the flatFileAttrs object that you specify in the request:

Field	Type	Required	Description
id	Long	Yes	Field ID.
delimiter	String	Yes	Character used to separate fields.
textQualifier	String	Yes	Quote character that defines the boundaries of text strings.
escapeChar	String	Yes	Character immediately preceding a field delimiter character embedded in an unquoted string, or immediately preceding the quote character in a quoted string.
headerLineNo	Int	Yes	Number of header lines.
firstDataRow	Int	Yes	The row number where the data begins in the file.
rowDelimiter	Int	--	Line break character. Enter the decimal code for an ASCII character between 1 and 32. Default is 10, which is the line feed character.
consecutiveDelimiter	Boolean	--	Indicates whether one or more consecutive delimiters are treated as one. Default is false.
multiDelimitersAsAnd	Boolean	--	If the delimiter you specify is more than one character, indicates whether the characters are treated as a single delimiter or multiple delimiters. Default is true.

POST request example

To update fields in a flat file source object, you might use the following request:

```
POST <serverUrl>/api/v2/connection/source/0000010B000000000021/field/test_precision.csv
1.0
Content-Type: application/xml
Accept: application/xml
icSessionId
{
    "@type": "flatFileAttrs",
    "delimiter": ",",
    "textQualifier": "'",
    "escapeChar": "\\"
}
```

Updating fields in objects with non-flat file formats

Use the fields resource to update fields in a source or target object in a non-flat file format such as Avro, Parquet, ORC, or JSON.

POST request

For Avro, Parquet, ORC, and JSON formats, you can update fields in the source or target object by including the format type and optionally, the schema. If you don't include the schema, the schema format is inferred from the data file.

Use one of the following URIs:

- For a source object, use `/api/v2/connection/source/<id>/fields?objectName=<object name>`.
- For a target object, use `/api/v2/connection/target/<id>/fields?objectName=<object name>`.

The following table describes the attributes to include in the dataFormat object:

Field	Type	Required	Description
formatId	String	Yes	Format type, for example, Avro.
schema	String	--	Schema format.

POST request example

To update fields in a Parquet source object, you might use the following request:

```
POST <serverUrl>/api/v2/connection/source/0100000B00000000000F/fields?
objectName=infa.qa.bucket%2Fcustomer.parquet
1.0
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>
{
    "@type": "dataFormat",
    "dformatId": "Parquet",
    "schema": "message AllData_root { optional int32 c_custkey; optional binary c_name
(UTF8); optional binary c_address (UTF8); optional int64 c_nationkey; optional binary
c_phone (UTF8); optional double c_acctbal; optional binary c_mktsegment (UTF8); required
binary c_comment (UTF8);}"
}
```

A successful response might look like the following example:

```
[
    {
        "@type": "field",
        "id": -1,
        "name": "c_custkey",
        "type": "parquet_int32",
        "uniqueName": "c_custkey",
        "label": "c_custkey",
        "parentObject": "customer_tgt.parquet",
        "pcType": "INTEGER",
        "precision": 10,
        "scale": 0,
        "columnIndex": -1,
        "isKey": false,
        "isExternalId": false,
        "isSfIdLookup": false,
        "isNullable": true,
        "isUnique": false,
        "isCreateable": false,
        "isUpdateable": true,
        "isFilterable": true,
```

```
        "isCalculated": false,
        "javaType": "java.lang.Integer",
        "showLabel": true,
        "naturalOrder": 0,
        "linkedFields": [],
        "relatedInfos": [],
        "references": []
    },
    {
        "@type": "field",
        "id": -1,
        "name": "c_address",
        "type": "parquet_string",
        "uniqueName": "c_address",
        "label": "c_address",
        "parentObject": "customer_tgt.parquet",
        "pcType": "NSTRING",
        "precision": 4000,
        "scale": 0,
        "columnIndex": -1,
        "isKey": false,
        "isExternalId": false,
        "isSfIdLookup": false,
        "isNullable": true,
        "isUnique": false,
        "isCreateable": false,
        "isUpdateable": true,
        "isFilterable": true,
        "isCalculated": false,
        "javaType": "java.lang.String",
        "showLabel": true,
        "naturalOrder": 2,
        "linkedFields": [],
        "relatedInfos": [],
        "references": []
    },
    {
        "@type": "field",
        "id": -1,
        "name": "c_nationkey",
        "type": "parquet_int64",
        "uniqueName": "c_nationkey",
        "label": "c_nationkey",
        "parentObject": "customer_tgt.parquet",
        "pcType": "BIGINT",
        "precision": 19,
        "scale": 0,
        "columnIndex": -1,
        "isKey": false,
        "isExternalId": false,
        "isSfIdLookup": false,
        "isNullable": true,
        "isUnique": false,
        "isCreateable": false,
        "isUpdateable": true,
        "isFilterable": true,
        "isCalculated": false,
        "javaType": "java.math.BigInteger",
        "showLabel": true,
        "naturalOrder": 3,
        "linkedFields": [],
        "relatedInfos": [],
        "references": []
    },
    {
        "@type": "field",
        "id": -1,
        "name": "FileName",
        "type": "string",
        "uniqueName": "FileName",
        "label": "FileName",
```

```
        "parentObject": "customer_tgt.parquet",
        "pcType": "NSTRING",
        "precision": 1024,
        "scale": 0,
        "columnIndex": -1,
        "isKey": false,
        "isExternalId": false,
        "isSfIdLookup": false,
        "isNullable": false,
        "isUnique": false,
        "isCreateable": false,
        "isUpdateable": true,
        "isFilterable": true,
        "isCalculated": false,
        "javaType": "java.lang.String",
        "showLabel": true,
        "naturalOrder": 8,
        "linkedFields": [],
        "relatedInfos": [],
        "references": []
    }
]
```

File listeners

Use the filelisteners resource to create, update, delete, run a file listener, and change the owner of a file listener association from one user to another. IDMC can use file listeners to monitor specific folders. IDMC are notified by using a call-back API when new files arrive at a monitored folder and when files in the folder are updated or deleted.

Consider the following when you use the filelisteners resource:

- Use JSON format.
- Use the following base URL:

  ```
  <serverUrl>/mftsaas/api/v1/<API name>
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  IDS-SESSION-ID: <SessionId>
  ```

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Complete the following tasks to run and monitor file listeners:

- Send a GET request to view details of a file listener. See "Getting file listener details" on page 412.
- Send a POST request to create a file listener. See "Creating a file listener" on page 416.
- Send a PUT request to update an existing file listener. See "Updating a file listener" on page 422.
- Send a start POST request to start a file listener job. See "Starting a file listener" on page 427.
- Send a stop POST request to stop the file listener job manually. See "Stopping a file listener" on page 428.
- Send a POST request to change the owner a file listener association. See "Changing the owner of a file listener association" on page 430.

Getting file listener details

Use the GET request to view file listeners details. You can view the details for a particular file listener or view details for all file listeners in your organization.

GET request

To view the details of a particular file listener, include the file listener ID in the following URI:

```
Get <serverUrl>/mftsaas/api/v1/filelisteners/<filelistener ID>
```

To view the details for all of the file listeners in the organization, omit the file listener ID.

GET response

A request for file listener details returns the following information:

Field	Type	Description
id	String	ID number associated with the file listener.
name	String	Name of the file listener.
description	String	Description of the file listener.
status	String	Status of the file listener. - `enabled`. Listens to files on the designated folder. `disabled`. Does not listen to files on the designated folder.
agentGroup	Numeric	Runtime environment that contains the Secure Agent used to run the file listener.
type	String	Type of the connection to which the file listener listens.
connection	String	Connection to which the file listener listens.
folderPath	String	Path to the folder on the connection to which the file listener listens.
filePattern	String	File name pattern to which the file listener listens.
Post Action	String	Determines the action the file listener must perform after the file listener listens to the events. You can select the post action as **Delete** only if the file pattern is an indicator file. Default is None. The following connection types support the Post Action option: - Local folder - Advanced FTP V2 - Advanced FTPS V2 - Advanced SFTP V2 - Azure Data Lake Store Gen2

Field	Type	Description
patternType	String	The file pattern. - wildcard. Use wildcard patterns of file name. - regex. Use regular expression to match the file pattern. Consider the following examples: - Use the following syntax to listen to all files except for files with a name that contains out, foo, and baz: `^(?!.*(?:out|baz|foo)).*$ à all except` - Use the following syntax to listen to all files with doc and docx, pdf extensions: `([a-zA-Z0-9\s_\\.\-\(\):])+(.doc|.docx|.pdf)$ à` - indicator file. Use the file name to which the file listener listens.
mandatory	String	Defines whether rule values are mandatory.
recursive	String	Defines whether rule values are recursive.
type	String	Frequency at which the file listener runs, daily, weekly, or monthly.
timezone	String	Time zone that refers to the start and end time.
startDate	Date/Time	Date on which the file listener starts running.
endDate	Date/Time	Date until which the file listener runs.
runIndefinitely	String	Whether the file listener runs without an end date.
startsAt	Date/Time	Time of day when the file listener starts running.
endsAt	Date/Time	Time of day when the file listener stops running.
frequency	Numeric	Frequency at which the file listener checks for files in the folder.
frequencyUnit	String	Unit of frequency to which file listener checks for files in the folder, by seconds, minutes, or hours.
listenerEvents	String	Determines when the file listener sends notifications to the services that are registered to it. Response to each event when the event is set to true is as follows: - arrive. Send notifications when files arrive at the folder to which the file listener listens. - update. Send notifications when files in the folder to which the file listener listens are updated. - delete. Send notifications when files in the folder to which the file listener listens are deleted.

Field	Type	Description
stopWhenRulesMet	String	Whether the file listener stops listening to the folder when the listener rules are met. Set to one of the following values: - `false`. The file listener notifies the registered application on events and continues to listen for subsequent events. - `true`. The file listener stops listening to the folder when the first event of file deletion occurs in the folder.
checkFileStability	String	Enter one of the following values. - `false`.The file listener does not verify whether the entire file is copied to the folder before notifying the registered services. - `true`. The file listener verifies whether the entire file is copied to the folder before notifying the registered services. Default is `true`.
stabilityCheckInterval	Time	Time in seconds that a file listener waits to check for file stability. You can specify a value in the stabilityCheckInterval field only if the checkFileStability option is set to `true`.
notifyExistingFiles	String	The first time the file listener runs, it sends a notification if files exist in the folder to which it listens, of the parameter is set to true.
excludeFileEventsWhenNotRunning	String	Determines if you want to exclude file events that occur when a file listener is not running.
continueOnError	String	Determines if you want the file listener to continue to retry and run in case of failures, such as temporary network disruption.
location	String	Location of the project folder that contains the file listener component.
createTime	Date/Time	Time when the component was created.
lastupdateTime	Date/Time	Time when the component was last updated.

GET response example for one file listener

To view file listener details of the file listener with ID `eX5qlosUfEHbwvNwGpRwQd`, you might use the following request:

```
Get <serverUrl>/mftsaas/api/v1/filelisteners/<filelistener ID>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: eX5qlosUfEHbwvNwGpRwQd
```

If your request is successful, you might receive a response similar to the following example:

```
{
    "id": "eX5qlosUfEHbwvNwGpRwQd",
    "name": "FL512087",
    "description": "Demo",
```

```
    "status": "ENABLE",
    "agentGroup": "01000025000000000002",
    "connection": {
        "type": "local",
        "name": "",
        "connId": ""
    },
    "rules": [
        {
            "id": 10052,
            "folderPath": "C:\\temp1",
            "filePattern": "*.txt",
        "postAction": "NONE",
            "patternType": "wildcard",
            "mandatory": false,
            "recursive": false
        }
    ],
    "scheduleDefinition": {
        "type": "DAILY_WITH_INTERVAL",
        "timezone": "IST",
        "startDate": "20181227",
        "endDate": "20181227",
        "runIndefinitely": false,
        "startsAt": "1015",
        "endsAt": "2355",
        "frequency": 15,
        "frequencyUnit": "SECONDS"
    },
    "stopWhenRulesMet": false,
    "listenerEvents": {
        "arrive": true,
        "update": true,
        "delete": true
    },
    "checkFileStability": true,
    "stabilityCheckInterval": 10,
    "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "location": {
        "folderId": "avVCKODMM0RdSmcNWDnrKi",
        "folderName": "New",
        "projectId": "3iWWHkLbM2giVppBmJmZgV",
        "projectName": "Default"
    },
    "createTime": "2019-02-12T07:03:49Z",
    "lastUpdatedTime": "2019-02-12T07:03:49Z"
}
```

Response example to view all file listeners

If your request to view file listener details is successful, you might receive a response similar to the following example:

```
{
    "listeners": [
        {
            "id": "8h9hng2kRokf2Db6Xb4pA8",
            "name": "dfgdfg",
            "description": "",
            "status": "ENABLE",
            "stopWhenRulesMet": false,
    "checkFileStability": false,
    "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "location": {
                "projectId": "3iWWHkLbM2giVppBmJmZgV",
                "projectName": "Default"
            },
```

```
            "createTime": "2019-01-28T05:31:00Z",
            "lastUpdatedTime": "2019-01-28T05:31:00Z"
        },
        {
            "id": "bQdKQmGlFUUgS85AevLkqi",
            "name": "FL123",
            "description": "xsdfsdfsdf",
            "status": "ENABLE",
            "stopWhenRulesMet": false,
    "checkFileStability": true,
    "stabilityCheckInterval": 10,
    "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "location": {
                "projectId": "3iWWHkLbM2giVppBmJmZgV",
                "projectName": "Default"
            },
            "createTime": "2019-01-24T05:20:26Z",
            "lastUpdatedTime": "2019-01-25T06:52:40Z"
        },
        {
            "id": "eX5qlosUfEHbwvNwGpRwQd",
            "name": "FL512087",
            "description": "Demo",
            "status": "ENABLE",
            "stopWhenRulesMet": false,
    "checkFileStability": true,
    "stabilityCheckInterval": 10,
    "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "location": {
                "folderId": "avVCKODMM0RdSmcNWDnrKi",
                "folderName": "New",
                "projectId": "3iWWHkLbM2giVppBmJmZgV",
                "projectName": "Default"
            },
            "createTime": "2019-02-12T07:03:49Z",
            "lastUpdatedTime": "2019-02-12T07:03:49Z"
        }
    ]
}
```


If the request to view all file listeners is unsuccessful, you might receive a response similar to the following example:

```
File Listener not found (403 Forbidden)
{    "responseCode": "NOT_FOUND",    "message": "File Listener with id
'eX5qlosUfEHbwvNwGpRwQd1' not found." }
```

Creating a file listener

Use a POST request to create a file listener and an event listener.

POST request

Use the following URI to create a file listener and an event listener:

```
POST <serverUrl>/mftsaas/api/v1/filelisteners
```

Use the following fields in the POST request:

Field	Type	Required	Description
name	String	Yes	Name of the file listener.
description	String	-	Description of the file listener.
status	String	Yes	Status of the file listener. - `enabled`. Listens to files on the designated folder. - `disabled`. Does not listen to files on the designated folder.
agentGroup	Numeric	Yes	Runtime environment that contains the Secure Agent used to run the file listener.
connectionType	String	Yes	Type of the connection to which the file listener listens.
connection	String	Yes	Connection to which the file listener listens.
folderPath	String	Yes	Path to the folder on the connection to which the file listener listens.
filePattern	String	Yes	File name pattern to which the file listener listens.
Post Action	String	-	Determines the action the file listener must perform after the file listener listens to the events. You can select the post action as **Delete** only if the file pattern is an indicator file. Default is None. The following connection types support the Post Action option: - Local folder - Advanced FTP V2 - Advanced FTPS V2 - Advanced SFTP V2 - Azure Data Lake Store Gen2
patternType	String	Yes	The file pattern. - wildcard. Use wildcard patterns of file name. - regex. Use regular expression to match the file pattern. Consider the following examples: - Use the following syntax to listen to all files except for files with a name that contains out, foo, and baz: `^(?!.*(?:out|baz|foo)).*$ à all except` - Use the following syntax to listen to all files with doc and docx, pdf extensions: `([a-zA-Z0-9\s_\\.\-\(\):])+(.doc|.docx|.pdf)$ à` - Indicator File. Use the file name to which the file listener listens.
mandatory	String	-	Defines whether rule values are mandatory.
recursive	String	-	Defines whether rule values are recursive.
scheduleDefinition	String	Yes	Defines the frequency in which the file listener must run.

Field	Type	Required	Description
type	String	Yes	Frequency at which the file listener runs, daily, weekly, or monthly.
timezone	String	Yes	Time zone that refers to the start and end time.
startDate	Date/ Time	Yes	Date on which the file listener starts running.
endDate	Date/ Time	Yes	Date until which the file listener runs.
runIndefinitely	String	-	The file listener runs without an end date.
startsAt	Date/ Time	Yes	Time of day when the file listener starts running.
endsAt	Date/ Time	Yes	Time of day when the file listener stops running.
frequency	Numeric	Yes	Frequency at which the file listener checks for files in the folder.
frequencyUnit	String	Yes	Unit of frequency to which file listener checks for files in the folder, by seconds, minutes, or hours.
listenerEvents	String	Yes	Determines when the file listener sends notifications to the services that are registered to it. Response to each event, when the event is set to true is as follows: - arrive. Send notifications when files arrive at the folder to which the file listener listens. - update. Send notifications when files in the folder to which the file listener listens are updated. - delete. Send notifications when files in the folder to which the file listener listens are deleted.
stopWhenRulesMet	String	-	The file listener stops listening to the folder when the listener rules are met. - `false`. The file listener notifies the registered application on events and continues to listen for subsequent events. - `true`. The listener stops listening to the folder when the first event of file deletion occurs in the folder.
checkFileStability	String	-	The file listener verifies that the entire file is copied to the folder before notifying the registered services.
stabilityCheckInterval	Time	-	Time in seconds that a file listener waits to check for file stability. You can specify a value in the stabilityCheckInterval field only if the checkFileStability option is set to `true`.

Field	Type	Required	Description
notifyExistingFiles	String	-	The first time the file listener runs, it sends a notification if files exist in the folder to which it listens.
excludeFileEventsWhenNotRunning	String	-	Determines if you want to exclude file events that occur when a file listener is not running.
continueOnError	String	-	Determines if you want the file listener to continue to retry and run in case of failures, such as temporary network disruption.
emailIds	String	-	List of email addresses to send notifications if the file listener fails. Use commas to separate email addresses in the list.
location	String	-	Location of the project folder that contains the file listener component.

POST request example

Use this sample as a reference to create a file listener.

```
POST <serverUrl>/mftsaas/api/v1/filelisteners
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "name": "{{NEWFILELISTENER-NAME}}",
    "description": "Demo",
    "status": "ENABLE",
    "location": {
        "folderId": "avVCKODMM0RdSmcNWDnrKi",
        "folderName": "New",
        "projectId": "3iWWHkLbM2giVppBmJmZgV",
        "projectName": "Default"
    },
    "agentGroup": "01000025000000000002",
    "connection": {
        "type": "local",
        "name": "",
        "connId": "",
        "local": true
    },
        "listenerEvents":{
        "arrive":true,
        "update":true,
        "delete":true},
        "checkFileStability": true,
        "stabilityCheckInterval": 10,
    "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "emailIDs":"test@gmail.com,infa@hotmail.com",
        "rules": [
        {
            "id": 10070,
            "folderPath": "C:\\temp1",
            "patternType":"wildcard",
            "filePattern": "*.txt",
        "postAction": "NONE",
            "mandatory": false,
```

```
            "recursive": false
        }
    ],
  "scheduleDefinition": {
        "type": "DAILY_WITH_INTERVAL",
        "timezone": "IST",
        "startDate": "20181227",
        "endDate": "20181227",
        "runIndefinitely": false,
        "startsAt": "1015",
        "endsAt": "2355",
        "frequency": 15,
        "frequencyUnit": "SECONDS",
        "dayOfMonth": 0
    },
    "stopWhenRulesMet": false

}
```

POST response example

If the post request is successful, you might receive a response similar to the following example:

```
{
    "id": "eX5qlosUfEHbwvNwGpRwQd",
    "name": "FL512087",
    "description": "Demo",
    "status": "ENABLE",
    "agentGroup": "01000025000000000002",
    "connection": {
        "type": "local",
        "name": "",
        "connId": ""
    },
    "rules": [
        {
           "id": 10070,
           "folderPath": "C:\\temp1",
           "filePattern": "*.txt",
           "patternType": "wildcard",
       "postAction": "NONE",
           "mandatory": false,
           "recursive": false
        }
    ],
    "scheduleDefinition": {
        "type": "DAILY_WITH_INTERVAL",
        "timezone": "IST",
        "startDate": "20181227",
        "endDate": "20181227",
        "runIndefinitely": false,
        "startsAt": "1015",
        "endsAt": "2355",
        "frequency": 15,
        "frequencyUnit": "SECONDS",
        "dayOfMonth": 0
    },
    "stopWhenRulesMet": false,
    "listenerEvents": {
        "arrive": true,
        "update": true,
        "delete": true
    },
        "checkFileStability": true,
        "stabilityCheckInterval": 10,
        "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "emailIDs":"test@gmail.com,infa@hotmail.com",
        "location": {
        "folderId": "avVCKODMM0RdSmcNWDnrKi",
```

```
        "folderName": "New",
        "projectId": "3iWWHkLbM2giVppBmJmZgV",
        "projectName": "Default"
    }
}
```

POST request example

Use this sample as a reference to create an event listener.

```
POST <serverUrl>/public/core/v1/filelisteners
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "name": "{{NEWEVENTLISTENER-NAME}}",
    "description": "",
    "agentGroup": "01000025000000000003",
    "sourceType": "Server",
    "location": {
        "projectId": "1UNDIQkHQYKcNLPdxeR56p",
        "projectName": "overRide"
    },
   "eventProvider": "AS2",
    "eventType": "as2_message_receive_failed",
    "rules": [
        {
            "key": "event.userName",
            "value": "Suraj",
            "operator": "NONE",
            "type": "CONTAINS"
        },
        {
            "key": "event.fileName",
            "value": "Test",
            "operator": "AND",
            "type": "STRING_EQUALS"
        },
        {
            "key": "event.fileSize",
            "value": "89",
            "operator": "OR",
            "type": "INTEGER_EQUALS"
        }
    ]
}
```

POST response example

If the post request is successful, you might receive a response similar to the following example:

```
{
    "id": "f11rC9Kwa0UlOeg2TIjBks",
    "name": "EventFL684930",
    "description": "",
    "agentGroup": "01000025000000000003",
    "sourceType": "Server",
    "location": {
        "projectId": "1UNDIQkHQYKcNLPdxeR56p",
        "projectName": "overRide"
    },
    "createTime": "2020-04-06T05:25:55Z",
    "lastUpdatedTime": "2020-04-06T05:25:55Z",
    "eventProvider": "AS2",
    "eventType": "as2_message_receive_failed",
    "rules": [
        {
            "key": "event.userName",
            "value": "Suraj",
            "operator": "NONE",
            "type": "CONTAINS"
```

```
            },
            {
                "key": "event.fileName",
                "value": "Test",
                "operator": "AND",
                "type": "STRING_EQUALS"
            },
            {
                "key": "event.fileSize",
                "value": "89",
                "operator": "OR",
                "type": "INTEGER_EQUALS"
            }
        ]
    }
```

Updating a file listener

Use a PUT request to update a file listener.

PUT Request

Use the following URI to update an existing file listener.

```
PUT <server URL>/mftsaas/api/v1/filelisteners/<filelistener ID>
```

Use the following fields in the PUT request:

Field	Type	Required	Description
id	String	Yes	ID number associated with the file listener.
name	String	Yes	Name of the file listener.
description	String	-	Description of the file listener.
status	String	Yes	Status of the file listener. - `enabled`. Listens to files on the designated folder. - `disabled`. Does not listen to files on the designated folder.
agentGroup	Numeric	Yes	Runtime environment that contains the Secure Agent used to run the file listener.
connectionType	String	Yes	Type of the connection to which the file listener listens.
connection	String	Yes	Connection to which the file listener listens.
folderPath	String	Yes	Path to the folder on the connection to which the file listener listens.
filePattern	String	Yes	File name pattern to which the file listener listens.

Field	Type	Required	Description
Post Action	String	-	Determines the action the file listener must perform after the file listener listens to the events. You can select the post action as **Delete** only if the file pattern is an indicator file. Default is None. The following connection types support the Post Action option: - Local folder - Advanced FTP V2 - Advanced FTPS V2 - Advanced SFTP V2 - Azure Data Lake Store Gen2
patternType	String	Yes	The file pattern. - wildcard. Use wildcard patterns of file name. - regex. Use regular expression to match the file pattern. Consider the following examples: - Use the following syntax to listen to all files except for files with a name that contains out, foo, and baz: `^(?!.*(?:out|baz|foo)).*$ à all except` - Use the following syntax to listen to all files with doc and docx, pdf extensions: `([a-zA-Z0-9\s_\\.\-\(\):])+(.doc|.docx|.pdf)$ à`
mandatory	String	-	Defines whether rule values are mandatory.
recursive	String	-	Defines whether rule values are recursive.
scheduleDefinition	String	Yes	Defines the frequency in which the file listener must run.
type	String	Yes	Frequency at which the file listener runs, daily, weekly, or monthly.
timezone	String	Yes	Time zone that refers to the start and end time.
startDate	Date/ Time	Yes	Date on which the file listener starts running.
endDate	Date/ Time	Yes	Date until which the file listener runs.
runIndefinitely	String	-	The file listener runs without an end date.
startsAt	Date/ Time	Yes	Time of day when the file listener starts running.
endsAt	Date/ Time	Yes	Time of day when the file listener stops running.
frequency	Numeric	Yes	Frequency at which the file listener checks for files in the folder.
frequencyUnit	String	Yes	Unit of frequency to which file listener checks for files in the folder, by seconds, minutes, or hours.

Field	Type	Required	Description
listenerEvents	String	Yes	Determines when the file listener sends notifications to the services that are registered to it. Response to each event, when the event is set to true is as follows: - arrive. Send notifications when files arrive at the folder to which the file listener listens. - update. Send notifications when files in the folder to which the file listener listens, are updated. - delete. Send notifications when files in the folder to which the file listener listens are deleted.
stopWhenRulesMet	String	-	The file listener stops listening to the folder when the listener rules are met. - `false`. The file listener notifies the registered application on events and continues to listen for subsequent events. - `true`. The listener stops listening to the folder when the first event of file deletion occurs in the folder.
checkFileStability	String	-	The file listener verifies that the entire file is copied to the folder before notifying the registered services.
stabilityCheckInterval	Time	-	Time in seconds that a file listener waits to check for file stability. You can specify a value in the stabilityCheckInterval field only if the checkFileStability option is set to `true`.
notifyExistingFiles	String	-	The first time the file listener runs, it sends a notification if files exist in the folder to which it listens.
excludeFileEventsWhenNotRunning	String	-	Determines if you want to exclude the file events that occur when a file listener is not running.
continueOnError	String	-	Determines if you want the file listener to continue to retry and run in case of a failure, such as temporary network disruption.
emailIds	String	-	List of email addresses to send notifications if the file listener fails. Use commas to separate email addresses in the list.
location	String	-	Location of the project folder.

PUT request example

Use this sample as a reference to update the file listener.

```
PUT <serverUrl>/public/core/v1/filelisteners
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "description": "Demo",
    "status": "ENABLE",
    "location": {
```

```
        "folderId": "avVCKODMM0RdSmcNWDnrKi",
        "folderName": "New",
        "projectId": "3iWWHkLbM2giVppBmJmZgV",
        "projectName": "Default"
    },
    "agentGroup": "01000025000000000002",
    "connection": {
        "type": "local",
        "name": "",
        "connId": "",
        "local": true
    },
        "listenerEvents":{
        "arrive":true,
        "update":true,
        "delete":true},
        "checkFileStability": true,
        "stabilityCheckInterval": 10,
        "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "emailIDs":"test@gmail.com,infa@hotmail.com"
    "rules": [
        {
            "id": 10070,
            "folderPath": "C:\\temp1",
            "patternType":"wildcard",
            "filePattern": "*.txt",
            "postAction": "NONE",
            "mandatory": false,
            "recursive": false
        }
    ],
  "scheduleDefinition": {
        "type": "DAILY_WITH_INTERVAL",
        "timezone": "IST",
        "startDate": "20181227",
        "endDate": "20181227",
        "runIndefinitely": false,
        "startsAt": "1015",
        "endsAt": "2355",
        "frequency": 15,
        "frequencyUnit": "SECONDS",
        "dayOfMonth": 0
    },
    "stopWhenRulesMet": false

}
```

PUT response

If the request to update the file listener is successful, you receive the response similar to the following example:

```
{
    "id": "eX5qlosUfEHbwvNwGpRwQd",
    "name": "FL512087",
    "description": "Demo",
    "status": "ENABLE",
    "agentGroup": "01000025000000000002",
    "connection": {
        "type": "local",
        "name": "",
        "connId": ""
    },
    "rules": [
        {
            "id": 10070,
            "folderPath": "C:\\temp1",
            "filePattern": "*.txt",
```

```
            "patternType": "wildcard",
            "postAction": "NONE",
            "mandatory": false,
            "recursive": false
        }
    ],
    "scheduleDefinition": {
        "type": "DAILY_WITH_INTERVAL",
        "timezone": "IST",
        "startDate": "20181227",
        "endDate": "20181227",
        "runIndefinitely": false,
        "startsAt": "1015",
        "endsAt": "2355",
        "frequency": 15,
        "frequencyUnit": "SECONDS",
        "dayOfMonth": 0
    },
    "stopWhenRulesMet": false,
    "listenerEvents": {
        "arrive": true,
        "update": true,
        "delete": true
    },
        "checkFileStability": true,
        "stabilityCheckInterval": 10,
        "notifyExistingFiles": false,
    "excludeFileEventsWhenNotRunning": true,
    "continueOnError": true,
    "emailIDs":"test@gmail.com,infa@hotmail.com"
    "location": {
        "folderId": "avVCKODMM0RdSmcNWDnrKi",
        "folderName": "New",
        "projectId": "3iWWHkLbM2giVppBmJmZgV",
        "projectName": "Default"
    }
}
```

If the request to update the file listener is unsuccessful, you might receive an error similar to the following example:

```
{
 "responseCode": "NOT_FOUND",
"message": "File Listener with id 'eX5qlosUfEHbwvNwGpRwQd1' not found."
}
```

Deleting a file listener

Use a DELETE request to delete a file listener.

DELETE request

Use the following URI to delete a file listener:

```
DELETE <server URL>/mftsaas/api/v1/filelisteners/<file listener ID>
```

Use the following fields in the delete request:

Field	Type	Description
file listener ID	String	ID number associated with the file listener.

Delete response example

If the delete request is unsuccessful, you receive a response similar to the following example:

```
{
 "responseCode": "NOT_FOUND",
"message": "Document Artifact with Id = bQdKQmGlFUUgS85AevLkqi3 not found."
}
```

Starting a file listener

Use a POST request to start a file listener job.

POST request

To start a file listener, use the following URI:

```
POST <server URL>/mftsaas/api/v1/filelisteners/<file listener ID>/start
```

Include the following field in the request:

Field	Type	Description
file listener ID	String	ID number associated with the file listener.

POST request example

To start a file listener, you might use the following request:

```
POST <server URL>/mftsaas/api/v1/filelisteners/<file listener ID>/start
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

POST response example

If the request to start the file listener is successful, you might receive a response similar to the following example:

```
{
    "status": "STARTED",
    "jobId": 1038
}
```

POST error response example

If the request to start the file listener is unsuccessful, you might receive a response similar to the following example:

```
{
 "responseCode": "NOT_FOUND",
"message": "File listener not found for ListenerId:  bQdKQmGlFUUgS85AevLkqisd"
}
```

Response : Agent down (403 Forbidden)

```
{
 "responseCode": "NOT_FOUND",   "message": "Agent \"0100000800000000002\" in Agent
Group \"0100002500000000002\" is not accessible."}
```

Stopping a file listener

Use a POST request to stop a file listener job.

POST request

To stop a file listener, use the following URI:

```
POST <server URL>/mftsaas/api/v1/filelisteners/<file listener ID>/stop
```

Include the following field in the request:

Field	Type	Description
fileListenerID	String	ID number associated with the file listener.

POST request example

To stop a file listener, you might use the following request:

```
POST <server URL>/mftsaas/api/v1/filelisteners/<file listener ID>/stop
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

POST response example

If the request to stop the file listener is successful, you might receive a response similar to the following example:

```
{
    "status": "STOPPED",
    "jobId": 1038
}
```

POST error response example

If the request to stop the file listener is unsuccessful, you might receive a response similar to the following example:

```
{
 "responseCode": "NOT_FOUND",
"message": "File listener not found for ListenerId:  bQdKQmGlFUUgS85AevLkqisd"
}
```

Response : Agent down (403 Forbidden)

```
{
 "responseCode": "NOT_FOUND",   "message": "Agent \"0100000800000000002\" in Agent
Group \"0100002500000000002\" is not accessible."}
```

Getting the status of a file listener

Use a GET request to request the status of a file listener job.

GET request

To view the status of a file listener, use the following URI:

```
GET <server URL>/mftsaas/api/v1/filelisteners/job/<Job ID>/status
```

Include the following field in the request:

Field	Type	Description
Job ID	String	ID number associated with the file listener job.

GET request example

To view the status of a file listener job, you might use the following request:

```
GET <server URL>/mftsaas/api/v1/filelisteners/job/<Job ID>/status
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

GET response example

If the request to view the status of a file listener job is successful, you might receive a response similar to the following example:

```
{
    "status": "STOPPED",
    "jobId": 1038
}
```

If the request to view the status of a file listener job is unsuccessful, you might receive a response similar to the following example:

```
{
    "responseCode": "NOT_FOUND",
    "message": "File listener not found for TaskId:  1079"
}
```

Getting file listener job details

Use a GET request to view the details of a file listener job.

GET request

To view the details of a file listener job, use the following URI:

```
GET <server URL>/mftsaas/api/v1/filelisteners/<Run ID>/activityLog
```

Include the following field in the request:

Field	Type	Description
Run ID	String	ID number associated with the file listener job.

GET request example

To view the details of a file listener job, you might use the following request:

```
GET <server URL>/mftsaas/api/v1/filelisteners/<Run ID>/activityLog
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

GET response example

If the request to view the details of a file listener job is a success, you might receive a response similar to the following example:

```
{
   "instanceName": "FL_1-1006",
    "jobId": 1006
    "startTime": "2021-02-09T22:38:01Z",
    "updateTime": "2021-02-09T22:38:01Z",
    "endTime": "2021-02-09T22:38:01Z",
    "status": "Completed",
}
```

The responses vary based on the file listener status.

Changing the owner of a file listener association

A file listener can be associated with a taskflow or with file ingestion tasks. You can use file listener as a source or schedule (trigger) for file ingestion tasks and as a trigger for a taskflow. A file listener association is the internal link between file listener and its associated file ingestion tasks or taskflows. The owner of a file listener association is the last person who selected the file listener as a source or schedule in a file ingestion task or the last person who published the taskflow with the file listener as a trigger.

You might want to change or transfer the owner of a file listener association when a user who owns the file listener association leaves the organization. For example, if the user Alex creates a file ingestion task, the user Beth creates a file listener, and the user Clara selects the file listener as a source or schedule in a file ingestion task, Clara is the owner of the file listener association. If Clara leaves the organization, you must reassign her assigned file listener associations to another user before you can delete her user account.

POST request

Use a POST request to change the owner of a file listener association from one user to an another.

Use the following URI to change the owner of a file listener association:

```
POST <serverUrl>/mftsaas/api/v1/ChangeCallbackOwnership
```

Use the following fields in the POST request:

Field	Type	Required	Description
currentOwner	String	Yes	User ID of the current owner.
newOwner	String	Yes	User ID of the new owner.

POST request example

Use this sample as a reference to change the owner of a file listener association.

```
POST <serverUrl>/mftsaas/api/v1/ChangeCallbackOwnership
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "currentOwner": "{{UserIDwhoLeftTheOrganization}}",
    "newOwner": "{{NewUserID}}"
}
```

POST response example

If the post request is successful, you might receive the following example:

```
200 OK
```

File transfer

You can send files to a remote server or receive files from a remote server, and get the job status through the REST API.

Use the following resources for file transfer:

- sendfiles. Use to send files to a remote server.
- receivefiles. Use to receive files from a remote server.
- job. Use to get the status of the supported file transfer jobs that are initiated using the sendfiles or receivefiles resource.

When you use these resources, note the following rules:

- Use JSON format.
- Use the following base URL:

  ```
  <serverUrl>/mftsaas/api/v1/<API name>
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  IDS-SESSION-ID: <SessionId>
  ```

Note: You must have the appropriate connector license to send and receive files.

Transferring files to a remote server

Use the sendfiles resource to transfer files to a remote server.

The following connection types use the sendfiles resource to transfer files to the remote server:

- AS2
- Advanced FTP V2
- Advanced FTPS V2
- Advanced SFTP V2

Before you construct a sendfiles request to transfer files, obtain the identifier of the connection that provides access to the server. To get the connection ID, you can send a GET request using the connection resource. The connection resource can return information for each of your organization's connections.

POST Request

To transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/sendfiles/<connection ID>
```

Include the following information in the request:

Field	Type	Required	Description
targetConnectionType	String	Yes	Connection type. The supported connection types are: - Advanced FTP V2 - Advanced FTPS V2 - Advanced SFTP V2 - AS2
srcDirectoryPath	String	Yes	Directory path from where files are transferred.
tgtDirectoryPath	String	-	Directory path to where files are transferred. This option is available only for Advanced FTP V2, Advanced FTPS V2, and Advanced SFTP V2 connection types. Default is '/'.
srcFilePattern	String	Yes	Source file name pattern. Specify a file name pattern to identify which files to send. You can use the regular expression type.
deleteSourceFiles	String	-	Whether to delete source files after a successful POST request. Use one of the following values: - true. Delete source files. - false. Save source files. Default is true.

For example, to transfer the files that begin with "file_" that are located in the workspace directory, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/sendfiles/<connection ID>
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "targetConnectionType":   "as2",
    "srcDirectoryPath":  "C:\\server\\userdata\\workspace",
    "srcFilePattern":  "file_*"
}
```

For example, to transfer the files with ".txt" pattern, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/sendfiles/<connection ID>
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "targetConnectionType":   "Advanced SFTP V2",
    "srcDirectoryPath":  "C:\\docstoreLocal2",
    "tgtDirectoryPath":  "C:\\server\\userdata\\workspace",
    "srcFilePattern":  ".*txt"

}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
```

```
    "submitSourceId": -1,
    "correlationId": "OWMxOTc2YjktNzI4YS00Mm",
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000000384,
    "runId": 385
}
```


If unsuccessful, the response includes a reason for the failure.

Receiving files from a remote server

Use the receivefiles resource to get files from a remote server.

The following connection types use the receivefiles resource to transfer files to the remote server:

- Advanced FTP V2
- Advanced FTPS V2
- Advanced SFTP V2

Before you construct a receivefiles request to receive files, obtain the identifier of the connection that provides access to the server. To get the connection ID, you can send a GET request using the connection resource. The connection resource can return information for each of your organization's connections.

POST Request

To receive files, include the connection ID in the following URI.

```
mftsaas/api/v1/receivefiles/<connection ID>
```

Include the following information in the request:

Field	Type	Required	Description
sourceConnectionType	String	Yes	Connection type. The supported source connection types are: - Advanced FTP V2 - Advanced FTPS V2 - Advanced SFTP V2
tgtDirectoryPath	String	Yes	Directory path to where files are transferred.
srcDirectoryPath	String	-	Directory path from where files are transferred. Default is '/'.
srcFilePattern	String	Yes	Source file name pattern. Specify a file name pattern to identify which files to send. You can use the regular expression type.
processFilesRecursively	String	-	Whether to process files from all sub-folders within the base directory. Default is false.

Field	Type	Required	Description
afterFilePickupAction	String	-	Determines what to do with source files after the files transfer. The following options are available: - Keep the files in the source directory. - Delete the files from the source directory. - Rename the files in the source directory. You must specify a file name suffix that adds to the file name when renaming the files. - Archive the files to a different location. You must specify an archive directory. Default is KEEP.
skipDuplicateFiles	String	-	Do not transfer duplicate files. If files with the same name and creation date were transferred, the task does not transfer them again, and the files are marked as duplicate in the job log. If this option is not selected the task transfers all files. Default is false.
whenFileExists	String	-	Determines what to do with a file if a flat file with the same name exists in the target directory. The following options are available: - rename - overwrite - skip - stop - error Default is rename.

For example, to transfer the files with ".txt" pattern, and rename the file if a flat file with same name exists in the target directory, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/sendfiles/<connection ID>
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "sourceConnectionType": "Advanced SFTP V2",
    "tgtDirectoryPath": "C:\\docstoreLocal2",
    "srcDirectoryPath": "C:\\server\\userdata\\workspace",
    "srcFilePattern": ".*txt",
    "processFilesRecursively": false,
    "afterFilePickupAction": "KEEP",
    "skipDuplicateFiles": false,
    "whenFileExists": "rename",
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
    "submitSourceId": -1,
    "correlationId": "OWMxOTc2YjktNzI4YS00Mm",
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000000384,
```

```
    "runId": 385
}
```

If unsuccessful, the response includes a reason for the failure.

Getting job status

When you use the REST API to send or receive files, use the REST API version 1 job resource to get the status of the file transfer.

Do not use the platform REST API version 2 job resource to get the status of an file transfer job.

GET Request

When you send the request for status of an file transfer job, include the run ID returned in the sendfiles POST response. Use the following URI:

```
mftsaas/api/v1/job/<runID>/status
```

GET Response

If successful, Data Integration returns the job status.

If unsuccessful, the response includes a reason for the failure.

GET Request Example

To view the status of a file transfer job, you might use the following request:

```
GET <serverUrl>/mftsaas/api/v1/job/<runID>/status
Content-Type: application/json
Accept: application/json
icSessionId: <SessionId>
```

GET Response Example

If the request is successful, you might receive a response similar to the following example:

```
{
    "jobStatus": "SUCCESS"
}
```

File transfer tasks

Use the filetransferTask resource to decrypt or decompress inbound files and to encrypt or compress outbound files.

You can transfer files in the following ways:

- Transfer files locally on a hosted server.
- Transfer files from or to a remote server.

Hosted file transfer task

You can manage files on a hosted server, and transfer files locally.

You can perform the following actions:

- Compress and transfer files to or within a folder in the home directory of the file server user.
- Decompress uploaded files and transfer them from the home directory of file server user to the target location.
- Encrypt and transfer files from source location to the home directory of the file server user.
- Decrypt and transfer files from the file server user's home directory to the target location.

Compress and transfer files

Compress and transfer inbound files to or within a folder specified in the home directory of the file server user.

POST Request

To compress and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1003
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
portalUser	String	-	Whether the user is a portal user. Default is false.
fileServerUsername	String	Yes	The user name of the file server.
relativeTargetLocation	String	-	The relative target location within the file server user's home directory.
pattern	String	Yes	The file pattern to identify the files to collect for compression. The regular expression pattern is supported.
sourceLocation	String	Yes	The source directory that contains the files that you want to compress.
COMPRESSION_TYPE	String	Yes	The format of the files that you want to compress. Select one of the following compression methods: - Zip - Tar - Gzip The values are not case sensitive.

For example, to compress and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1003
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "agentGroupId": "0100012500000000002",
    "fileServerUsername": "arun",
    "portalUser":true,
    "relativeTargetLocation":"",
    "pattern":"arun.csv",
    "sourceLocation":"C:\\Informatica_Source",
    "taskVariables": {
    "COMPRESSION_TYPE": "zip"
    }
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
```

```
    "submitSourceId": -1,
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000007154,
    "runId": 13
}
```

If unsuccessful, the response includes a reason for the failure.

Decompress and transfer files

Decompress and transfer the uploaded files from the home directory of file server user to the target location.

POST Request

To decompress and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1004
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
fileServerUsername	String	Yes	The user name of the file server.
pattern	String	Yes	The file pattern of the file to release to the specified target location after decompressing the file. The regular expression pattern is supported.
targetLocation	String	Yes	The target directory to which the file is moved after decompressing.
DECOMPRESSION_TYPE	String	Yes	The format of the files that you want to decompress. Select one of the following decompression methods: - Zip - Tar - Gzip The values are not case sensitive.
PATTERN_CASE_SENSITIVE	String	-	Whether the file pattern is case sensitive. The values are not case sensitive. Default is false.
PATTERN _TO_COLLECT	String	Yes	The pattern of the file that you want to collect to decompress from the file server user's home directory. Use a regular expression to match the file name pattern.

For example, to decompress and transfer a file, you might use the following request

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1004
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "agentGroupId": "01000125000000000002",
    "fileServerUsername": "arun",
    "pattern":".*csv",
    "targetLocation":"C:\\Informatica_Target",
    "taskVariables": {
    "PATTERN_CASE_SENSITIVE": "false",
```

```
        "DECOMPRESSION_TYPE": "unzip",
        "PATTERN_TO_COLLECT": ".*zip"
        }
    }
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
    {
        "projectId": 0,
                    "timeTaken": 0,
                    "queuePriority": 0,
                    "runPriority": 0,
                    "runMode": "UNKNOWN",
                    "submitSourceId": -1,
                    "runModeInteractive": false,
                    "runModeBatch": false,
                    "runModeDebug": false,
                    "runModeUnknown": true,
                    "formattedTimeTaken": "0.00",
                    "id": 1000000007161,
                    "runId": 20
    }
```

If unsuccessful, the response includes a reason for the failure.

Encrypt and transfer files

Encrypt and transfer files from the source location to the home directory of the file server user or the directory specified in the REST API param within the file server user's home directory. You can encrypt single or multiple files.

POST Request

To encrypt and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1001
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
portalUser	String	-	Whether the user is a portal user. Default is false.
fileServerUsername	String	Yes	The user name of the file server.
relativeTargetLocation	String	-	The relative target location within the file server user's home directory.
pattern	String	Yes	The file pattern to identify the files to collect for encryption. The regular expression pattern is supported.
sourceLocation	String	Yes	The source directory that contains the files you want to encrypt.
SIGN	String	-	Whether the file is signed by PGP. The values are not case sensitive. Default is false.

Field	Type	Required	Description
PUBLIC_KEY_ID	String	Yes	The ID of the key that is used to encrypt the file.
SECRET_KEY_ID	String	Yes	The ID of the secret key that is used to sign the file, if the value of the SIGN variable is true.
SECRET_KEY_PASSPHRASE	String	Yes	The passphrase used to access the secret key if the value of the SIGN variable is true.

For example, to encrypt and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1001
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "agentGroupId": "01000125000000000002",
    "fileServerUsername": "arun",
    "portalUser":true,
    "pattern":"arun.csv",
    "relativeTargetLocation":"",
    "sourceLocation":"C:\\Informatica_Source",
    "taskVariables": {
        "SIGN":"false",
        "PUBLIC_KEY_ID":"0x51986F687ADACBE1",
        "SECRET_KEY_ID":"0x51986F687ADACBE1",
        "SECRET_KEY_PASSPHRASE":"TESTER"
    }
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
                "timeTaken": 0,
                "queuePriority": 0,
                "runPriority": 0,
                "runMode": "UNKNOWN",
                "submitSourceId": -1,
                "runModeInteractive": false,
                "runModeBatch": false,
                "runModeDebug": false,
                "runModeUnknown": true,
                "formattedTimeTaken": "0.00",
                "id": 1000000007155,
                "runId": 14
                }
```

If unsuccessful, the response includes a reason for the failure.

Decrypt and transfer files

Decrypt and transfer files from the file server user's home directory to the target location.

POST Request

To decrypt and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1002
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
fileServerUsername	String	Yes	The user name of the file server.
pattern	String	Yes	The file pattern of the file to release to the specified target location after decrypting the file. The regular expression pattern is supported.
targetLocation	String	Yes	The target directory to which the file is moved after decryption.
PATTERN_CASE_SENSITIVE	String	Yes	Whether the file pattern is case sensitive. The values are not case sensitive. Default is false.
PGP_PASSPHRASE	String	Yes	The PGP passphrase.
PATTERN _TO_COLLECT	String	Yes	The file name pattern of the files that PGP has to collect and decrypt. Use a regular expression to match the file name pattern.

For example, to decrypt and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1002
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
        "agentGroupId": "0100012500000000002",
        "fileServerUsername": "arun",
        "pattern":".*csv",
        "targetLocation":"C:\\Informatica_Target",
        "taskVariables": {
            "PATTERN_CASE_SENSITIVE": "false",
            "PGP_PASSPHRASE": "TESTER",
            "PATTERN_TO_COLLECT": ".*pgp"
    }
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
                "timeTaken": 0,
                "queuePriority": 0,
                "runPriority": 0,
                "runMode": "UNKNOWN",
                "submitSourceId": -1,
                "runModeInteractive": false,
                "runModeBatch": false,
                "runModeDebug": false,
                "runModeUnknown": true,
                "formattedTimeTaken": "0.00",
                "id": 1000000007160,
                "runId": 19
}
```

If unsuccessful, the response includes a reason for the failure.

Remote file transfer task

You can manage the files on a remote server using Advanced FTP V2, Advanced FTPS V2, and Advanced SFTP V2 connectors, and transfer files from or to a remote server.

You can perform the following actions:

- Compress and transfer files to or within a folder in the home directory of the file server user.
- Decompress uploaded files and transfer them from the home directory of file server user to the target location.
- Encrypt and transfer files from source location to the home directory of the file server user.
- Decrypt and transfer files from the file server user's home directory to the target location.

Compress and transfer files

Compress and transfer inbound files to or within a folder specified in the home directory of the remote server.

POST Request

To compress and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1003
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
portalUser	String	-	Whether the user is a portal user. Default is false.
connectionId	String	Yes	The connection ID of the Advanced FTP, Advanced FTPS, or Advanced SFTP V2 connector.
relativeTargetLocation	String	-	The relative target location within the remote server home directory.
pattern	String	Yes	The file pattern to identify the files to collect for compression. The regular expression pattern is supported.
sourceLocation	String	Yes	The source directory that contains the files that you want to compress.
COMPRESSION_TYPE	String	Yes	The format of the files that you want to compress. Select one of the following compression methods: - Zip - Tar - Gzip The values are not case sensitive.

For example, to compress and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1003
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
   "agentGroupId": "01000125000000000002",
    "portalUser": "false",
    "connectionId": "0100010B000000000002",
    "pattern":"arun_zip.txt",
    "relativeTargetLocation":"/",
```

```
    "sourceLocation":"C:\\FIS_Home\\DOCSTORE",
    "taskVariables": {
      "COMPRESSION_TYPE": "gzip"
      }
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
    "submitSourceId": -1,
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000007170,
    "runId": 29
}
```

If unsuccessful, the response includes a reason for the failure.

Decompress and transfer files

Decompress and transfer the uploaded files from the home directory of the remote server to the target location.

POST Request

To decompress and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1004
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
portalUser	String	-	Whether the user is a portal user. Default is false.
relativeSourceLocation	String	-	The relative source location within the remote server home directory.
pattern	String	Yes	The file pattern of the file to release to the specified target location after decompressing the file. The regular expression pattern is supported.
targetLocation	String	Yes	The target directory to which the file is moved after decompressing.
relativeTargetLocation	String	-	The relative target location within the remote server home directory.
connectionId	String	Yes	The connection ID of the Advanced FTP, Advanced FTPS, or Advanced SFTP V2 connector.

Field	Type	Required	Description
afterFilePickupAction	String	-	Determines what to do with the source files after the files are transferred. Select one of the following filter options: - KEEP. Keep the files in the source directory. - DELETE. Delete the files from the source directory. - RENAME. Rename the files in the source directory. - ARCHIVE. Archive the files to a different location. You must specify an archive directory Default is KEEP.
renameSuffix	String	Yes	If afterFilePickupAction is selected as RENAME, the file name suffix to append to the files in the source directory. You can use the following suffix types: - $date - $time - $runId - $timestamp
archiveDirectoryPath	String	Yes	If afterFilePickupAction is selected as ARCHIVE, the archive directory in which to archive the files.
skipDuplicateFiles	String	-	Indicates whether to skip the source files which are already present in the docstore location. Default is false.
processFilesRecursively	String	-	Indicates whether to process files from all sub-folders within the base directory. Default is false.
DECOMPRESSION_TYPE	String	Yes	The format of the files that you want to decompress. Select one of the following decompression methods: - Zip - Tar - Gzip The values are not case sensitive.
PATTERN _TO_COLLECT	String	Yes	The pattern of the file that you want to collect to decompress from the file server user's home directory. Use a regular expression to match the file name pattern.

For example, to decompress and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1004
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "agentGroupId": "01000125000000000002",
    "portalUser": "false",
    "pattern": "arun_zip.txt",
    "relativeSourceLocation": "/",
    "targetLocation": "C:\\Informatica_Target",
    "relativeTargetLocation": "",
    "connectionId": "0100010B000000000002",
    "afterFilePickupAction": "RENAME",
    "renameSuffix":"_RENAME_",
    "archiveDirectoryPath" :"",
    "skipDuplicateFiles": true,
    "processFilesRecursively": false,
   "taskVariables": {
       "DECOMPRESSION_TYPE": "gunzip",
```

```
            "PATTERN_TO_COLLECT": ".*gz"
        }
    }
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
       "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
    "submitSourceId": -1,
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000007171,
    "runId": 30
}
```

If unsuccessful, the response includes a reason for the failure.

Encrypt and transfer files

Encrypt and transfer files from the source location to a remote server using connectors or to the directory specified in the REST API param within the remote server's home directory. You can encrypt single or multiple files.

POST Request

To encrypt and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1001
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
connectionId	String	Yes	The connection ID of the Advanced FTP, Advanced FTPS, or Advanced SFTP V2 connector.
portalUser	String	-	Whether the user is a portal user. Default is false.
relativeTargetLocation	String	-	The relative target location within the remote server home directory.
pattern	String	Yes	The file pattern to identify the files to collect for encryption. The regular expression pattern is supported.
sourceLocation	String	Yes	The source directory that contains the files you want to encrypt.
SIGN	String	-	Whether the file is signed by PGP. The values are not case sensitive. Default is false.

Field	Type	Required	Description
PUBLIC_KEY_ID	String	Yes	The ID of the key that is used to encrypt the file.
SECRET_KEY_ID	String	Yes	The ID of the secret key that is used to sign the file, if the value of the SIGN variable is true.
SECRET_KEY_PASSPHRASE	String	Yes	The passphrase used to access the secret key if the value of the SIGN variable is true.

For example, to encrypt and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1001
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "agentGroupId": "01000125000000000002",
    "portalUser": "false",
     "connectionId": "0100010B000000000002",
    "pattern":"arun.txt",
    "relativeTargetLocation":"/",
    "sourceLocation":"C:\\FIS_Home\\DOCSTORE",
    "taskVariables": {
        "SIGN":"true",
        "PUBLIC_KEY_ID":"0x51986F687ADACBE1",
        "SECRET_KEY_ID":"0x51986F687ADACBE1",
        "SECRET_KEY_PASSPHRASE":"TESTER"
    }
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
        "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
    "submitSourceId": -1,
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000007165,
    "runId": 24
}
```

If unsuccessful, the response includes a reason for the failure.

Decrypt and transfer files

Decrypt and transfer files from the remote server home directory to the target location.

POST Request

To decrypt and transfer files, include the connection ID in the following URI.

```
mftsaas/api/v1/filetransferTask/execute/1002
```

Include the following information in the request:

Field	Type	Required	Description
agentGroupId	String	Yes	The ID of the agent group.
portalUser	String	-	Whether the user is a portal user. Default is false.
relativeSourceLocation	String	-	The relative source location within the remote server home directory.
pattern	String	Yes	The file pattern of the file to release to the specified target location after decrypting the file. The regular expression pattern is supported.
targetLocation	String	Yes	The target directory to which the file is moved after decrypting.
relativeTargetLocation	String	-	The relative target location within the remote server home directory.
connectionId	String	Yes	The connection ID of the Advanced FTP, Advanced FTPS, or Advanced SFTP V2 connector.
afterFilePickupAction	String	-	Determines what to do with the source files after the files are transferred. Select one of the following filter options: - KEEP. Keep the files in the source directory. - DELETE. Delete the files from the source directory. - RENAME. Rename the files in the source directory. - ARCHIVE. Archive the files to a different location. You must specify an archive directory Default is KEEP.
renameSuffix	String	Yes	If afterFilePickupAction is selected as RENAME, the file name suffix to append to the files in the source directory. You can use the following suffix types: - $date - $time - $runId - $timestamp
archiveDirectoryPath	String	Yes	If afterFilePickupAction is selected as ARCHIVE, the archive directory in which to archive the files.
skipDuplicateFiles	String	-	Indicates whether to skip the source files which are already present in the docstore location. Default is false.
processFilesRecursively	String	-	Indicates whether to process files from all sub-folders within the base directory. Default is false.
PATTERN_CASE_SENSITIVE	String	Yes	Whether the file pattern is case sensitive. The values are not case sensitive. Default is false.

Field	Type	Required	Description
PGP_PASSPHRASE	String	Yes	The PGP passphrase.
PATTERN _TO_COLLECT	String	Yes	The pattern of the file that you want to collect to decompress from the file server user's home directory. Use a regular expression to match the file name pattern.

For example, to decrypt and transfer a file, you might use the following request:

```
POST <serverUrl>/mftsaas/api/v1/filetransferTask/execute/1002
Accept:application/json
IDS-SESSION-ID: <icSessionId or INFA-SESSION-ID>
{
    "agentGroupId": "01000125000000000002",
    "portalUser": "false",
    "pattern": "arun.txt",
    "relativeSourceLocation": "/",
    "targetLocation": "C:\\Informatica_Target",
    "relativeTargetLocation": "",
    "connectionId": "0100010B000000000002",
    "afterFilePickupAction": "ARCHIVE",
    "renameSuffix":"_RENAME_",
    "archiveDirectoryPath" :"/ARCH",
    "skipDuplicateFiles": false,
    "processFilesRecursively": false,
   "taskVariables": {
        "PATTERN_CASE_SENSITIVE": "false",
        "PGP_PASSPHRASE": "TESTER",
        "PATTERN_TO_COLLECT": "arun.txt.pgp"
    }
}
```

POST Response

If successful, IDMC returns the run ID for the job. Use the run ID to monitor the job status.

The following example shows a successful response:

```
{
    "projectId": 0,
    "timeTaken": 0,
    "queuePriority": 0,
    "runPriority": 0,
    "runMode": "UNKNOWN",
    "submitSourceId": -1,
    "runModeInteractive": false,
    "runModeBatch": false,
    "runModeDebug": false,
    "runModeUnknown": true,
    "formattedTimeTaken": "0.00",
    "id": 1000000007169,
    "runId": 28
}
```

If unsuccessful, the response includes a reason for the failure.

HTTPS file transfer

You can send files to a remote HTTPS server or receive files from a remote HTTPS server, and get the job status through the REST API.

Consider the following when you use the resources for HTTPS file transfer:

- You must have the HTTPS license to exchange files through HTTPS servers.

- You should log in to the HTTPS server to perform the API operations.

You can use the following resources for HTTPS file transfer:

- Authentication. Use to authenticate a user.
- Standard operations. Use during a file transfer action.
- File transfer. Use to transfer file to or from a HTTPS server
- Server responses. Details on the server responses.
- Status codes. Details on the HTTPS file transfer status codes.

Authentication

Use the following resources to log in to the HTTP server and log out.

login

You should log in to the HTTPS server to perform any HTTPS API operations. Use this command to lg in to the HTTPS server. To log in to the Informatica Managed File Transfer HTTPS Server send a POST request using the login resource. You must send a login request to start a user session if you don't use client certificate authentication.

Include the following parameters in the request:

- Username. The name of the user on the server.
- Password. The password required to log in.

For example: `https://10.60.40.11:15400/fileservers/login?username=https_automation&password=T@1234`

logout

Use the logout resource to log out and end the user session on the Informatica Managed File Transfer HTTPS Server. You can make a GET or POST request.

For example, `https://10.60.40.11:15400/fileservers/logout`

Standard operations

You can use the following standard operational commands:

PWD

Use the PWD (Print Working Directory) command to retrieve the current working directory on the server. The response includes the absolute path to the current working directory as part of the X-GDX-Reply header message. The path is enclosed in double quotes.

For example, `https://localhost:15400/fileservers/pwd`

delete

Use this command to remove files from the server. Include the relative or absolute file path to delete in the file parameter.

For example, `https://10.60.40.11:15400/fileservers/delete?file=/abc/1.txt`

rename

Use this command to rename files on the server. If the current working directory contains the files that you want to rename, then the from and to parameters might contain only the file names. You can also use the rename command to move files on the server. To move files, include the full paths in the from and to parameters.

For example, the following command changes the name of the newInput.txt file to Input.txt:

```
https://10.60.40.11:15400/fileservers/rename?from=/newInput.txt&;to=/Input.txt
```

For example, the following command moves the newInput.txt file from the current working directory to the parent directory:

```
https://10.60.40.11:15400/fileservers/rename?from=/newInput.txt&to=/aa/newInput.txt
```

Include the following parameters in the request:

Request Type	Parameters
GET or POST	- from: The relative or absolute path of the file or directory to rename. - to: The relative or absolute path of the new name.

list

Use this command to list the contents of a directory on the server. Include the target directory as a parameter to this command. If you do not include the directory, the command lists the contents of the current working directory.

For example, `https://10.60.40.11:15400/fileservers/list?dir=/`

The response body includes the contents of the directory in content type text/plain. The following example shows the format of the directory listing:

```
2009-12-03 14:02:19 D 0 backup
```

The response includes the following information delimited by a tab (\t) character:

- The last modified date of the file or directory. The timestamp is in ISO format yyyy-MM-dd HH:mm:ss. The hour(hh) is displayed as a 24-hour clock.
- Whether the content type is a file, a directory, or unknown.
- The size of the file in bytes.
- The name of the file or directory.

checksum

Use this command to calculate the hash of a remote file. The reply is returned on the first line of the response body. You can compare the response with the hash value of the downloaded local file to verify data integrity.

For example, `https://10.60.40.11:15400/fileservers/hash?file=/input.txt`

The supported hash algorithms are SHA1, MD5, and CRC32. Include the following parameters in the request:

Request Type	Parameters
GET or POST	- file: Required. The path relative to the current working directory, or an absolute path to the file. - algorithm: The hash algorithm to use when calculating a checksum. Valid values are SHA1, MD5, or CRC32. Default is SHA1. - length: The starting position within the file. This value is used for calculating partial file checksums. The default value is 0, which performs the checksum on the entire file.

CD (Change Directory)

Use this command to change the current working directory. The absolute path to the new working directory returns as part of the X-GDX-Reply header message. The path is enclosed in double quotes.

For example, `https://10.60.40.11:15400/fileservers/cd?dir=/`

CDUP (Change Directory Up)

Use this command to change the current working directory to the parent directory. The absolute path to the new working directory returns as part of the X-GDX-Reply header message. The path is enclosed in double quotes.

For example, `https://10.60.40.11:15400/fileservers/cdup`

MKDIR (Make Directory)

Use this command to create a new directory on the server. The absolute path to the newly created directory returns as part of the X-GDX-Reply header message. The path is enclosed in double quotes.

For example, `https://10.60.40.11:15400/fileservers/mkdir?dir=/a/b/c/mkdri1`

file information

Use this command to retrieve information about a specific file or directory. The response includes the information in the response body with content type text/plain. The format of the file information is identical to the listing returned from the List command. If no information is returned in the response body, then the file or directory does not exist.

For example, `https://10.60.40.11:15400/fileservers/fileInfo?file=/TEST.txt`

File transfer

Use the following commands to transfer an HTTPS file to or from a server:

upload

Use this command to transfer a file to the server. The request must be a multipart POST request and only one file is uploaded per request. A file is a required part of the multipart request, but any parameter name given to the file part is ignored.

For example, `https://10.60.40.11:15400/fileservers/upload`

The request includes the following parameters:

Request Type	Parameters
POST/ Multipart	- to: The relative or absolute path of the destination file. - file: The file being uploaded as part of the multipart request. - generateUniqueId. Optional. Set to true to generate and return a unique ID for the file transfer task. Default is false. - fileMetadata. Optional. Metadata related to the file in JSON format.

If you include the optional request parameters, the response includes the following return parameters, respectively:

- fileUniqueId. Unique ID generated for the file transfer task.
- fileMetadata. Metadata related to the file in JSON format.

upload2

Use this command to transfer a file to the server. The request must be a multipart POST request and only one file is uploaded per request. A file is a required part of the multipart request, but any parameter name given to the file part is ignored.

For example, `https://10.60.40.11:15400/fileservers/upload2`

The response includes the following parameters:

Request Type	Parameters
POST/ Multipart	- to: The relative or absolute path of the destination file. - append: Optional. If the file exists on the target directory, set this parameter to `true` to append the new file to the existing one. - transferMode: Use B for binary transfers or A for ascii transfers. Default is B. - file: The file being uploaded as part of the multipart request.

upload3

Use this command to transfer a file to the server. The request must be a multipart POST request and only one file is uploaded per request. A file is a required part of the multipart request, but any parameter name given to the file part is ignored.

For example, `https://10.60.40.11:15400/fileservers/upload3`

You must provide the fileserver username and password for basic authorization.

The response includes the following parameters:

Request Type	Parameters
POST/ Multipart	- to: The relative or absolute path of the destination file. - append: Optional. If the file exists on the target directory, set this parameter to `true` to append the new file to the existing one. - transferMode: Use B for binary transfers or A for ascii transfers. Default is B. - file: The file being uploaded as part of the multipart request.

uploadRawData

Use this command to upload data directly to the server where the data is the content of the request body. The request must be a POST request. The name of the file is automatically derived and returned as part of the X-GDX-Reply header message. This is a special command where the request body must contain the file data being uploaded.

For example, `https://10.60.40.11:15400/fileservers/uploadRawData`

uploadRawData2

Use this command to upload data directly to the server where the data is the content of the request body. The request must be a POST request. The name of the file is automatically derived and returned as part of the X-GDX-Reply header message. This is a special command where the request body must contain the file data being uploaded.

For example, `https://10.60.40.11:15400/fileservers/uploadRawData2`

You must provide the fileserver username and password for basic authorization.

download

Use this command to download a file from the server. The file is returned as the response body. The content type is always an application or force download, along with the content disposition field containing the name of the file. The content-length header is also included in the response indicating the size of the file.

For example, `https://10.60.40.11:15400/fileservers/download?file=/test&downloadReleased=true&transferMode=b`

The response includes the following parameters:

Request Type	Parameters
GET or POST	- file: Required. The file to download. This can be a path relative to the current working directory, or an absolute path to the file. - offset: For downloading partial files. Enter the starting position from where the file must begin to download. - transferMode: Use B for binary transfers or A for ascii transfers. Default is B.

Server responses

For every request, the server responds with success or error codes and messages specific to the HTTPS service in the X-CDX-Reply header. The format of the header message is a status code followed by a single white space, followed by the message details.

For example, 200 Welcome, testuser!

You can use header codes and messages to determine the success or failure of an operation.

Status codes

A response might include any of the following HTTPS file transfer status codes:

200-299

Informational or success status codes: Successful operation performed against the server .

500-509

Internal server error: The server experienced a critical error. Contact the server's administrator immediately.

510-519

Bad or Invalid request: The server could not process the request due to invalid or incomplete information. See the X-GDX-Reply header message for more details.

530-539

Login or account related errors: Indicates that an error occurred with the account or login, such as invalid login or account disabled. See the X-GDX-Reply header message for more details.

550-559

Permission errors: The user does not have permission or authority to perform the requested action. See the X-GDX-Reply header message for more details.

560-569

Errors related to files or directories on the system: An error occurred while accessing a file or directory on the server, such as a file or directory does not exist.

580-589

File I/O Errors: An internal server error occurred while trying to access a file or directory.

590

Unknown error: An unexpected error occurred while trying to process the command. See the X-GDX-Reply header message for more details.

Fixed-width configuration

Use the fwConfig resource to configure column widths for flat file source, lookup, and target objects.

GET request

To request all of the fixed-width formats, use the following URI:

```
/api/v2/fwConfig
```

To request the details of a particular fixed-width format, you can include the fixed-width format ID, the fixed-width federated ID, or fixed-width format name in the URI. If you include the federated ID, the response includes the project and folder location of the fixed-width format. Use one of the following URIs:

```
/api/v2/fwConfig/<id>
/api/v2/fwConfig/frs/<id>
/api/v2/fwConfig/name/<name>
```

If you use the fixed-width format name in the URI and the fixed-width format name includes a space, replace the space with `%20`. For example:

```
/api/v2/fwConfig/name/my%20fixedwidth%20format
```

GET response

The fwConfig object returns the following attributes:

Field	Type	Description
id	String	Fixed-width format ID.
name	String	Fixed-width format name.
description	String	Description of the fixed-width format.
createTime	Date/time	Time that the fixed-width format was created.
updateTime	Date/time	Last time that the fixed-width format was updated.
createdBy	String	User who created the fixed-width format.
updatedBy	String	User who last updated the fixed-width format.
lineSequential	Boolean	Whether each row ends with a newline character. - True. Line sequential is enabled. - False. Line sequential is not enabled.

Field	Type	Description
padBytes	Int	Number of bytes between the last column of one row and the first column of the next.
skipRows	Int	Number of rows to skip. You can skip blank or header rows.
nullChar	String	The character to represent a null value.
dateFormat	String	Default date format to use when a date format is not specified in the flat file connection.
nullCharType	String	Determines if the null character is single-byte or multibyte.
repeatNullChar	Boolean	Determines how to treat null characters in a single field. - True. Read repeat null characters as a single null value. - False. does not read repeat null characters as a single null value.
stripTrailingBlank	Boolean	Determines how to treat trailing blanks in string values. - True. Removes trailing blanks from string values. - False. Does not remove trailing blanks in string values.
location	String	The project and folder that the fixedd-width file resides in.
columns	String	Includes the following attributes for each column: - name. Name of the column. - nativeType. Native data type. - precision. Length of the field in bytes. - scale. Number of digits after the decimal point for numeric values.

GET example

The following example shows a request to get details for a fixed-width format using the fixed-width format ID:

```
GET <serverUrl>/api/v2/fwConfig/00001R29000000000002
Content-type: application/json
Accept: application/json
icSessionId: <icSessionId>
```

The following text is a sample response:

```
{
  "@type": "fwConfig",
  "id": "00001R29000000000002",
  "orgId": "00001R",
  "name": "item",
  "description": "",
  "createTime": "2016-10-06T17:08:09.000Z",
  "updateTime": "2016-10-06T17:08:09.000Z",
  "createdBy": "org1@infa.com",
  "updatedBy": "org1@infa.com",
  "lineSequential": true,
  "padBytes": 0,
  "skipRows": 0,
  "nullChar": "*",
  "nullCharType": "ASCII",
  "repeatNullChar": false,
  "stripTrailingBlank": false,
  "location": Default\\MyProject
  "dateFormat": "",
  "columns": [
    {
```

```
      "@type": "fwColumn",
      "name": "COLUMN_0",
      "nativeType": "string",
      "precision": 1,
      "physicalLength": 0,
      "scale": 0
    },
    {
      "@type": "fwColumn",
      "name": "COLUMN_1",
      "nativeType": "string",
      "precision": 9,
      "physicalLength": 0,
      "scale": 0
    },
    {
      "@type": "fwColumn",
      "name": "COLUMN_2",
      "nativeType": "string",
      "precision": 10,
      "physicalLength": 0,
      "scale": 0
    }
  ]
}
```

POST request

To create a fixed-width format, use the following URI:

```
/api/v2/fwConfig
```

If you want to specify a location for the fixed-width format, include the container ID in the request. If the container ID isn't included in the request, the fixed-width format is created in the Default folder. You can find the container ID for a project or folder in the Data Integration user interface. On the **Explore** page, select the folder. In the URL, the last string of characters is the container ID.

For example, in the following URL, the container ID is dH2DuGJYda7ijgW4Sm32sR

```
https://na1.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/Explore/
dH2DuGJYda7ijgW4Sm32sR
```

To update a fixed-width format, include the fixed-width format ID in the following URI:

```
/api/v2/fwConfig/<id>
```

You can submit a partial update using partial mode. If you want to update a field in the fwColumn object using partial mode, you must include the name. To submit a request using partial mode, use a JSON request and include the following line in the header:

```
Update-Mode=PARTIAL
```

You can use the following attributes in a fwConfig POST request:

Field	Type	Required	Description
id	String	Yes	Fixed-width format ID.
name	String	Yes	Fixed-width format name.
description	String		Description of the fixed-width format.
containerId	String		ID of the project or folder to contain the linear taskflow. If not included in request, the linear taskflow is created in the Default folder.

Field	Type	Required	Description
lineSequential	Boolean	Yes	Whether each row ends with a newline character. - True. Line sequential is enabled. - False. Line sequential is not enabled.
padBytes	Int	Yes	Number of bytes between the last column of one row and the first column of the next.
skipRows	Int	Yes	Number of rows to skip. You can skip blank or header rows.
nullChar	String	Yes	The character to represent a null value.
dateFormat	String	Yes	Default date format to use when a date format is not specified in the flat file connection.
nullCharType	String	Yes	Determines if the null character is single-byte or multibyte.
repeatNullChar	Boolean	Yes	Determines how to treat null characters in a single field. - True. Read repeat null characters as a single null value. - False. does not read repeat null characters as a single null value.
stripTrailingBlank	Boolean	Yes	Determines how to treat trailing blanks in string values. - True. Removes trailing blanks from string values. - False. Does not remove trailing blanks in string values.
columns	String	Yes	Includes the following attributes for each column: - name. Name of the column. - nativeType. Native data type. - precision. Length of the field in bytes. - scale. Number of digits after the decimal point for numeric values.

POST response

If successful, returns the fwConfig object that you created or updated. Returns the error object if errors occur.

POST example

```
POST <serverURL>/api/v2/fwConfig/00000103000000000004
Content-Type: application/json
Accept: application/json
{
    "@type": "fwConfig",
    "name": "FW_FILE_CONFIG_1",
    "description": "Test description",
    "lineSequential": false,
    "padBytes": 1,
    "skipRows": 2,
    "nullChar": "*",
    "nullCharType": "ASCII",
    "repeatNullChar": false,
    "stripTrailingBlank": false,
    "columns": [
        {
            "@type": "fwColumn",
            "name": "ASCII",
            "nativeType": "string",
            "precision": 10
        }
    ]
}
```

DELETE request

To delete a fixed-width format, use the fixed-width format ID in the following URI:

```
/api/v2/fwConfig/<id>
```

DELETE response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

Hierarchical mappers

Use the h2h resource to create or run a hierarchical mapper that converts hierarchical data to a different hierarchical structure. You can also use the h2h resource to get metadata about a hierarchical mapper.

The h2h resource uses a hierarchical mapper ID in the URI. To find the hierarchical mapper ID, open the hierarchical mapper in the Data Integration user interface. In the URL, the last string of characters is the hierarchical mapper ID.

For example, in the URL `https://dm-us.informaticacloud.com/diUI/products/integrationDesign/main/idsm/7sQJvjkeZLIfpWg6hpYwqJ/read`, the hierarchical mapper ID is `7sQJvjkeZLIfpWg6hpYwqJ`.

Creating a hierarchical mapper

To create a hierarchical mapper, send a POST request and specify the hierarchical mapper details.

POST request

Use the following URI to create the hierarchical mapper:

```
/h2h/api/v1/create/<hierarchical mapper ID>
```

The following table describes the fields in the POST request:

Field	Type	Description
name	String	Name of the hierarchical mapper.
description	String	Description of the hierarchical mapper.
projectName	String	Project where you want to save the hierarchical mapper.
projectFolderPath	String	Folder within the project where you want to save the hierarchical mapper.
sourceXsd	String	Source XSD file, such as `EDI832__20190322_140316.xsd`
sourceXsdDependencies	Array	List of dependencies for the source XSD file.
targetXsd	String	Target XSD file, such as `X12_4010_810.xsd`
targetXsdDependencies	Array	List of dependencies for the target XSD file.
sourceRoot	String	Name of the root element in the source.

Field	Type	Description
targetRoot	String	Name of the root element in the target.
variables		Details about variables. The variables object includes the name, type, list indicator, and initial value.
name	String	Variable name.
type	String	Variable data type.
list	Boolean	True or false.
initialValue	String	Initial value of the variable.
statements	String	Comma-separated list of statements in the hierarchical mapper.
encodedService	String	Base64-encoded ZIP file that contains the source and target XSD files for the source and target schemas, as well as the dependencies of those XSD files.

POST response

If successful, the API creates the hierarchical mapper.

POST request example

The following example shows a request to create a hierarchical mapper:

```
POST <serverUrl>/h2h/api/v1/service/create
IDS-SESSION-ID: 689EaCniaW9b0YgwET5DwU
Content-Type: application/json

{
    "name": "MigAsset2",
    "description": "Migrated service",
    "projectName": "Interfor_Mapping",
    "projectFolderPath": "C:_Informatica_XMap_Interfor",
    "sourceXsd": "EDI_810_0_2_0_2_0_0.xsd",
    "sourceXsdDependencies": [],
    "targetXsd": "X12_4010_810_schema_restricted_0_0_0_1_0_0_0_0_0_1.xsd",
    "targetXsdDependencies": [
        "X12_4010_810_schema_segments_restricted_0_1_0_2_0_1_0_1_0_2.xsd"
    ],
    "sourceRoot": "DTedi810",
    "targetRoot": "x12:interchanges",
    "variables": [
        {
            "name": "IT_CTR",
            "type": "xs:integer",
            "list": false,
            "initalValue": "0"
        },
        {
            "name": "CTT_1",
            "type": "xs:integer",
            "list": false,
            "initalValue": "0"
        }
    ],
    "statements": "[{\"output\":\"interchange/x12:TS_810\",\"mode\":\"Add\",\"input
\":\".\",\"onFail\":\"propagate\",\"statementType\":\"Group\",\"name\":\"INPUT_LOOP
\",\"skip\":true,\"statements\":[{\"output\":\"ST\",\"mode\":\"Add\",\"input
\":\"InvoiceHeader\",\"onFail\":\"Skip\",\"statementType\":\"Group\",\"name\":\"ST
\",\"skip\":true,\"statements\":[{\"output\":\"R01\",\"mode\":\"Add\",\"input
\":\"'810'\",\"onFail\":\"propagate\",\"statementType\":\"Map\",\"name\":\"1\",\"skip
```

```
\":false,\"statements\":[],\"statementNumber\":3},{\"output\":\"R02\",\"mode\":\"Add
\",\"input\":\"invNum\",\"onFail\":\"propagate\",\"statementType\":\"Map\",\"name\":\"2-
for now it's default value\",\"skip\":false,\"statements\":[],\"statementNumber
\":4}],\"statementNumber\":2},{\"output\":\"BIG\",\"mode\":\"Add\",\"input
\":\"InvoiceHeader\",\"onFail\":\"Skip\",\"statementType\":\"Group\",\"name\":\"BIG
\",\"skip\":true,\"statements\":[{\"output\":\"R01\",\"mode\":\"Add\",\"input
\":\"replace(invDate,'-','')\",\"onFail\":\"propagate\",\"statementType\":\"Map\",\"name
\":\"1\",\"skip\":false,\"statements\":[],\"statementNumber\":6},{\"output
\":\"R02\",\"mode\":\"Add\",\"input\":\"invNum\",\"onFail\":\"propagate\",\"statementType
\":\"Map\",\"name\":\"2\",\"skip\":false,\"statementNumber\":7},[...]",
    "encodedService": "UEsDBBQACAgIALiUSlkAAAAAAAAAAAAAAAAdAAAAb[...]"
}
```

The statement and encoded service values are truncated for brevity.

Running a hierarchical mapper

To run a hierarchical mapper, create a POST request and specify the XML or JSON data for the hierarchical mapper to process. You can provide the data as a buffer in the request body or as a file to pass to the hierarchical mapper. The output can be a buffer that is returned in the response, or you can write the output to a file.

POST request

Use the following URI to run the hierarchical mapper:

```
/h2h/api/v1/service/run/<hierarchical mapper ID>
```

The following table describes the fields in the POST request:

Field	Type	Description
agentGroupId	String	Runtime environment to run the hierarchical mapper. If you don't specify a runtime environment, the hierarchical mapper runs natively on the Cloud Server.
input		Input details.
type	String	Type of input to send in the request body. Use buffer or file.
value	String	Input value to pass to the hierarchical mapper. If the input is a buffer, enter the XML or JSON data. If the input is a file, enter the path to the file.
output		Output details.
type	String	Type of output to receive in the response. Use buffer or file.
value	String	Output to receive in the response. If the output is a buffer, use an empty string. If the output is a file, enter the path to the file.

POST response

If successful, the hierarchical mapper returns the data in the target hierarchical structure.

The following table describes the fields in the response:

Field	Type	Description
output	String	Output value. The output is either a buffer or the path to a file.
message	String	Response message, such as `Success`.

POST request example for buffer to file

The following request runs a hierarchical mapper that converts XML data as a buffer and stores the converted data in an output file:

```
POST <server URL>/h2h/api/v1/service/run/<hierarchical mapper ID>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: jpaybAKQMsmdt7vLJ02z0

{
    "agentGroupId": "016GOR25000000000005",
    "input": {
        "type": "buffer",
        "value":"<?xml version=\"1.0\" encoding=\"UTF-8\"?><HL7:MSH><MSH.1>1</
MSH.1><MSH.2>^~\\&amp;</MSH.2><MSH.3><HD.1>GHH_ADT</HD.1></
MSH.3><MSH.7>20080115153000</MSH.7><MSH.9><MSG.1>ADT</MSG.1><MSG.2>A01</
MSG.2><MSG.3>ADT_A01</MSG.3></MSH.9><MSH.10>0123456789</MSH.10><MSH.11><PT.1>P</PT.1></
MSH.11><MSH.12><VID.1>2.6</VID.1></MSH.12><MSH.16>AL</MSH.16></HL7:MSH>"
        },
    "output": {
        "type": "file",
        "value": "/root/idsm"
    }
}
```

If successful, you receive the following response:

```
{
    "output": "/root/idsm/hmapper_runtime_api_5040_output.xml",
    "message": "Success"
}
```

POST request example for file to buffer

The following request runs a hierarchical mapper that converts XML data in a file and returns the output as a buffer in the response:

```
POST <server URL>/h2h/api/v1/service/run/<hierarchical mapper ID>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: jpaybAKQMsmdt7vLJ02z0

{
    "agentGroupId": "016GOR25000000000005",
    "input": {
        "type": "file",
        "value":"/root/idsm/2.6_parser_response.xml"
        },
    "output": {
        "type": "buffer",
        "value": " "
    }
}
```

If successful, you receive the following response:

```
{
    "output": "<?xml version=\"1.0\" encoding=\"UTF-8\"?>\r\n<Departments>\r
\n<Department name=\"\">\r\n<Employee>\r\n<Profile>\r\n<Id>0</Id>\r\n<FullName>1</
```

```
FullName>\r\n<Skills>\r\n<FHIR4></FHIR4>\r\n<XYZ></XYZ>\r\n<hl7></hl7>\r\n<HIPAA></HIPAA>
\r\n</Skills>\r\n</Profile>\r\n</Employee>\r\n</Department>\r\n</Departments>\r\n",
    "message": "Success"
}
```

Getting hierarchical mapper metadata

To get metadata about a hierarchical mapper, use a GET request and specify the hierarchical mapper ID.

GET request

Use the following URI to get metadata about a hierarchical mapper:

```
/h2h/api/v1/idsm/metadata/<hierarchical mapper ID>
```

GET response

If successful, the response returns the metadata.

The following table describes the fields in the response:

Field	Type	Description
srcSchemaType	String	Source schema type
tgtSchemaType	String	Target schema type
srcSchemaContent	String	Base64-encoded source schema
tgtSchemaContent	String	Base64-encoded target schema

The following table lists the source and target schema types that the response returns based on the asset used to create the hierarchical mapper:

Asset	Schema type
Intelligent structure model	Any
Data service in the data services repository	Native or XML based on whether **Input in Native format** is selected
Hierarchical schema from an XML file	XML
Hierarchical schema from a JSON file	JSON

GET example

The following request gets metadata about a hierarchial mapper:

```
GET <server URL>/h2h/api/v1/idsm/metadata/<hierarchical mapper ID>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: jpaybAKQMsmdt7vLJ02z0
```

If successful, you might receive the following response:

```
{
  "srcSchemaType": "XML",
  "tgtSchemaType": "JSON",
  "srcSchemaContent": "eJzNV+tP2zAQ/
85fEWXqJ5RHk1CgoqCKthNSAY3HhvYFuYlLLSV2SNzXtD9+Zz...",
```

```
  "tgtSchemaContent": "eJzNkL0OgjAUhXeegnRm0ZiYuBFlwBA0/q2kylVrUPByHYjh3aVVI2nAusnS3n..."
}
```

The source and target schema values are truncated for brevity.

Job log files

You can request log information for completed Data Integration jobs from Operational Insights.

To get log entries from Operational Insights, use the following resources:

- Login. Use to log in to IDMC and get the session ID to use in job log REST API calls.
- jobLogEntries. Use to request log information for completed Data Integration jobs.

When you use these resources, note the following rules:

- Use JSON format.
- Use the following URL:

  ```
  <serverUrl>/cdiinsights-service/api/v1/analytical/Orgs(<orgID>)/<API name>
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  IDS-SESSION-ID: <SessionId>
  ```

  The server URL includes the name and region of the POD that your organization uses and the IDMC domain, informaticacloud.com. If you don't know the name and region of your organization's POD, you can find it by logging in to IDMC through the user interface. The POD information is located in the browser's address bar.

  In the following example, https://usw3.dm-us.informaticacloud.com is the server URL:

  ```
  https://usw3.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/home
  ```

  Use the server URL as the base URL in the header of REST API calls.

  Note: If you use a tool such as Postman that automatically includes the HTTP version, don't enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Logging in

Use this resource to log into IDMC when you use resources that require the IDS-SESSION-ID in the call header. The IDS-SESSION-ID is included in a successful login response.

POST request

Use the following URL:

```
<login URL>/identity-service/api/v1/Login
```

The login URL includes the region where your organization is located and the IDMC domain, informaticacloud.com. You can find your organization's login region by opening the IDMC log in page. The regional login URL is located in the browser's address bar before you log in to IDMC.

In the following example, https://dm-us.informaticacloud.com, is the region URL:

```
https://dm-us.informaticacloud.com/identity-service/home
```

The following table describes the fields to include in the request:

Field	Type	Required	Description
username	String	Yes	IDMC user name. Maximum length is 255 characters.
password	String	Yes	IDMC password. Maximum length is 255 characters.

POST response

Returns the user object if the request is successful. Returns the error object if errors occur.

Use the session ID returned in the response for subsequent requests.

The user object includes the following attributes:

Field	Type	Description
sessionId	String	REST API session ID for the current session. Use in most REST API request headers.
sessionExpireTime	String	Time the session expires.
id	String	User ID.
name	String	IDMC user name.
currentOrgId	String	Current organization ID.
currentOrgName	String	Name of the current organization.
parentOrgId	String	ID of the parent organization.
orgId	String	ID of the organization the user belongs to.
orgName	String	Name of the organization the user belongs to.
groups	String	User group.
effectiveRoles	String	Roles assigned to the user.
effectivePrivileges	String	Privileges assigned to the user.
status	String	Status of the user.
timeZoneId	String	Time zone of the user. Time zone honors Daylight Saving Time. For more information, see "Time zone codes" on page 768.
authenticator	String	User authentication method.

Getting log information

Use the jobLogEntries resource to request log information for completed Data Integration jobs from Operational Insights. When you use this resource, include the organization ID in the URL.

GET Request

You can request all the log information or filter the log response. You can request data for the last 33 days. The response returns a maximum of 500 records for any applied filter.

JobLogEntries returns data for completed jobs from a repository that is updated asynchronously. Requests for recent jobs may return fewer records until ingestion completes.

To request information from the log, use the following URI:

```
/cdiinsights-service/api/v1/analytical/Orgs(<orgID>)/JobLogEntries
```

To filter the log response, use the following URI:

```
/cdiinsights-service/api/v1/analytical/Orgs(<orgID>)/JobLogEntries?<query parameters>
```

You can include the following filters in the URI:

Parameter	Type	Description
filter	String	Query filter.
endTime	Date	Date and time the task ended. Include in the filter parameter.
startswith	String	Runtime environment, Secure Agent, or asset that started the task. Include in the filter parameter.
listfilter	String	Job status and asset type.
status in	String	Status of the task. You can filter by any of the following statuses: - COMPLETED - WARNING - FAILED - END - SUCCESS - STOPPED
assetType in	String	Type of asset: - MTT. Mapping task. - TASKFLOW. Advanced taskflow. - MI_TASK. Mass ingestion task. - DSS. Synchronization task. - WORKFLOW. Linear taskflow. - DRS. Replication task. - PCS. PowerCenter task. - DTT. Data transfer task. - DLT. Data loader task. - MAPPING - BATCH_MAPPING. Dynamic mapping task. - DMASK. Data masking task.
count	Int	If true, returns total records available for applied filter.

Parameter	Type	Description
top	Int	Number of elements to return. For example, a value of 25 returns the first 25 records available for the applied filters. Max is 500.
skip	Int	Number of records to skip. For example, a value of 4 excludes the first four assets in the list.
orderby	String	Sort order in which to return the data.

GET request examples

The following examples show how you can use query parameters to request log information:

- To request a list of mapping tasks that successfully completed between October 8, 2023 at 6am and October 9, 2023 at 6am, you might use the following request:

```
GET <serverUrl>/cdiinsights-service/api/v1/analytical/Orgs(<orgID>)/JobLogEntries?
$filter=(endTime%20ge%202023-10-08T06:00:00Z)%20and%20(endTime%20le
%202023-10-09T06:00:00Z)&listFilter=status%20in%20(SUCCESS)%20and%20assetType%20in
%20(MTT)&$count=true&$top=500&$skip=0
Content-type: application/json
Accept: application/json
icSessionId: <SessionId>
```

- To request a list of all jobs that completed between October 1, 2023 at 6am and October 31, 2023 at 6am and sort the jobs by descending end time, you might use the following request:

```
GET >serverUrl>/cdiinsights-service/api/v1/analytical/Orgs(<orgID>)/JobLogEntries?
$filter=(endTime%20ge%202023-10-01T06:00:00Z)%20and%20(endTime%20le
%202023-11-31T06:00:00Z)&listFilter=status%20in
%20(COMPLETED,WARNING,FAILED,END,SUCCESS,STOPPED)%20and%20assetType%20in
%20(MTT,DTT,DMASK,PCS,DRS,DSS,MTT_TEST,BATCH_MAPPING,MAPPING,command,MI_TASK)&
$count=true&$top=500&$skip=0&$oderby=endTime desc
Content-type: application/json
Accept: application/json
icSessionId: <SessionId>
```

GET Response

Returns a jobLogEntry object for each row in the log. Returns the error object if errors occur.

When you request information for each row in the log, the jobLogEntry object includes the following attributes:

Field	Type	Description
logEntryId	String	Log entry ID.
assetId	String	ID for the task.
runId	Long	ID for the task run.
assetName	String	Name of the asset.
instanceName	String	Name of the job in the following format: <asset name>-<instance number>
orgId	String	Organization ID.

Field	Type	Description
status	String	Whether the job completed successfully.
assetType	String	Type of task. For Data Integration jobs, returns one of the following codes: - MTT. Mapping task. - TASKFLOW. Advanced taskflow. - MI_TASK. Mass ingestion task. - DSS. Synchronization task. - WORKFLOW. Linear taskflow. - DRS. Replication task. - PCS. PowerCenter task. - DTT. Data transfer task. - DLT. Data loader task. - MAPPING. - BATCH_MAPPING. Dynamic mapping task. - DMASK. Data masking task.
startTime	Date/time	Start time for the task or linear taskflow. Uses Eastern Time Zone (ET).
endTime	Date/time	End time for the task or linear taskflow. Uses Eastern Time Zone (ET).
updateTime	String	Last time the task was updated.
duration	String	Time in seconds that the task ran.
errorMessage	String	Error message associated with the job.
location	String	Location of the asset.
rowsProcessed	String	Total number of rows processed by the task.
successRows	String	Number of rows that were successfully processed by the task.
errorRows	String	Number of rows that were not processed by the task.
runtimeEnv	String	Runtime environment where the task runs.
runtimeEnvName	String	Name of the runtime environment where the task runs.
startedBy	String	User or schedule that started the task.
subtasks	String	Number of subtasks that the task contains.
runContext	String	Method through which the task was initiated. Includes the following values: - UI. Task was initiated through the user interface. - SCHEDULER. Task was initiated through the task scheduler. - REST-API. Task was initiated through the REST API. - OUTBOUND MESSAGE. Task was initiated through an outbound message.
extraData	String	Additional information including the saasLogId and saasTaskId.
parentEntityId	String	ID of the parent task.
updateDayHour	Date/Time	Last time the task was updated.
taskId	String	ID of the task.

Field	Type	Description
stopOnError	Boolean	Whether or not the runtime environment stops the task when a nonfatal error occurs.
isAtScale	Boolean	Whether or not the mapping associated with the task is in advanced mode.
parAssetName	String	Name of the parent asset.
parRunId	String	Run ID for the parent asset.
parLocation	String	Location of the parent asset.
parAssetType	String	Parent asset type.
agentId	String	Secure Agent that runs the task.
agentName	String	Name of the agent that runs the task.
projectName	String	Project in which the asset resides.

GET response example

You might get the following response when you request job log information for mapping tasks:


```
{
  "@odata.context": "$metadata#JobLogEntries",
  "@odata.count": 2,
  "value": [
    {
      "logEntryId": "9hQOSzOu0GSeG0r73CzK8L",
      "assetId": "jn94HPOUK4zlEoO07eGfEq",
      "runId": "148201",
      "assetName": "CDI_9102",
      "instanceName": "CDI_9102-148201",
      "orgId": "010cdi",
      "status": "COMPLETED",
      "assetType": "MTT",
      "correlationId": "ZGVmN2E3ZDEtMTE2MC00NT",
      "startTime": "2023-07-20T07:55:52Z",
      "endTime": "2023-07-20T07:56:09Z",
      "updateTime": null,
      "duration": 17,
      "errorMessage": "",
      "location": "9102",
      "rowsProcessed": 2,
      "successRows": 2,
      "errorRows": 0,
      "runtimeEnv": "runtime environment",
      "runtimeEnvName": "ASH0001",
      "startedBy": "every_day",
      "subtasks": 0,
      "runContext": "SCHEDULER",
      "extraData": "{\"saasLogId\":\"010AXYC100000000RC5Q\", \"runtimeType\":\"\",
\"isServerless\":\"false\", \"releaseVersion\":\"4400\", \"saasTaskId
\":\"010AXY0Z0000000005EM\"}",
      "parentEntityId": null,
      "statusDisplayName": "SUCCESS",
      "updateDayHour": "2023-07-20T07:00:00Z",
      "taskId": "010AXY0Z0000000005EM",
      "stopOnError": "0",
      "requestId": null,
      "isAtScale": 0,
      "parAssetName": null,
      "parRunId": null,
```

```
      "parLocation": "n/a",
      "parAssetType": null,
      "agentId": "010AXY08000000000003",
      "agentName": "ASH0001",
      "projectName": "9102"
    }
{
      "logEntryId": "7gQRt15YPsBcdK6RsozzSJ",
      "assetId": "iwm48QrytmidcBrdpMElu6",
      "runId": "145708",
      "assetName": "CDI-9845_test2",
      "instanceName": "CDI-9845_test2-145708",
      "orgId": "010cdi",
      "status": "COMPLETED",
      "assetType": "MTT",
      "correlationId": "NjNlNGFhY2QtYzFjZC00MT",
      "startTime": "2023-07-20T07:55:52Z",
      "endTime": "2023-07-20T07:56:03Z",
      "updateTime": null,
      "duration": 11,
      "errorMessage": "",
      "location": "Default",
      "rowsProcessed": 1000,
      "successRows": 1000,
      "errorRows": 0,
      "runtimeEnv": "runtime environment",
      "runtimeEnvName": "ASH0001",
      "startedBy": "CDI-9845_scheduler",
      "subtasks": 0,
      "runContext": "SCHEDULER",
      "extraData": "{\"saasLogId\":\"010AXYC100000000RC5P\", \"runtimeType\":\"\",
\"isServerless\":\"false\", \"releaseVersion\":\"4400\", \"saasTaskId
\":\"010AXY0Z00000000005N4\"}",
      "parentEntityId": null,
      "statusDisplayName": "SUCCESS",
      "updateDayHour": "2023-07-20T07:00:00Z",
      "taskId": "010AXY0Z00000000005N4",
      "stopOnError": "0",
      "requestId": null,
      "isAtScale": 0,
      "parAssetName": null,
      "parRunId": null,
      "parLocation": "n/a",
      "parAssetType": null,
      "agentId": "agentID",
      "agentName": "ASH0001",
      "projectName": "Default"
    }
```


Linear taskflows

Use this resource to request the details of a linear taskflow or the details of all linear taskflows in the organization. You can also create, update, or delete a linear taskflow.

GET request

To request the details of a particular linear taskflow, include the linear taskflow ID or linear taskflow name in the URI. Use one of the following URIs:

```
/api/v2/workflow/<id>
```

```
/api/v2/workflow/name/<name>
```

If you use the linear taskflow name in the URI and the linear taskflow name includes a space, replace the space with `%20`. For example:

```
/api/v2/workflow/name/my%20linear%20taskflow
```

To request the details of all linear taskflows in the organization, use the following URI:

```
/api/v2/workflow
```

Optionally, you can receive the response in simple mode which significantly improves performance. When you enable simple mode, the response does not include the ScheduleId attribute and the email attributes. To receive the response in simple mode, include `simpleMode=true` in the request. Use the following URI to receive details of all linear taskflows using simple mode:

```
/api/v2/workflow/?simpleMode=true
```

GET response

If successful, returns the workflow object for the requested linear taskflow. Or, if you request the details for all linear taskflows in the organization, returns a workflow object for each linear taskflow in the organization.

Returns an error object if errors occurred.

The workflow object includes the following attributes:

Field	Type	Description
id	String	Linear taskflow ID.
orgId	String	Organization ID.
name	String	Linear taskflow name.
description	String	Description.
createTime	Date/time	Time the linear taskflow was created.
updateTime	Date/time	Last time the linear taskflow was updated.
createdBy	String	User who created the linear taskflow.
updatedBy	String	User who last updated the linear taskflow.
errorTaskEmail		Object that includes the taskEmail object for error notifications.
id	String	Included in taskEmail object for errorTaskEmail. ID.
emails	String	Included in taskEmail object for errorTaskEmail. Email address that receives email notification when a task fails to complete.
successTaskEmail		Object that includes the taskEmail object for success notifications.
id	String	Included in taskEmail object for successTaskEmail. ID.
emails	String	Included in taskEmail object for successTaskEmail. Email address that receives email notification when a task completes successfully.

Field	Type	Description
warningTaskEmail		Object that includes the taskEmail object for warning notifications.
id	String	Included in taskEmail object for warningTaskEmail. ID.
emails	String	Included in taskEmail object for warningTaskEmail. Email address that receives email notification when a task completes with errors.
agentId	String	Agent that runs the task.
runtimeEnvironmentId	String	Runtime environment used for the task.
scheduleId	String	Schedule associated with the linear taskflow, if any.
preProcessingCmd	String	Command to run before the task.
postProcessingCmd	String	Command to run after the task completes.
tasks		Defines each task associated with the linear taskflow. Includes a workflowTask object for each task.
taskId	String	Included in the workflowTask object. Task ID.
type	String	Included in the workflowTask object. Workflow task type. Returns one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task.
name	String	Included in the workflowTask object. Task name.
stopOnError	Boolean	Included in the workflowTask object. Stops the linear taskflow if a task fails to complete.
stopOnWarning	Boolean	Included in the workflowTask object. Stops the linear taskflow if a task completes with warnings.

POST request

To create a linear taskflow, use the following URI:

```
/api/v2/workflow
```

If you want to specify a location for the linear taskflow, include the container ID in the request. If the container ID isn't included in the request, the linear taskflow is created in the Default folder. You can find the container ID for a project or folder in the Data Integration user interface. On the **Explore** page, select the folder. In the URL, the last string of characters is the container ID.

For example, in the following URL, the container ID is dH2DuGJYda7ijgW4Sm32sR

```
https://na1.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/Explore/
dH2DuGJYda7ijgW4Sm32sR
```

To update a linear taskflow, include the workflow ID as shown in the following example:

```
/api/v2/workflow/<id>
```

When you update a linear taskflow, Data Integration replaces the existing linear taskflow with the update.

You can submit a partial update using partial mode. If you want to update a field in the workflowTask object using partial mode, you must include the taskId field. To submit a request using partial mode, use a JSON request and include the following line in the header:

```
Update-Mode=PARTIAL
```

With this URI, you can use the following attributes in the **workflow** object:

Field	Type	Required	Description
name	String	Yes	Name of the linear taskflow.
description	String		Description of the linear taskflow.
containerId	String		ID of the project or folder to contain the linear taskflow. If not included in the request, the linear taskflow is created in the Default folder.
errorTaskEmail			Object that includes the taskEmail object for error notifications.
id	String		Include in taskEmail object for errorTaskEmail. ID.
emails	String		Include in taskEmail object for errorTaskEmail. Email address that receives email notification when a task fails to complete.
successTaskEmail			Object that includes the taskEmail object for success notifications.
id	String		Include in taskEmail object for successTaskEmail. ID.
emails	String		Include in taskEmail object for successTaskEmail. Email address that receives email notification when a task completes successfully.
warningTaskEmail			Object that includes the taskEmail object for warning notifications.
id	String		Include in taskEmail object for warningTaskEmail. ID.
emails	String		Include in taskEmail object for warningTaskEmail. Email address that receives email notification when a task completes with errors.
tasks			Use a workflowTask object to define the following attributes for each task you want to include in the linear taskflow.

Field	Type	Required	Description
taskId	String	Yes	Include in the workflowTask object. Task ID.
		Yes	Include in the workflowTask object. Workflow task type. Use one of the following codes: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task.
name	String	Yes	Include in the workflowTask object. Name of the task.
stopOnError	Boolean		Include in the workflowTask object. Stops the linear taskflow if the task fails to complete. Use one of the following options: - 1. True. Stop on error. - 2. False. Do not stop on error.
stopOnWarning	Boolean		Include in the workflowTask object. Stops the linear taskflow if a task completes with warnings. Use one of the following options: - 1. True. Stop on error. - 2. False. Do not stop on error.
scheduleId	String		Schedule for the linear taskflow.

POST response

If successful, returns the workflow response object for the linear taskflow that you created or updated.

Returns the error object if errors occur.

DELETE request

To delete a linear taskflow, use the linear taskflow ID in the following URI:

```
/api/v2/workflow/<id>
```

DELETE response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST example

To update an existing linear taskflow with an ID of 0000342J0000K, you might use the following request:

```
POST <serverUrl>/api/v2/workflow/0000342J0000K
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>

{
"@type": "workflow",
"name": "linear taskflow",
"tasks":[{
"@type":"workflowTask",
```

```
"taskId":"0000100I00000000001G",
"type":"DSS",
"name":"DSS_DQ5",
"stopOnError":"false"
},{
"@type":"workflowTask",
"taskId":"0000100Z0000000000B8",
"type":"MTT",
"name":"CIT_SimpleTemplate2",
"stopOnError":"false"
},{
"@type":"workflowTask",
"taskId":"0000100G000000000002",
"type":"DRS",
"name":"SF2File",
"stopOnError":"false"
}]
}
```

A successful request returns the workflow object that you updated.

Mappings

Use this resource to request the details for a mapping, the details of all mappings in the organization, or an image of a mapping. You can also send a request to get transformation details such as advanced properties and sequence generator details for all of the transformations in a mapping or for a particular transformation type.

Getting mapping details

You can get the details for all the mappings in an organization or details for a particular mapping.

Get request

Use one of the following URIs to get mapping details.

Details for all mappings in the organization

To request the details for all mappings in the organization, use the following URI:

```
/api/v2/mapping
```

Details for a particular mapping

To request the details for a particular mapping, include the mapping ID or mapping name in the URI. Use one of the following URIs:

```
/api/v2/mapping/<id>
```

```
/api/v2/mapping/name/<name>
```

If you use the mapping name in the URI and the mapping name value includes a space, replace the space with %20. For example:

```
/api/v2/mapping/name/my%20mapping
```

You can also request a specific mapping by name with the following URI:

```
/api/v2/mapping/search?name=<name>
```

GET response

If successful, returns the mapping object for the requested mapping.

If you request the details for all mappings, returns the mapping object for every mapping in the organization without parameter details.

Returns the error object if errors occur.

The mapping object includes the following attributes:

Field	Type	Description
id	String	Mapping ID.
orgId	String	Organization ID.
name	String	Mapping name.
description	String	Description of the mapping.
createTime	Date/time	Time the mapping was created.
updateTime	Date/time	Last time the mapping was updated.
createdBy	String	User who created the mapping.
updatedBy	String	User who last updated the mapping.
bundleObjectId	String	ID of the bundle that includes the mapping, if applicable.
bundleVersion	String	Version of the bundle that includes the mapping, if applicable.
templateId	String	ID of the template created internally to represent the mapping.
deployTime	Date/time	Time the mapping was deployed.
hasParameters	Boolean	Indicates if the mapping includes parameters. Returns true or false.
valid	Boolean	Indicates if the mapping is valid. Returns true or false.
fixedConnection	Boolean	Indicates if the mapping has fixed connections. Returns true or false.
hasParametersDeployed	Boolean	Indicates if the mapping has parameters deployed. Returns true or false.
fixedConnectionDeployed	Boolean	Indicates if the mapping has fixed connections deployed. Returns true or false.
deployedTemplateId	String	ID of the template created internally to represent the deployed mapping.
tasks	Int	Number of tasks that use the mapping.
parameters		Parameters used in the mapping. Includes an mtTaskParameter object for each parameter.
id	Long	Included in the mtTaskParameter object. Parameter ID.

Field	Type	Description
name	String	Included in the mtTaskParameter object. Parameter name.
type	String	Included in the mtTaskParameter object. Parameter type.
description	String	Included in the mtTaskParameter object. Parameter description.
customFuncId	String	Mapplet ID for mapplet type parameters.
uiProperties	String	Included in the mtParameter object. Display property for the parameter. Includes the following information: - cnxtype. Connection type for the parameter. - logcnx. Logical connection. - order. Display order. - wizstep. Wizard step to display the parameter. - default. Default value. - visible. Whether the parameter is visible. - editable. Whether the parameter is editable. - required. Whether the parameter is required. - paramtype. UI control type for string parameters. Returns one of the following responses: - Condition. Filter condition input control. - Expression. Expression editor input control. - Field. Field selection input control. - Fieldmap. Field mapping input control. Includes the following attributes: - lefttitle. Left title for the field mapping display. - righttitle. Right title for the field mapping display. - leftfs. Set of fields to display in the left table of the field mapping display. - rightfs. Set of fields to display in the right table of the field mapping display. - leftfilter. Regular expression to limit the fields that display in the left table of the field mapping display. - rightfilter. Regular expression to limit the fields that display in the right table of the field mapping display. - staticlist. List of fields to display on the right side of the field mapping display.
inOutParameters		In-out parameter used in the mapping. Includes a mtTaskInOutParameter object for each in-out parameter.
id	Long	Included in the mtTaskInOutParameter object. Parameter ID.

Field	Type	Description
name	String	Included in the mtTaskInOutParameter object. Parameter name.
description	String	Included in the mtTaskInOutParameter object. Description of the parameter.
initialValue	String	Included in the mtTaskInOutParameter object. Initial value for the parameter.
datatype	String	Included in the mtTaskInOutParameter object. Data type of the parameter.
precision	String	Included in the mtTaskInOutParameter object. Precision of the parameter.
scale	String	Included in the mtTaskInOutParameter object. Scale of the parameter.
retentionPolicy	String	Included in the mtTaskInOutParameter object. Determines when the task retains the current value.
aggregationType	String	Included in the mtTaskInOutParameter object. Determines the final current value of the parameter when the task runs.
currentValue	String	Included in the mtTaskInOutParameter object. Current value for the parameter.
mappingPreviewFileRecordId	String	ID of the image file that is used when previewing a mapping.
deployedMappingPreviewFileRecordId	String	ID of the image file that is used when previewing a deployed mapping.
references		Reference information. Returns the reference object, which includes the following attributes:
refObjectId	String	Included in the reference object.
refType	String	Included in the reference object.

Getting transformation details

You can get the details for all the transformations in a mapping or details for the transformations of a particular type in a mapping.

Get request

Use one of the following URIs to get transformation details.

Details for all the transformations in a mapping

To include transformation details for all of the transformations in the mapping, use one of the following URIs:

```
/api/v2/mapping/additionalTransformationInfo/<mapping ID>
/api/v2/mapping/additionalTransformationInfoByName/<mapping name>
```

Details for transformations of a particular transformation type in a mapping

To include transformation details for a particular transformation type, include `?txType=<transformation type>` in the URI, for example:

```
/api/v2/mapping/additionalTransformationInfoByName/m_MyMapping?txType=Sequence
```

GET Response

If successful, returns transformation details for the mapping. Details can include transformation advanced properties such as tracing level and sequence information if a Sequence transformation is included in the mapping.

Note: If any advanced properties are specified for a transformation, the response includes all of the advanced property values for the transformation. If no advanced properties are specified for a transformation, the response doesn't include values for the advanced properties even though default values are used.

Returns the error object if errors occur.

The response includes the following attributes:

Field	Type	Description
id	String	Mapping ID.
orgId	String	Organization ID.
name	String	Mapping name.
description	String	Description of the mapping.
createTime	Date/time	Time the mapping was created.
updateTime	Date/time	Last time the mapping was updated.
createdBy	String	User who created the mapping.
updatedBy	String	User who last updated the mapping.
templateId	String	ID of the template created internally to represent the mapping.
valid	Boolean	Indicates if the mapping is valid. Returns true or false.
additionalAttributes		Additional mapping attributes.
specialCharacterSupport	Boolean	Returned in the additionalAttributes object. Whether the mapping supports special characters in field names or replaces special characters with an underscore (_).

Field	Type	Description
allowMaxFieldLength	Boolean	Returned in the additionalAttributes object. Whether the mapping allows field names up to 255 characters. Names exceeding 255 characters are truncated. Default is false.
transformations	Object	Advanced transformation properties and sequence details.
transformationProperties	Object	Properties for each transformation in the mapping, or for a specific transformation type, if requested.
name	String	Transformation name.
txType	String	Transformation type.
advancedProperties	Object	Returned in the transformationProperties object. Advanced properties for the transformation. The properties included in the response vary based on the transformation type and connection type.
sequences	Object	Sequence information for the mapping, if the mapping includes a Sequence transformation.
sequenceStateDefinition	Object	Properties for each Sequence transformation in the mapping.
name	String	Name of the Sequence transformation
txType	String	Transformation type.
cycle	Boolean	Whether the mapping task cycles through the sequence range.
endValue	String	Maximum value that the mapping task generates.
incrementBy	String	The difference between two consecutive values in a generated sequence.
numberOfCachedValues	String	Number of sequential values the mapping task caches for each run.
reset	Boolean	Whether reset is enabled.
sharedSequenceId	String	ID of the shared sequence, if enabled.
initialValue	String	Initial value of the sequence.
cycleStartValue	String	Start value of the generated sequence that you want the mapping task to use.
useSharedSequence	Boolean	Whether the Sequence transformation uses a shared sequence.

GET Example

To request details for all transformations in a particular mapping, you might use the following request:

```
GET <serverUrl>/api/v2/mapping/additionalTransformationInfoByName/m_Mapping26
Content-type: application/xml
Accept: application/xml
icSessionId: ABCdOrJmd6YUtmK123
```

If successful, you might receive a response similar the to following example:


```
{
    "@type": "mappingAdditionalInfo",
    "id": "0100001700000000123G",
    "orgId": "012300",
    "name": "m_Mapping26",
    "description": "",
    "createTime": "2026-03-27T00:35:37.000Z",
    "updateTime": "2026-03-27T00:35:37.000Z",
    "createdBy": "orguser",
    "updatedBy": "orguser",
    "autoExpireObject": false,
    "templateId": "stringIdentity:0100000X0000000123IY",
    "valid": false,
    "documentType": "MAPPING",
    "additionalAttributes": {
        "specialCharacterSupport": false,
        "allowMaxFieldLength": false
    },
    "transformations": [
        {
            "@type": "transformationProperties",
            "name": "Source",
            "txType": "TmplSource",
            "advancedProperties": {
                "Tracing Level": "Verbose Data"
            }
        },
        {
            "@type": "transformationProperties",
            "name": "Target",
            "txType": "TmplTarget",
            "advancedProperties": {
                "Thousand Separator": ",",
                "Datetime Format": "",
                "Forward Rejected Rows": "true",
                "Decimal Separator": ","
            }
        },
        {
            "@type": "transformationProperties",
            "name": "Sequence",
            "txType": "TmplGenerator",
            "advancedProperties": {
                "Tracing Level": "Verbose Data",
                "Optional": "true"
            }
        },
        {
            "@type": "transformationProperties",
            "name": "Expression",
            "txType": "TmplExpression",
            "advancedProperties": {
                "Tracing Level": "Verbose Initialization",
                "Optional": "true"
            }
        },
        {
            "@type": "transformationProperties",
            "name": "Lookup",
            "txType": "TmplLookup",
            "advancedProperties": {
                "Cache File Name Prefix": "",
                "Lookup Index Cache Size": "AUTO",
                "Optional": "true",
                "Lookup cache persistent": "false",
                "Lookup source is static": "false",
                "Lookup Sql Override": "",
                "Update Dynamic Cache Condition": "TRUE",
                "Re-cache from lookup source": "false",
                "Lookup caching enabled": "true",
```

```
                    "Insert Else Update": "false",
                    "Tracing Level": "Verbose Initialization",
                    "Lookup Data Cache Size": "AUTO",
                    "Subsecond Precision": "6",
                    "Lookup cache directory name": "$PMCacheDir",
                    "Output Old Value On Update": "false",
                    "Lookup Source Filter": "",
                    "Dynamic Lookup Cache": "false",
                    "Pre-build lookup cache": "AUTO",
                    "Synchronize dynamic cache": "false"
                }
            }
        ],
        "sequences": [
            {
                "@type": "sequenceStateDefinition",
                "name": "Sequence",
                "txType": "TmplGenerator",
                "cycle": false,
                "endValue": "9223372036854775807",
                "incrementBy": "3",
                "numberOfCachedValues": "150",
                "reset": false,
                "sharedSequenceId": "",
                "initialValue": "2",
                "cycleStartValue": "0",
                "useSharedSequence": false
            }
        ]
    }
```


Getting an image of a mapping

You can request an image of a mapping.

To request an image of a mapping, specify the mapping ID and whether the mapping is deployed or not. Use the following URI:

```
/api/v2/mapping/<id>/image?deployed=<true|false>
```

For example:

```
/api/v2/mapping/N0A1700000000001J/image?deployed=true
```

Mapping tasks

Use this resource to request the details of a mapping task. You can also create, update, or delete a mapping task.

Note: You cannot use the REST API to create a mapping task based on a mapping that includes a mapplet.

GET request

To request the details of a mapping task, you can use the task ID, federated task ID, or task name. To find the federated task ID, use the lookup resource. The federated task ID is the value of the id field in the lookup response.

Use one of the following URIs:

```
/api/v2/mttask/<id>
/api/v2/mttask/frs/<id>
/api/v2/mttask/name/<name>
```

If you use the task name in the URI and the task name includes a space, replace the space with `%20`. For example:

```
/api/v2/mttask/name/task%20name
```

GET response

Returns the mtTask object for the requested task ID or task name.

Returns the error object if errors occurred.

The following table describes attributes in an **mtTask** object:

Field	Type	Description
id	String	Task ID.
orgId	String	Organization ID.
name	String	Task name.
agentId	String	Agent that runs the task.
runtimeEnvironmentId	String	Runtime environment used for the task.
maxLogs	Long	Number of session log files and import log files Data Integration retains.
description	String	Description.
createTime	Date/time	Time the task was created.
updateTime	Date/time	Last time the task was updated.
createdBy	String	User who created the task.
updatedBy	String	User who last updated the mapping or task.
schemaMode	String	Mode in which Data Integration refreshes the data object schema.
errorTaskEmail		Object that includes the taskEmail object for error notifications
id	String	Included in taskEmail object for errorTaskEmail. ID.
emails	String	Included in taskEmail object for errorTaskEmail. Email address that receives email notification when a task fails to complete.
successTaskEmail		Object that includes the taskEmail object for success notifications.
id	String	Included in taskEmail object for successTaskEmail. ID.

Field	Type	Description
emails	String	Included in taskEmail object for successTaskEmail. Email address that receives email notification when a task completes successfully.
warningTaskEmail		Object that includes the taskEmail object for warning notifications.
id	String	Included in taskEmail object for warningTaskEmail. ID.
emails	String	Included in taskEmail object for warningTaskEmail. Email address that receives email notification when a task completes with errors.
parameters		Parameters associated with the task. Includes attributes in the mtTaskParameter object for each parameter.
id	Long	Included in the mtTaskParameter object. Parameter ID.
name	String	Included in the mtTaskParameter object. Parameter name.
type	String	Included in the mtTaskParameter object. Parameter type.
text	String	Included in the mtTaskParameter object. Parameter value.
label	String	Included in the mtTaskParameter object. Parameter label.
description	String	Included in the mtTaskParameter object. Parameter description.
sourceConnectionId	String	Included in the mtTaskParameter object. Source connection ID.
targetConnectionId	String	Included in the mtTaskParameter object. Target connection ID.
lookupConnectionId	String	Included in the mtTaskParameter object. Lookup connection ID.
transfConnectionId	String	Included in the mtTaskParameter object. Connection ID of mapplet. Reserved for future use.
midstreamConnectionId	String	Included in the mtTaskParameter object. Connection ID of midstream transformation.
sourceObject	String	Included in the mtTaskParameter object. Source object name.

Field	Type	Description
sourceObjectLabel	String	Included in the mtTaskParameter object. Source object label.
targetObject	String	Included in the mtTaskParameter object. Target object name.
targetObjectLabel	String	Included in the mtTaskParameter object. Target object label.
lookupObject	String	Included in the mtTaskParameter object. Lookup object name.
lookupObjectLabel	String	Included in the mtTaskParameter object. Lookup object label.
midstreamObject	String	Included in the mtTaskParameter object. Midstream object name.
midstreamObjectLabel	String	Included in the mtTaskParameter object. Midstream object label.
newObject	Boolean	Included in the mtTaskParameter object. Whether the application creates a new flat file target. Returns True when it creates a target.
newObjectName	String	Included in the mtTaskParameter object. Name of the flat file target.
operationType	String	Included in the mtTaskParameter object. The task operation for the target.
truncateTarget	Boolean	Included in the mtTaskParameter object. Whether the application truncates a database target before writing to it. Returns True when it truncates the target.
srcFFAttrs		Included in the mtTaskParameter object. Object that contains the source file attributes in the flatFileAttrs object.
tgtFFAttrs		Included in the mtTaskParameter object. Object that contains the target file attributes in the flatFileAttrs object.
lkpFFAttrs		Included in the mtTaskParameter object. Object that contains the lookup file attributes in the flatFileAttrs object.
flatFileAttrs		Object that includes attributes for the source, target, and lookup files.
id	Long	Included in the flatFileAttrs object. Field ID.

Field	Type	Description
delimiter	String	Included in the flatFileAttrs object. Character used to separate fields
textQualifier	String	Included in the flatFileAttrs object. Quote character that defines the boundaries of text strings
escapeChar	String	Included in the flatFileAttrs object. Character immediately preceding a field delimiter character embedded in an unquoted string, or immediately preceding the quote character in a quoted string
headerLineNo	Int	Included in the flatFileAttrs object. Number of header lines
firstDataRow	Int	Included in the flatFileAttrs object. The row number where the data begins in the file.
rowDelimiter	Int	Included in the flatFileAttrs object. Line break character. Returns the decimal code for an ASCII character.
consecutiveDelimiter	Boolean	Included in the flatFileAttrs object. Indicates whether one or more consecutive delimiters are treated as one.
multiDelimitersAsAnd	Boolean	Included in the flatFileAttrs object. If the delimiter is more than one character, indicates whether the characters are treated as a single delimiter or multiple delimiters.
customFuncCfg		Included in the mtTaskParameter object. Object that defines configuration for mapplets used in the task. Includes attributes in the customFuncConfig object for each mapplet.
id	Long	Included in the customFuncConfig object. Mapplet ID.
connections		Included in the customFuncConfig object. Object to define connections used in a mapplet. Includes information in the pcsConnection object for each connection.
id	Long	Included in the pcsConnection object.
name	String	Included in the pcsConnection object. Connection name.
type	String	Included in the pcsConnection object. Connection type.
subtype	String	Included in the pcsConnection object. Connection subtype.
description	String	Included in the pcsConnection object. Description of the connection.

Field	Type	Description
connectionId	String	Included in the pcsConnection object. Connection ID.
showBusinessNames	Boolean	Included in the mtTaskParameter object. Whether the task displays business names. Returns True when it shows business names.
naturalOrder	Boolean	Included in the mtTaskParameter object. The order that the task uses to display fields. Returns True for the order returned by the connection. Returns False for alphabetic order.
isRESTModernSource	Boolean	Included in the mtTaskParameter object. Always set to True to enable extended objects.
customQuery	String	Included in the mtTaskParameter object. The custom query specified in Mapping Designer or mapping task query options.
overriddenFields		Included in the mtTaskParameter object. Changes to field metadata in the mapping task. Includes information in the mtTaskOverriddenField object for each overridden field.
name	String	Included in the mtTaskOverriddenField object. Field name.
type	String	Included in the mtTaskOverriddenField object. Field type.
precision	Int	Included in the mtTaskOverriddenField object. Length of the field in bytes.
scale	Int	Included in the mtTaskOverriddenField object. Number of digits after the decimal point for numeric values.
platformType	String	Included in the mtTaskOverriddenField object. Platform data type for the field.
tgtFieldRefs	String	Included in the mtTaskParameter object. Salesforce field reference IDs.
extendedObject		Included in the mtTaskParameter object. The source or target with more than one object joined.
targetUpdateColumns	String	Included in the mtTaskParameter object. List of column names used to update records in the target object.
lookupConditions		Included in the mtTaskParameter object. Object that includes the simple lookup conditions in the mapping.
left	String	Included in the lookupConditions object. Lookup object field name.

Field	Type	Description
operator		Included in the lookupConditions object. Lookup condition operator.
right	String	Included in the lookupConditions object. Incoming field name.
runtimeAttrs	String	Included in the mtTaskParameter object. Advanced connection properties for connections used in a task. Use a runtimeAttrs object to define key-value pairs of advanced connection properties. Use an entry object for each key-value pair. For the attribute name, use the advanced connection property name as displayed in the Data Integration user interface. For more information about advanced connection properties, see the Data Integration help.
dataFormat		Included in the mtTaskParameter object. Data format provided by the connector. Includes attributes in the dataFormat object for each connector. The dataFormat object is not applicable to all connectors. To see if dataFormat is applicable to the connectors you are using, see the help for the relevant connectors.
formatId		Included in the dataFormat object. Data format type provided by the connector, such as FLAT, AVRO, PARQUET, JSON, or XML.
dataFormatAttributes		Included in the dataFormat object. Format attributes for the data format type. For example, for a flat file, the dataFormatAttributes object includes values such as escapeChar, delimiter, and qualifier.
sequences		Defines values for the Sequence transformation. Includes the sequenceDefinition object for each sequence transformation.
txName	String	Included in the sequenceDefinition object. Name of the Sequence transformation.
initialValue	String	Included in the sequenceDefinition object. The initial value of the sequence.
currentValue	String	Included in the sequenceDefinition object. The value used for the last row added to the transformation.
inOutParameters		In-out parameter used in the task. Includes a mtTaskInOutParameter object for each in-out parameter.
id	Long	Included in the mtTaskInOutParameter object. Parameter ID.
name	String	Included in the mtTaskInOutParameter object. Parameter name.

Field	Type	Description
description	String	Included in the mtTaskInOutParameter object. Description of the parameter.
initialValue	String	Included in the mtTaskInOutParameter object. Initial value for the parameter.
datatype	String	Included in the mtTaskInOutParameter object. Data type of the parameter.
precision	String	Included in the mtTaskInOutParameter object. Precision of the parameter.
scale	String	Included in the mtTaskInOutParameter object. Scale of the parameter.
retentionPolicy	String	Included in the mtTaskInOutParameter object. Determines when the task retains the current value.
aggregationType	String	Included in the mtTaskInOutParameter object. Determines the final current value of the parameter when the task runs.
currentValue	String	Included in the mtTaskInOutParameter object. Current value for the parameter.
lastRunTime	Date/time	Time the task last run.
mappingId	String	Mapping ID. Returned when a mapping is the basis for the task.
scheduleId	String	Schedule associated with the task, if any.
shortDescription	String	The first 50 characters of the description.
sessionProperties	String	Advanced session properties associated with the task. Includes advanced session properties in a sessionProperties object.
outboundMessageUrlToken	String	Outbound message URL token for the task, if it exists.
outboundMessageUrlQueueTime	Long	Outbound message URL queue time for the task, if it exists.
preProcessingCmd	String	Command to run before the task.
postProcessingCmd	String	Command to run after the task completes.
parameterFileName	String	The name of the parameter file used in the task.
verbose	Boolean	Whether Data Integration generates additional data in the logs to use for troubleshooting purposes. Returns True or False.

Field	Type	Description
connRuntimeAttrs		Included in the mtTaskParameter parameter. Includes an mtTaskConnRuntimeAttr object for each connector. The connRuntimeAttrs object applies to the CDC connectors.
id	String	Included in the mtTaskConnRuntimeAttr object. Internal id for each mtTaskConnRuntimeAttr object.
name	String	Included in the mtTaskConnRuntimeAttr object. The internal ID of a connection runtime attribute for a CDC connector.
value	String	Included in the mtTaskConnRuntimeAttr object. The value associated with the name attribute.
connectionID	String	Included in the mtTaskConnRuntimeAttr object. The CDC connection ID.

POST request

To create a mapping task, use the following URI:

```
/api/v2/mttask/
```

If you want to specify a location for the task, include the container ID in the request. If the container ID isn't included in the request, the task is created in the Default folder. You can find the container ID for a project or folder in the Data Integration user interface. On the **Explore** page, select the folder. In the URL, the last string of characters is the container ID.

For example, in the following URL, the container ID is dH2DuGJYda7ijgW4Sm32sR:

```
https://na1.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/Explore/
dH2DuGJYda7ijgW4Sm32sR
```

To update a mapping task, include the task ID or federated task ID in the URI. To find the federated task ID, use the lookup resource. The federated task ID is the value of the id field in the lookup response.

Use one of the following URIs:

```
/api/v2/mttask/<id>
```

```
/api/v2/mttask/frs/<id>
```

You can submit a partial update using partial mode. If you want to update a field that is within a collection using partial mode, you must include the key field for the collection. The following table lists the collections in the mttask resource and the corresponding key fields:

Collection	Key Fields
mtTaskInOutParameter	name
sequenceDefinition	txName
mtTaskOverriddenField	name

Collection	Key Fields
mtTaskParameter	name type
objects	name

To submit a request using partial mode, use a JSON request and include the following line in the header:

```
Update-Mode=PARTIAL
```

The following table describes the attributes you can include in an mtTask object:

Field	Type	Required	Description
name	String		Name of the task.
containerId	String		ID of the project or folder to contain the task. If not included in the request, the task is created in the Default folder.
description	String		Description of the task.
runtimeEnvironmentId	String	Yes	ID of the runtime environment used for the task.
mappingId	String	Required when a mapping is the basis for task.	ID of the mapping used in the task.
scheduleId	String		Schedule associated with the task, if any.
sessionProperties	String		Advanced session properties. Use a sessionProperties object to define key-value pairs of advanced session properties. Use an entry object for each key-value pair. For the attribute name, use the advanced session property name as displayed in the Data Integration user interface.
schemaMode	String		Mode in which Data Integration refreshes the data object schema. Use one of the following values: - async - dynamic Default is async. If you run multiple mapping tasks at the same time, Data Integration picks up the latest schema regardless of the schema mode.
errorTaskEmail			Object that includes the taskEmail object for error notifications

Field	Type	Required	Description
id	String		Include in taskEmail object for errorTaskEmail. ID.
emails	String		Include in taskEmail object for errorTaskEmail. Email address that receives email notification when a task fails to complete.
successTaskEmail			Object that includes the taskEmail object for success notifications.
id	String		Include in taskEmail object for successTaskEmail. ID.
emails	String		Include in taskEmail object for successTaskEmail. Email address that receives email notification when a task completes successfully.
warningTaskEmail			Object that includes the taskEmail object for warning notifications.
id	String		Include in taskEmail object for warningTaskEmail. ID.
emails	String		Include in taskEmail object for warningTaskEmail. Email address that receives email notification when a task completes with errors.
parameters			Parameters associated with the task. Use an mtTaskParameter object to define the following attributes for each parameter.
id	Long		Include in the mtTaskParameter object. System generated parameter ID. You cannot update this value
name	String		Include in the mtTaskParameter object. Parameter name. Key field for the mtTaskParameter collection.

Field	Type	Required	Description
type	String		Include in the mtTaskParameter object. Parameter type. Key field for the mtTaskParameter collection. Use one of the following values: - STRING - SOURCE - TARGET - MAPPLET - LOOKUP
text	String		Include in the mtTaskParameter object. Parameter value.
label	String		Include in the mtTaskParameter object. Parameter label.
description	String		Include in the mtTaskParameter object. Parameter description.
sourceConnectionId	String		Include in the mtTaskParameter object. Source connection ID.
targetConnectionId	String		Include in the mtTaskParameter object. Target connection ID.
lookupConnectionId	String		Include in the mtTaskParameter object. Lookup connection ID.
newFlatFile	Boolean		Include in the mtTaskParameter object. Whether Data Integration creates a new flat file target. Use one of the following values: - True. - False.
flatFileName	String		Include in the mtTaskParameter object. Name of the flat file target.
newObject	Boolean		Include in the mtTaskParameter object. Whether the application creates a new flat file target. Returns True when it creates a target.
newObjectName	String		Include in the mtTaskParameter object. Name of the flat file target.

Field	Type	Required	Description
operationType	String		Include in the mtTaskParameter object. The task operation for the target. Use one of the following values: - Insert - Upsert - Update - Delete - Rowbased **Note:** The Rowbased value corresponds to the Data Driven value in the user interface.
dataDrivenCondition	String		Include in the mtTaskParameter object. Applicable when operationType is Rowbased. Defines expressions that flag rows for an insert, update, delete, or reject operation. For example: `IIF(ISNULL (ISDELETED), DD_INSERT`
truncateTarget	Boolean		Include in the mtTaskParameter object. Whether the application truncates a database target before writing to it. Use one of the following values: - True. - False.
srcFFAttrs			Include in the mtTaskParameter object. Object for the source file attributes. Include the attributes in the flatFileAttrs object.
tgtFFAttrs			Include in the mtTaskParameter object. Object for the target file attributes. Include the attributes in the flatFileAttrs object.
lkpFFAttrs			Include in the mtTaskParameter object. Object for the lookup file attributes. Include the attributes in the flatFileAttrs object.
flatFileAttrs			Object to hold attributes for the source, target, and lookup files.
id	Long		Include in the flatFileAttrs object. Field ID.
delimiter	String		Include in the flatFileAttrs object. Character used to separate fields.

Field	Type	Required	Description
textQualifier	String		Include in the flatFileAttrs object. Quote character that defines the boundaries of text strings.
escapeChar	String		Include in the flatFileAttrs object. Character immediately preceding a field delimiter character embedded in an unquoted string, or immediately preceding the quote character in a quoted string.
headerLineNo	Int		Include in the flatFileAttrs object. Number of header lines.
firstDataRow	Int		Include in the flatFileAttrs object. The row number where the data begins in the file.
rowDelimiter	Int		Include in the flatfileAttrs object. Line break character. Enter the decimal code for an ASCII character between 1 and 32. Default is 10, which is the line feed character.
consecutiveDelimiter	Boolean		Included in the flatFileAttrs object. Indicates whether one or more consecutive delimiters are treated as one. Default is false.
multiDelimitersAsAnd	Boolean		Included in the flatFileAttrs object. If the delimiter is more than one character, indicates whether the characters are treated as a single delimiter or multiple delimiters. Default is true.
customFuncCfg			Include in the mtTaskParameter object. Object to define configuration for mapplets used in the task. Use a customFuncConfig object to define each mapplet.
id	Long		Include in the customFuncConfig object. Mapplet ID.
connections			Include in the customFuncConfig object. Object to define connections used in a mapplet. Use a pcsConnection object for each connection. For more information about connections, see "Connections" on page 354.
id	Long		Include in the pcsConnection object.

Field	Type	Required	Description
name	String		Include in the pcsConnection object. Connection name.
type	String		Include in the pcsConnection object. Connection type.
subtype	String		Include in the pcsConnection object. Connection subtype.
description	String		Include in the pcsConnection object. Description of the connection.
connectionId	String		Include in the pcsConnection object. Connection ID.
overriddenFields			Include in the mtTaskParameter object. Changes to field metadata in the mapping task. Use the mtTaskOverriddenField object for each overridden field.
name	String		Include in the mtTaskOverriddenField object. Field name. Key field for the mtTaskOverriddenField collection.
type	String		Include in the mtTaskOverriddenField object. Field type.
precision	Int		Include in the mtTaskOverriddenField object. Length of the field in bytes.
scale	Int		Include in the mtTaskOverriddenField object. Number of digits after the decimal point for numeric values.
platformType	String		Include in the mtTaskOverriddenField object. Platform data type for the field.
tgtFieldRefs	String		Include in the mtTaskParameter object. Salesforce field reference IDs.

Field	Type	Required	Description
runtimeAttrs	String		Include in the mtTaskParameter object. Advanced connection properties for connections used in a task. Use a runtimeAttrs object to define key-value pairs of advanced connection properties. Use an entry object for each key-value pair. For the attribute name, use the advanced connection property name as displayed in the Data Integration user interface. For more information about advanced connection properties, see the Data Integration help.
parameterFileName	String		Include in the mtTaskParameter object. Name of the parameter file used in the task.
parameterFileDir	String		Include in the mtTaskParameter object. Path for the directory that contains the parameter file.
dataFormat			Include in the mtTaskParameter object. Data format provided by the connector. Include attributes in the dataFormat object for each connector. The dataFormat object is not applicable to all connectors. To see if dataFormat is applicable to the connectors you are using, see the help for the relevant connectors.
formatId	String		Include in the dataFormat object. Data format type provided by the connector, such as FLAT, AVRO, PARQUET, JSON, or XML.
fwConfigId	String	Required when formatID is set to Flat and fixed-width mode is used.	Include in the dataFormat object. Valid fixed-width format ID.
dataFormatAttributes	String		Include in the dataFormat object. Format attributes for the data format type. For example, for a flat file data format, the dataFormatAttributes object includes values such as escapeChar, delimiter, and qualifier.
inOutParameters			In-out parameter used in the task. Include an mtTaskInOutParameter object for each in-out parameter.

Field	Type	Required	Description
id	Long		Include in the mtTaskInOutParameter object. Parameter ID.
name	String		Include in the mtTaskInOutParameter object. Parameter name. Key field in the mtTaskInOutParameter collection.
description	String		Include in the mtTaskInOutParameter object. Description of the parameter.
initialValue	String		Include in the mtTaskInOutParameter object. Initial value for the parameter.
datatype	String		Include in the mtTaskInOutParameter object. Data type of the parameter.
precision	String		Include in the mtTaskInOutParameter object. Precision of the parameter.
scale	String		Include in the mtTaskInOutParameter object. Scale of the parameter.
retentionPolicy	String		Include in the mtTaskInOutParameter object. Determines when the task retains the current value. Include one of the following values: - ON_SUCCESS_OR_WARNING - ON_SUCCESS - ON_WARNING - NEVER
aggregationType	String		Include in the mtTaskInOutParameter object. Determines the final current value of the parameter when the task runs.
currentValue	String		Include in the mtTaskInOutParameter object. Current value for the parameter.
outboundMessageUrlToken	String		Outbound message URL token for the task, if it exists.
outboundMessageUrlQueueTime	Long		Outbound message URL queue time for the task, if it exists.

Field	Type	Required	Description
preProcessingCmd	String		Command to run before the task.
postProcessingCmd	String		Command to run after the task completes.
maxLogs	Long		Number of session log files and import log files to retain. By default, Data Integration stores each type of log file for 10 runs before it overwrites the log files for new runs.
verbose	Boolean		Whether to generate additional data in the logs to use for troubleshooting purposes. Use True or False.
agentId	String		Agent that runs the task.
sequences			Defines values for the Sequence transformation. Use a sequenceDefinition object for each sequence transformation.
txName	String		Include in the sequenceDefinition object. Name of the Sequence transformation. Key field in the sequenceDefinition collection.
initialValue	String		Include in the sequenceDefinition object. The initial value of the sequence.
currentValue	String		Include in the sequenceDefinition object. The value used for the last row added to the transformation.
connRuntimeAttrs			Include in the mtTaskParameter parameter. Include an mtTaskConnRuntimeAttr object for each CDC connector for which runtime attributes will be changed. The connRuntimeAttrs object applies to the CDC connectors.
id	String	Required for connRuntimeAttrs object.	Include in the mtTaskConnRuntimeAttr object. Include the internal ID of the mtTaskConnRuntimeAttr object.

Field	Type	Required	Description
name	String	Required for mtTaskConnRuntimeAttr.	Include in the mtTaskConnRuntimeAttr object. Use one of the following names for the runtime attributes: - 101 for Maximum Rows Per Commit. - 102 for Minimum Rows Per Commit. - 103 for Maximum Latency in Seconds. - 104 for Real-time Flush Latency in Milliseconds. - 105 for Restart Point. - 106 for Restart Revision. - 107 for UOW Count. - 108 for Update as Delete or Insert. - 110 for Restart Option.
value	String		Include in the mtTaskConnRuntimeAttr object. Use a valid value for the specified attribute name: - Maximum Rows Per Commit. 0 to 999999999. - Minimum Rows Per Commit. 0 to 999999999. - Maximum Latency in Seconds. 2 to 360. - Real-time Flush Latency in Milliseconds. -1 to 999999999. - Restart Point. Set in conjunction with the Restart Option. 0 for earliest available. An empty string for end of log. A valid timestamp for specific timestamp in the log. A valid PWX Token to restart at a specific token in the log. - Restart Revision. A valid revision number from 0 to 2147483647. - UOW Count. -1 to 999999999. - Update as Delete or Insert. 0 to process as update. 1 to process as delete and insert. - Restart Option. Set in conjunction with the Restart Point. 0 for earliest available. 1 for end of log. 2 for time-based. 3 for PWX token.
connectionID	String	Required for mtTaskConnRuntimeAttr object.	Include in the mtTaskConnRuntimeAttr object. Include the CDC connection ID.

POST response

If successful, returns the mtTask object that you created or updated. Returns the error object if errors occur.

DELETE request

To delete a mapping task, use the task ID in the following URI:

```
/api/v2/mttask/<id>
```

Note: You cannot use the federated task ID to delete a mapping task.

DELETE response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST example

To create a new mapping task with XML, you might use the following request:

```
POST <serverUrl>/api/v2/mttask
Content-Type: application/xml
Accept: application/xml
icSessionId: <icSessionId>

<mtTask>
  <errorTaskEmail>
    <taskEmail>
      <emails>email_dev@company.com, email2_dev@company.com</emails>
    </taskEmail>
  </errorTaskEmail>
  <successTaskEmail>
    <taskEmail>
      <emails>reviewer@company.com</emails>
    </taskEmail>
  </successTaskEmail>
  <warningTaskEmail>
    <taskEmail>
      <emails>email_dev@company.com, email2_dev@company.com</emails>
    </taskEmail>
  </warningTaskEmail>
  <parameters>
    <mtTaskParameter>
      <name>sort convert plugin</name>
      <type>MAPPLET</type>
    </mtTaskParameter>
  </parameters>
  <parameters>
    <mtTaskParameter>
      <name>DB lookup</name>
      <type>LOOKUP</type>
    </mtTaskParameter>
  </parameters>
  <sessionProperties>
      <entry>
         <key>Java Classpath</key>
         <value>C:/test/classpathnew</value>
      </entry>
      <entry>
         <key>Pushdown Optimization</key>
         <value>To Source</value>
      </entry>
      <entry>
         <key>Write Backward Compatible Session Log File</key>
         <value>no</value>
      </entry>
   </sessionProperties>
  <runtimeEnvironmentId>00000398D00000004</runtimeEnvironmentId>
  <sequences>
    <sequenceDefinition>
      <txName>SeqGen1</txName>
      <initialValue>1</initialValue>
      <currentValue>62</currentValue>
    </sequenceDefinition>
  </sequences>
  <preProcessingCmd>echo CurrentDate is 'date'</preProcessingCmd>
  <postProcessingCmd>echo PR-PostProcess</postProcessingCmd>
  <masterTemplateId>00034234M00000R</masterTemplateId>
</mtTask>
```

A successful request returns the mtTask object.

Getting advanced connection property details

You can get the details about advanced properties for source, target, and lookup connections in a mapping task. Use this resource to get details about the advanced connection properties even if the properties aren't overridden in the mapping task.

GET Request

Use one of the following URIs to get details about advanced connection properties.

Advanced properties for all connections in a mapping task

To include advanced properties for all of the source, target, and lookup connections in the task, use the following URI:

```
api/v2/mttask/mergedRuntimeAttributes/<mapping task ID>
```

Advanced properties for a particular connection

To include advanced properties for a particular connection, include `?paramId=<paramId>` in the URI, for example:

```
/api/v2/mttask/mergedRuntimeAttributes/<mttaskId>?paramId=<paramId>
```

To get the paramId, use the mttask resource.

GET Response

If successful, returns details about advanced connection properties in the mapping task.

Returns the error object if errors occur.

The response includes the following attributes:

Field	Type	Description
name	String	Name of the advanced property.
value	String	Configured value of the advanced property.
overriddenInMct	Boolean	Indicates whether the property value was overridden in the mapping task.
default value	String	Default value of the advanced property.

GET Example

To request advanced properties for a particular connection in a mapping task, you might use the following request:

```
GET <serverUrl>/api/v2/mttask/mergedRuntimeAttributes/0152ZV0Z0000000000H0?paramId=13841
Content-type: application/xml
Accept: application/xml
icSessionId: ABCdOrJmd6YUtmK123
```

If successful, you might receive a response similar the to following example:

```
{
    "13841": [
        "ArrayList",
        [
            {
                "@type": "connectorRuntimeAttrMetaData",
                "name": "Thousand Separator",
                "value": "None",
                "overriddenInMct": false,
                "defaultValue": "None"
            },
```

```
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Header Options",
                    "value": "Output Field Names",
                    "overriddenInMct": false,
                    "defaultValue": "Output Field Names"
                },
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Create Target Directory",
                    "value": "false",
                    "overriddenInMct": false,
                    "defaultValue": "NO"
                },
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Output Type",
                    "value": "File",
                    "overriddenInMct": false,
                    "defaultValue": "File"
                },
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Output file directory",
                    "value": "/root",
                    "overriddenInMct": false,
                    "defaultValue": ""
                },
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Decimal Separator",
                    "value": ".",
                    "overriddenInMct": false,
                    "defaultValue": "."
                },
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Append if Exists",
                    "value": "false",
                    "overriddenInMct": false,
                    "defaultValue": "NO"
                },
                {
                    "@type": "connectorRuntimeAttrMetaData",
                    "name": "Output filename",
                    "value": "sample_merge_data",
                    "overriddenInMct": false,
                    "defaultValue": ""
                }
            ]
        ]
}
```

Mask rule parameter attributes for masking techniques

Define the parameter attribute values of a mask rule parameter when you run the mapping task. The attributes that you define depend on the masking technique that you apply.

For example, to mask a billing city field with the Substitution City masking technique, define the following attributes:

```
[
  {
    "referenceField": "BillingCity",
    "pcType": "string",
    "precision": 40,
    "paramMap": {
      "isSeeded": "TRUE",
```

```
        "seedValue": "190",
        "dicName": "informatica_mask_us_towns.dic",
        "outputPort": "TOWNNAMES",
      },
      "maskingType": "Substitution City"
    }
  ]
```

The following table lists the attributes that you define for each masking technique:

Masking Technique	Attributes
Credit Card	- isSeeded - seedValue - keepCardIssuer - targetIssuer
Custom Substitution	- DicConn - DicName - outputPort - isSeeded - seedValue
Email address	- isSeeded - seedValue
IP address	- isSeeded - seedValue
Key Date	- isSeeded - seedValue
Key Numeric	- override - isSeeded - seedValue
Key String	- isSeeded - seedValue - useMaskFormat - maskFormat - useSrcFilter - srcFilterOption - srcFilterStr - useTargetFilter - targetFilterOption - targetFilterStr
Phone	- isSeeded - seedValue
Random Date	- useRange - minWidth - maxWidth - useBlurring - blurringUnit - blurLow - blurHigh

Masking Technique	Attributes
Random Numeric	- useRange - minWidth - maxWidth - useBlurring - blurringOption - blurLow - blurHigh
Random String	- useRange - minWidth - maxWidth - useMaskFormat - useSrcFilter - srcFilterStr - useTargetFilter - targetFilterOption - targetFilterStr
SIN	- isSeeded - seedValue - startDigit - startDigitValue
SSN	- isSeeded - seedValue
Substitution City	- isSeeded - seedValue - DicName - outputPort
Substitution Country	- isSeeded - seedValue - DicName - outputPort
Substitution Female Name	- isSeeded - seedValue - DicName - outputPort
Substitution Last Name	- isSeeded - seedValue - DicName - outputPort
Substitution Male Name	- isSeeded - seedValue - DicName - outputPort
Substitution Name	- isSeeded - seedValue - DicName - outputPort

Masking Technique	Attributes
Substitution Position	- isSeeded - seedValue - DicName - outputPort
Substitution State	- isSeeded - seedValue - DicName - outputPort
Substitution Street	- isSeeded - seedValue - DicName - outputPort
Substitution U.S. ZIP code	- isSeeded - seedValue - DicName - outputPort
URL	- isSeeded - seedValue

Mask rule parameter attribute values

Define the required parameter attribute values when you run the mapping task.

The following table describes the attributes and values that you define for the mask rule parameter:

Attribute	Description
blurHigh	Required. The higher bound for blurring. You can specify the value in digits. Default is 0.
blurLow	Required. The lower bound for blurring. You can specify the value in digits. Default is 0.
blurringOption	Required. The unit of blurring for a numeric port. You can specify the following values: - Percent. Blurs the data based on a percent value. - Fixed. Blurs the data based on a fixed value.
blurringUnit	Required. The unit of blurring for a date port. You can specify the following values: - Year. Blurs the year value. - Month. Blurs the month value. - Day. Blurs the day value. - Hour. Blurs the hour value. - Minute. Blurs the minute value. - Second. Blurs the second value. Default is Year.

Attribute	Description
delimiter	Delimiter to separate the first name and last name in a masked email address. You can specify the value as: - . - - - _
DicConn	The connection that contains the dictionary files. Create a flat file connection that points to the directory with the dictionary files. Specify the flat file connection name.
dicName	The name of the flat file dictionary file. The dictionary file must be present in the `rdtmDir` directory of the Secure Agent.
domainConstantValue	Domain name to use in masked email addresses. Default is company.com.
expText	An attribute to configure an expression.
firstNameColumn	The first name column to use in masked email addresses. Specify the name of the port.
firstNameLength	The length of the first name in a masked email address. You can specify the value in digits. Default is 5.
isSeeded	An attribute to configure repeatable output. You can specify the following values: - TRUE. Masks the data with repeatable output. When true, specify a seed value. - FALSE. Masks the data with random output. Default is TRUE.
keepCardIssuer	Masks a credit card field with a credit card number from the same issuer. You can specify the following values: - TRUE. Retains the same card issuer in the masked data. - FALSE. Uses a specified card issuer in the masked data. When false, define the targetIssuer attribute. Default is TRUE.
lastNameColumn	The last name column to use in masked email addresses. Specify the name of the port.
lastNameLength	The maximum length of the last name in masked email addresses. You can enter the value in digits. Default is 5.

Attribute	Description
maskFormat	Defines the type of character to substitute for each character in the input data. You can limit each character to an alphabetic, numeric, or alphanumeric character type. Use the following characters to define a mask format: - A. Alphabetic - D. Digits 0-9 - N. Alphanumeric - X. Any character - R. Rest of the characters. Specify the value as ADNX+R. R must appear as the last character. For example, to ensure the masked output begins with an alphabet, enter the value as A+R. Default is R.
maxWidth	Required. The minimum value for the range. Enter the value in digits. Default is 0.
maxWidth	Required. The maximum value for the range. Enter the datetime value. Default is 01/19/2038 03:13:59.
minWidth	Required. The minimum value for the range. Enter the datetime value. Default is 01/01/1970 00:00:00.
minWdth	Required. The minimum value for the range. Enter the value in digits. Default is 0.
outputPort	The output port column from the dictionary.
seedValue	The seed value. Specify a value between 1 and 999. Default is 190.
srcFilterOption	Required. The type of filter to apply to source filter characters. You can specify the following values: - Mask Only. Masks only the specified characters in the source. - Mask all except. Masks all characters in the source except the characters specified.
srcFilterStr	Required. Defines the characters in the source string that you want to mask.
startDigit	Required. Defines the first digit of the masked SIN. You can specify the following values: - TRUE. Uses the digit that you specify as the first digit of the masked SIN. - FALSE. Uses a random digit as the first digit of the masked SIN. Default is FALSE. When true, define the startDigitValue attribute.
startDigitValue	Required. Defines the first digit of the masked SIN. Specify a value between 0 and 9. Default is 0.
targetFilterOption	Required. The type of filter to apply on target filter characters. You can specify the following values: - Use Only. Uses only the target characters that you specify. - Use All Except. Uses all characters in the target except what you specify.

Attribute	Description
targetFilterStr	Required. Substitutes the characters in a target string with the characters that you define in target filter characters. For example, enter the following characters to configure the masked output to contain all uppercase alphabetic characters: ABCDEFGHIJKLMNOPQRSTUVWXYZ.
targetIssuer	Required. Masked values contain credit card numbers from the issuer that you select. You can specify the following values: - ANY - JCB - VISA - AMEX - DISCOVER - MASTERCARD
useBlurring	Required. Masks dates based on a variance that you apply to a unit of the date. The masked date is within the variance. You can specify the following values: - TRUE. Applies a variance that you specify on a unit of the date. - FALSE. Does not apply a variance. Default is FALSE.
useMaskFormat	Specifies a mask format. You can specify the following values: - TRUE. Masks the data based on a format that you specify. - FALSE. Masks the data in a random format. Default is TRUE. If true, define the maskFormat attribute.
useRange	Required. Specifies a return value between the minimum and maximum values of the range based on field precision. You can specify the following values: - TRUE. Masks the data within a range that you specify. - FALSE. Does not use a specified range to mask the data. To define the range, configure the minimum and maximum ranges or configure a blurring range based on a variance from the original source value. Default is FALSE.
useSrcFilter	Specifies the characters in the source string that you want to mask. You can specify the following values: - TRUE. Masks the characters in the source string that you specify. - FALSE. Masks random characters in the source string. Default is FALSE.
useTargetFilter	Specifies the characters to use in the masked string. You can specify the following values: - TRUE. Uses characters that you specify in the masked string. - FALSE. Uses random characters in the masked string. Default is FALSE.

PowerCenter mapplets

Use this resource to request the details of a PowerCenter mapplet or to request a list of all PowerCenter mapplets in the organization. You can also use this resource to upload or delete a PowerCenter mapplet.

Note: To request a list of all mapplets in the organization, use the objects resource. For more information, see "Finding an asset" on page 237.

GET request

To request a list of all PowerCenter mapplets in the organization, use the following URI:

```
/api/v2/customFunc
```

To request the details of a single mapplet, you can use the mapplet ID or mapplet name in the request. Use one of the following URIs:

```
/api/v2/customFunc/<id>
/api/v2/customFunc/name/<name>
```

If you use the mapplet name and the mapplet name includes a space, replace the space with `%20`. For example:

```
/api/v2/customFunc/name/my%20mapplet
```

GET response

If the request for a list of mapplets is successful, returns the customFunc object for every PowerCenter mapplet in the organization without the input, output, and connection details.

If the request for the details of a single mapplet is successful, returns the customFunc object.

Returns the error object if errors occur.

The customFunc object includes the following attributes:

Field	Type	Description
id	String	Mapplet ID.
orgId	String	Organization ID.
name	String	Mapplet name.
description	String	Mapplet description.
createTime	Date/time	Time the mapplet was created.
updateTime	Date/time	Time the mapplet was last updated.
createdBy	String	User who created the mapplet.
updatedBy	String	User who last updated the mapplet.
mappletName	String	Name of the Mapplet transformation used in the mapplet.
active	Boolean	Whether the mapplet is active. Returns true or false.
mappletXmlFile	String	The mapplet XML file.

Field	Type	Description
inputs	String	Input fields for the mapplet. Includes the following information for each field in the field object: - id - name - type - label - parentObject - precision - pcType - scale - columnIndex - isKey - isExternalId - isNullable - isUnique - isCreateable - isCalculated - isUpdateable - isFilterable - linkedFields - relatedInfos. Includes the following information in the fieldRelatedInfo object: - id - referenceObject - relationshipName - javaType - showLabel - naturalOrder - customProperties
outputs	String	Output fields for the mapplet. Includes the following information for each field in the field object: - id - name - type - label - parentObject - precision - pcType - scale - columnIndex - isKey - isExternalId - isNullable - isUnique - isCreateable - isCalculated - isUpdateable - isFilterable - linkedFields - relatedInfos. Includes the following information in the fieldRelatedInfo object: - id - referenceObject - relationshipName - javaType - showLabel - naturalOrder - customProperties

Field	Type	Description
connections		Connection information for the mapplet. Includes a pcsConnection object for each connection.
id	Long	Included in the pcsConnection object.
name	String	Included in the pcsConnection object. Connection name.
type	String	Included in the pcsConnection object. Connection type.
subtype	String	Included in the pcsConnection object. Connection subtype.
description	String	Included in the pcsConnection object. Description of the connection.
connectionId	String	Included in the pcsConnection object. Connection ID.

POST request

To upload a new PowerCenter mapplet, use the following URI:

```
/api/v2/customFunc
```

If you want to specify a location for the mapplet, include the container ID in the request. If the container ID isn't included in the request, the mapplet is created in the Default folder. You can find the container ID for a project or folder in the Data Integration user interface. On the **Explore** page, select the folder. In the URL, the last string of characters is the container ID.

For example, in the following URL, the container ID is dH2DuGJYda7ijgW4Sm32sR:

```
https://na1.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/Explore/
dH2DuGJYda7ijgW4Sm32sR
```

To update an existing PowerCenter mapplet, include the mapplet ID in the following URI:

```
/api/v2/customFunc/<id>
```

Note: Encode the request body as multipart/form-data.

With this URI, you can use the following attributes in the request body:

Field	Type	Required	Description
file	String	Yes	The mapplet XML file exported from Informatica PowerCenter. File content should be in binary format, UTF-8 encoding.
name	String	Yes	The mapplet name.

Field	Type	Required	Description
description	String	-	The mapplet description.
containerId	String	-	ID of the project or folder to contain the mapplet. If not included in request, the mapplet is created in the Default folder.

In addition to the POST attributes, pass the following information in the request body:

- Boundary value. Used to define different parts of the request body.
- File name. Name of the mapplet XML file.
- icSessionId. IDMC session ID returned by the login resource. You can pass this information in the request body for clients that do not allow custom headers. If you can pass icSessionId as part of the request header, you can omit this information in the request body.

Use the following template for the customFunc POST request:

```
URL: <serverUrl>/api/v2/customFunc/
HTTP method: POST

Content-Type:multipart/form-data;boundary=<boundary value>
--<boundary value>
Content-Disposition:form-data; name="file";filename="<filename.XML>";Content-Type:text/
<xml|json>

<content of the mapplet XML file encoded as UTF-8>

--<boundary value>
Content-Disposition: form-data; name="name"

<mapplet name>
--<boundary value>
Content-Disposition: form-data; name="desc"

<description of the mapplet>
--<boundary value>
Content-Disposition: form-data; name="icSessionId"

<icSessionID returned from login resource>
--<boundary value>--
```

POST response

If successful, returns the customFunc response object for the PowerCenter mapplet that was created or updated.

Returns the error object if errors occur.

DELETE request

To delete a PowerCenter mapplet, use the mapplet ID in the following URI:

```
/api/v2/customFunc/<id>
```

DELETE response

Returns the 200 response code if the request is successful.

Returns the error object if errors occur.

POST example

To update a PowerCenter mapplet with an ID of 3 with an icSessionId of IV4wOrJmd6YUtmKa8t, you might use the following request. The updated mapplet is named Lookup Mapplet and uses the lookup_mapplet.xml file. XML data should be encoded in UTF-8.

```
URL: https://example.informatica.com/saas/api/v2/customFunc/3
HTTP method: POST

Content-Type:multipart/form-data;boundary=243553118520053
--243553118520053
Content-Disposition:form-data; name="file";filename="<lookup_mapplet.xml>";Content-
Type:text/xml

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE POWERMART SYSTEM "powrmart.dtd">
<POWERMART CREATION_DATE="05/14/2012 12:17:26" REPOSITORY_VERSION="181.90">
<REPOSITORY NAME="pc91hf1" VERSION="181" CODEPAGE="UTF-8" DATABASETYPE="Oracle">
<FOLDER NAME="test" GROUP="" OWNER="Administrator" SHARED="SHARED" DESCRIPTION=""
PERMISSIONS="rwx---r--" UUID="96f9d03b-c2c5-4034-8e3a-838026bbf6e8">
  <SOURCE BUSINESSNAME ="" DATABASETYPE ="Oracle" DBDNAME ="ddicst" DESCRIPTION ="" NAME
="CUSTOMERMASTER" OBJECTVERSION ="1" OWNERNAME ="C01" VERSIONNUMBER ="1">
    <SOURCEFIELD BUSINESSNAME ="" DATATYPE ="nvarchar2" DESCRIPTION ="" FIELDNUMBER ="1"
FIELDPROPERTY ="0" FIELDTYPE ="ELEMITEM" HIDDEN ="NO" KEYTYPE ="PRIMARY KEY" LENGTH ="0"
LEVEL ="0" NAME ="CUSTOMERID" NULLABLE ="NOTNULL" OCCURS ="0" OFFSET ="0" PHYSICALLENGTH
="30" PHYSICALOFFSET ="0" PICTURETEXT ="" PRECISION ="30" SCALE ="0" USAGE_FLAGS =""/>
.
.
.
 <ATTRIBUTE NAME ="Parameter Filename" VALUE =""/>
        <ATTRIBUTE NAME ="Write Backward Compatible Workflow Log File" VALUE ="NO"/>
        <ATTRIBUTE NAME ="Workflow Log File Name" VALUE ="wf_plugin_lookup.log"/>
        <ATTRIBUTE NAME ="Workflow Log File Directory" VALUE ="$PMWorkflowLogDir&#x5c;"/>
        <ATTRIBUTE NAME ="Save Workflow log by" VALUE ="By runs"/>
        <ATTRIBUTE NAME ="Save workflow log for these runs" VALUE ="0"/>
        <ATTRIBUTE NAME ="Service Name" VALUE =""/>
        <ATTRIBUTE NAME ="Service Timeout" VALUE ="0"/>
        <ATTRIBUTE NAME ="Is Service Visible" VALUE ="NO"/>
        <ATTRIBUTE NAME ="Is Service Protected" VALUE ="NO"/>
        <ATTRIBUTE NAME ="Fail task after wait time" VALUE ="0"/>
        <ATTRIBUTE NAME ="Enable HA recovery" VALUE ="NO"/>
        <ATTRIBUTE NAME ="Automatically recover terminated tasks" VALUE ="NO"/>
        <ATTRIBUTE NAME ="Service Level Name" VALUE ="Default"/>
        <ATTRIBUTE NAME ="Allow concurrent run with unique run instance name" VALUE
="NO"/>
        <ATTRIBUTE NAME ="Allow concurrent run with same run instance name" VALUE ="NO"/>
        <ATTRIBUTE NAME ="Maximum number of concurrent runs" VALUE ="0"/>
        <ATTRIBUTE NAME ="Assigned Web Services Hubs" VALUE =""/>
        <ATTRIBUTE NAME ="Maximum number of concurrent runs per Hub" VALUE ="1000"/>
        <ATTRIBUTE NAME ="Expected Service Time" VALUE ="1"/>
    </WORKFLOW>
</FOLDER>
</REPOSITORY>
</POWERMART>

--243553118520053
Content-Disposition: form-data; name="name"

Lookup Mapplet
--243553118520053
Content-Disposition: form-data; name="icSessionId"

IV4wOrJmd6YUtmKa8t
--243553118520053--
```

A successful request returns the customFunc response object for the mapplet that you updated.

Synchronization task conversion

Use the convert resource to convert synchronization tasks to data transfer tasks.

You can use the convert resource to send the following requests:

- Send a GET request to test whether the synchronization task is compatible with data transfer task features.
- Send a POST request to convert the synchronization task to a data transfer task.

When you use the convert resource, use the following request header format:

```
<METHOD><server URL><URI>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

The server URL includes the name and region of the POD that your organization uses and the domain, informaticacloud.com. If you don't know the name and region of your organization's POD, you can find it by logging in through the user interface. The POD information is located in the browser's address bar.

In the following example, https://usw3.dm-us.informaticacloud.com is the server URL:

```
https://usw3.dm-us.informaticacloud.com/diUI/products/integrationDesign/main/home
```

Testing compatibility

Use the convert resource to test whether a synchronization task can be converted to a data transfer task. If the synchronization task isn't compatible with data transfer task features, the response includes the reasons for the incompatibility.

GET request

To find out if a synchronization task can be converted to a data transfer task, use the following URI:

```
/dtt/dss/convert/test/<assetId>
```

GET response

The response includes the following information:

Field	Type	Description
assetId	String	ID of the synchronization task to be converted.
assetName	String	Name of the synchronization task to be converted.
dttparity	Boolean	Whether the synchronization task is compatible with data transfer task features. A Yes value means the synchronization task is compatible with data transfer task features so the task can be converted.
errors	String	If the value for dttparity is No, includes reasons why the synchronization task can't be converted to a data transfer task.

GET example

The following request checks a synchronization task to see if it's compatible with data transfer task features:

```
GET <server URL>/dtt/dss/convert/test/0001R291234567891234
Content-type: application/json
```

```
Accept: application/json
IDS-SESSION-ID: 2l0oeVx22Rujiej7y1234T
```

The following response shows that the synchronization task can be converted to a data transfer task:

```
{
    "assetId": "0001R291234567891234",
    "assetName": "Sync Task 1",
    "errors": [],
    "dttparity": YES
}
```

The following text is an example of a response when the synchronization task can't be converted to a data transfer task:

```
{
    "assetId": "0001R291234567896789",
    "assetName": "Sync Task 2",
    "errors": [
        "Multiple source objects are not supported"
    ],
    "dttparity": NO
}
```

Converting an asset to a data transfer task

Use the convert resource to convert a synchronization task to a data transfer task. The synchronization task still exists after the conversion, but you can delete it.

POST request

To convert a synchronization task, include the asset ID of the synchronization task in the following URI:

```
/dtt/dss/convert/<assetId>
```

Include the following fields in the request:

Field	Type	Required	Description
projectId	String	Yes	Project or folder where you want the data transfer task to reside.
skipSchedulerJob	Boolean	--	Whether to exclude the schedule settings from the synchronization task in the data transfer task. Use one of the following values: - true: Don't include the schedule settings. - false: Include the schedule settings. Default is false.

POST response

The following table describes the fields in the POST response:

Field	Type	Description
originalAssetId	String	ID of the synchronization task that was converted.
originalAssetName	String	Name of the synchronization task that was converted.
status	String	Status of the conversion, such as SUCCESS or FAILED.

Field	Type	Description
newAssetId	String	Asset ID of the new data transfer task.
newAssetName	String	Name of the data transfer task, which is the same as the synchronization task used in the conversion.
newAssetType	String	Value will always be DTT.
errors	String	If the status is FAILED, reason for the failure.

POST example

The following request converts a synchronization task to a data transfer task:

```
POST <server URL>/dtt/dss/convert/0001R291234567891234
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7y1234T

{
    "projectId": "8Fhm0Ovp4Dhfl3yNr1234G",
    "skipSchedulerJob" : false
}
```

If successful, you receive the following response:

```
{
    "originalAssetId": "0100000I00000000000H",
    "originalAssetName": "Sync Task 1",
    "status": "SUCCESS",
    "newAssetId": "8Fhm0Ovp4Dhfl3yNr2345G",
    "newAssetName": "Sync Task 1",
    "newAssetType": "Data Transfer Task"
}
```

If the request isn't successful, you receive the following response:

```
{
    "originalAssetId": "0100000I00000000000H",
    "originalAssetName": "Sync Task 1",
    "status": "FAIL",
    "errors": [
        "Multiple sorting conditions are not supported"
    ]
}
```

Taskflows

You can use the REST API to get the status of a taskflow and publish multiple taskflows simultaneously.


For more information about how to run a taskflow as an API, see Running a taskflow as an API.

Running a taskflow as an API

After you publish a taskflow as a service, you can run the taskflow as an API or schedule the taskflow. You can use the endpoint URLs to run the taskflow as an API, and dynamically provide input parameters for the tasks that the taskflow contains and perform orchestration.

1. Navigate to the taskflow that you published as a service.
2. From the **Actions** menu, select **Properties Detail**.

   The **Properties Detail** dialog box appears displaying the service URL and the SOAP service URL as shown in the following image:

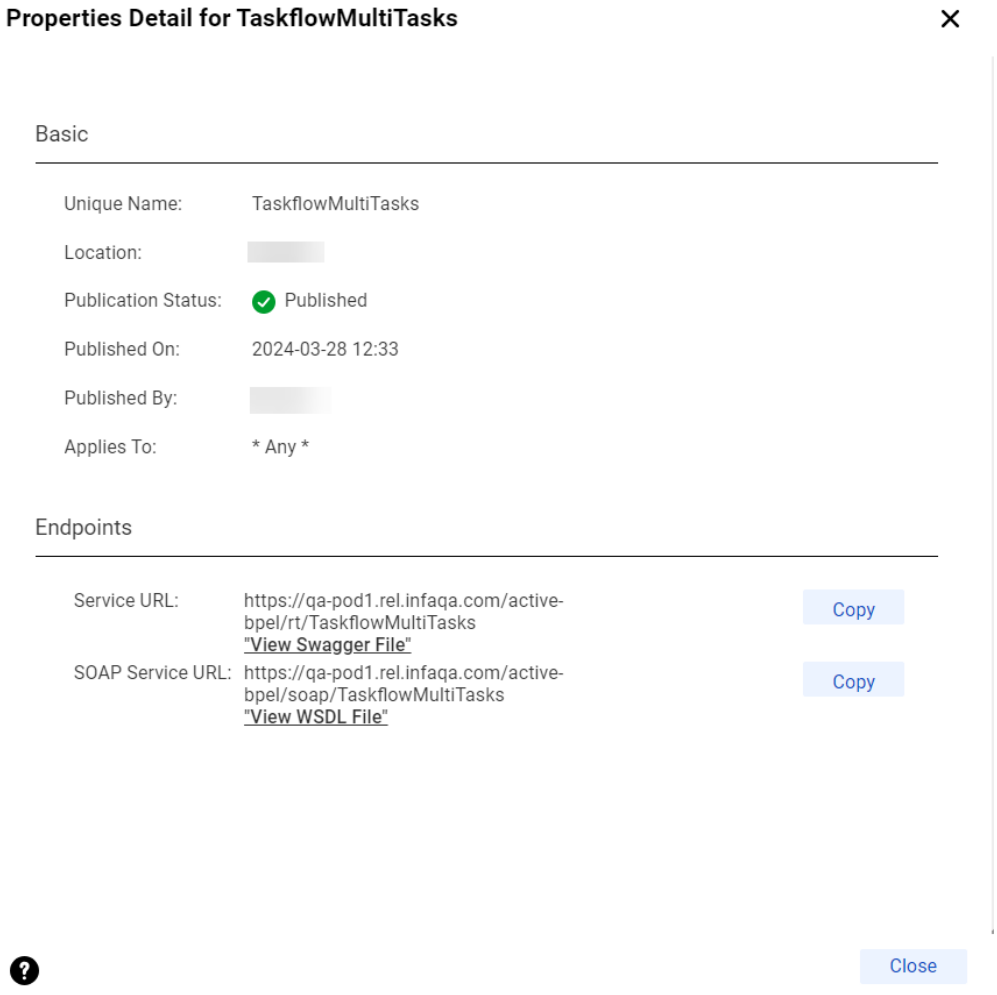

   The service URL uses the following format:

   ```
   <Informatica Intelligent Cloud Services URL>/active-bpel/rt/<API_name>
   ```

   The SOAP service URL uses the following format:

   ```
   <Informatica Intelligent Cloud Services URL>/active-bpel/soap/<API_name>
   ```

   You can also view the associated Swagger file and WSDL file.
3. To run the taskflow, perform one of the following steps based on the type of client that you want to use:
   - If you use a REST client, use the service URL and the API definition available in the Swagger file to send a request through the REST client.

- If you use a SOAP client, use the SOAP service URL and the API definition available in the WSDL file to send a request through the SOAP client.

You can pass inputs using the service URL through a browser or a third-party tool. For more information, see "Passing inputs through a browser" on page 517 or "Passing inputs through a REST client" on page 517.

You receive the taskflow run ID as the response.

4. To monitor the taskflow with the run ID, perform one of the following steps:
   - Use the run ID to monitor the taskflow run in the **My Jobs** page. The instance name uses the following format:
     `<taskflow name>-<run ID>`
   - Use the status resource to query the status of the taskflow based on the run ID. For more information about using the status resource, see "Monitoring taskflow status with the status resource" on page 527.

Passing inputs through a browser

When you run a taskflow as an API, you can pass inputs using the endpoint URLs through a browser.

1. Open the taskflow and click **Actions** > **Properties Detail** > **Copy Service URL**.
2. Open a text editor and add the input field and value to the service URL as shown below:

   ```
   <Informatica Intelligent Cloud Service URL>/active-bpel/rt/<API_name>?
   <inputfield>=<value>
   ```

   For example: `https://na1.dm-us.informaticacloud.com/active-bpel/rt/Taskflow?CustomerName=TestConsumer`

   To pass values for more than one field, use `&` to separate the input fields as shown below:

   ```
   https://na1.dm-us.informaticacloud.com/active-bpel/rt/Taskflow?
   CustomerName=TestConsumer&CustomerEmail=testconsumer@mailinator.com&ItemName=item1&ItemCount=2
   ```

3. Open a browser and paste the service URL with the input fields and values. If the taskflow uses authentication, you must enter the allowed user name and password.

   The service returns the taskflow run ID as the response. You can monitor the taskflow execution by using the run ID.

Passing inputs through a REST client


When you have multiple input values to pass and have a complex body, you can use a REST client such as Postman. You must use the service URL and the API definition available in the Swagger file to send a request through a REST client. The Swagger file contains the operation name, authentication method, and the input for the taskflow. You can use the Swagger editor to parse the Swagger file and get the Swagger request.

The following is a sample swagger request:


```
{
    "input": "ACCOUNT.csv",
    "inputConn": {
        "input": {
            "source": {
                "Source": {
                    "object": "RetailCustomer",
                    "connection": "0100000B000000000004"
                }
        },
        "connectionNameParam": "ACCOUNT.csv"
```

```
        }
}
}
```

1. Open Postman.
2. Select the HTTP verb such as GET or POST and specify the generated REST service URL as shown in the following image:

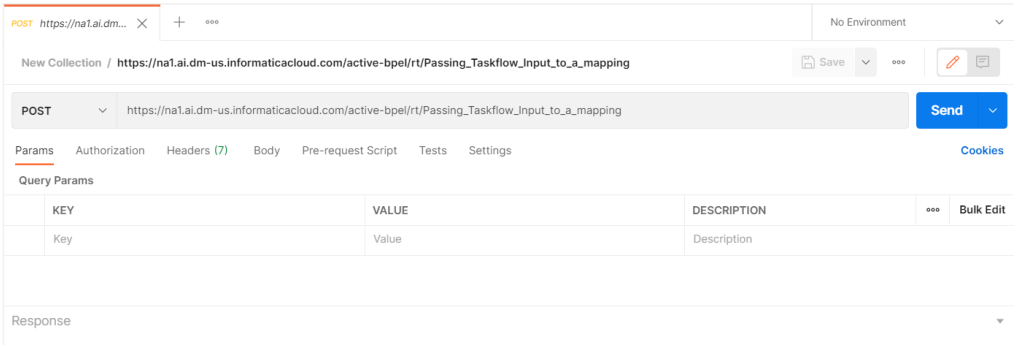


3. Enter the user account details in the **Authorization** tab.
4. Specify the swagger request in the **Body** tab as shown in the following image:

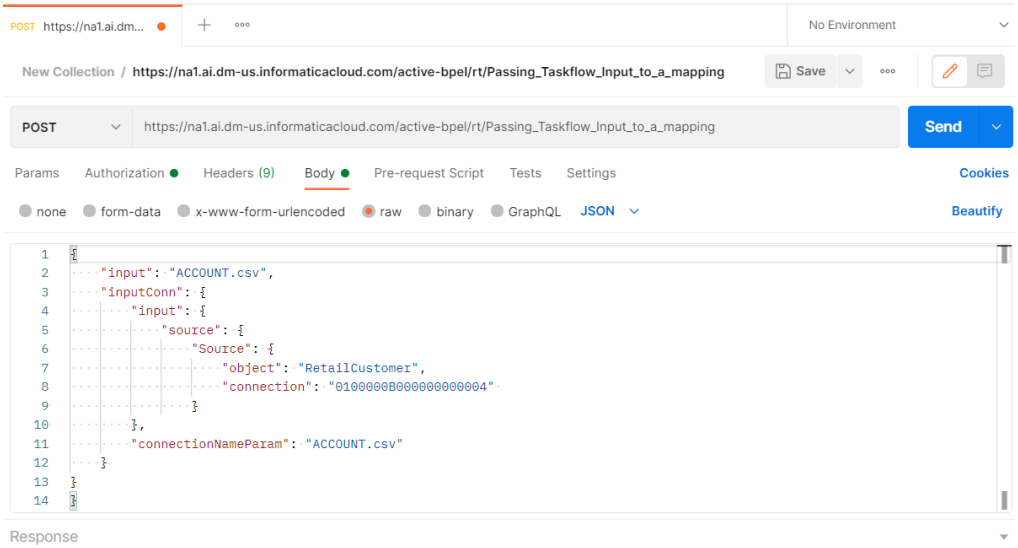

5. Specify the input values in the request body.
6. Click **Send**.

   You receive the taskflow run ID as the response as shown in the following image:

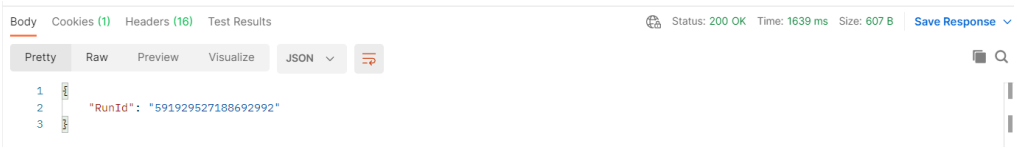

Resume a suspended taskflow

You can use the `resumeWithFaultRetry` resource to resume a suspended taskflow instance from a faulted step. You can also use the `resumeWithFaultSkip` resource to skip a faulted step and resume a suspended taskflow instance from the next step.

Note: If you configure the **Custom Error Handling** option for a step within a taskflow, you can't use the resumeWithFaultyRetry resource to resume the taskflow from the failed step.

resumeWithFaultRetry

To resume a suspended taskflow instance from a faulted step, use the following URI in a PUT request:

```
PUT <Informatica Intelligent Cloud Services URL>/active-bpel/management/runtime/v1/
resumeWithFaultRetry/<run ID>
```

Include the following information in the request:

Field	Type	Required	Description
run ID	String	Yes	Run ID for the taskflow.

resumeWithFaultRetry PUT example

Use this sample as a reference to resume a suspended taskflow instance from a faulted step in a PUT request.

```
PUT https://na1.dm-us.informaticacloud.com/active-bpel/management/runtime/v1/
resumeWithFaultRetry/681134580186693632

Accept: application/json

INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
```

resumeWithFaultRetry PUT response

Returns the 204 response code if the request is successful.

Returns an error object if error occurs.

resumeWithFaultSkip

To skip a faulted step and resume a suspended taskflow instance from the next step, use the following URI in a PUT request:

```
PUT <Informatica Intelligent Cloud Services URL>/active-bpel/management/runtime/v1/
resumeWithFaultSkip/<run ID>
```

Include the following information in the request:

Field	Type	Required	Description
run ID	String	Yes	Run ID for the taskflow.

resumeWithFaultSkip PUT example

Use this sample as a reference to skip a faulted step and resume a suspended taskflow instance from the next step in a PUT request.

```
PUT https://na1.dm-us.informaticacloud.com/active-bpel/management/runtime/v1/
resumeWithFaultSkip/681134580186693632
```

```
Accept: application/json

INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK4
```

resumeWithFaultSkip PUT response

Returns the 204 response code if the request is successful.

Returns an error object if error occurs.

Listing suspended taskflows through an API

You can use a JLS API to get a list of taskflows that are suspended. By default, the number of suspended taskflows that the API returns is 200.

To get a list of suspended taskflows, use the following URI:

```
{{<Informatica Intelligent Cloud Services URL>}}/jls-di/api/v1/Orgs(<Organization ID>)/
JobLogEntries?$top=<Number of suspended taskflows>&$filter=(status eq 'SUSPENDED' and
assetType eq 'TASKFLOW')
```

To get a list of latest suspended taskflows within an organization based on the users who started the taskflows, use the following URI :

```
{{<Informatica Intelligent Cloud Services URL>}}/jls-di/api/v1/Orgs(<Organization ID>)/
JobLogEntries?$top=<Number of suspended taskflows>&$filter=(status eq 'SUSPENDED' and
startedBy eq '<username>' and assetType eq 'TASKFLOW')
```

Terminating taskflows through an API

You can terminate one or more taskflows using an API. The maximum number of taskflows that you can terminate at a time is 200.

Use the following URI to terminate one or more taskflows:


```
PUT <Informatica Intelligent Cloud Services URL>/active-bpel/services/tf/terminate
```

Enter the taskflow run IDs as the input in the body of the PUT request.

Enclose the run IDs within double quotation marks and separate multiple run IDs with a comma. For example, enter: < { "runid" : ["7645954072982472420" , "6753485370351835l8"] } >.

The API displays error messages when you enter a run ID that does not exist or is not valid. The API supports basic authentication and session ID authorization.

The following image shows a sample terminate request and response:

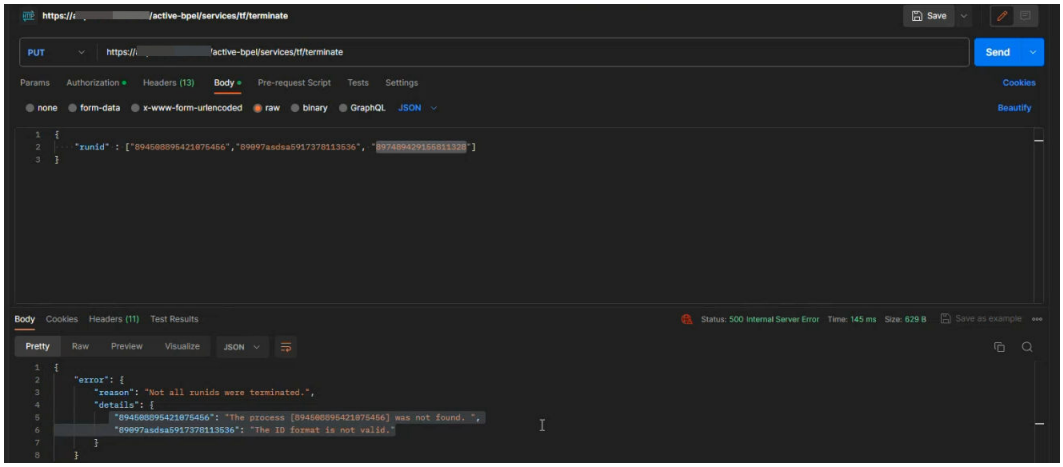

Modifying taskflow attributes with the update resource

If you are assigned the Administrator, Deployer, Designer, or Operator role, you can use the update resource to update the values of the **API Name**, **Allowed Users**, **Allowed Groups**, **Parameter Set**and fields of a taskflow. You can update these fields for both single and multiple taskflows.

Use the request body to pass the values. The updates can be applied to one or more taskflows using the update resource.

To perform the updates, use the following URI with the updated values included in the request body:

```
 PUT<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/update?
assetType=<Taskflow>
```

Rules and guidelines for **Parameter Set** field

Consider the following rules and guidelines when you use the **Parameter Set** field:

- You can configure the parameter set name using alphanumeric characters, underscores, hyphens, dots, and spaces. The parameter set name must not exceed 255 characters.
- You can perform a bulk update of parameter sets for both published and unpublished taskflows.

Rules and guidelines for **API Name** field

Consider the following rules and guidelines when you use the **API Name** field:

- The API name must not be blank and shouldn't exceed 80 characters.
- Use only alphanumeric characters, underscores and hyphens in the API name.
- The API name must be unique. No two taskflows should share the same API name.

PUT request

The following HTTP header shows a PUT request to update the **API Name**, **Allowed Users**, **Allowed Groups**, and **Parameter Set** fields:

```
PUT <Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/update?
assetType=Taskflow
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <Your_Session_ID>
```

Example

Use the following sample PUT request to update the **API Name**, **Allowed Users**, **Allowed Groups**, and **Parameter Set** fields of a taskflow:

```
PUT <baseApiUrl>/active-bpel/asset/v1/update?assetType=Taskflow
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <Infa-Session-ID>

{
  "taskflows": [
    {
      "guid": {
        "$t": "<guidvalue>"
      },
      "deployment": [
        {
          "key": {
            "$t": "API Name"
          },
          "value": {
            "$t": "<new-api-name>"
          }
        },
        {
```

```
            "key": {
              "$t": "Parameter Set"
            },
           "value":[ {
              "$t": "paramSetData"
            },
          {
            "key": {
              "$t": "Allowed Users"
            },
            "value":[ {
              "$t": "user1"
            },
            {
              "$t": "user2"
            }]
          },
          {
            "key": {
              "$t": "Allowed Groups"
            },
            "value":[ {
              "$t": "group1"
            },
            {
              "$t": "group2"
            }]
          }
        ]
      }
    ]
}
```

Send a JSON payload in the body of the PUT request that contains a list of taskflows and the fields that you want to update, such as **API Name**, **Allowed Users**, **Allowed Groups**, and **Parameter Set**.

Use the following sample PUT request to update the **API Name**, **Allowed Users**, **Allowed Groups**, and **Parameter Set** fields of multiple taskflows:

```
{
  "taskflows": [
        {
            "guid": {
                "$t": "{{guid1}}"
            },
            "deployment": [
                {
                    "key": {
                        "$t": "API Name"
                    },
                    "value": {
                        "$t": <<"apiname">>
                    }
                },
                 {
                      "key": {
                        "$t": "Parameter Set"
                  },
                  "value":[
                    {
                        "$t": "paramSetData"
                  },
                {
                    "key": {
                        "$t": "Allowed Users"
                    },
                    "value": [
                        {
                            "$t": "user1"
                        },
```

```
                {
                    "$t": "user2"
                }
            ]
        },
        {
            "key": {
                "$t": "Allowed Groups"
            },
            "value": [
                {
                    "$t": "user_Group1"
                },
                {
                    "$t": "user_Group2"
                }
            ]
        }
    ]
},
{
    "guid": {
        "$t": "{{guid2}}"
    },
    "deployment": [
        {
            "key": {
                "$t": "API Name"
            },
            "value": {
                "$t": <<"apiname1">>
            }
        },
        {
            "key": {
                "$t": "Parameter Set"
            },
            "value": [
                {
                    "$t": "paramSetData"
                },
        {
            "key": {
                "$t": "Allowed Users"
            },
            "value": [
                {
                    "$t": "user1"
                },
                {
                    "$t": "user2"
                }
            ]
        },
        {
            "key": {
                "$t": "Allowed Groups"
            },
            "value": [
                {
                    "$t": "user_Group1"
                },
                {
                    "$t": "user_Group2"
                }
            ]
        }
    ]
}
```

```
    ]
}
```

PUT response example

If the fields are successfully updated, you receive the following response:

```
// Success Response
{
  "status": {
    "$t": "SUCCESS"
  }
}
```

If the fields include invalid data, you receive the following error response:

```
// Failure Response
{
  "status": {
    "$t": "FAILED"
  },
  "errorDetails": {
    "error": {
      "$t": "Update failed for assets"
    },
    "failedAssets": {
      "updateAssetFaultInfo": {
        "xmlns": "https://com.informatica.icrt/2021/08/updateAssets.xsd",
        "xmlns$aetgt": "https://com.informatica.icrt/2021/08/updateAssets.xsd",
        "name": {},
        "GUID": {
          "$t": "<Incorrectguidvalue>"
        },
        "fault": {
          "$t": "The Api Name is not valid. Specify a valid Api Name."
        }
      }
    }
  }
}
```

Adding a custom name to a taskflow name


You can add a custom name to a taskflow name by using an API and the RunAJob utility. You can use the custom name as an identifier for the taskflow.

Adding a custom name to a taskflow name using an API

After you publish a taskflow as a service, you can run the taskflow as an API and add a custom name to the taskflow name. When you use the API to add a custom name that contains Japanese characters, you must pass the URL encoded characters.

1. Navigate to the taskflow that you published as a service.
2. From the **Actions** menu, select **Properties Detail**.

   The **Properties Detail** dialog box appears displaying the service URL and the SOAP service URL as shown in the following image:

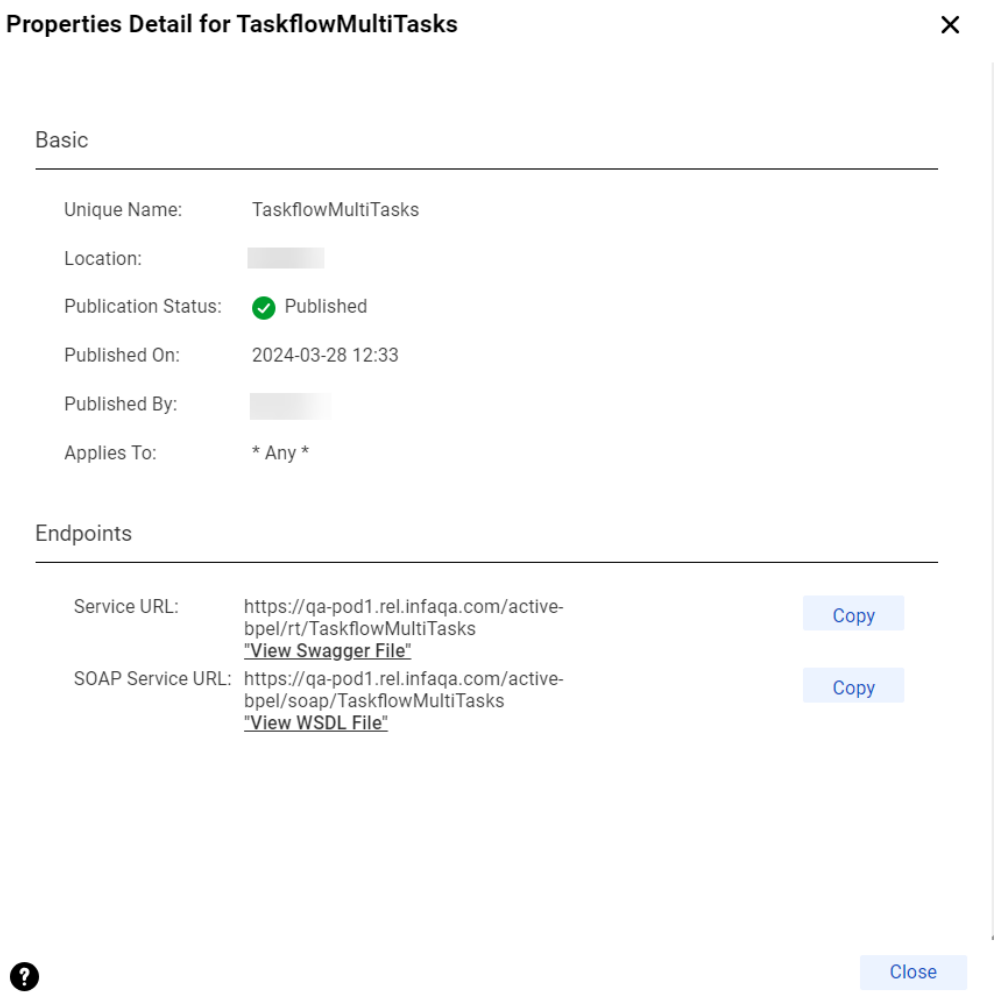

The service URL uses the following format:

```
<Informatica Intelligent Cloud Services URL>/active-bpel/rt/<API_name>
```

The SOAP service URL uses the following format:

```
<Informatica Intelligent Cloud Services URL>/active-bpel/soap/<API_name>
```


You can also view the associated Swagger file and WSDL file.

3. To run the taskflow, perform one of the following steps based on the type of client that you want to use:
   - If you use a REST client, use the service URL and the API definition available in the Swagger file to send a request through the REST client.
   - If you use a SOAP client, use the SOAP service URL and the API definition available in the WSDL file to send a request through the SOAP client.

   You can pass inputs using the service URL through a browser or a third-party tool. For more information, see "Passing inputs through a REST client" on page 517.

   You receive the taskflow run ID as the response.

4. In the GET request, add the TF-INSTANCE-NAME header and set the header value to the custom name that you want to use. The following image shows the custom name set to the value **OrderManagement**:

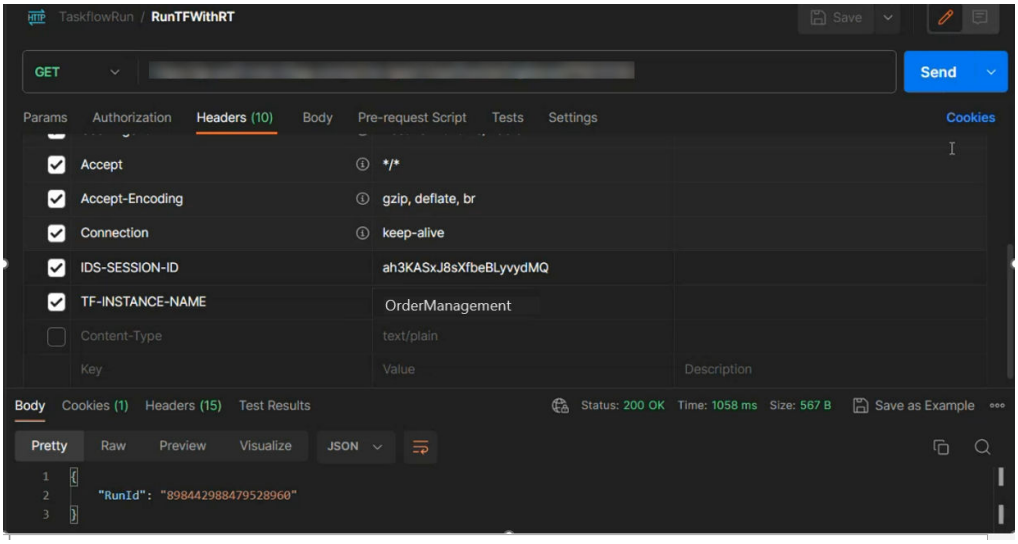

5. To monitor the taskflow with the run ID, use the run ID to monitor the taskflow run in the **My Jobs** page. The instance name uses the following format: `<taskflow name>-<custom name>-<run ID>`

Adding a custom name to a taskflow name using RunAJob utility

You can add a custom name to a taskflow name using the RunAJob utility. To run a taskflow using the RunAJob utility, the taskflow must be published. Add the custom name by providing `-in` as the short argument and `--instanceName` as the long argument in the RunAJob command.

For more information about short and long options for RunAJob utility arguments, see RunAJob utility arguments in *REST API Reference*.

To add a custom name to a taskflow name using the RunAJob utility, use the following syntax:

```
cli.bat runAJobCli -t <task_type> -in <custom_name> -un <taskflow_name>
```

For example: `cli.bat runAJobCli -t TASKFLOW -in Order -un taskflowManagement`

When you use the RunAJob utility, the custom names can't contain the following characters:

- Special characters and meta characters such as `., +, -, =, ~, `, !, %, ^, &, *, (), [], {}, '", ;, :, ?, <>, \, |, \t, \r, \n, <space>`, and so on
- Japanese characters

The taskflow name with the custom name appears in the **My Jobs** page in the following format:

```
<taskflow name>-<custom name>-<runID>
```

Monitoring taskflow status with the status resource

To use the status resource, you need at least Read permission on the taskflow. You can get the status of a taskflow using the taskflow run ID as a path parameter or using query parameters such as run ID, run status, start time, end time, offset, and row limit.

GET request

To get the status of a taskflow using the run ID as a path parameter, use the following URI:

```
<Informatica Intelligent Cloud Services URL>/active-bpel/services/tf/status/<run ID>
```

For example:

```
https://na4.dm.us.informaticacloud.com/active-bpel/services/tf/status/
20262247166322413568
```

You can add the optional `subtaskDetails` parameter in the Taskflow Status API URL to indicate whether you want to return the status of only the taskflow or you also want to return the status of the subtasks within the taskflow.
Use the following URL:

```
GET/active-bpel/services/tf/status/<runId>?subtaskDetails =<value>
```

Set the `subtaskDetails` parameter to **No** or leave the parameter empty to return only the taskflow status. Default is **No**. To get the status of multiple subtasks within the taskflow, set the `subtaskDetails` parameter to **Yes**.

For example:

```
https://na4.dm.us.informaticacloud.com/active-bpel/services/tf/status/
202622471663224135 68?subtaskDetails=No
```

When the subtaskDetails is set to **No** (default), you get the following sample API response:

```
{
  "assetName": "Taskflow1",
  "assetType": "TASKFLOW",
  "duration": 1,
  "endTime": "2025-06-30T07:53:53Z",
  "errorMessage": "",
  "location": "Default",
  "runId": 1.1242464044289925e+18,
  "runtimeEnv": "application-integration:8443",
  "runtimeEnvName": "",
  "startedBy": "kkunal@informatica.com",
  "startTime": "2025-06-30T07:53:52Z",
  "status": "SUCCESS",
  "subtasks": 1,
  "updateTime": "2025-06-30T07:53:53Z",
  "subtaskDetails": {
    "details": {
      "tasks": []
    }
  }
}
```

You can also get the status of multiple taskflows using query parameters. The query parameters are case sensitive.

You can use the following optional query parameters in the GET request URI:

Field	Description
runId	Run ID for the taskflow. For example, to get the status of a particular taskflow with a run ID, use the following URI: `https://na4.dm.us.informaticacloud.com/active-bpel/services/tf/status?runId=20262247166322413568`
runStatus	Execution status of the taskflow. You can specify the status as Success, Failed, Suspended, or Running. For example, to get the status of all the taskflows that were successfully executed in the last 24 hours, use the following URI: `https://na4.dm.us.informaticacloud.com/active-bpel/services/tf/status?runStatus=Success`
startTime	Start time for the taskflow runs at the beginning of the date and time range. Use Coordinated Universal Time (UTC). For example, to get the status of all the taskflows that started on or after 2021-06-**10**T05:48:28Z, use the following URI: `https://na4.dm.us.informaticacloud.com/active-bpel/services/tf/status?startTime=2021-06-10T05:48:28Z`
endTime	Start time for the taskflow runs at the end of the date and time range. Use Coordinated Universal Time (UTC). For example, to get the status of all the taskflows that started between 2021-06-**10**T05:48:28Z and 2021-06-**11**T05:48:28Z, use the following URI: `https://na4.dm.us.informaticacloud.com/active-bpel/services/tf/status?startTime=2021-06-10T05:48:28Z&endTime=2021-06-11T05:48:28Z`
offset	Number of rows to skip. For example, you might want to skip the first three rows.
rowLimit	Maximum number of rows to return. The maximum number you can specify is 50. If you omit this parameter, the query returns all available rows, up to a maximum of 10 rows.

You can use any combination of these query parameters to get the status of multiple taskflows. For example, you can use the following URI:

```
<Informatica Intelligent Cloud Services URL>/active-bpel/services/tf/status?
startTime=<startTime>&runStatus=<runStatus>&endTime=<endTime>&rowLimit=<rowLimit>
```

Note: If the startTime or endTime parameters are not used in the query, the response contains status information about the taskflows that ran in the last 24 hours.

Authenticate the GET request in one of the following ways:

- Use basic authorization and specify the Informatica Intelligent Cloud Services user name and password. For example:

```
GET <Informatica Intelligent Cloud Services URL>/active-bpel/services/tf/status/<run
ID>
Accept: application/json
Authorization: Basic Auth
username: <Informatica Intelligent Cloud Services user name>
password: <Informatica Intelligent Cloud Services password>
```

- Use the INFA-SESSION-ID in the HTTP header.

For example:

```
GET <Informatica Intelligent Cloud Services URL>/active-bpel/services/tf/status/<run
ID>
Accept: application/json
INFA-SESSION-ID: <sessionId>
```

To get the INFA-SESSION-ID, use the Platform REST API version 3 login resource. For more information about the login resource, see *REST API Reference*.

Send the request using JSON format. Include the following line in the header: `Accept: application/json`

GET response

Returns the taskflow status information if successful or an error object if errors occur.

If successful, returns the following status information for a taskflow:

Field	Type	Description
assetName	String	Name of the taskflow. The taskflow name also includes the custom name, if you had added a custom name to the taskflow using an API or the RunAJob utility.
assetType	String	Type of the object. Returns the value TASKFLOW.
duration	String	Time in seconds that the taskflow ran before it completed, was suspended, was failed, or was stopped.
endTime	Date/time	End time for the taskflow run. Uses Coordinated Universal Time (UTC).
location	String	Project and folder path where the taskflow is located.
runId	Long	Run ID for the taskflow.
runtimeEnv	String	ID of the runtime environment where the taskflow runs.
runtimeEnvName	String	Name of the runtime environment where the taskflow runs.
startTime	Date/time	Start time for the taskflow run. Uses Coordinated Universal Time (UTC).
startedBy	String	User who started the taskflow.
status	String	Execution status of the taskflow. Returns one of the following values to indicate the taskflow status: - RUNNING. The taskflow is running. - SUCCESS. The taskflow completed successfully. - FAILED. The taskflow did not complete because it encountered errors. - SUSPENDED. The taskflow run was suspended. - CHILD_SUSPENDED. The taskflow was suspended due to an underlying subtaskflow suspension.
subtasks	String	Number of subtasks that the taskflow contains.
updateTime	Date/time	Last time the taskflow run status was updated. Uses Coordinated Universal Time (UTC).
errorMessage	String	Error message string.

Field	Type	Description
subtaskDetails	String	Object that contains status details for all subtasks in the taskflow.
details	String	Status details. Includes status information for each subtask in the tasks object.
tasks	Collection	Status information for all subtasks that the taskflow contains.

The tasks object includes the following status information for each subtask that the taskflow contains:

Field	Type	Description
assetName	String	Name of the subtask in the taskflow.
assetType	String	Type of the subtask. Returns one of the following values: - MTT. Mapping task. - DSS. Synchronization task.
duration	String	Time in seconds that the subtask ran before it completed, was failed, or was stopped.
endTime	Date/time	End time for the subtask run. Uses Coordinated Universal Time (UTC).
errorMessage	String	Error message string.
errorRows	String	Total number of rows that resulted in errors in a subtask.
location	String	Project and folder path where the subtask is located.
rowsProcessed	String	Total number of rows that were processed in a subtask.
runId	Long	Run ID for the subtask.
runtimeEnv	String	ID of the runtime environment where the subtask runs.
runtimeEnvName	String	Name of the runtime environment where the subtask runs.
startTime	Date/time	Start time for the subtask run. Uses Coordinated Universal Time (UTC).
startedBy	String	User who started the task. This field is the same as the user who started the taskflow.
status	String	Execution status of the subtask. Returns one of the following values to indicate the subtask status: - QUEUED. The subtask is queued on a Secure Agent, but it has not started yet. - STARTING. The subtask is starting. - RUNNING. The subtask is running. - COMPLETED. The subtask completed successfully. - SUSPENDED. The subtaskflow is suspended. - STOPPED. The taskflow has stopped running, so the subtask cannot start. - WARNING. The subtask completed with errors. - FAILED. The subtask did not complete because it encountered errors.
subtasks	String	Reserved for future use. When this field is returned for a subtask, the value is always 0.

Field	Type	Description
successRows	String	Total number of rows that were processed successfully in a subtask.
updateTime	Date/time	Last time the subtask run status was updated. Uses Coordinated Universal Time (UTC).

You might receive one of the following responses:

Response	Description
Purged logs	If logs are purged for the instance, the response is as follows: `{ "status": "No status available." }` The HTTP status code is **200 OK**.
Invalid run ID	If the run ID is not valid, the response is as follows: `{ "error": "CMN_003-Bad request. Error message - The property '<runID>', used in a query expression, is not defined in type 'OData.job-log-service.JobLogEntry'." }` The HTTP status code is **400 Bad Request(From JLS)**.
Invalid filter clause	If the parameter value is not valid, the response is as follows: `{ "error": "JLS_007-Invalid Filter clause in OData request. RawURI = http://internal-nal-elb.infacloudops.net:443/jls-di/internal/api/v1" }` The HTTP status code is **400 Bad Request(From JLS)**.
Unavailable JLS service	If the JLS service is unavailable, the response is as follows: `{ "error": "503-Service Unavailable." }` The HTTP status code is **503 Service Unavailable**. **Note:** If you receive a 503 error code, you perform retries to ensure resiliency. It is recommended to execute at least six retries with an exponential backoff starting at 10 seconds. If you use the runAJob CLI, retries occur automatically. For more information about **RETRYCOUNT** parameter, see the *Job status* section in *REST API Reference*.

GET example using the run ID as a path parameter

The following example shows a taskflow status request that uses the run ID as a path parameter:

```
GET https://pod.ics.dev:444/active-bpel/services/tf/status/20262247166322413568
Content-type: application/json
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
```

Based on the taskflow configuration and request inputs, the response can be of the following types:

Taskflow without subtasks

If the request is successful and the taskflow does not contain subtasks, the response includes taskflow status information as shown in the following example:


```
{
    "assetName": "Taskflow1",
    "assetType": "TASKFLOW",
    "duration": "2",
    "endTime": "2018-12-25T15:56:39Z",
    "location": "Default",
    "runId": "262247166322413568",
    "runtimeEnv": "tf_runtime",
    "runtimeEnvName": "",
    "startTime": "2018-12-25T15:56:37Z",
    "startedBy": "sb",
    "status": "SUCCESS",
    "subtasks": "0",
    "updateTime": "2018-12-25T15:56:39Z",
    "errorMessage": {},
    "subtaskDetails": {
        "details": {}
    }
}
```


The HTTP status code is **200 OK**.

Taskflow with subtasks

If the request is successful and the taskflow contains multiple subtasks, the response includes status information for each subtask that the taskflow contains as shown in the following example:


```
{
    "assetName": "Taskflow2",
    "assetType": "TASKFLOW",
    "duration": "89",
    "endTime": "2018-12-23T17:25:16Z",
    "location": "Default",
    "runId": 20262247166322413568,
    "runtimeEnv": "tf_runtime",
    "runtimeEnvName": "",
    "startTime": "2018-12-23T17:23:47Z",
    "startedBy": "sb",
    "status": "SUCCESS",
    "subtasks": "2",
    "updateTime": "2018-12-23T17:25:17Z",
    "errorMessage": {},
    "subtaskDetails": {
        "details": {
            "tasks": [
                {
                    "assetName": "MTR",
                    "assetType": "MTT",
                    "duration": "3",
                    "endTime": "2018-12-23T17:24:45Z",
                    "errorMessage": "",
                    "errorRows": "0",
                    "location": "Default",
                    "rowsProcessed": "7",
                    "runId": "4",
                    "runtimeEnv": "01001Q25000000000002",
                    "runtimeEnvName": "tf_runtime_devagent",
                    "startTime": "2018-12-23T17:24:42Z",
                    "startedBy": "sb",
                    "status": "COMPLETED",
                    "subtasks": "0",
                    "successRows": "7",
                    "updateTime": "2018-12-23T17:24:46Z"
                },
```

```
                    {
                        "assetName": "MTR",
                        "assetType": "MTT",
                        "duration": "10",
                        "endTime": "2018-12-23T17:23:59Z",
                        "errorMessage": "",
                        "errorRows": "0",
                        "location": "Default",
                        "rowsProcessed": "7",
                        "runId": "3",
                        "runtimeEnv": "01001Q25000000000002",
                        "runtimeEnvName": "tf_runtime_devagent",
                        "startTime": "2018-12-23T17:23:49Z",
                        "startedBy": "sb",
                        "status": "COMPLETED",
                        "subtasks": "0",
                        "successRows": "7",
                        "updateTime": "2018-12-23T17:24:00Z"
                    }
                ]
            }
        }
    }
```

The HTTP status code is **200 OK**.

GET example using query parameters

The following example shows a taskflow status request that uses run ID, run status, and row limit as query parameters:

```
GET https://pod.ics.dev:444/active-bpel/services/tf/status?
runId=2026224716632241356 8&runStatus=Success&rowLimit=3
Accept: application/json
INFA-SESSION-ID: 9KA11tLGqxVcGeul8SQBK3
```

If the request is successful, the response format is the same as when we use the path parameter, but within square brackets [ ].

If the request is successful and the taskflow does not contain subtasks, the response includes taskflow status information as shown in the following example:

```
[
    {
        "assetName": "Taskflow1",
        "assetType": "TASKFLOW",
        "duration": "2",
        "endTime": "2018-12-25T15:56:39Z",
        "location": "Default",
        "runId": 262247166322413568,
        "runtimeEnv": "tf_runtime",
        "runtimeEnvName": "",
        "startTime": "2018-12-25T15:56:37Z",
        "startedBy": "sb",
        "status": "SUCCESS",
        "subtasks": "0",
        "updateTime": "2018-12-25T15:56:39Z",
        "errorMessage": {},
        "subtaskDetails": {
            "details": {
                "tasks": []
            }
        }
    }
]
```

The HTTP status code is **200 OK**.

GET example without any parameter

The following example shows a taskflow status request without a path parameter or query parameter:

```
<Informatica Intelligent Cloud Services URL>/active-bpel/services/tf/status
```

The response contains status information of the last 10 taskflows that were run in the last 24 hours.

GET example of a running taskflow

If you use the status resource to get the status of a running taskflow, the response includes taskflow status information with the `endTime` as `null` without quotes as shown in the following example:

```
{
    "assetName": "waitStatus",
    "assetType": "TASKFLOW",
    "duration": 27,
    "endTime": null,
    "errorMessage": "",
    "location": "Default",
    "runId": 737194191850250240,
    "runtimeEnv": "taskflow-preview-usw1-r40-app02.infacloudops.net:4430",
    "runtimeEnvName": "",
    "startedBy": "sb",
    "startTime": "2022-07-28T06:26:32Z",
    "status": "RUNNING",
    "subtasks": 0,
    "updateTime": "2022-07-28T06:26:32Z",
    "subtaskDetails": {
        "details": {
            "tasks": []
        }
    }
}
```

After the taskflow is complete, the correct `endTime` value is displayed.

Publishing taskflows in bulk

You can use the publish resource to publish a single taskflow or multiple taskflows simultaneously and save time.

The taskflows are published in the same order as given in the request payload. You can publish a maximum of 199 taskflows at a time.

1. In a REST client, use a POST request with the following URL:

   ```
   <Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/publish
   ```

   For example: `https://na1.dm-us.informaticacloud.com/active-bpel/asset/v1/publish`

2. Add the following headers:

Key	Value
Accept	application/vnd.api+json
Content-Type	application/vnd.api+json
INFA-SESSION-ID	Use the login resource to get the session ID. For more information about the login resource, see *REST API Reference*.

3. In the body, use the assetPaths attribute to specify one or more locations and names of the taskflows that you want to publish.

Use the following format:

```
{
  "data": {
    "type": "publish",
    "attributes": {
      "assetPaths": [
                        "Explore/<location-of-taskflow1>/<name-of-
taskflow1>.TASKFLOW.xml",
                        "Explore/<location of taskflow2>/<name-of-
taskflow2>.TASKFLOW.xml",
                        "Explore/<location-of-taskflown>/<name-of-
taskflown>.TASKFLOW.xml"
                    ]
    }
  }
}
```

4. Send the POST request.

   You see a publish ID and a success or failure response. If the request fails, the response also gives the error details.

   The following snippet shows a sample response:

```
{
    "data": {
        "type": "publish",
        "id": "690487059198201856",
        "attributes": {
            "jobState": "NOT_STARTED",
            "jobStatusDetail": {},
            "startedBy": "autouser_pod1",
            "startDate": "2022-03-21T09:09:04.000+0000",
            "totalCount": 1,
            "processedCount": 0,
            "assetPaths": [
                "Explore/Pavan/BulkPublishApi/BPTaskflow1.TASKFLOW.xml"
            ]
        }
    },
    "links": {
        "self": https://na1.dm-us.informaticacloud.com/active-bpel/asset/v1/
publish/690487059198201856,
        "status": https://na1.dm-us.informaticacloud.com/active-bpel/asset/v1/
publish/690487059198201856/Status
    }
}
```

   The publish ID in this example is 690487059198201856.

5. To view information about the publish status and publish job, use a GET request with the following URLs:

URL	Description
<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/publish/<publishId>/Status	Displays the publish status.
<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/publish/<publishId>	Displays the publish job information.

Unpublishing taskflows in bulk

You can use the unpublish resource to unpublish a single taskflow or multiple taskflows simultaneously and save time.

The taskflows are unpublished in the same order as given in the request payload. You can unpublish a maximum of 199 taskflows at a time.

1. In a REST client, use a POST request with the following URL:

   `<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/unpublish`

   For example: `https://na1.dm-us.informaticacloud.com/active-bpel/asset/v1/unpublish`

2. Add the following headers:

Key	Value
Accept	application/vnd.api+json
Content-Type	application/vnd.api+json
INFA-SESSION-ID	Use the login resource to get the session ID. For more information about the login resource, see *REST API Reference*.

3. In the body, use the assetPaths attribute to specify one or more locations and names of the taskflows that you want to unpublish.

   Use the following format:

```
{
  "data": {
    "type": "unpublish",
    "attributes": {
      "assetPaths": [
                        "Explore/<location-of-taskflow1>/<name-of-
taskflow1>.TASKFLOW.xml",
                        "Explore/<location of taskflow2>/<name-of-
taskflow2>.TASKFLOW.xml",
                        "Explore/<location-of-taskflown>/<name-of-
taskflown>.TASKFLOW.xml"
                    ]
    }
  }
}
```

4. Send the POST request.

   You see an unpublish job ID and a success or failure response. If the request fails, the response also gives the error details.

   The following snippet shows a sample response:

```
{
    "data": {
        "type": "unpublish",
        "id": "7645874567965431",
        "attributes": {
            "jobState": "NOT_STARTED",
            "jobStatusDetail": {},
            "startedBy": "autouser_pod1",
            "startDate": "2022-03-21T09:09:04.000+0000",
            "totalCount": 1,
            "processedCount": 0,
            "assetPaths": [
                "Explore/Pavan/BulkUnpublishApi/BPTaskflow1.TASKFLOW.xml"
```

```
            ]
        }
    },
    "links": {
        "self": https://na1.dm-us.informaticacloud.com/active-bpel/asset/v1/
unpublish/7645874567965431,
        "status": https://na1.dm-us.informaticacloud.com/active-bpel/asset/v1/
unpublish/7645874567965431/Status
    }
}
```

The unpublish job ID in this example is 7645874567965431.

5. To view information about the unpublish status and unpublish job, use a GET request with the following URLs:

URL	Description
<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/unpublish/<unpublishId>/Status	Displays the unpublish status.
<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/unpublish/<unpublishId>	Displays the unpublish job information.

Customer Managed Secure Agent group REST API

You can use the REST API to run, stop, and monitor taskflows directly on a Customer Managed Secure Agent group, without routing the request through IDMC. Use these APIs to get taskflow status when the agent group is disconnected from IDMC.

Taskflows REST API resources normally send requests to the IDMC URL. However, the Customer Managed Secure Agent group REST API sends requests directly to the Secure Agent in the agent group.

Use the Customer Managed Secure Agent group REST API to perform the following tasks:

- Authenticate API requests
- Run a taskflow
- Stop a taskflow instance
- Resume a suspended taskflow
- Restart a taskflow
- Monitor taskflow status

For information about creating and configuring a Customer Managed Secure Agent group, see the Administrator help.

Authenticating API requests to a Customer Managed Secure Agent group

To call the taskflow REST API resources on a Customer Managed Secure Agent group, authenticate with the Secure Agent and get a JSON web token (JWT). Include this token in the **Authorization** header of each subsequent request.

Authenticate with a separate password that you set for API and command line access. This password is distinct from your IDMC password and never confirms your identity against IDMC. The Secure Agent validates this password locally, so authentication works even when the agent group is disconnected from IDMC.

For more information, see *Rest API Reference* and *Runtime Environments* in the Administrator help.

POST request

To get a JWT, use the following URI:

```
POST https://<Secure Agent host>:<port>/rm/api/v2/login
Content-Type: application/json

{
  "username": "<IDMC user name>",
  "password": "<second password>"
}
```

The default port is 9443.

Example:

```
curl --location '<URL>' \
--header 'Content-Type: application/json' \
--data-raw '{
   "username": "<user name>",
   "password": "<password>"
}'
```

POST response

The API returns a JWT if the credentials are valid, or an error object if the request fails.

If the credentials are valid, the response is similar to the following example:

```
{
  "token": "eyJhbGciOiJSUzI1NiIsInR5cCI6IkpXVCJ9...",
  "expiresIn": 900
}
```

The response contains the following fields:

Field	Type	Description
token	String	JWT to include in the RM-USER-TOKEN header of subsequent requests.
expiresIn	Integer	Number of seconds until the token expires.

Note: By default, the token expires after 15 minutes. You can request for a new token before the current one expires. There's no session renewal endpoint. Hence, you need to call this resource again to generate a new token.

Running a taskflow on a Customer Managed Secure Agent group

Use the REST API to run a taskflow directly on a Customer Managed Secure Agent group. Use this resource to trigger taskflows from a third-party scheduler or an orchestration tool without an IDMC connection.

You can run a taskflow on a Customer Managed Secure Agent group by using the following methods:

- Schedule: The Secure Agent starts the taskflow on the deployed schedule.
- REST API: Call the following endpoint directly on the agent:

```
/active-bpel/rt/<taskflow_name>
```

Before you run a taskflow on a Customer Managed Secure Agent group, verify the following prerequisites:

- You deployed the taskflow to the Customer Managed Secure Agent group, and the taskflow and its assets are synchronized and activated.
- You obtained a JWT.

POST request

To run a taskflow, use the following URI:

```
POST https://<Secure Agent host>:<port>/active-bpel/rt/<taskflow_name>
RM-USER-TOKEN: <token>
Content-Type: application/json

{
  "taskId": "<taskflow task ID>",
  "parameters": {
    "<parameter name>": "<parameter value>"
  }
}
```

The request body contains the following fields:

Field	Type	Description
taskId	String	Required. The ID of the deployed taskflow task to run.
parameters	Object	Input parameters to pass to the taskflow, as name-value pairs.

Example:

```
curl --location --request POST '<URL>' \
--header 'RM-USER-TOKEN: <token>' \
--header 'Content-Type: application/json' \
--data-raw '{
   "taskId": "<taskflow task ID>",
   "parameters": {
      "<parameter name>": "<parameter value>"
   }
}'
```

POST response

The API returns an run ID if the agent accepts the request, or an error object if the request fails.

```
{
  "runId": "<run ID>"
}
```

Example:

```
{
    "runId": "2019XX"
}
```

A **202 Accepted** response means the agent accepted the job. It doesn't mean that the taskflow completed. Use the execution ID to check the run status. For more information, see "Monitoring taskflow status on a Customer Managed Secure Agent group" on page 541.

Stopping a taskflow run on a Customer Managed Secure Agent group

Use the REST API to stop a taskflow run that is in progress on a Customer Managed Secure Agent group.

Before you stop a run, verify the following prerequisites:

- You obtained a JWT. For more information, see "Authenticating API requests to a Customer Managed Secure Agent group" on page 537.
- You have the run ID of the taskflow run. To find the run ID, use the status resource. For more information, see "Monitoring taskflow status on a Customer Managed Secure Agent group" on page 541.

PUT request

To stop a running taskflow, use the following URI:

```
PUT https://<Secure Agent host>:<port>/rm/active-bpel/restadmin/processes/<run ID>/
terminate?isManual=true
RM-USER-TOKEN: <token>
```

The request body contains the following fields:

Parameter	Type	Description
<run ID>	Number	The ID of the taskflow run to stop.
isManual	Boolean	Required. Set to **true**.

PUT response

The API returns the HTTP status code 204 and an empty response body if the agent accepts the request. If the request fails, the response contains the same error information as the corresponding Data Integration resource.

Resuming a suspended taskflow run on a Customer Managed Secure Agent group

Use the REST API to resume a taskflow run that is suspended on a Customer Managed Secure Agent group.

To find suspended runs, query the status resource and filter by the **Suspended** status. For more information, see "Monitoring taskflow status on a Customer Managed Secure Agent group" on page 541.

PUT request

To resume a suspended taskflow run, use the following URI:

```
PUT https://<Secure Agent host>:<port>/rm/active-bpel/restadmin/processes/<run ID>/resume
RM-USER-TOKEN: <token>
```

In the URI, <run ID> is the ID of the taskflow run to resume.

PUT response

The API returns the HTTP status code 204 and an empty response body if the agent accepts the request. The run status changes from **Suspended** to **Running**.

If the run isn't suspended, the request has no effect on the run.

Restarting a taskflow run on a Customer Managed Secure Agent group

Use the REST API to restart a taskflow run on a Customer Managed Secure Agent group. The agent starts a new run of the taskflow. The original run doesn't change.

You can restart a suspended taskflow instance but not a taskflow instance that's still running.

POST request

To restart a taskflow run, use the following URI:

```
POST https://<Secure Agent host>:<port>/rm/active-bpel/restadmin/processes/<run ID>/
restartasnew
RM-USER-TOKEN: <token>
```

In the URI, <run ID> is the ID of the taskflow instance to restart.

POST response

The API returns the HTTP status code 204 and an empty response body if the agent accepts the request. The response doesn't include the run ID of the new run. To find the new run, use the status resource. For more information, see "Monitoring taskflow status on a Customer Managed Secure Agent group" on page 541.

If the original run is still running, the request fails with the same error that Data Integration returns.

Monitoring taskflow status on a Customer Managed Secure Agent group

Use the status resource to monitor a taskflow running on a Customer Managed Secure Agent group. The request and response match those for the status resource described in Monitoring taskflow status with the status resource. The only difference is that you send the request directly to the agent, not to your IDMC URL.

GET request for a single run

To get the status of one taskflow run, use the following URI:

```
GET https://<Secure Agent host>:<port>/rm/active-bpel/services/tf/status/<run ID>
RM-USER-TOKEN: <token>
```

To include details about each subtask, add `?subtaskDetails=yes` to the URI.

You can include the following optional headers. The headers apply only to requests for a single run.

Header	Description
Max-Retry	Number of times the agent retries the lookup if it doesn't find the run. Maximum value is 5.
Retry-Interval	Number of seconds between retries. Maximum value is 20.

For more information about the status parameters, see "Monitoring taskflow status with the status resource" on page 527

Query this resource directly on the agent to get real-time status when the agent group is disconnected from IDMC. Taskflow runs that start while the agent group is disconnected don't appear in Monitor until the agent group reconnects and synchronizes run history. Synchronization time depends on the number of runs that occurred during the disconnection.

You can't perform live job actions, such as stop or restart, against runs from Monitor in IDMC while the agent group is disconnected. To stop a run while disconnected, use the agent-side stop resource. For more information, see "Stopping a taskflow run on a Customer Managed Secure Agent group" on page 540.

GET request for suspended runs

To list the taskflow runs that are suspended, use the following URI:

```
GET https://<Secure Agent host>:<port>/rm/active-bpel/services/tf/status?
runStatus=Suspended
RM-USER-TOKEN: <token>
```

You can also use the **startTime**, **endTime**, **offset**, **rowLimit**, and **subtaskDetails** query parameters. These parameters work the same way as they do in "Monitoring taskflow status with the status resource" on page 527. The **rowLimit** value can range from 10 through 50.

A run doesn't appear in this list after you resume it or stop it.

GET response

A request for a single run returns one status object. A request for suspended runs returns an array of status objects. If no run matches, the response is HTTP status code 200 with the following body:

```
{
  "status": "No status available"
}
```

The agent returns the HTTP status code 400 if the run ID isn't valid, and 500 if the agent can't read the run data. The response body contains the **reason**, **code**, **detail**, and **message** fields.

Rules and Guidelines

Consider the following rules and guidelines when you monitor taskflow runs on a Customer Managed Secure Agent group:

- Monitor shows limited information about taskflow runs on a Customer Managed Secure Agent group. To check run status, use the status resource.
- The agent deletes run data after 30 days. To keep the data, query or export it before then.

Validating expressions

Use this resource to validate expressions.

POST Request

To validate an expression, use the following URI:

```
/saas/api/v2/expression/validate
```

Use the following attributes in the request body:

Field	Type	Required	Description
expr	String	Yes	The expression to validate.
connectionId	String	Yes	Connection ID.
objectName	String	Yes	Name of the source or target object.
isSourceType	Boolean	Yes	Whether the expression is for a source object. Values are True or False.

If the expression is valid, the response returns a message that says the expression is valid. If the expression is not valid, the response returns an error.

POST Example

To validate an expression, you might use the following request:

```
POST <serverURL>/api/v2/expression/validate
Content-Type: application/json
Accept: application/json
INFA-SESSION-ID: <SessionId>
   {
   "@type":"expressionValidation",
   "expr":"REPVERSION",
   "connectionId":"0000010B000000000004",
   "objectName":"OPB_REPOSIT",
   "isSourceType":true
   }
```

Data Integration REST API supplemental information

This section includes supplemental information such as connector data types and a mapping of connection REST API attributes to user interface fields.

Connector data types

When you submit a request for connector metadata, data type is included in the response. Data types for connector attributes are returned in REST API responses using a numeric value.

The following example shows a response with the type value of 2:

```
{
  "name": "database",
  "label": "",
  "id": "",
  "value": "",
  "type": 2,
  "isMandatory": true,
  "visible": false,
  "list": []
},
```

The type value of 2 means the database attribute can only contain alphabetic characters.

The following table lists the numeric values that might be included in the response and the corresponding data type:

Value	Data Type	Description
1	NUMERIC_TYPE	Attribute value can only contain numbers.
2	ALPHABET_TYPE	Attribute value can only contain alphabetic characters.
3	NUMERIC_TYPE/ ALPHABET_TYPE	Attribute value can only contain numbers or alphabetic characters.
4	SYMBOLS_TYPE	Attribute value can only contain symbols.

Value	Data Type	Description
5	NUMERIC_TYPE/ SYMBOLS_TYPE	Attribute value can only contain numbers and symbols.
6	ALPHABET_TYPE/ SYMBOLS_TYPE	Attribute value can only contain alphabetic characters and symbols.
7	NUMERIC_TYPE/ ALPHABET_TYPE/ SYMBOLS_TYPE	Attribute value can only contain alphabetic characters, numbers, and symbols.
8	LIST_TYPE	Attribute value can only contain values from a predefined list.
9	NUMERIC_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only numbers.
10	ALPHABET_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only numbers.
11	NUMERIC_TYPE/ ALPHABET_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only alphabetic characters and numbers.
12	SYMBOLS_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only symbols.
13	NUMERIC_TYPE/ SYMBOLS_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only numbers and symbols.
14	ALPHABET_TYPE/ SYMBOLS_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only alphabetic characters and symbols.
15	NUMERIC_TYPE/ ALPHABET_TYPE/ SYMBOLS_TYPE/ LIST_TYPE	Attribute value can only contain values from a predefined list and the value contains only alphabetic characters, numbers, and symbols.
16	BOOLEAN	Attribute value is a boolean.
32	PASSWORD	Attribute value is a password.

For more information about requesting connector metadata, see "Connectors" on page 378.

Connection user interface fields to REST API attributes mapping

Some connection field names in the user interface do not intuitively map to corresponding REST API attribute names in the connection resource. Additionally, some attribute names used for REST API GET and POST

methods for the connection resource do not match the attribute names used in the REST API response that populates the values shown in the user interface.

The following tables map user interface fields with attributes used for REST API GET and POST calls and the REST API response to the user interface, where the correlation between these fields might be confusing.

Connection	UI Field Name	REST API GET and POST Attribute Name	Response to UI Attribute Name
All connections	Runtime Environment	runtimeEnvironmentId	agentGroupId
CSV Flat File	Directory	database	dirName
FTP and SFTP	Directory	database	dirName
Microsoft Access	Data Source Name	database	database
Microsoft SQL Server	SQL Server Version	type	subType
Oracle	Service Name	database	database
SAP IDoc Reader	Destination Entry	database	database
SAP IDoc Writer and SAP RFC/ BAPI	Connection String	database	database
Web Service Consumer	Endpoint URL	serviceUrl	serviceUrl

CHAPTER 6

Cloud Data Integration for PowerCenter (CDI-PC) REST API

Use CDI-PC REST API resources to register, deregister, get domain status, reconcile, and delete a specified domain in IDMC.

The REST API resources in this section apply specifically to the Cloud Data Integration for PowerCenter (CDI-PC) service.

When you use CDI-PC REST API resources, note the following details:

- Use APIs in the following format:

  ```
  <dms base url>/dms/public/api/v1/domains/{ldoId}/reconcile
  ```

- Use the DMS base URL to construct your API requests according to your deployment region and service endpoint. The **dms base url** is the dedicated public endpoint for the Domain Management Service (DMS) API. Use this URL specifically for making API calls to the DMS. For example: `https://na1-idms.dm-us.informaticacloud.com3/dms (NA West1 AWS)`

For different POD availability and networking, see POD Availability and Networking.

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Login

Use the login resource to log in to Intelligent Data Management Cloud to use CDI-PC REST API resources.

The login response includes the session ID and base URL that you need to include in the REST API calls that you make during the session.

Use the login API to obtain the `IDS-SESSION-ID`. You will need this ID to authorize all other IDMC API calls.

For more information about the login API, see Loginon page 199.

Register a domain

Use a POST request to register a CDI-PC domain in IDMC.

Note: You can't register a Kerberos authenticated CDI-PC domain using REST API. If the domain uses Kerberos authentication, log in to IDMC service and then register the domain in the CDI-PC home page.

POST request

Use the following POST request to register a CDI-PC domain:

```
POST /public/api/v1/domains
```

Parameters

To register a CDI-PC domain in IDMC using the REST API, provide a request with specific parameters that detail the domain's configuration and authentication credentials.

The following example demonstrates the structure and content of a typical request to register domain API:

```
POST /public/api/v1/domains
Content-Type: application/json
IDS-SESSION-ID: <your-session-token>

{
 "domainAuthInfo": {
 "username": "string",
 "password": "string",
 "namespace": "string"
 },
 "domainName": "string",
 "domainDisplayName": "string",
 "domainHost": "string",
 "domainPort": 1,
 "description": "string",
 "kerberos": false,
 "environmentType": "NONE",
 "secureAgentGroup": {
 "agentGroupSaasId": "string"
 }
}
```

The following table describes the parameters of the header component:

Attribute	Type	Description
IDS-SESSION-ID	String	The `IDS-SESSION-ID` attribute in the header that holds the session ID value. If the organization uses the session ID authentication type, session-based authentication is used. The session ID expires after 30 minutes of inactivity. A grace period of up to 2 minutes might be included to account for any network or unexpected delays.

Request body

The following table describes the attributes of the request body:

Attribute	Type	Description
domainAuthInfo	String	Contains the authentication details for the domain. - `username`: Username for authenticating access to a specific domain. It identifies the user within the domain's authentication system. - `password`: The corresponding password for the username. - `namespace`: The namespace associated with the domain authentication.
domainName	String	The name of the CDI-PC domain that you want to register.
domainDisplayName	String	A display name for the CDI-PC domain. By default, the display name is the same as the domain name. You can update the name if needed. The name can be different from the domain name, but the name must be unique in the organization.
domainHost	String	Host name or IP address of the gateway node machine.
domainPort	Integer	HTTPS port number used to connect to the domain host
description	String	A brief description of the domain and its purpose.
kerberos	Boolean	A boolean flag indicating whether Kerberos authentication is enabled (`true`) or not (`false`).
environmentType	String	Specifies the environment type of the domain, such as `NONE`, `DEV`, `QA`, or `PROD`.
secureAgentGroup	String	Contains information about the Secure Agent group associated with the domain.
agentGroupSaasId	String	The SaaS ID of the Secure Agent group used for managing data integration tasks.

Responses

The following table describes the common responses to the register API request:

Field	Description	Sample example
200	Success response. **Note:** The response includes a Logical Domain Object ID (`ldoId`), which is the unique identifier that IDMC assigns to a domain upon registration. You must include this `ldoId` in the URL for all future API requests for this domain. Use `ldoId` to track the domain through various lifecycle actions, such as deregistration and reconciliation.	<pre>{ "message": "string", "domainVersion": "string", "latestAvailableVersion": "string", "applyDeadline": 0, "domainVersionState": "SUPPORTED", "ldoId": "string", "pdoId": "string" }</pre>

400	Bad request. Can be a field or format issue, such as an invalid character or incorrect string length.	<pre>{
		    "result": {
		        "output": {
		        "errorInfo": {
		            "error": {
		                "code": "string",
		                "message": "string",
		                "debugMessage": "string",
		                "requestId": "string",
		                "details": [
		                "errorContext": {
		                    "component": "string",
		                    "componentId": "string",
		                    "sanitizedLogDirectoryPaths": string
		                }
		            }
		        }
		    }
		}</pre>

Field	Description	Sample example
401	Authentication issue. For example, invalid credentials or invalid session IDs.	For invalid credentials or invalid session ID, you might see responses,such as `Exception encountered while processing JWT` or `Unauthorized request error`.

500	Internal server error when an unexpected condition is encountered.	<pre>{
		  "result": {
		  "output": {
		  "status": "string",
		  "message": "string",
		  "data": {}
		  },
		  "errorInfo": {
		  "error": {
		  "code": "string",
		  "message": "string",
		  "debugMessage": "string",
		  "requestId": "string",
		  "details": [
		  {
		  "code": "string",
		  "message": "string",
		  "debugMessage": "string"
		  }
		  ],
		  "errorContext": {
		  "component": "string",
		  "componentId": "string",
		  "sanitizedLogDirectoryPaths": [
		  "string"
		  ]
		  }
		  }</pre>

Get domain status

Use a GET request to retrieve the real-time status of a CDI-PC domain.

GET request

Use the following GET request to check if a domain is registered and is online:

```
GET /public/api/v1/domains/{ldoId}
```

The following table describes the path parameter component:

Attribute	Type	Description
ldoId	String	Unique identifier assigned to a Logical Domain Object within an organization. Replace `ldoId` with the actual ID of the domain you want to reconcile.

Responses

The API returns a JSON object with the following boolean fields that describe the domain's current state:

- isRegistered. Confirms if the domain is successfully registered.
- isOnline. Shows if the domain is currently online and accessible.

- isObsolete. Indicates if the domain is marked as obsolete.

Reconcile a domain

Use a PATCH request to reconcile a specified domain in IDMC.

PATCH request

Use the following PATCH request to reconcile a CDI-PC domain:

```
PATCH /public/api/v1/domains/{ldoId}/reconcile
```

Note: The URL paths must include the complete Domain Management Service path for the respective POD. Prefix the request with this path.

Parameters

When you reconcile a domain using a REST API, the request typically includes parameters that identify the domain and provide the necessary information to synchronize its state with a source system.

The following example demonstrates the structure and content of a typical request to reconcile API:

```
PATCH /public/api/v1/domains/{ldoId}/reconcile HTTP/1.1
Content-Type: application/json
IDS-SESSION-ID: <your-session-token>

{
  "domainAuthInfo": {
    "username": "admin",
    "password": "secretPassword",
    "namespace": "Native"
  }
}
```

The following table describes the header and the path parameter components:

Attribute	Type	Description
IDS-SESSION-ID	String	The `IDS-SESSION-ID` attribute in the header that holds the session ID value. If the organization uses the session ID authentication type, session-based authentication is used. The session ID expires after 30 minutes of inactivity. A grace period of up to 2 minutes might be included to account for any network or unexpected delays.
ldoId	String	Unique identifier assigned to a Logical Domain Object within an organization. Replace `ldoId` with the actual ID of the domain you want to reconcile.

Request body

The request body requires a `domainAuthInfo` object for authentication purposes.

```
{ "domainAuthInfo": {
    "username": "string",
    "password": "string",
    "namespace": "string"
    }
}
```

The following table describes the fields of `domainAuthInfo`:

Field	Type	Description
username	String	The username for authenticating access to a specific domain. It identifies the user within the domain's authentication system.
password	String	The corresponding password for the username.
namespace	String	The namespace associated with the domain authentication.

Responses

The following table describes the common responses to the reconcile API request:

Field	Description
200	Success response.
400	Bad request. Can be a field or format issue, such as an invalid character or incorrect string length.
401	Authentication issue. For example, invalid credentials or invalid session IDs.
500	Internal server error when an unexpected condition is encountered.

Delete a domain

Use a PATCH request to delete a specified domain from IDMC.

PATCH request

Use the following PATCH request to delete a CDI-PC domain:

```
PATCH /public/api/v1/domains/{ldoId}/delete
```

Note: The URL paths must include the complete Domain Management Service path for the respective POD. Prefix the request with this path.

Parameters

The following example demonstrates the structure and content of a typical request to delete domain API:

```
PATCH /public/api/v1/domains/{ldoId}/delete
Content-Type: application/json
IDS-SESSION-ID: <your-session-token>
```

The following table describes the header and the path parameter components:

Attribute	Type	Description
IDS-SESSION-ID	String	The `IDS-SESSION-ID` attribute in the header that holds the session ID value. If the organization uses the session ID authentication type, session-based authentication is used. The session ID expires after 30 minutes of inactivity. A grace period of up to 2 minutes might be included to account for any network or unexpected delays.
ldoId	String	Unique identifier assigned to a Logical Domain Object within an organization. Replace `ldoId` with the actual ID of the domain you want to reconcile.

Responses

The following table describes the common responses to the delete API request:

Field	Description
204	Successful deletion of domain.
400	Invalid request.
500	Internal server error when an unexpected condition is encountered.

Deregister a domain

Use a PATCH request to deregister a CDI-PC domain from IDMC.

PATCH request

Use the following PATCH request to deregister a CDI-PC domain:

```
PATCH /public/api/v1/domains/{ldoId}/deregister
```

Note: The URL paths must include the complete Domain Management Service path for the respective POD. Prefix the request with this path.

Parameters

To deregister a CDI-PC domain in IDMC using the REST API, provide a request with specific parameters that detail the domain's configuration and authentication credentials.

The following example demonstrates the structure and content of a typical request to deregister domain API:

```
PATCH /public/api/v1/domains/{ldoId}/deregister
Content-Type: application/json
Accept: */*
IDS-SESSION-ID: <your-session-token>

PATCH /public/api/v1/domains/{ldoId}/deregister

{
  "domainAuthInfo": {
    "username": "admin",
    "password": "secretPassword",
    "namespace": "Native"
  }
```

The following table describes the parameters of the header component:

Attribute	Type	Description
IDS-SESSION-ID	String	The `IDS-SESSION-ID` attribute in the header that holds the session ID value. If the organization uses the session ID authentication type, session-based authentication is used. The session ID expires after 30 minutes of inactivity. A grace period of up to 2 minutes might be included to account for any network or unexpected delays.
ldoId	String	Unique identifier assigned to a Logical Domain Object within an organization. Replace `ldoId` with the actual ID of the domain you want to reconcile.

Request body

The request body requires a `domainAuthInfo` object for authentication purposes.

```
{ "domainAuthInfo": {
    "username": "string",
    "password": "string",
    "namespace": "string"
    }
}
```

The following table describes the fields of `domainAuthInfo`:

Field	Type	Description
username	String	The username for authenticating access to a specific domain. It identifies the user within the domain's authentication system.
password	String	The corresponding password for the username.
namespace	String	The namespace associated with the domain authentication.

Responses

The following table describes the common responses to the deregister API request:

Field	Description	Sample example
200	Success response.	<pre>{ "message": "string" }</pre>

400	Bad request. Can be a field or format issue, such as an invalid character or incorrect string length.	<pre>{
		  "result": {
		  "output": {
		  "status": "string",
		  "message": "string",
		  "data": {}
		  },
		  "errorInfo": {
		  "error": {
		  "code": "string",
		  "message": "string",
		  "debugMessage": "string",
		  "requestId": "string",
		  "details": [
		  {
		  "code": "string",
		  "message": "string",
		  "debugMessage": "string"
		  }
		  ],
		  "errorContext": {
		  "component": "string",
		  "componentId": "string",
		  "sanitizedLogDirectoryPaths": [
		  "string"
		  ]
		  }
		  }
		  }
		  }</pre>

Field	Description	Sample example
401	Authentication issue. For example, invalid credentials or invalid session IDs.	For invalid credentials or invalid session ID, you might see responses,such as `Exception encountered while processing JWT` or `Unauthorized request error`.
500	Internal server error when an unexpected condition is encountered.	`{ "result": { "output": { "status": "string", "message": "string", "data": {} }, "errorInfo": { "error": { "code": "string", "message": "string", "debugMessage": "string", "requestId": "string", "details": [{ "code": "string", "message": "string", "debugMessage": "string" }], "errorContext": { "component": "string", "componentId": "string", "sanitizedLogDirectoryPaths": ["string"] } } } }`

CHAPTER 7

Data Ingestion and Replication REST API

The REST API resources in this section apply specifically to Data Ingestion and Replication.

The section includes resources for jobs in a standard Secure Agent group and resources for jobs in a Customer Managed runtime environment.

Use the REST APIs to create and manage application ingestion and replication, database ingestion and replication, file ingestion and replication, and streaming ingestion and replication tasks.

When you use the REST API resources, note the following rules:

- All APIs use the JSON format for request and response payloads.
- If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.
- For resources in a standard Secure Agent group, requests require an IDS-SESSION-ID or a similar session token in the request headers. The base URL and URI vary by ingestion type and are based on the serverUrl value in the login response. For the base URL, URI, header format, and examples, see the topics for each ingestion type.
- For resources in a Customer Managed runtime environment, log in to the Secure Agent API to get a token. For more information, see Customer Managed REST APIs for Data Ingestion and Replication.

Logging in

Before you call any Data Ingestion and Replication REST API resource, log in to your organization to get a session ID and a server URL.

Use the login resource of the platform REST API version 2. For the request and response fields, see "Logging in" on page 84.

To log in, send the following request:

```
POST https://<cloud provider>-<region>.informaticacloud.com/ma/api/v2/user/login
Content-Type: application/json
Accept: application/json

{
    "@type": "login",
    "username": "<IDMC user name>",
    "password": "<IDMC password>"
}
```

Save the following values from the response:

Field	Description
icSessionId	The session ID. Send this value in the IDS-SESSION-ID header of every later request.
serverUrl	The server URL of your organization. Use it to build the base URL for your requests.

Database and Application Ingestion and Replication REST API

The REST API resources in this section apply to both database ingestion and replication and application ingestion and replication tasks in the Data Ingestion and Replication service.

Both task types use the same base URL, URI, request structure, and headers. To specify the task type, see "Create a database or application ingestion and replication task" on page 578.

Base URL and URI

To call the API, use the base URL and URI:

- Base URL. Use the serverUrl value from the login response to build the base URL. Add *-ing* to the end of the first part of the host name (*na4* becomes *na4-ing*). For example, if serverUrl is *https://na4.dm-us.informaticacloud.com*, the base URL *<baseUrl>* is *https://na4-ing.dm-us.informaticacloud.com*.
- URI. Use the following URI for all API calls, where <API name> is the resource that you call, such as task/create:

```
/dbmi/public/api/v2/<API name>
```

The full URL for a call is the base URL followed by the URI. For example, use the following URL to create a task:

```
https://na4-ing.dm-us.informaticacloud.com/dbmi/public/api/v2/task/create
```

Request header

All requests must include the following header format:

```
<METHOD> <baseUrl>/<URI> HTTP/<HTTP version>
Content-Type: application/json
IDS-SESSION-ID: <IDS_SESSION_ID>
```

Example API call

To create a task, send a POST request as follows:

```
POST https://na4-ing.dm-us.informaticacloud.com/dbmi/public/api/v2/task/create HTTP/1.1
Content-Type: application/json
IDS-SESSION-ID: 123ABC456789defIJK
```

Get a request body for a new task

A create request needs a request body that defines the task. To get a request body, you can either copy the request body of an existing task, or start from the sample task details.

Copy the request body of an existing task

Perform the following tasks to use the request body of an existing task from the user interface:

1. Create and save a task in the user interface.
2. Get the task ID. Use the following request:

   ```
   GET <baseUrl>/dbmi/public/api/v2/task/fetchId?
   taskName={taskName}&projectId={projectId}&folderId={folderId}
   ```

   For more information, see "Get the task ID" on page 625.
3. Get the task details. Use the following request:

   ```
   GET <baseUrl>/dbmi/public/api/v2/task/details?taskId={taskId}
   ```

   For more information, see "Get database or application ingestion and replication task details" on page 648.
4. From the response, copy the `dbmiTask` object, starting from the `type` field.

Start from a sample task

Copy a sample request body from "Sample request body for creating a task" on page 559. In the sample, copy the `dbmiTask` object, starting from the `type` field.

Edit the request body

After you copy the request body, change the task name `general.name`. Then, set the properties that are specific to your source and target. You can remove the properties that you do not need, or send the entire request body. For the property fields and descriptions, see the following topics:

- "Source attributes" on page 581
- "Target attributes" on page 592
- "Runtime attributes" on page 607

To send the request body, see "Create a database or application ingestion and replication task" on page 578.

Sample request body for creating a task

Use these samples as a starting point for the request body when you create a task. Each sample is the response that the task details resource returns for a sample task. The response contains the full task definition in the `dbmiTask` object.

The samples cover the following tasks:

- Application ingestion and replication tasks that read from Salesforce and write to Snowflake.
- Database ingestion and replication tasks that read from Oracle and write to Snowflake.

To create a task from a sample, copy the `dbmiTask` object, starting from the `type` field, and use it as the request body. Update the connection names, the runtime environment, and the project or folder to match your environment.

Application ingestion and replication initial load

Use this sample to create an application ingestion and replication initial load task. The sample task, sf_to_snowflake_full, reads data from Salesforce with the Salesforce Bulk API 2.0 and loads it to Snowflake one time. In the `dbmiTask` object, `general.type` is `initial`.


```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 746231,
            "name": "sf_to_snowflake_full",
            "documentState": "VALID",
            "documentType": "APPMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "3uDIOqah80qbMK3cXAceIp",
                    "parentName": "Default",
                    "parentType": "Project"
                }
            ],
            "description": "",
            "owner": "6r2IItttmU3ibDwPqxnRwb",
            "createdBy": "6r2IItttmU3ibDwPqxnRwb",
            "createdTime": "2026-09-24T05:46:27.000+00:00",
            "accessedTime": "2026-09-24T05:47:24.306+00:00",
            "updateTime": "2026-09-24T05:47:24.306+00:00",
            "dbmiTask": {
                "type": "appmi",
                "general": {
                    "name": "sf_to_snowflake_full",
                    "description": null,
                    "location": "Default",
                    "runtimeEnvironment": "invyaminirh01.informatica.com",
                    "type": "initial"
                },
                "source": {
                    "connection": "AIN_Salesforce",
                    "customProperties": {
                        "salesforce.bulkv2.enable.partitioning": "true",
                        "salesforce.bulkv2.max.parallel.partitions": "5",
                        "salesforce.bulkv2.records.per.partition": "10000",
                        "selectionMode": "RULE_BASED",
                        "ai.fetch.size": "50000",
                        "ai.salesforce.unload.api.type": "bulkv2"
                    },
                    "restartPointForIncrementalLoadTimestamp": null,
                    "schema": "SALESFORCE",
                    "includeViews": null,
                    "replicationSlotName": null,
                    "replicationPlugin": null,
                    "publication": null,
                    "journalName": null,
                    "restartPointForIncrementalLoad": null,
                    "restartPointForIncrementalLoadPosition": null,
                    "cdcTechnique": null,
                    "cdcQueryBasedColumnType": null,
                    "cdcQueryBasedColumnName": null,
                    "cdcQueryBasedDateColumn": null,
                    "cdcQueryBasedTimeColumn": null,
                    "context": null,
                    "accountId": null,
```

```
        "propertyId": null,
        "viewId": null,
        "pathToReportConfigurationFile": null,
        "product": null,
        "services": null,
        "outputType": null,
        "salesforceAPI": "bulkv2",
        "fetchSize": "50000",
        "fetchSizeForInitialLoad": null,
        "fetchSizeForIncrementalLoad": null,
        "startDate": null,
        "endDate": null,
        "cdcIntervalDays": null,
        "cdcIntervalHours": null,
        "cdcIntervalMins": null,
        "extractNonDefaultFields": null,
        "includeArchivedAndDeletedRows": null,
        "includeBase64Fields": null,
        "maximumBase64BodySize": null,
        "batchSize": null,
        "mid": null,
        "readerInputIsPersisted": null,
        "readerHistoricalCacheUseCloud": null,
        "lobsEnabled": null,
        "unloadFlashbackDisabled": null,
        "enableAlternateSource": null,
        "alternateSourceId": null,
        "cdcStagingMigration": null,
        "cdcStagingMigrationTasks": null,
        "jdbcPartitioningTechnique": null,
        "sourceMaxParallelPartitions": null,
        "unloadHelperThreadCount": null,
        "readEventBatchSize": null,
        "readerHelperThreadCount": null,
        "salesforceBulkV2Partitioning": "true",
        "salesforceBulkV2RecordsPerPartition": "10000",
        "salesforceBulkV2MaxParallelPartitions": "5",
        "workdayReplicationType": null,
        "workdayReportsNumber": null,
        "workdayReportName": null,
        "workdayReportsConfigFile": null,
        "oracleFusionInterfaceType": null,
        "oracleFusionModuleName": null,
        "oracleFusionEnableChildObjects": null,
        "formattedStartDate": "",
        "formattedEndDate": "",
        "selectionRules": [
            {
                "include": "Custom_all__c"
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "INFORMATION_SCHEMA",
        "outputFormat": "CSV",
        "fileCompressionType": "None",
        "parquetFormat": "true",
        "fixedDirectoryForEachTable": "false",
        "renamingRules": [],
        "dataTypeRules": [],
        "stage": "gkn",
        "bucket": "",
        "directory": "",
        "addBeforeImages": "false",
        "useTableNameAsTopicName": "false",
        "includeSchemaName": "false",
        "asyncWrite": "true",
        "writerSnowflakeIngestionMethod": "",
        "customProperties": {
```

```
                        "targetIdentifiersEnableCaseTransformation": "false",
                        "auditColumnsPrefix": "INFA_",
                        "targetBucket": "",
                        "targetDirectory": "",
                        "writerSnowflakeIngestionMethod": ""
                    }
                },
                "runtimeOptions": {
                    "numberOfRowsInOutputFile": null,
                    "fileExtensionBasedOnFileType": null,
                    "applyCycleChangeLimit": null,
                    "applyCycleIntervalDays": null,
                    "applyCycleIntervalHours": null,
                    "applyCycleIntervalMins": null,
                    "applyCycleIntervalSecs": null,
                    "lowActivityFlushHours": null,
                    "lowActivityFlushMins": null,
                    "checkpointAllRows": null,
                    "checkpointEveryCommit": null,
                    "checkpointRowCount": null,
                    "checkpointFrequencySecs": null,
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": null,
                    "customProperties": {}
                },
                "replicationRules": {
                    "source": "SALESFORCE",
                    "target": "INFORMATION_SCHEMA",
                    "overrides": {
                        "tableRules": [],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "schema": "",
                            "include": "Custom_all__c"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```

Application ingestion and replication incremental load

Use this sample to create an application ingestion and replication incremental load task. The sample task, sf_to_snowflake_incremental_full, reads data from Salesforce and replicates changes to Snowflake. In the `dbmiTask` object, `general.type` is `cdc`.

```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 759323,
            "name": "sf_to_snowflake_incremental_full",
            "documentState": "VALID",
            "documentType": "APPMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "3uDIOqah80qbMK3cXAceIp",
```

```
        "parentName": "Default",
        "parentType": "Project"
    }
],
"description": "",
"owner": "6r2IItttmU3ibDwPqxnRwb",
"createdBy": "6r2IItttmU3ibDwPqxnRwb",
"createdTime": "2026-10-12T10:27:41.000+00:00",
"accessedTime": "2026-10-12T10:28:23.296+00:00",
"updateTime": "2026-10-12T10:28:23.296+00:00",
"dbmiTask": {
    "type": "appmi",
    "general": {
        "name": "sales_cdc_check_case1_oct12",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "cdc"
    },
    "source": {
        "connection": "AIN_Salesforce",
        "customProperties": {
            "selectionMode": "RULE_BASED",
            "ai.fetch.size": "2000",
            "ai.cdc.interval.mins": "5"
        },
        "restartPointForIncrementalLoadTimestamp": "2026-10-12 10:25:56 AM",
        "schema": "SALESFORCE",
        "includeViews": null,
        "replicationSlotName": null,
        "replicationPlugin": null,
        "publication": null,
        "journalName": null,
        "restartPointForIncrementalLoad": null,
        "restartPointForIncrementalLoadPosition": null,
        "cdcTechnique": null,
        "cdcQueryBasedColumnType": null,
        "cdcQueryBasedColumnName": null,
        "cdcQueryBasedDateColumn": null,
        "cdcQueryBasedTimeColumn": null,
        "context": null,
        "accountId": null,
        "propertyId": null,
        "viewId": null,
        "pathToReportConfigurationFile": null,
        "product": null,
        "services": null,
        "outputType": null,
        "salesforceAPI": null,
        "fetchSize": "2000",
        "fetchSizeForInitialLoad": null,
        "fetchSizeForIncrementalLoad": null,
        "startDate": null,
        "endDate": null,
        "cdcIntervalDays": null,
        "cdcIntervalHours": null,
        "cdcIntervalMins": "5",
        "extractNonDefaultFields": null,
        "includeArchivedAndDeletedRows": null,
        "includeBase64Fields": null,
        "maximumBase64BodySize": null,
        "batchSize": null,
        "mid": null,
        "readerInputIsPersisted": null,
        "readerHistoricalCacheUseCloud": null,
        "lobsEnabled": null,
        "unloadFlashbackDisabled": null,
        "enableAlternateSource": null,
        "alternateSourceId": null,
        "cdcStagingMigration": null,
```

```
            "cdcStagingMigrationTasks": null,
            "jdbcPartitioningTechnique": null,
            "sourceMaxParallelPartitions": null,
            "unloadHelperThreadCount": null,
            "readEventBatchSize": null,
            "readerHelperThreadCount": null,
            "salesforceBulkV2Partitioning": null,
            "salesforceBulkV2RecordsPerPartition": null,
            "salesforceBulkV2MaxParallelPartitions": null,
            "workdayReplicationType": null,
            "workdayReportsNumber": null,
            "workdayReportName": null,
            "workdayReportsConfigFile": null,
            "oracleFusionInterfaceType": null,
            "oracleFusionModuleName": null,
            "oracleFusionEnableChildObjects": null,
            "formattedStartDate": "",
            "formattedEndDate": "",
            "selectionRules": [
                {
                    "include": "Period"
                }
            ]
        },
        "target": {
            "connection": "Snowflake_pat_sp",
            "schema": "SNOW_PB",
            "outputFormat": "CSV",
            "fileCompressionType": "None",
            "parquetFormat": "true",
            "fixedDirectoryForEachTable": "false",
            "renamingRules": [
                {
                    "source": "Period",
                    "target": "Period_O12A"
                }
            ],
            "dataTypeRules": [],
            "stage": "gkn",
            "bucket": "",
            "directory": "",
            "addBeforeImages": "false",
            "directoryTags": "",
            "useTableNameAsTopicName": "false",
            "includeSchemaName": "false",
            "asyncWrite": "true",
            "writerSnowflakeIngestionMethod": "",
            "writerSnowflakeDeferredMergeInterval": "3600",
            "addLastReplicatedTime": "false",
            "cycleId": "false",
            "customProperties": {
                "targetDirectory": "",
                "rat.cdcfile.target.directory": "",
                "writerSnowflakeIngestionMethod": "",
                "targetIdentifiersEnableCaseTransformation": "true",
                "rat.audit.columns.optype": "false",
                "targetIdentifiersCaseConversionStrategy": "NO_TRANSFORMATION",
                "rat.target.columns.last.replicated.time": "false",
                "applyMode": "standard",
                "targetBucket": "",
                "writerSnowflakeDeferredMergeInterval": "3600",
                "auditColumnsPrefix": "INFA_",
                "rat.target.columns.cycleId": "false"
            },
            "caseTransformation": "none"
        },
        "runtimeOptions": {
            "numberOfRowsInOutputFile": null,
            "fileExtensionBasedOnFileType": null,
            "applyCycleChangeLimit": null,
```

```
                    "applyCycleIntervalDays": null,
                    "applyCycleIntervalHours": null,
                    "applyCycleIntervalMins": null,
                    "applyCycleIntervalSecs": null,
                    "lowActivityFlushHours": null,
                    "lowActivityFlushMins": null,
                    "checkpointAllRows": null,
                    "checkpointEveryCommit": null,
                    "checkpointRowCount": null,
                    "checkpointFrequencySecs": null,
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": {
                        "modifyField": "replicate",
                        "dropField": "ignore",
                        "addField": "replicate",
                        "renameField": "ignore"
                    },
                    "customProperties": {}
                },
                "replicationRules": {
                    "source": "SALESFORCE",
                    "target": "SNOW_PB",
                    "overrides": {
                        "tableRules": [
                            {
                                "source": "Period",
                                "target": "Period_O12A"
                            }
                        ],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "schema": "",
                            "include": "Period"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```


Application ingestion and replication combined load response

Use this sample to create an application ingestion and replication combined load task. The sample task, sf_to_snowflake_combined, reads data from Salesforce and replicates changes to Snowflake. In the `dbmiTask` object, `general.type` is `combined`.


```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 746431,
            "name": "sf_to_snowflake_combined",
            "documentState": "VALID",
            "documentType": "APPMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "33YxQayEoi1d5QgU02OQGV",
                    "parentName": "Oracle",
```

```
        "parentType": "Project"
    }
],
"description": "this is task created from api for combined",
"owner": "6r2IItttmU3ibDwPqxnRwb",
"createdBy": "6r2IItttmU3ibDwPqxnRwb",
"createdTime": "2026-09-24T11:34:37.000+00:00",
"accessedTime": "2026-10-07T07:05:27.328+00:00",
"updateTime": "2026-10-07T07:05:27.328+00:00",
"dbmiTask": {
    "type": "appmi",
    "general": {
        "name": "sf_to_snowflake_combined",
        "description": null,
        "location": "Oracle",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "combined"
    },
    "source": {
        "connection": "AIN_Salesforce",
        "customProperties": {
            "salesforce.bulkv2.enable.partitioning": "true",
            "ai.cdc.interval.hours": "0",
            "ai.fetch.size.cdc": "2000",
            "ai.cdc.interval.days": "0",
            "salesforce.bulkv2.max.parallel.partitions": "5",
            "salesforce.bulkv2.records.per.partition": "2000",
            "ai.cdc.interval.mins": "5",
            "ai.unload.fetch.deleted.archived.data": "false",
            "ai.fetch.size": "50000",
            "ai.salesforce.unload.api.type": "bulkv2"
        },
        "restartPointForIncrementalLoadTimestamp": null,
        "schema": "SALESFORCE",
        "includeViews": null,
        "replicationSlotName": null,
        "replicationPlugin": null,
        "publication": null,
        "journalName": null,
        "restartPointForIncrementalLoad": "LATEST",
        "restartPointForIncrementalLoadPosition": null,
        "cdcTechnique": null,
        "cdcQueryBasedColumnType": null,
        "cdcQueryBasedColumnName": null,
        "cdcQueryBasedDateColumn": null,
        "cdcQueryBasedTimeColumn": null,
        "context": null,
        "accountId": null,
        "propertyId": null,
        "viewId": null,
        "pathToReportConfigurationFile": null,
        "product": null,
        "services": null,
        "outputType": null,
        "salesforceAPI": "bulkv2",
        "fetchSize": "50000",
        "fetchSizeForInitialLoad": null,
        "fetchSizeForIncrementalLoad": "2000",
        "startDate": null,
        "endDate": null,
        "cdcIntervalDays": "0",
        "cdcIntervalHours": "0",
        "cdcIntervalMins": "5",
        "extractNonDefaultFields": null,
        "includeArchivedAndDeletedRows": "false",
        "includeBase64Fields": null,
        "maximumBase64BodySize": null,
        "batchSize": null,
        "mid": null,
        "readerInputIsPersisted": null,
```

```
        "readerHistoricalCacheUseCloud": null,
        "lobsEnabled": null,
        "unloadFlashbackDisabled": null,
        "enableAlternateSource": null,
        "alternateSourceId": null,
        "cdcStagingMigration": null,
        "cdcStagingMigrationTasks": null,
        "jdbcPartitioningTechnique": null,
        "sourceMaxParallelPartitions": null,
        "unloadHelperThreadCount": null,
        "readEventBatchSize": null,
        "readerHelperThreadCount": null,
        "salesforceBulkV2Partitioning": "true",
        "salesforceBulkV2RecordsPerPartition": "2000",
        "salesforceBulkV2MaxParallelPartitions": "5",
        "workdayReplicationType": null,
        "workdayReportsNumber": null,
        "workdayReportName": null,
        "workdayReportsConfigFile": null,
        "oracleFusionInterfaceType": null,
        "oracleFusionModuleName": null,
        "oracleFusionEnableChildObjects": null,
        "formattedStartDate": "",
        "formattedEndDate": "",
        "selectionRules": [
            {
                "include": "cli_sf__c"
            },
            {
                "exclude": "Period"
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "ADOBE_PB",
        "outputFormat": "CSV",
        "fileCompressionType": "None",
        "parquetFormat": "false",
        "avroFormat": "Avro-Generic",
        "avroSerializationFormat": "BINARY",
        "fixedDirectoryForEachTable": "true",
        "avroCompressionType": "None",
        "parquetCompressionType": "None",
        "deflateCompressionLevel": "1",
        "renamingRules": [
            {
                "source": "cli_sf__c",
                "target": "cli_sf__c3"
            }
        ],
        "dataTypeRules": [],
        "stage": "gkn",
        "addBeforeImages": "false",
        "useTableNameAsTopicName": "false",
        "includeSchemaName": "true",
        "asyncWrite": "true",
        "customProperties": {
            "targetIdentifiersEnableCaseTransformation": "false"
        }
    },
    "runtimeOptions": {
        "numberOfRowsInOutputFile": null,
        "fileExtensionBasedOnFileType": null,
        "applyCycleChangeLimit": null,
        "applyCycleIntervalDays": null,
        "applyCycleIntervalHours": null,
        "applyCycleIntervalMins": null,
        "applyCycleIntervalSecs": null,
        "lowActivityFlushHours": null,
```

```
                    "lowActivityFlushMins": null,
                    "checkpointAllRows": null,
                    "checkpointEveryCommit": null,
                    "checkpointRowCount": null,
                    "checkpointFrequencySecs": null,
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": {
                        "modifyField": "replicate",
                        "dropField": "ignore",
                        "addField": "ignore",
                        "renameField": "replicate"
                    },
                    "customProperties": {
                        "writerRecoveryEnableCycleUpdates": "false",
                        "enableAutoTuning": "false"
                    }
                },
                "replicationRules": {
                    "source": "SALESFORCE",
                    "target": "ADOBE_PB",
                    "overrides": {
                        "tableRules": [
                            {
                                "source": "cli_sf__c",
                                "target": "cli_sf__c3"
                            }
                        ],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "schema": "",
                            "include": "cli_sf__c"
                        },
                        {
                            "schema": "",
                            "exclude": "Period"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```

Database ingestion and replication initial load response

Use this sample to create a database ingestion and replication initial load task. The sample task, oracle_to_snowflake_full, reads data from Oracle and loads it to Snowflake one time. In the `dbmiTask` object, `general.type` is `initial`.

```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 757385,
            "name": "oracle_to_snowflake_full",
            "documentState": "VALID",
            "documentType": "DBMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
```

```
        "parentId": "3uDIOqah80qbMK3cXAceIp",
        "parentName": "Default",
        "parentType": "Project"
    }
],
"description": "oracle unload sample",
"owner": "6r2IIttttmU3ibDwPqxnRwb",
"createdBy": "6r2IIttttmU3ibDwPqxnRwb",
"createdTime": "2026-10-08T06:41:11.000+00:00",
"accessedTime": "2026-10-08T06:46:54.541+00:00",
"updateTime": "2026-10-08T06:46:54.541+00:00",
"dbmiTask": {
    "type": "dbmi",
    "general": {
        "name": "oracle_to_snowflake_full",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "initial"
    },
    "source": {
        "connection": "Oracle_19RDS_yk-CDC",
        "customProperties": {
            "lobsEnabled": "true",
            "unloadFlashbackDisabled": "true",
            "unloadJdbcPartitioningTechnique": "uniform",
            "unloadSourceMaxParallelPartitions": "5",
            "unloadHelperThreadCount": "2"
        },
        "restartPointForIncrementalLoadTimestamp": null,
        "schema": "AUTO_INIT",
        "includeViews": null,
        "replicationSlotName": null,
        "replicationPlugin": null,
        "publication": null,
        "journalName": null,
        "restartPointForIncrementalLoad": null,
        "restartPointForIncrementalLoadPosition": null,
        "cdcTechnique": null,
        "cdcQueryBasedColumnType": null,
        "cdcQueryBasedColumnName": null,
        "cdcQueryBasedDateColumn": null,
        "cdcQueryBasedTimeColumn": null,
        "context": null,
        "accountId": null,
        "propertyId": null,
        "viewId": null,
        "pathToReportConfigurationFile": null,
        "product": null,
        "services": null,
        "outputType": null,
        "salesforceAPI": null,
        "fetchSize": null,
        "fetchSizeForInitialLoad": null,
        "fetchSizeForIncrementalLoad": null,
        "startDate": null,
        "endDate": null,
        "cdcIntervalDays": null,
        "cdcIntervalHours": null,
        "cdcIntervalMins": null,
        "extractNonDefaultFields": null,
        "includeArchivedAndDeletedRows": null,
        "includeBase64Fields": null,
        "maximumBase64BodySize": null,
        "batchSize": null,
        "mid": null,
        "readerInputIsPersisted": null,
        "readerHistoricalCacheUseCloud": null,
        "lobsEnabled": "true",
        "unloadFlashbackDisabled": "true",
```

```
            "enableAlternateSource": null,
            "alternateSourceId": null,
            "cdcStagingMigration": null,
            "cdcStagingMigrationTasks": null,
            "jdbcPartitioningTechnique": "uniform",
            "sourceMaxParallelPartitions": "5",
            "unloadHelperThreadCount": "2",
            "readEventBatchSize": null,
            "readerHelperThreadCount": null,
            "salesforceBulkV2Partitioning": null,
            "salesforceBulkV2RecordsPerPartition": null,
            "salesforceBulkV2MaxParallelPartitions": null,
            "workdayReplicationType": null,
            "workdayReportsNumber": null,
            "workdayReportName": null,
            "workdayReportsConfigFile": null,
            "oracleFusionInterfaceType": null,
            "oracleFusionModuleName": null,
            "oracleFusionEnableChildObjects": null,
            "formattedStartDate": "",
            "formattedEndDate": "",
            "selectionRules": [
                {
                    "include": "SRC_ALLCHAR_8K",
                    "fieldsSet": [
                        {
                            "exclude": "VARCHARMAX"
                        }
                    ]
                }
            ]
        },
        "target": {
            "connection": "Snowflake_pat_sp",
            "schema": "ADOBE_PB",
            "outputFormat": "CSV",
            "fileCompressionType": "None",
            "parquetFormat": "false",
            "avroFormat": "Avro-Generic",
            "avroSerializationFormat": "BINARY",
            "fixedDirectoryForEachTable": "true",
            "avroCompressionType": "None",
            "parquetCompressionType": "None",
            "deflateCompressionLevel": "1",
            "renamingRules": [],
            "dataTypeRules": [],
            "stage": "gkn",
            "addBeforeImages": "false",
            "useTableNameAsTopicName": "false",
            "includeSchemaName": "true",
            "asyncWrite": "true",
            "addLastReplicatedTime": "true",
            "cycleId": "false",
            "customProperties": {
                "targetIdentifiersCaseConversionStrategy": "TO_LOWERCASE",
                "rat.target.columns.last.replicated.time": "true",
                "targetIdentifiersEnableCaseTransformation": "true",
                "rat.target.columns.cycleId": "false"
            },
            "caseTransformation": "lowercase"
        },
        "runtimeOptions": {
            "numberOfRowsInOutputFile": null,
            "fileExtensionBasedOnFileType": null,
            "applyCycleChangeLimit": null,
            "applyCycleIntervalDays": null,
            "applyCycleIntervalHours": null,
            "applyCycleIntervalMins": null,
            "applyCycleIntervalSecs": null,
            "lowActivityFlushHours": null,
```

```
                    "lowActivityFlushMins": null,
                    "checkpointAllRows": null,
                    "checkpointEveryCommit": null,
                    "checkpointRowCount": null,
                    "checkpointFrequencySecs": null,
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": null,
                    "customProperties": {
                        "writerRecoveryEnableCycleUpdates": "false",
                        "enableAutoTuning": "false"
                    }
                },
                "replicationRules": {
                    "source": "AUTO_INIT",
                    "target": "ADOBE_PB",
                    "overrides": {
                        "tableRules": [],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "fieldsSet": [
                                {
                                    "exclude": "VARCHARMAX"
                                }
                            ],
                            "schema": "",
                            "include": "SRC_ALLCHAR_8K"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```

Database ingestion and replication incremental load response

Use this sample to create a database ingestion and replication incremental load task. The sample task, oracle_to_snowflake_cdc, uses the query-based change data capture (CDC) method. In the `dbmiTask` object, `general.type` is `cdc`.

```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 757659,
            "name": "oracle_to_snowflake_cdc",
            "documentState": "VALID",
            "documentType": "DBMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "3uDIOqah80qbMK3cXAceIp",
                    "parentName": "Default",
                    "parentType": "Project"
                }
            ],
            "description": "",
            "owner": "6r2IItttmU3ibDwPqxnRwb",
            "createdBy": "6r2IItttmU3ibDwPqxnRwb",
            "createdTime": "2026-10-08T11:42:11.000+00:00",
```

```
"accessedTime": "2026-10-08T11:51:21.259+00:00",
"updateTime": "2026-10-08T11:51:21.259+00:00",
"dbmiTask": {
    "type": "dbmi",
    "general": {
        "name": "oracle_to_snowflake_cdc",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "cdc"
    },
    "source": {
        "connection": "Oracle_19RDS_yk-CDC",
        "customProperties": {
            "loadType": "CDC",
            "journalName": "",
            "dbmi.cdc.query.based.column.type": "COLUMN_TYPE_TIMESTAMP",
            "pwx.cdcreader.postgresql.connection.repl.publication": "",
            "readEventBatchSize": "32",
            "dbmi.cdc.interval.mins": "5",
            "dbmi.cdc.query.based.column.name": "QUERY_BASED_COL",
            "dbmi.cdc.interval.hours": "0",
            "readerInputIsPersisted": "false",
            "readerHelperThreadCount": "3",
            "dbmi.cdc.technique": "QUERY_BASED_CDC",
            "pwx.cdcreader.postgresql.connection.repl.slotname": "",
            "lobsEnabled": "false",
            "dbmi.cdc.interval.days": "0",
            "selectionMode": "RULE_BASED"
        },
        "restartPointForIncrementalLoadTimestamp": null,
        "schema": "QUERYBASEDCDC",
        "includeViews": null,
        "replicationSlotName": "",
        "replicationPlugin": null,
        "publication": "",
        "journalName": "",
        "restartPointForIncrementalLoad": "LATEST",
        "restartPointForIncrementalLoadPosition": null,
        "cdcTechnique": "QUERY_BASED_CDC",
        "cdcQueryBasedColumnType": "COLUMN_TYPE_TIMESTAMP",
        "cdcQueryBasedColumnName": "QUERY_BASED_COL",
        "cdcQueryBasedDateColumn": null,
        "cdcQueryBasedTimeColumn": null,
        "context": null,
        "accountId": null,
        "propertyId": null,
        "viewId": null,
        "pathToReportConfigurationFile": null,
        "product": null,
        "services": null,
        "outputType": null,
        "salesforceAPI": null,
        "fetchSize": null,
        "fetchSizeForInitialLoad": null,
        "fetchSizeForIncrementalLoad": null,
        "startDate": null,
        "endDate": null,
        "cdcIntervalDays": "0",
        "cdcIntervalHours": "0",
        "cdcIntervalMins": "5",
        "extractNonDefaultFields": null,
        "includeArchivedAndDeletedRows": null,
        "includeBase64Fields": null,
        "maximumBase64BodySize": null,
        "batchSize": null,
        "mid": null,
        "readerInputIsPersisted": "false",
        "readerHistoricalCacheUseCloud": null,
        "lobsEnabled": "false",
```

```
        "unloadFlashbackDisabled": null,
        "enableAlternateSource": null,
        "alternateSourceId": null,
        "cdcStagingMigration": null,
        "cdcStagingMigrationTasks": null,
        "jdbcPartitioningTechnique": null,
        "sourceMaxParallelPartitions": null,
        "unloadHelperThreadCount": null,
        "readEventBatchSize": "32",
        "readerHelperThreadCount": "3",
        "salesforceBulkV2Partitioning": null,
        "salesforceBulkV2RecordsPerPartition": null,
        "salesforceBulkV2MaxParallelPartitions": null,
        "workdayReplicationType": null,
        "workdayReportsNumber": null,
        "workdayReportName": null,
        "workdayReportsConfigFile": null,
        "oracleFusionInterfaceType": null,
        "oracleFusionModuleName": null,
        "oracleFusionEnableChildObjects": null,
        "formattedStartDate": "",
        "formattedEndDate": "",
        "selectionRules": [
            {
                "include": "SRC_ALLNUM_8K"
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "SNOW_PB",
        "outputFormat": "CSV",
        "fileCompressionType": "None",
        "parquetFormat": "true",
        "fixedDirectoryForEachTable": "false",
        "renamingRules": [
            {
                "source": "SRC_ALLNUM_8K",
                "target": "NUM_SPIPE2"
            }
        ],
        "dataTypeRules": [],
        "stage": "gkn",
        "bucket": "",
        "directory": "",
        "addBeforeImages": "false",
        "directoryTags": "",
        "useTableNameAsTopicName": "false",
        "includeSchemaName": "false",
        "asyncWrite": "true",
        "writerSnowflakeIngestionMethod": "",
        "writerSnowflakeDeferredMergeInterval": "3600",
        "addLastReplicatedTime": "false",
        "cycleId": "false",
        "customProperties": {
            "targetDirectory": "",
            "rat.cdcfile.target.directory": "",
            "writerSnowflakeIngestionMethod": "",
            "targetIdentifiersEnableCaseTransformation": "true",
            "rat.audit.columns.optype": "false",
            "targetIdentifiersCaseConversionStrategy": "NO_TRANSFORMATION",
            "rat.target.columns.last.replicated.time": "false",
            "applyMode": "standard",
            "targetBucket": "",
            "writerSnowflakeDeferredMergeInterval": "3600",
            "auditColumnsPrefix": "INFA_",
            "rat.target.columns.cycleId": "false"
        },
        "caseTransformation": "none"
    },
```

```
                "runtimeOptions": {
                    "numberOfRowsInOutputFile": null,
                    "fileExtensionBasedOnFileType": null,
                    "applyCycleChangeLimit": null,
                    "applyCycleIntervalDays": null,
                    "applyCycleIntervalHours": null,
                    "applyCycleIntervalMins": null,
                    "applyCycleIntervalSecs": null,
                    "lowActivityFlushHours": null,
                    "lowActivityFlushMins": null,
                    "checkpointAllRows": null,
                    "checkpointEveryCommit": null,
                    "checkpointRowCount": null,
                    "checkpointFrequencySecs": null,
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": {
                        "addColumn": "replicate",
                        "renameColumn": "ignore",
                        "modifyColumn": "replicate",
                        "dropColumn": "ignore"
                    },
                    "customProperties": {
                        "writerRecoveryEnableCycleUpdates": "false",
                        "enableAutoTuning": "false"
                    }
                },
                "replicationRules": {
                    "source": "QUERYBASEDCDC",
                    "target": "SNOW_PB",
                    "overrides": {
                        "tableRules": [
                            {
                                "source": "SRC_ALLNUM_8K",
                                "target": "NUM_SPIPE2"
                            }
                        ],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "schema": "",
                            "include": "SRC_ALLNUM_8K"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```

Database ingestion and replication combined load response

Use this sample to create a database ingestion and replication combined initial and incremental load task. The sample task, oracle_to_snowflake_combined, loads the source data once and then replicates changes by using the log-based CDC method. In the `dbmiTask` object, `general.type` is `combined`.

```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 757421,
            "name": "oracle_to_snowflake_combined",
            "documentState": "VALID",
            "documentType": "DBMI_TASK",
            "parentInfo": [
                {
```

```
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
        },
        {
            "parentId": "3uDIOqah80qbMK3cXAceIp",
            "parentName": "Default",
            "parentType": "Project"
        }
    ],
    "description": "",
    "owner": "6r2IIttttmU3ibDwPqxnRwb",
    "createdBy": "6r2IIttttmU3ibDwPqxnRwb",
    "createdTime": "2026-10-08T08:44:09.000+00:00",
    "accessedTime": "2026-10-08T09:49:30.311+00:00",
    "updateTime": "2026-10-08T09:49:30.311+00:00",
    "dbmiTask": {
        "type": "dbmi",
        "general": {
            "name": "oracle_to_snowflake_combined",
            "description": null,
            "location": "Default",
            "runtimeEnvironment": "invyaminirh01.informatica.com",
            "type": "combined"
        },
        "source": {
            "connection": "Oracle_19RDS_yk-CDC",
            "customProperties": {
                "loadType": "CDC_COMBINED",
                "journalName": "",
                "dbmi.cdc.query.based.column.type": "COLUMN_TYPE_TIMESTAMP",
                "pwx.cdcreader.postgresql.connection.repl.publication": "",
                "dbmi.cdc.interval.mins": "5",
                "dbmi.cdc.interval.hours": "0",
                "readerInputIsPersisted": "true",
                "dbmi.cdc.technique": "LOG_BASED_CDC",
                "unload.source.partition.count": "5",
                "pwx.cdcreader.postgresql.connection.repl.slotname": "",
                "lobsEnabled": "true",
                "dbmi.cdc.interval.days": "0",
                "selectionMode": "RULE_BASED"
            },
            "restartPointForIncrementalLoadTimestamp": null,
            "schema": "SP_UNLOAD",
            "includeViews": null,
            "replicationSlotName": "",
            "replicationPlugin": null,
            "publication": "",
            "journalName": "",
            "restartPointForIncrementalLoad": "LATEST",
            "restartPointForIncrementalLoadPosition": null,
            "cdcTechnique": "LOG_BASED_CDC",
            "cdcQueryBasedColumnType": "COLUMN_TYPE_TIMESTAMP",
            "cdcQueryBasedColumnName": null,
            "cdcQueryBasedDateColumn": null,
            "cdcQueryBasedTimeColumn": null,
            "context": null,
            "accountId": null,
            "propertyId": null,
            "viewId": null,
            "pathToReportConfigurationFile": null,
            "product": null,
            "services": null,
            "outputType": null,
            "salesforceAPI": null,
            "fetchSize": null,
            "fetchSizeForInitialLoad": null,
            "fetchSizeForIncrementalLoad": null,
            "startDate": null,
            "endDate": null,
            "cdcIntervalDays": "0",
```

```
            "cdcIntervalHours": "0",
            "cdcIntervalMins": "5",
            "extractNonDefaultFields": null,
            "includeArchivedAndDeletedRows": null,
            "includeBase64Fields": null,
            "maximumBase64BodySize": null,
            "batchSize": null,
            "mid": null,
            "readerInputIsPersisted": "true",
            "readerHistoricalCacheUseCloud": null,
            "lobsEnabled": "true",
            "unloadFlashbackDisabled": null,
            "enableAlternateSource": null,
            "alternateSourceId": null,
            "cdcStagingMigration": null,
            "cdcStagingMigrationTasks": null,
            "jdbcPartitioningTechnique": null,
            "sourceMaxParallelPartitions": null,
            "unloadHelperThreadCount": null,
            "readEventBatchSize": null,
            "readerHelperThreadCount": null,
            "salesforceBulkV2Partitioning": null,
            "salesforceBulkV2RecordsPerPartition": null,
            "salesforceBulkV2MaxParallelPartitions": null,
            "workdayReplicationType": null,
            "workdayReportsNumber": null,
            "workdayReportName": null,
            "workdayReportsConfigFile": null,
            "oracleFusionInterfaceType": null,
            "oracleFusionModuleName": null,
            "oracleFusionEnableChildObjects": null,
            "formattedStartDate": "",
            "formattedEndDate": "",
            "selectionRules": [
                {
                    "include": "COMPO8"
                }
            ]
        },
        "target": {
            "connection": "Snowflake_pat_sp",
            "schema": "SNOW_PB",
            "outputFormat": "CSV",
            "fileCompressionType": "None",
            "parquetFormat": "true",
            "fixedDirectoryForEachTable": "false",
            "renamingRules": [
                {
                    "source": "COMPO8",
                    "target": "COMPO8_O9"
                }
            ],
            "dataTypeRules": [],
            "stage": "gkn",
            "bucket": "",
            "directory": "",
            "addBeforeImages": "true",
            "directoryTags": "",
            "useTableNameAsTopicName": "false",
            "includeSchemaName": "false",
            "asyncWrite": "true",
            "writerSnowflakeIngestionMethod": "",
            "writerSnowflakeDeferredMergeInterval": "3600",
            "addLastReplicatedTime": "true",
            "cycleId": "true",
            "customProperties": {
                "rat.audit.columns.optime": "true",
                "rat.audit.columns.opseq": "true",
                "targetDirectory": "",
                "rat.cdcfile.target.directory": "",
                "writerSnowflakeIngestionMethod": "",
```

```
                "targetIdentifiersEnableCaseTransformation": "true",
                "rat.audit.columns.optype": "true",
                "targetIdentifiersCaseConversionStrategy": "NO_TRANSFORMATION",
                "rat.target.columns.last.replicated.time": "true",
                "rat.audit.columns.optxid": "true",
                "applyMode": "audit",
                "targetBucket": "",
                "rat.audit.columns.opowner": "true",
                "writerSnowflakeDeferredMergeInterval": "3600",
                "auditColumnsPrefix": "INFA_",
                "rat.target.columns.cycleId": "true"
            },
            "auditData": {
                "applyMode": "audit",
                "auditColumnPrefix": "INFA_",
                "addOperationType": "true",
                "addOperationTime": "true",
                "addOperationOwner": "true",
                "addOperationTransactionId": "true",
                "addOperationSequence": "true"
            },
            "caseTransformation": "none"
        },
        "runtimeOptions": {
            "numberOfRowsInOutputFile": null,
            "fileExtensionBasedOnFileType": null,
            "applyCycleChangeLimit": null,
            "applyCycleIntervalDays": null,
            "applyCycleIntervalHours": null,
            "applyCycleIntervalMins": null,
            "applyCycleIntervalSecs": null,
            "lowActivityFlushHours": null,
            "lowActivityFlushMins": null,
            "checkpointAllRows": null,
            "checkpointEveryCommit": null,
            "checkpointRowCount": null,
            "checkpointFrequencySecs": null,
            "executeInTaskflow": false,
            "enableAutoTuning": false,
            "schemaDriftOptions": {
                "addColumn": "replicate",
                "renameColumn": "ignore",
                "modifyColumn": "replicate",
                "dropColumn": "ignore"
            },
            "customProperties": {
                "writerRecoveryEnableCycleUpdates": "false",
                "enableAutoTuning": "false"
            }
        },
        "replicationRules": {
            "source": "SP_UNLOAD",
            "target": "SNOW_PB",
            "overrides": {
                "tableRules": [
                    {
                        "source": "COMPO8",
                        "target": "COMPO8_O9"
                    }
                ],
                "fieldRules": []
            },
            "sourceSet": [
                {
                    "schema": "",
                    "include": "COMPO8"
                }
            ],
            "columnTransformations": []
        }
    }
```

```
            }
        ]
    }
```

Create a database or application ingestion and replication task

Use the task resource to create a database ingestion and replication task or application ingestion and replication task in a specified project and folder.

To create a task, send a POST request to the following resource:

```
/dbmi/public/api/v2/task/create
```

For the steps to get a request body and create a task, see "Get a request body for a new task" on page 559.

Task type and payload requirements

The request payload must include the `taskType` field to specify the type of task that you want to create:

- `appmi`. Creates an application ingestion and replication task.
- `dbmi`. Creates a database ingestion and replication task.

If you omit the value for the `taskType` field, it defaults to `dbmi`.

The following payload specifies an application ingestion and replication task:

```
{
  "taskType": "appmi",
  ...
}
```

The following payload specifies a database ingestion and replication task:

```
{
  "taskType": "dbmi",
  ...
}
```

Request payload

The following table describes the attributes that you can set within the `general` object for a database ingestion and replication task or application ingestion and replication task:

Field	Type	Description
name	String	Name of the task.
description	String	An optional description that provides context about the purpose of the task.
location	String	Project or project folder that contains the task definition.

Field	Type	Description
runtimeEnvironment	String	The name of the runtime environment where the task runs.
type	String	Type of load operation that the task performs. Options are: - **initial**. Loads source data read at a single point in time to a target. After the data is loaded, the ingestion and replication job ends. - **cdc**. Loads data changes continuously or until the ingestion and replication job is stopped or ends. The ingestion and replication job loads the changes that have occurred since the last time it ran or from a specific start point. - **combined**. Performs an initial load of point-in-time data to the target and then automatically switches to replicating incremental data changes made to the same source objects on a continuous basis.

The source, target, and runtime attributes for the task in the request payload depend on the task type and on the specific source and target connector. For the connector-specific source and target attributes, see the "Source attributes" on page 581, "Target attributes" on page 592, and "Runtime attributes" on page 607 tables.

Post request and response examples

For sample post requests and responses, including the required payload fields and expected output, see the following examples:

- "Example: Create a Salesforce to Snowflake task" on page 612
- "Example: Create an Oracle to Snowflake task" on page 618

Successful post response

If the task is created successfully, the API returns a 201 Created success code. The response typically includes the following header:

```
Content-Type: application/json;charset=UTF-8
HTTP/2 201 Created
```

The response also includes the following information about the task:

Field	Type	Description
location	String	Project and folder name in which the task is created.
taskId	String	ID generated for the newly created task.
frsId	String	FRS reference ID.
name	String	Name of the task.
description	String	Description for the task.
createdBy	String	User ID who created the task.
documentType	String	Type of document: DBMI_TASK or APPMI_TASK based on the taskType value specified in the request.
parentInfo	String	Parent project and structure details.

Failed responses and error codes

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when a connection specified in the request does not exist:

```
{
    "error": {
        "httpStatus": 404,
        "code": "CDIR_CONNECTION_DOES_NOT_EXIST",
        "message": "Connection with name Oracle_19RDS_yk-CDC23 does not exist.",
        "details": [
            {
                "taskName": "ora_2_snflk_api_agust5_case3"
            }
        ],
        "traceId": "b2bca519-8c6c-4a63-a882-9b3f4b6a852b"
    }
}
```

Source attributes

The following table describes the source connection and task attributes in the request.

Field	Type	Description	Supported source types
connection	String	Name of the connection for the source system that the task uses to read data.	All sources
selectionRules	List	Optional object or table selection rules to select a subset of the source objects or tables for a task. By default, an Include rule that contains only the asterisk (*) wildcard character selects all objects on the source for an application ingestion and replication task or all tables in the source schema for a database ingestion and replication task. To narrow the source objects or tables that the task processes, you can add additional Include rules, Exclude rules, or a combination of both. For example: selectionRules: - include: TABLE_1 - exclude: TABLE_2	All sources
schema	String	The source schema that includes the source tables. This option applies for database ingestion and replication sources except MongoDB.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA **Note:** For MongoDB, to provide the database that stores collections, you must use this schema property instead of database.
journalName	String	For Db2 for i incremental loads in a database ingestion and replication task, the name of the journal that records the changes made to source tables.	Db2 for i
replicationSlotName	String	For PostgreSQL sources in a database ingestion and replication task, the unique name of a PostgreSQL replication slot.	PostgreSQL

Field	Type	Description	Supported source types
replicationPlugin	String	For PostgreSQL sources in a database ingestion and replication task, the replication plugin. Options are: - **pgoutput** - **wal2json** **Note:** You can specify pgoutput only for PostgreSQL version 10 and later.	PostgreSQL
publication	String	For PostgreSQL sources in a database ingestion and replication task, the publication name used by the pgoutput plugin. Use this parameter only if you specified pgoutput as the replicationPlugin value.	PostgreSQL
restartPointForIncrementalLoad	String	For SAP ECC sources in an application ingestion and replication incremental load task and all sources in a database ingestion and replication incremental load or combined initial and incremental load task, the position in the source change stream or logs from which to start reading changes the first time the job runs. Options are: - **earliest** - **latest** For example: restartPointForIncrementalLoad: earliest, restartPointForIncrementalLoad: latest For a database ingestion and replication task, default is latest. For an application ingestion and replication task, the **earliest** option is not supported. The default is the restartPointForIncrementalLoadTimestamp value. If you specify this parameter, do not also specify the restarPointForIncrementalLoadPosition or restartPointForIncrementalLoadTimestamp parameter.	SAP ECC, and database ingestion and replication sources

Field	Type	Description	Supported source types
restartPointForIncrementalLoadPosition	Integer	For all sources in a database ingestion and replication incremental load or combined initial and incremental load task, the RBA position in source change stream or logs from which to start reading change records the first time the job runs. For example: restartPointForIncrementalLoadPosition: 0 If you specify this parameter, do not also specify the restarPointForIncrementalLoad or restartPointForIncrementalLoadTimestamp parameter.	Database ingestion and replication sources
restartPointForIncrementalLoadTimestamp	Timestamp	For all sources in an application ingestion and replication incremental load task or database ingestion and replication combined initial and incremental load task, the date and time, including AM or PM, in the source change stream or logs from which to start reading change records the first time the job runs. For example: restartPointForIncrementalLoadTimestamp: 2021-08-18 02:50:00 PM For an application ingestion and replication task, this parameter determines the default behavior. **Note:** If you specify this parameter, do not also specify the restarPointForIncrementalLoad or restartPointForIncrementalLoadPosition parameter.	All sources
cdcInterval	String (time interval)	For Salesforce sources in an application ingestion and replication incremental load or combined load task, the time interval for which the job runs to retrieve change records for CDC. You can specify cdcIntervalDays, cdcIntervalHours, and cdcIntervalMins parameters.	Salesforce

Field	Type	Description	Supported source types
fetchSize	Integer	For Salesforce sources in an application ingestion and replication initial load or incremental load task, the number of records that the job reads at a time from the source. The default value for initial load jobs is 50000, and the default value for incremental load jobs is 2000. If you specified Standard (REST) API for the salesforceAPI parameter, you must change the fetchSize value to 2000.	Salesforce
fetchSizeForInitialLoad	Integer	For Salesforce sources in an application ingestion and replication combined initial and incremental load task, the number of source records that the job reads at a time during the initial unload phase. The default value is 50000. If you specified Standard (REST) API for the salesforceAPI field, you must change the fetchSize value to 2000.	Salesforce
fetchSizeForIncrementalLoad	Integer	For Salesforce sources in an application ingestion and replication combined initial and incremental load task, the number of change records that the job can fetch at a time from the source during the incremental phase. The default value is 2000. For an initial load task or combined initial and incremental load task, if you specified Standard (REST) API for the salesforceAPI parameter, you must update the fetchSize value to 2000.	Salesforce
includeArchivedAndDeletedRows	Boolean	For Salesforce sources in an application ingestion and replication initial load or combined initial and incremental load task, controls whether the job can read archived and soft-deleted rows from the source during the initial load or unload phase of the combined load. Default is false.	Salesforce

Field	Type	Description	Supported source types
includeBase64Fields	Boolean	For an application ingestion and replication task with a Salesforce source, controls whether the job can replicate data from source fields that have the Base64 data type. The default value is false. Configure this parameter only if you set the salesforceAPI parameter to Standard (REST) API.	Salesforce
maximumBase64BodySize	Integer	For Salesforce sources in an application ingestion and replication task, the maximum body size of Base64 encoded data. Default is 7 MB. Pass this parameter only if you set the includeBase64Fields field to true.	Salesforce
includeViews	Boolean	Indicates whether to include views in the table counts and list of table names. Options are: - **true**. Include views. - **false**. Do not include views.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
startDate	String	The start date for retrieving source records for the load operation.	Salesforce, Marketo, Microsoft Dynamics 365, SAP (ODP Extractor, OData V2, SAP Mass Ingestion), SAP (ABAP), NetSuite, Workday, ServiceNow, Salesforce Marketing Cloud, Oracle Fusion Cloud
endDate	String	The end date for retrieving source records for the load operation.	Salesforce, Marketo, Microsoft Dynamics 365, SAP (ODP Extractor, OData V2, SAP Mass Ingestion), SAP (ABAP), NetSuite, Workday, ServiceNow, Salesforce Marketing Cloud, Oracle Fusion Cloud,

Field	Type	Description	Supported source types
batchSize	Integer	The batch size used when reading source records.	Salesforce, Marketo, Microsoft Dynamics 365, SAP (ODP Extractor, OData V2, SAP Mass Ingestion), SAP (ABAP), NetSuite, Workday, ServiceNow, Salesforce Marketing Cloud, Oracle Fusion Cloud
mid	String	The unique Member Identification code assigned to your Salesforce Marketing Cloud account.	Salesforce Marketing Cloud
context	String	For SAP sources using the ODP extractor, the context name.	SAP ODP
cdcTechnique	String	For incremental load or combined initial and incremental load tasks, specifies the change data capture method. Options are: - **CDC Tables**. Read data changes directly from the SQL Server CDC tables. This option applies only to SQL Server sources. Default is CDC Tables. - **Log-based**. Capture Inserts, Updates, and Deletes in near real time by reading the database transaction logs. Also capture DDL changes based on schema drift settings. For SQL Server sources, data changes are read from the SQL Server transaction log and the enabled SQL Server CDC tables. For Azure SQL Database sources, data changes are read from CDC tables only. - **Query-based**. Capture Inserts and Updates by using a SQL WHERE clause that points to a CDC query column. The query column is used to identify the rows that contain the changes made to the source tables since the beginning of the CDC interval.	Oracle, Microsoft SQL Server, MySQL, Db2 for LUW

Field	Type	Description	Supported source types
cdcQueryBasedColumnType	String	For query-based CDC on source types, the column data type of the CDC query column in the source table. The column data type must combine the date and time. For Oracle, use Timestamp.	Oracle, Microsoft SQL Server, MySQL, Db2 for LUW
cdcQueryBasedColumnName	String	For query-based CDC on source types , the case-sensitive name of the CDC query column in the source table. The column must be present in the source table. Maximum length is 70 characters.	Oracle, Microsoft SQL Server, MySQL, Db2 for LUW
cdcQueryBasedDateColumn	String	For query-based CDC on source types that use a separate date column, the date column used to detect changed rows.	Oracle, Microsoft SQL Server, MySQL, Db2 for LUW
cdcQueryBasedTimeColumn	String	For query-based CDC on source types that use a separate time column, the time column used to detect changed rows.	Oracle, Microsoft SQL Server, MySQL, Db2 for LUW
CdcIntervalDays	Integer	The frequency of a query-based change data capture cycle, expressed in days. Sets the days portion of the CDC Interval property.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
CdcIntervalHours	Integer	The frequency of a query-based change data capture cycle, expressed in hours. Sets the hours portion of the CDC Interval field.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
CdcIntervalMins	Integer	The frequency of a query-based change data capture cycle, expressed in minutes. Sets the minutes portion of the CDC Interval field. Default value is 5 minutes.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
lobsEnabled	Boolean	Set this parameter to true if the source contains large object columns that you want to replicate to the target. Supported LOB data types are BLOB, CLOB, NCLOB, LONG, LONG RAW, and XML.	Oracle, PostgreSQL, Db2 for LUW, Db2 for i, SAP ABAP

Field	Type	Description	Supported source types
workdayReplicationType	String	The type of web service to use for data retrieval. Options are: - **SOAP**: Uses SOAP APIs to extract Workday data. - **RaaS**: Uses Workday Report-as-a-Service (RaaS) to extract source data from custom objects and fields through custom reports. You can use Workday RaaS only in initial load jobs.	Workday
workdayReportsNumber	Integer	If you use the RaaS API, specify the number of reports you want to extract from the source.	Workday
workdayReportName	String	If you use the RaaS API and you want to extract a single report, specify the name or URL of the custom report you want to read from the source.	Workday
workdayReportsConfigFile	String	If you use the RaaS API and you want to extract multiple reports, specify the path to the CSV file that you created for the list of custom reports that you want to read from the source.	Workday
outputType	String	The format in which you want the data to be stored on the target.	Workday
extractNonDefault	Boolean	Indicates whether extract source fields that do not contain any default value.	Workday
oracleFusionInterfaceType	String	The type of interface used to extract data from the source. Options are: - REST. Extracts data from various applications of Oracle Fusion such as ERP, SCM, HCM, Sales, and Services, and transfer data to the target. - BICC. Extracts bulk data from the source to the target.	Oracle Fusion Cloud
oracleFusionModuleName	String	The name of the Oracle Fusion Cloud Applications Suite module to extract data.	Oracle Fusion Cloud
oracleFusionEnableChildObjects	Boolean	Indicates whether to include child objects from the Oracle Fusion Cloud source in the extraction.	Oracle Fusion Cloud

The following table describes the source advanced attributes in the request:

Field	Type	Description	Supported source types
salesforceAPI	String	For Salesforce sources in an application ingestion and replication task, the type of Salesforce API that you want to use to retrieve the source data. Options are: - **Standard (REST) API**. Replicates source fields of Base64 data type. - **Bulk API 2.0**. Excludes replication of source fields of Base64 data type. To use Bulk API 2.0, pass the value bulkv2 in the payload. Default is Bulk API 2.0.	Salesforce
salesforceBulkV2Partitioning	Boolean	For initial and combined load jobs that use the Salesforce Bulk API 2.0, set this parameter to true to use partitioning when reading source data.	Salesforce
salesforceBulkV2RecordsPerPartition	Integer	For initial and combined load jobs that use the Salesforce Bulk API 2.0, the number of records to process per partition when reading data.	Salesforce
salesforceBulkV2MaxParallelPartitions	Integer	The maximum number of partition threads that can be used to query the source for data in parallel during initial load processing or the unload phase of combined jobs that use the Salesforce Bulk API 2.0. Use this property to control the number of source partition queries that can be executed against the source at the same time. For example, if a table contains data in 100 partitions, all 100 partitions are queried at the same time by default. However, you can use this property to reduce the number of concurrent queries. Default value is equal to the total number of partitions.	Salesforce
enableSourcePartitioning	Boolean	Controls whether to use multiple partitions to query for the source data to be unloaded in parallel during initial load processing or the unload phase of combined load jobs. Set this property to true to use multiple partitions with one query per partition.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA

Field	Type	Description	Supported source types
sourcePartitionCount	Integer	The number of partitions to use for querying for source data in parallel during initial load jobs and the unload phase of combined load jobs, when the Enable Partitioning custom property is selected. Default is 5.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
jdbcPartitioningTechnique	String	The partitioning technique used to distribute source rows across partitions. Valid values are uniform, which distributes primary keys evenly across partitions, and heuristic, which estimates key ranges for faster calculation. Default is uniform.	Oracle, Microsoft SQL Server, SAP HANA
sourceMaxParallelPartitions	Integer	The maximum number of partition reader threads that can be used to query the source in parallel during initial load processing or the unload phase of combined jobs.	Oracle, Microsoft SQL Server, SAP HANA
unloadHelperThreadCount	Integer	The number of unload helper threads allocated to an initial load job or the unload phase of a combined job to convert the unloaded data rows into a canonical format that can be passed to the writer. Default value is 2.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
readEventBatchSize	Integer	The number of payload events written in batch to the internal event queue during CDC processing. When the event queue is implemented as an internal ring buffer, this value is the number of payload events that the reader writes to a single internal buffer slot.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
readerHelperThreadCount	Integer	The number of reader helper threads used during CDC processing to convert change data into a canonical format that can be passed to the target. Default value is 3. You can enter a larger value to allow more threads to be available for performing conversion processing in parallel.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA

Field	Type	Description	Supported source types
readerInputIsPersisted	Boolean	Set this parameter to true to persistently store transaction data in a disk buffer so that the data can be consumed continually, even when the writing of data to the target is slow or delayed.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA
unloadFlashbackDisabled	Boolean	Set this parameter to true to disable the use of Oracle Flashback when fetching data from the database.	Oracle, Microsoft SQL Server, MySQL
salesforceBulkV2Partitioning	Boolean	For initial and combined load jobs that use the Salesforce Bulk API 2.0, set this parameter to true to use partitioning when reading source data.	Salesforce
salesforceBulkV2RecordsPerPartition	Integer	For initial and combined load jobs that use the Salesforce Bulk API 2.0, the number of records to process per partition when reading data.	Salesforce
salesforceBulkV2MaxParallelPartitions	Integer	The maximum number of partition threads that can be used to query the source for data in parallel during initial load processing or the unload phase of combined jobs that use the Salesforce Bulk API 2.0. Use this property to control the number of source partition queries that can be executed against the source at the same time. For example, if a table contains data in 100 partitions, all 100 partitions are queried at the same time by default. However, you can use this property to reduce the number of concurrent queries. Default value is equal to the total number of partitions.	Salesforce
readerHistoricalCacheUseCloud	Boolean	Indicates whether the reader historical cache is stored in cloud storage.	Oracle, Microsoft SQL Server, MySQL, PostgreSQL, Teradata, Netezza, Db2 for LUW, Db2 for i, Db2 for z/OS, SAP HANA

Target attributes

The following table describes the target connection and task attributes in the request:

Field	Type	Description	Supported target types
connection	String	Name of the connection for the target system.	All supported targets
schema	String	The target schema where Data Ingestion and Replication creates the target objects or tables.	Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL
bucket	String	The name of an existing bucket container that stores, organizes, and controls access to the data objects that you load to the target.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
directory	String	Name of a root directory to use for storing output files for an incremental load task. If you select the Connection Directory as Parent option, you can still optionally specify a task target directory. It will be appended to the parent directory to form the root for the data, schema, cycle completion, and cycle contents directories. This field is required if the {TaskTargetDirectory} placeholder is specified in patterns for any of the following directory fields.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
snowflakeRole	String	The Snowflake role assigned to the data ingestion and replication user to load data to Snowflake.	Snowflake Data Cloud
useTableNameAsTopicName	Boolean	Indicates whether the task writes messages that contain source data to separate topics, one for each source table or object, or writes all messages to a single topic. Options are: - **true**. Write messages to separate table-specific topics. - **false**. Write all messages to the single topic that has the name specified in the topicName field.	Kafka

Field	Type	Description	Supported target types
includeSchemaName	Boolean	When you set useTableNameAsTopicName to true for a Kafka target, this setting adds the source schema name in the table-specific topic names. The topic names then have the format schemaname_tablename. Options are: - **true**. Add the source schema name in the table-specific topic names. - **false**. Do not add the source schema name in the table-specific topic names.	Kafka
tablePrefix	String	When you set useTableNameAsTopicName to true for a Kafka target, this parameter specifies an optional prefix to add to the table-specific topic names. For example, if you specify myprefix_, the topic names have the format myprefix_tablename. If you omit the underscore (_) after the prefix, the prefix is prepended to the table name.	Kafka
tableSuffix	String	When you set useTableNameAsTopicName to true for a Kafka target, this parameter specifies an optional suffix to add to the table-specific topic names. For example, if you specify _mysuffix, the topic names have the format tablename_mysuffix. If you omit the underscore (_) before the suffix, the suffix is appended to the table name.	Kafka
topicName	String	The name of the single Kafka topic to which all messages that contain source data will be written. Use this parameter if useTableNameAsTopicName is set to false.	Kafka
stage	String	The name of the internal staging area that holds the data read from the source before the data is written to the target tables. This name must not include spaces. If the staging area does not exist, it will be automatically created.	Snowflake Data Cloud

Field	Type	Description	Supported target types
auditData	String	For incremental load and combined initial and incremental load jobs, indicates how source DML changes, including inserts, updates, and deletes, are applied to the target. Options are: - softDeletes. Apply source delete operations to the target as soft deletes. A soft delete marks the deleted row as deleted without actually removing it from the database. For example, a delete on the source results in a change record on the target with "D" displayed in the INFA_OPERATION_TYPE column. After enabling Soft Deletes, any update in the source table during normal or backlog mode results in the deletion of the matching record, insertion of the updated record, and marking of the INFA_OPERATION_TYPE operation as NULL in the target table. Similarly, inserting a record in the source table during backlog mode results in marking the INFA_OPERATION_TYPE operation as E in the target table record. Consider using soft deletes if you have a long-running business process that needs the soft-deleted data to finish processing, to restore data after an accidental delete operation, or to track deleted values for audit purposes. - audit. Apply an audit trail of every DML operation made on the source tables to the target. A row for each DML change on a source table is written to the generated target table along with the audit columns you select. The audit columns contain metadata about the change, such as the DML operation type, time, owner, transaction ID, generated ascending sequence number, and before image. Consider using the Audit apply mode when you want to use the audit history to perform downstream computations or processing on the data before writing it to the target database or when you want to examine metadata about the captured changes. **Note:** If you use **Query-based** CDC method, this property is not applicable. - Standard. If you do not specify the auditData property, the task applies standard by default. In standard mode, the task accumulates the changes in a single apply cycle and intelligently merge them into fewer SQL statements before applying them to the target. For example, if an update followed by a delete occurs on the source row, no row is applied to the target. If multiple updates occur on the same column or field, only the last update is applied to the target. If multiple updates occur on different columns or fields, the updates are merged into a single update record before being applied to the target.	

Field	Type	Description	Supported target types
outputFormat	String	The format of the output file. Options are: - **AVRO** - **CSV** - **PARQUET** Default is CSV. **Note:** Output files in CSV format use double-quotation marks ("") as the delimiter for each field.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
parquetFormat	Boolean	If AVRO is specified as the output format in the outputFormat parameter for the target, set this parameter to true to write data in uncompressed Parquet format. Alternatively, you can set the outputFormat parameter to PARQUET and not include this parameter. Options are: - **true**. Write data in uncompressed Parquet format. - **false**. Write data in AVRO format. **Note:** If you set this option to true, you must install Visual C++ Redistributable Packages for Visual Studio 2013 on the computer where the Secure Agent runs.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
avroFormat	String	If AVRO is specified as the output format, specifies the format of the Avro schema that will be created for each source table or object. Options are: - **Avro-Flat**. This Avro schema format lists all Avro fields in one record. - **Avro-Generic**. This Avro schema format lists all columns or fields from a source table or object in a single array of Avro fields. - **Avro-Nested**. This Avro schema format organizes each type of information in a separate record. Default is Avro-Flat.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
avroSerializationFormat	String	If AVRO is specified as the output format, specify the serialization format of the Avro output files. Options are: - **Binary** - **JSON** Default value is Binary.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
avroSchemaDirectory	String	If AVRO is specified as the output format, specifies the local directory where Data Ingestion and Replication stores Avro schema definitions for each source table or object. Schema definition files have the following naming pattern: schemaname_tablename.txt **Note:** If you do not specify this directory, no Avro schema definition file is produced.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage

Field	Type	Description	Supported target types
fixedDirectoryForEachTable	Boolean	For an initial load task, indicates whether to use the source table or object names as the names of the directories to which the task writes flat files that contain source data for all job runs. Options are : - **true**. Use the source table or object names as the names of the directories for each job run. - **false**. Create a new set of directories for each job run by using the following naming pattern: tablename_timestamp.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
fileCompressionType	String	The file compression type to optionally use for AVRO or CSV output files. Options are: - **Deflate** - **gzip** - **Snappy** If you do not specify this parameter, the output files are not compressed.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
avroCompressionType	String	The optional Avro compression type if the output format is set to AVRO. Options are: - **None** - **Bzip2** - **Deflate** - **Snappy** Default value is **None**, which means no compression is used.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
parquetCompressionType	String	The optional Parquet compression type to use when the output format is set to PARQUET or AVRO by the parquetFormat true parameter. Options are: - **None** - **gzip** - **Snappy**	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
deflateCompressionLevel	Integer	The compression level of 0-9 to use for Deflate compression type, which is set by the avroCompressionType parameter. Default is 0.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
addDirectoryTags	Boolean	For incremental load and combined initial and incremental load tasks, indicates whether the task adds the "dt=" prefix to the names of apply cycle directories to be compatible with the naming convention for Hive partitioning. Options are: - **true**. Add the "dt=" prefix to the names of apply cycle directories. - **false**. Do not change the names of apply cycle directories. Default is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types

directoryTags	String	This field is dependent on the addDirectoryTags field.
		For example:
		`addDirectoryTags: true,`
		`directoryTags: \directory.`
			Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

renamingRules	List	Optional rules for renaming target tables that correspond to the source tables or objects.
		For example:
		`- source: "*"`
		`target: "*_1"`
			Amazon S3, Microsoft Azure Data Lake Storage Gen2, Microsoft Azure Synapse Analytics, Flat File, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL, Google Cloud Storage

dataTypeRules	List	Optional data type mapping rules that override the default source-to-target data-type mapping rules. The default mappings are described under Default Data-Type Mappings in the *Application Ingestion and Replication* and *Database Ingestion and Replication* documentation. For example: `- source: Int target: String`	Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks
cdcCompatibleFormat	Boolean	Indicates whether to include UNDO data in the output. Default is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
useGenericDatatypeFramework	Boolean	Set this parameter to true to use the generic data type framework for mapping source data types to target data types.	All supported targets

The following table describes the target advanced attributes that you can set for a task:

Field	Type	Description	Supported target types
createUnmanagedTables	Boolean	Set this parameter to true if you want the task to create Databricks target tables as unmanaged tables. After you deploy the task, you cannot change this parameter to switch to managed tables. Default is false, which creates managed tables.	Databricks
unmanagedTablesParentDirectory	String	If you create Databricks unmanaged tables, specify a parent directory in Amazon S3 or Microsoft Azure Data Lake Storage to hold the Parquet files that are generated for each target table when captured DML records are processed. For example: `/data/unmanaged`	Databricks
writerTargetTableFormat	String	The format of the target tables, such as standard or Iceberg. To enable the use of Snowflake-managed Iceberg tables, set this property to **iceberg**.	Snowflake Data Cloud
writerTargetTableExternalVolumeName	String	If the target uses the Iceberg table format, the name of the external volume used for the target tables.	Snowflake Data Cloud
writerTargetTableExternalStorageBaseLocation	String	If the target uses the Iceberg table format, the base URL for the external storage location. If you do not specify this value, the base URL from the external volume definition is used.	Snowflake Data Cloud
writerSnowflakeIngestionMethod	String	Set to SNOWPIPE_STREAMING to use the Snowpipe Streaming API to quickly stream rows of data directly to Snowflake Data Cloud target tables with low latency instead of first writing the data to stage files. This option is applicable for all load types. Ensure that the Snowflake connection uses KeyPair authentication.	Snowflake Data Cloud

Field	Type	Description	Supported target types
writerSnowflakeDeferredMergeInterval	Integer	If you set writerSnowflakeIngestionMethod to SNOWPIPE_STREAMING, you can optionally set the frequency, in seconds, at which change data rows are merged and applied to the Snowflake target tables. The merge frequency affects how often the stream change data is merged to the Snowflake base table. A Snowflake view joins the stream change data with the base table. Set this value to balance the costs of merging data to the base table with the performance of view join processing. This field applies to incremental load and combined initial and incremental load tasks. Valid values are 60 through 604800 seconds. Default is 3600 seconds.	Snowflake Data Cloud
addHeadersToCSVFile	Boolean	If you specify **CSV** as the output format, indicates whether to add a header row with column names to the CSV output files.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Google Cloud Storage
addOperationType	Boolean	For targets in an incremental load or combined initial and incremental load task, set this parameter to true to add a metadata column that includes the source SQL operation type in the output that the job replicates to the target. For an incremental load or combined initial and incremental load task, default is true. For an initial load task, default is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
addOperationTime	Boolean	For targets in an incremental load or combined initial and incremental load task, set this parameter to true to add a metadata column that includes the source SQL operation time in the output that the job replicates to the target. For initial loads, the job always writes the current date and time. Default is false for all load types.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage

Field	Type	Description	Supported target types
addOperationOwner	Boolean	For targets in an incremental load or combined initial and incremental load task, set this parameter to true to add a metadata column that includes the owner of the source SQL operation in the output that the job replicates to the target. For initial loads, the job always writes "INFA" as the owner. Default is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
addOperationTransactionId	Boolean	For targets in an incremental load or combined initial and incremental load task, set this parameter to true to add a metadata column that includes the source transaction ID in the output that the job replicates to the target for SQL operations. Default is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
addBeforeImages	Boolean	For targets in an incremental load or combined load task, set this parameter to true to include UNDO data in the output that the job writes to the target. Default is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
asyncWrite	Boolean	Controls whether to use synchronous delivery of messages to Kafka. Options are: - **true**. Use asynchronous delivery. Data Ingestion and Replication sends messages as soon as possible, without regard for the order in which the changes were retrieved from the source. - **false**. Use synchronous delivery. Kafka must acknowledge each message as received before Data Ingestion and Replication sends the next message. In this mode, Kafka is unlikely to receive duplicate messages. However, performance might be slower. Default is true.	Kafka

Field	Type	Description	Supported target types
producerConfigurationProperties	String	A comma-separated list of key=value pairs to enter Kafka producer properties for Apache Kafka, Confluent Kafka, or Kafka-enabled Event Hubs targets. If you have a Confluent target that uses Confluent Schema Registry to store schemas, you must specify the following properties: schema.registry.url=url, key.serializer= org.apache.kafka.common.serialization.StringSerializer, value.serializer= io.confluent.kafka.serializers.KafkaAvroSerializer	Kafka
writerHelperThreadCount	Integer	The number of writer helper threads that are used to convert incoming change data rows or initial unload rows to the output format configured for the target, such as Avro, CSV, or Parquet. Default value is 2.	All supported targets
writerDistributorsCount	Integer	The number of distributors that can run on separate threads in parallel to process data during an initial load job or the unload phase of a combined load job when the Writer Unload Multiple Distributors custom property is set to true. Using parallel distributor threads can improve job performance, particularly for high-volume data transfers. Default value is 3.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Snowflake Data Cloud, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL, Google Cloud Storage
writerUnloadUseMultipleDistributors	Boolean	Indicates whether multiple distributor threads can be used to process data in parallel during initial load jobs and the unload phase of combined load jobs. Default value is false.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Snowflake Data Cloud, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL, Google Cloud Storage

Field	Type	Description	Supported target types
auditColumnsPrefix	String	Adds a prefix to the names of the added metadata columns to easily identify them and to prevent conflicts with the names of existing columns. The default value is INFA_.	Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL
jsonFormatType	String	The format type used when writing output data in JSON format.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Flat File, Kafka, Google Cloud Storage
checkpointsInTarget	Boolean	Set to true if you want the job to save a checkpoint in the Kafka header each time a source transaction commits. When the job is restarted, checkpoint information is retrieved from the Kafka header.	Kafka
addLastReplicatedTime	Boolean	Adds a metadata column that records the timestamp in UTC format at which a record was inserted or last updated in the target table. For initial loads, all loaded records have the same timestamp. For incremental and combined initial and incremental loads, the column records the timestamp of the last DML operation that was applied to the target.	Databricks, Amazon Redshift, Snowflake Data Cloud
caseTransformation	String	Controls the case of letters in the target names. Case transformation strategy options to handle the case of letters in generated target table (or object) names and column (or field) names are: - **Same as source**. Use the same case as the source table (or object) names and column (or field) names. Enter value "none" to use this option. - **UPPERCASE**. Use all uppercase. - **lowercase**. Use all lowercase.	Google BigQuery, Snowflake Data Cloud
useConnectionDir	Boolean	Uses the parent directory specified in the connection properties.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types
addOperationSequence	Boolean	Adds a metadata column that records a generated, ascending sequence number for each change operation that the job inserts into the target tables. The sequence number reflects the change stream position of the operation. This field is applicable when you use Apply Mode.	Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL
cycleId	Boolean	Set to true to add a metadata column that includes the cycle ID of each CDC cycle in each target table. A cycle ID is a number that's generated by the CDC engine for each successful CDC cycle. If you integrate the job with Data Integration taskflows, the job can pass the minimum and maximum cycle IDs in output fields to the taskflow so that the taskflow can determine the range of cycles that contain new CDC data. This capability is useful if data from multiple cycles accumulates before the previous taskflow run completes.	Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL
schemaDirectory	String	A custom directory for storing the schema file, if you want to store it in a directory other than the default. This property is optional. For initial loads, the schema is stored in the data directory by default. For incremental load and combined initial and incremental load tasks, the default value is `{TaskTargetDirectory}/data/{TableName}/schema`. You can use the same placeholders as for the data directory. Enclose placeholders in curly brackets { }. If you include the toUpper or toLower function, put the placeholder name in parentheses and enclose both the function and placeholder in curly brackets, for example: {toLower(SchemaName)}. The task writes the schema only to output data files in CSV format. Parquet and Avro data files contain their own embedded schema.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types
cdcDataDirectory	String	For incremental load and combined initial and incremental load tasks, the path to the subdirectory that contains the cdc-data data files. You can build the path from a folder path, timestamp values, schema name, and table name. Enclose each placeholder in curly brackets { }. Placeholder values are not case sensitive. Use {TaskTargetDirectory} for a task-specific base directory on the target instead of the folder path specified in the connection properties. Default value is `{TaskTargetDirectory}/data/{TableName}/data`. If you use Amazon S3 with the Apache Iceberg Open Table format, this property does not apply. Files are saved under the warehouse base directory. Placeholders: {TaskTargetDirectory}, {Timestamp}, {yy}, {yyyy}, {mm}, {dd}, {SchemaName}, {toUpper(SchemaName)}, {toLower(SchemaName)}, {TableName}, {toUpper(TableName)}, {toLower(TableName)}. Timestamp format is yyyymmdd_hhmissms.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
cdcCompletionDirectory	Boolean	For incremental load and combined initial and incremental load tasks, the path to the directory that contains the cycle completed file. Default value is `{TaskTargetDirectory}/cycle/completed`.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
cdcContentsDirectory	String	For incremental load and combined initial and incremental load tasks, the path to the directory that contains the cycle contents files. Default is {`TaskTargetDirectory}/cycle/contents`.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types
cdcDataDirectoryPartitioning	Boolean	For incremental load and combined initial and incremental load tasks, indicates whether to create a timestamp subdirectory for each CDC cycle under each data directory. Options are: - true. Create a timestamp subdirectory for each CDC cycle under the summary contents and completed subdirectories. - false. Write individual data files to the same directory without a timestamp, unless you define an alternative directory structure.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
cdcSummaryDirectoryPartitioning	Boolean	For incremental load and combined initial and incremental load tasks, indicates whether to create a timestamp subdirectory for each CDC cycle under the summary contents and completed subdirectories. Options are: - true. Create a timestamp subdirectory for each CDC cycle under the summary contents and completed subdirectories. - false. Do not create timestamp subdirectories under the summary contents and completed subdirectories.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
cdcContentsListFiles	Boolean	For incremental load and combined initial and incremental load tasks, indicates whether to list individual data files under the contents subdirectory. Options are: - true. List individual data files under the contents subdirectory. - false. Do not list individual data files under the contents subdirectory. If you set cdcSummaryDirectoryPartitioning to false, the default is true. All individual files are listed in the contents subdirectory unless you configure custom subdirectories by using placeholders, such as for timestamp or date. If you set cdcDataDirectoryPartitioning to true, you can still set this property to true to list individual files and group them by CDC cycle.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

The following table describes custom attributes that you can set for the target:

Field	Type	Description	Supported target types
forceRunOnOtherAgent	Boolean	Set to true to force the job to run on a Secure Agent other than the one it would run on by default.	All supported targets
forceRunOnSpecificAgent	String	Set this property to force an application or database ingestion and replication job to run on a specific agent in the group. This setting applies only to incremental load jobs and the incremental CDC portion of combined load jobs. This capability is helpful when you want to manually assign CDC jobs to a specific agent specified by the agent ID. For example, "forceRunOnSpecificAgent": "agent-007" To find the ID, go to Runtime Environments in Administrator, expand the runtime environment for the Secure Agent group, click the agent, and copy the agent ID from the browser URL.	All applicable targets

Runtime attributes

The following table describes the run-time options that you can set for a task:

Field	Type	Description	Supported target types

schemaDriftOptions	String	For Microsoft SQL Server, Oracle, or PostgreSQL sources in a database ingestion and replication incremental load or combined initial and incremental load task, the schema drift options for DDL operations.
		Options are:
		- **addColumn**
		- **modifyColumn**
		- **dropColumn**
		- **renameColumn**
		Valid values are:
		- **ignore**
		- **replicate**
		- **stop job**
		- **stop table**
		For example:
		`schemaDriftOptions:`
		`addColumn: ignore`
		`modifyColumn: replicate`
		`dropColumn: replicate`
		`renameColumn: replicate`
		Note: Tasks that have a Microsoft Azure Synapse Analytics target ignore the renameColumn option.
			All supported targets

numberOfRowsInOutputFile	Integer	The maximum number of rows that the task writes to an output data file on a target. When set to null, no row limit is applied and each output file contains all rows for the corresponding table or partition.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL, Google Cloud Storage
fileExtensionBasedOnFileType	Boolean	Indicates whether you want the output data files to have the .dat extension. - **true**. The output files have file-name extensions based on their file types. - **false**. The output files have the .dat extension. The default value is true.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types
applyCycleChangeLimit	Integer	In an incremental load task, the number of records that must be processed before the job ends an apply cycle. When this record limit is reached, the job ends the apply cycle and writes the change data to the target. Default is 10000. **Note:** Either the applyCycleChangeLimit parameter or applyCycleInterval*time_unit* parameter must have a non-zero value.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
applyCycleIntervalDays	Integer	In an incremental load task, the number of days that must elapse before the application ingestion and replication job or database ingestion and replication job ends an apply cycle. You can specify this parameter with the applyCycleIntervalHours, applyCycleIntervalMins, and applyCycleIntervalSecs parameters or specify a subset of these parameters. Default is 0.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
applyCycleIntervalHours	Integer	For targets in an incremental load task, the number of hours that must elapse before a job ends an apply cycle. Default is 0.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
applyCycleIntervalMins	Integer	In an incremental load task, the number of minutes that must elapse before the application ingestion and replication job or database ingestion and replication job ends an apply cycle. Default is 15.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
applyCycleIntervalSecs	Integer	For targets in an incremental load task, the number of seconds that must elapse before the application ingestion and replication job or database ingestion and replication job ends an apply cycle. Default is 0.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types
lowActivityFlushHours	Integer	The amount of time, in hours, that must elapse during a period of no change activity on the source before the application ingestion and replication job or database ingestion and replication job ends an apply cycle. You can use this parameter in conjunction with the lowActivityFlushMins parameter or specify only one of these parameters. When this time limit is reached, the job ends the apply cycle and writes the change data to the target. Default is 0. If you do not specify a value for lowActivityFlushHours or lowActivityFlushMins, the application ingestion and replication job or database ingestion and replication job ends apply cycles only after either the applyCycleChangeLimit or cycle interval time limit is reached.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage
lowActivityFlushMins	Integer	The amount of time, in minutes, that must elapse during a period of no change activity on the source before the application ingestion and replication job or database ingestion and replication job ends an apply cycle. You can use this parameter in conjunction with the lowActivityFlushHours parameter or specify only one of these parameters. When the overall time limit is reached, the ingestion and replication job ends the apply cycle and writes the change data to the target. Default is 0. If you do not specify a value for lowActivityFlushHours or lowActivityFlushMins, the job ends apply cycles only after either the applyCycleChangeLimit or cycle interval time limit is reached.	Amazon S3, Microsoft Azure Data Lake Storage Gen2, Google Cloud Storage

Field	Type	Description	Supported target types
executeInTaskflow	Boolean	Indicates whether the task can be run within a taskflow.	Any load type with Amazon Redshift, Oracle, SQL Server, or Snowflake target. Initial load jobs with Amazon S3, Azure SQL Database, Databricks, Google BigQuery, Google Cloud Storage, Kafka, Microsoft Azure Data Lake Storage Gen2, Microsoft Azure Synapse Analytics, Microsoft Fabric OneLake, Oracle Cloud Object Storage, or PostgreSQL target
enableAutoTuning	Boolean	Set this parameter to true to enable auto-tuning for a database ingestion and replication initial load job or the unload phase of a combined load job. Auto-tuning optimizes job performance on the source and target sides based on performance and system metrics collected automatically from your environment, such as network and database latency, row counts, table sizes, CPU core counts, and memory usage, along with application metrics such as JVM heap allocation and task capacity. Default is false.	Db2 for i, Db2 for LUW, Db2 for z/OS, MySQL, Oracle, PostgreSQL, SAP HANA, SQL Server, or Teradata source type with any supported target type.

The following table describes checkpoint attributes that define when and how progress is saved during data ingestion and replication:

Field	Type	Description	Supported target types
checkpointAllRows	Boolean	Indicates whether the incremental load task job performs checkpoint processing for every message that is sent to the target. When this parameter is set to true, the checkpointEveryCommit, checkpointRowCount, and checkpointFrequencySecs parameters are ignored. Default is true.	Kafka
checkpointEveryCommit	Boolean	For targets in an incremental load job, indicates whether the job performs checkpoint processing for every commit that occurs on the source. Default is false. If you set this parameter to true, do not also specify checkpointAllRows.	Kafka

Field	Type	Description	Supported target types
checkpointRowCount	Integer	For a Kafka target in an incremental load task, the maximum number of messages that the job sends to the target before adding a checkpoint. If you set this option to 0, an ingestion and replication job does not perform checkpoint processing based on the number of messages. If you set this option to 1, the ingestion and replication job adds a checkpoint for each message. Default is 0. If you set this parameter to a non-zero number, do not also specify checkpointAllRows.	Kafka
checkpointFrequencySecs	Integer	For a Kafka target in an incremental load task, the maximum number of seconds that must elapse before the ingestion and replication job adds a checkpoint. If you set this option to 0, the job does not perform checkpoint processing based on elapsed time. Default is 0. If you set this parameter to a non-zero number, do not also specify checkpointAllRows.	Kafka

The following table describes custom attributes that you can set for a task:

Field	Type	Description	Supported endpoints
customProperties	String	Custom properties for the source, target, and task definition that Informatica provides to meet special requirements. Specify these properties only at the direction of Informatica Global Customer Support. For example: "customProperties": { "readerInputIsPersisted": true	All
use.table.based.restart	Boolean	For application and database ingestion and replication jobs that use the Query-based CDC method, if the job is aborted or stopped for any reason, you can use this property to define the restart and recovery model. Options are: - **true.** Use table-based restart. For every cycle of the Query-based CDC interval, the DML data from individual source tables is applied to the corresponding target tables after the current CDC interval completes. The data of all the tables is committed together at the end of the CDC cycle. If the property is set to true, the job can automatically switch over to another Secure Agent in the Secure Agent group. - **false.** Use cycle-based restart. The DML data from source tables is applied to the corresponding target tables only when the DML data of all candidate tables is available for a current CDC interval cycle. The data is kept in persistent cache while the job waits for the data for all tables to be fetched successfully. If the property is set to false, the job cannot automatically switch over to another Secure Agent in the Secure Agent group.	Microsoft Azure Synapse Analytics, Snowflake Data Cloud, Amazon Redshift, Google BigQuery, Databricks, Oracle, Microsoft SQL Server, PostgreSQL, MySQL, Teradata, Db2 for i, Netezza, Db2 for LUW, Db2 for z/OS

The following table describes schedule attributes that you can set for a task:

Field	Type	Description	Supported endpoints
schedule	String	The name of a predefined schedule in Administrator to run job instances for initial load tasks automatically after deployment.	All endpoints

Example: Create a Salesforce to Snowflake task

In this example, you create application ingestion and replication tasks that load Salesforce data to Snowflake using initial, incremental, and combined initial and incremental loads.

The request bodies include only the properties that each task needs. For a complete request body, see "Sample request body for creating a task" on page 559.

For descriptions of all properties, see "Source attributes" on page 581, "Target attributes" on page 592, and "Runtime attributes" on page 607.

Request body

Send each request body in a POST request to the following resource:

```
POST https://qa-pod1-ing.rel.infaqa.com/dbmi/public/api/v2/task/create
```

Initial load

The following request body creates an initial load task named sf_to_snowflake_initial. The task uses the Salesforce Bulk API 2.0 to read the Custom_all__c object, splits the data into partitions of 10,000 records with up to five partitions read in parallel, and loads the data to the ADOBE_PB schema in Snowflake one time:

```
{
    "type": "appmi",
    "general": {
        "name": "sf_to_snowflake_initial",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "initial"
    },
    "source": {
        "connection": "AIN_Salesforce",
        "salesforceAPI": "bulkv2",
        "fetchSize": "50000",
        "salesforceBulkV2Partitioning": "true",
        "salesforceBulkV2RecordsPerPartition": "10000",
        "salesforceBulkV2MaxParallelPartitions": "5",
        "selectionRules": [
            {
                "include": "Custom_all__c"
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "ADOBE_PB",
        "stage": "gkn"
    },
    "runtimeOptions": {
        "executeInTaskflow": "false",
        "enableAutoTuning": "false"
    },
    "replicationRules": {
        "source": "SALESFORCE",
        "target": "ADOBE_PB",
```

```
            "overrides": {
                "tableRules": [],
                "fieldRules": []
            },
            "sourceSet": [
                {
                    "schema": "",
                    "include": "Custom_all__c"
                }
            ],
            "columnTransformations": []
        }
    }
```

The following table describes the properties in the initial load request body:

Property	Description
type	Use appmi to create an application ingestion and replication task.
general.name	Name of the task.
general.location	Project or folder that contains the task.
general.runtimeEnvironment	Runtime environment that runs the task.
general.type	Load type. The value *initial* loads a snapshot of the source data one time.
source.connection	Name of the Salesforce source connection.
source.salesforceAPI	The API that the task uses to read source data. The value *bulkv2* selects the Salesforce Bulk API 2.0.
source.fetchSize	Number of records that the task reads at a time from the source.
source.salesforceBulkV2Partitioning	Partitions the source data when the task reads it with the Bulk API 2.0.
source.salesforceBulkV2RecordsPerPartition	Number of records in each partition.
source.salesforceBulkV2MaxParallelPartitions	Maximum number of partitions that the task reads in parallel.
source.selectionRules	Rules that select the source objects.
target.connection	Name of the Snowflake target connection.
target.schema	Snowflake schema where the task creates the target tables.
target.stage	Name of the internal staging area that holds data before the task writes it to the target tables.
runtimeOptions.executeInTaskflow	Indicates whether a taskflow runs the task.

Property	Description
runtimeOptions.enableAutoTuning	Indicates whether automatic performance tuning is enabled for the task.
replicationRules	Source and target selection rules for the task. The sourceSet list repeats the include rule for the source objects.

A successful request returns HTTP status code 201. The response is similar to the following example:

```
{
  "location": "Default",
  "taskId": "56",
  "frsId": "9vnP9IpLx8BlmWL3LYNW8jk",
  "name": "sf_to_snowflake_initial",
  "createdBy": "4fxvSaESiMPjf8jIFKsYiY",
  "documentType": "APPMI_TASK",
  "parentInfo": [
    {
      "parentId": "7cCn5thwWFLhiZoSosphKL",
      "parentName": "REG",
      "parentType": "Space"
    },
    {
      "parentId": "3uDIOqah80qbMK3cXAceIp",
      "parentName": "Default",
      "parentType": "Project"
    }
  ]
}
```

Incremental load

The following request body creates an incremental load task named sf_to_snowflake_incremental. The task checks the Period object for changes every five minutes, starting from the restart point 2026-10-12 10:25:56 AM. The task renames the target table to Period_O12C:

```
{
                "type": "appmi",
                "general": {
                    "name": "sf_to_snowflake_incremental",
                    "description": null,
                    "location": "Default",
                    "runtimeEnvironment": "invyaminirh01.informatica.com",
                    "type": "cdc"
                },
                "source": {
                    "connection": "AIN_Salesforce",
                    "restartPointForIncrementalLoadTimestamp": "2026-10-12 10:25:56 AM",
                    "fetchSize": "2000",
                    "cdcIntervalDays": null,
                    "cdcIntervalHours": null,
                    "cdcIntervalMins": "5",
                    "selectionRules": [
                        {
                            "include": "Period"
                        }
                    ]
                },
                "target": {
                    "connection": "Snowflake_pat_sp",
                    "schema": "SNOW_PB",
                    "renamingRules": [
                        {
                            "source": "Period",
                            "target": "Period_O12C"
```

```
            }
        ],
        "stage": "gkn",
        "addLastReplicatedTime": "false",
        "cycleId": "false",
        "caseTransformation": "none"
    },
    "runtimeOptions": {
        "executeInTaskflow": false,
        "enableAutoTuning": false,
        "schemaDriftOptions": {
            "modifyField": "replicate",
            "dropField": "ignore",
            "addField": "replicate",
            "renameField": "ignore"
        },
        "customProperties": {}
    },
    "replicationRules": {
        "source": "SALESFORCE",
        "target": "SNOW_PB",
        "overrides": {
            "tableRules": [
                {
                    "source": "Period",
                    "target": "Period_O12C"
                }
            ],
            "fieldRules": []
        },
        "sourceSet": [
            {
                "schema": "",
                "include": "Period"
            }
        ],
        "columnTransformations": []
    }
}
```

The following table describes the properties in the combined load request body:

Property	Description
general.type	Load type. The value *cdc* creates an incremental load task. The task replicates only the changes that occur in the source after the restart point.
source.restartPointForIncrementalLoadTimestamp	Date and time from which the task starts to replicate changes from the source.
source.fetchSize	Number of records that the task reads at a time from the source.
source.cdcIntervalDays, cdcIntervalHours, cdcIntervalMins	Interval at which the task checks the source for changes. In the example, the task checks every 5 minutes.
target.renamingRules	Renames the target table. In the example, the task renames the Period source object to Period_O12C.

Property	Description
target.addLastReplicatedTime, cycleId, caseTransformation	Optional target properties. In the example, the task doesn't add the last replicated time or the cycle ID to the target tables, and it doesn't change the case of the target table and column names.
runtimeOptions.schemaDriftOptions	Replicates modified and added fields and ignores dropped and renamed fields.
replicationRules.overrides	Repeats the renaming rule for the replication.

A successful request returns HTTP status code 201. The response is similar to the following example:

```
{
    "location": "Default",
    "taskId": "759371",
    "frsId": "6s0Hym672sobmP2s17gME0",
    "name": "sf_to_snowflake_incremental",
    "createdBy": "5wHseC9ObJ2cvB6eHikRe3",
    "documentType": "APPMI_TASK",
    "parentInfo": [
        {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
        },
        {
            "parentId": "3uDIOqah80qbMK3cXAceIp",
            "parentName": "Default",
            "parentType": "Project"
        }
    ]
}
```

Combined load

The following request body creates a combined load task named sf_to_snowflake_combined. The task loads the cli_sf__c object to the cli_sf__c3 table in Snowflake and then checks for changes every five minutes:

```
{
    "type": "appmi",
    "general": {
        "name": "sf_to_snowflake_combined",
        "description": null,
        "location": "Oracle",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "combined"
    },
    "source": {
        "connection": "AIN_Salesforce",
        "salesforceAPI": "bulkv2",
        "fetchSize": "50000",
        "fetchSizeForIncrementalLoad": "2000",
        "cdcIntervalDays": "0",
        "cdcIntervalHours": "0",
        "cdcIntervalMins": "5",
        "includeArchivedAndDeletedRows": "false",
        "salesforceBulkV2Partitioning": "true",
        "salesforceBulkV2RecordsPerPartition": "2000",
        "salesforceBulkV2MaxParallelPartitions": "5",
        "selectionRules": [
            {
                "include": "cli_sf__c"
            },
            {
```

```
                "exclude": "Period"
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "ADOBE_PB",
        "renamingRules": [
            {
                "source": "cli_sf__c",
                "target": "cli_sf__c3"
            }
        ],
        "stage": "gkn"
    },
    "runtimeOptions": {
        "executeInTaskflow": false,
        "enableAutoTuning": false,
        "schemaDriftOptions": {
            "modifyField": "replicate",
            "dropField": "ignore",
            "addField": "ignore",
            "renameField": "replicate"
        }
    },
    "replicationRules": {
        "source": "SALESFORCE",
        "target": "ADOBE_PB",
        "overrides": {
            "tableRules": [
                {
                    "source": "cli_sf__c",
                    "target": "cli_sf__c3"
                }
            ],
            "fieldRules": []
        },
        "sourceSet": [
            {
                "schema": "",
                "include": "cli_sf__c"
            },
            {
                "schema": "",
                "exclude": "Period"
            }
        ],
        "columnTransformations": []
    }
}
```

The following table describes the properties in the combined load request body:

Property	Description
general.type	Load type. The value *combined* loads a snapshot of the source data and then replicates changes.
source.fetchSizeForIncrementalLoad	Number of records that the task reads at a time from the source during the change replication phase.
source.cdcIntervalDays, cdcIntervalHours, cdcIntervalMins	Interval at which the task checks the source for changes. In the example, the task checks every 5 minutes.
source.includeArchivedAndDeletedRows	Indicates whether the task includes archived and deleted rows.

Property	Description
target.renamingRules	Renames the target table.
runtimeOptions.schemaDriftOptions	Replicates modified and renamed fields and ignores added and dropped fields.
replicationRules.overrides	Repeats the renaming rule for the replication.

A successful request returns HTTP status code 201. The response is similar to the following example:

```
{
  "location": "Default",
  "taskId": "55",
  "frsId": "9vnP9IpLx8BlmWL3LYNW8j",
  "name": "sf_to_snowflake_combined",
  "createdBy": "4fxvSaESiMPjf8jIFKsYiY",
  "documentType": "APPMI_TASK",
  "parentInfo": [
    {
      "parentId": "7cCn5thwWFLhiZoSosphKL",
      "parentName": "REG",
      "parentType": "Space"
    },
    {
      "parentId": "3uDIOqah80qbMK3cXAceIp",
      "parentName": "Default",
      "parentType": "Project"
    }
  ]
}
```

Example: Create an Oracle to Snowflake task

In this example, you create database ingestion and replication tasks that load Oracle data to Snowflake using initial, incremental, and combined initial and incremental loads.

The request bodies include only the properties that each task needs. For a complete request body, see "Sample request body for creating a task" on page 559.

For descriptions of all properties, see "Source attributes" on page 581, "Target attributes" on page 592, and "Runtime attributes" on page 607.

Request body

Send each request body in a POST request to the following resource:

```
POST <baseUrl>/dbmi/public/api/v2/task/create
```

Initial load

The following request body creates a combined load task named sf_to_snowflake_combined. The task uses the Salesforce Bulk API 2.0 to load the cli_sf__c object once, excluding the Period object, and then checks for changes every five minutes. The task renames the target table to cli_sf__c3:

```
{
    "type": "dbmi",
    "general": {
        "name": "oracle_to_snowflake_initial_load",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "initial"
    },
```

```
    "source": {
        "connection": "Oracle_19RDS_yk-CDC",
        "schema": "AUTO_INIT",
        "lobsEnabled": "true",
        "unloadFlashbackDisabled": "true",
        "jdbcPartitioningTechnique": "uniform",
        "sourceMaxParallelPartitions": "5",
        "unloadHelperThreadCount": "2",
        "selectionRules": [
            {
                "include": "SRC_ALLCHAR_8K",
                "fieldsSet": [
                    { "exclude": "VARCHARMAX" }
                ]
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "ADOBE_PB",
        "stage": "gkn",
        "addLastReplicatedTime": "true",
        "cycleId": "false",
        "caseTransformation": "lowercase"
    },
    "runtimeOptions": {
        "executeInTaskflow": false,
        "enableAutoTuning": false
    },
    "replicationRules": {
        "source": "AUTO_INIT",
        "target": "ADOBE_PB",
        "overrides": {
            "tableRules": [],
            "fieldRules": []
        },
        "sourceSet": [
            {
                "fieldsSet": [
                    { "exclude": "VARCHARMAX" }
                ],
                "schema": "",
                "include": "SRC_ALLCHAR_8K"
            }
        ],
        "columnTransformations": []
    }
}
```

The following table describes the properties in the initial load request body:

Property	Description
type	Use dbmi to create a database ingestion and replication task.
general.name	Name of the task.
general.location	Project or folder that contains the task.
general.runtimeEnvironment	Runtime environment that runs the task.
general.type	Load type. The value *initial* loads a snapshot of the source data one time.
source.connection	Name of the Oracle source connection.

Property	Description
source.schema	Oracle schema that contains the source tables.
source.lobsEnabled	Indicates whether the task replicates large object (LOB) columns to the target.
source.unloadFlashbackDisabled	Disables the use of Oracle Flashback when the task fetches data from the source.
source.jdbcPartitioningTechnique	Technique that distributes source rows across partitions. The value uniform distributes primary keys evenly across partitions.
source.sourceMaxParallelPartitions	Maximum number of partitions that the task reads in parallel.
source.unloadHelperThreadCount	Number of helper threads that convert the unloaded rows into a format that the task can write to the target.
source.selectionRules	Rules that select the source tables. In this example, the task includes the SRC_ALLCHAR_8K table and excludes its VARCHARMAX column.
target.connection	Name of the Snowflake target connection.
target.schema	Snowflake schema where the task creates the target tables.
target.stage	Name of the internal staging area that holds data before the task writes it to the target tables.
target.addLastReplicatedTime	Indicates whether the task adds a column that records when each row was last replicated.
target.cycleId	Indicates whether the task adds a column that records the apply cycle ID.
target.caseTransformation	Case of the target table and column names. The value lowercase converts the names to lowercase.
runtimeOptions.executeInTaskflow	Indicates whether a taskflow runs the task.
runtimeOptions.enableAutoTuning	Indicates whether automatic performance tuning is enabled for the task.
replicationRules	Source and target selection rules for the task. The sourceSet list repeats the include rule and the excluded column.

A successful request returns HTTP status code 201. The response is similar to the following example:


```
{
    "location": "Default",
    "taskId": "757385",
    "frsId": "6kXq2PtYb9MwHn4RcLzV3d",
    "name": "oracle_to_snowflake_initial_load",
    "createdBy": "6r2IItttmU3ibDwPqxnRwb",
    "documentType": "DBMI_TASK",
    "parentInfo": [
        { "parentId": "7cCn5thwWFLhiZoSosphKL", "parentName": "REG", "parentType":
"Space" },
        { "parentId": "3uDIOqah80qbMK3cXAceIp", "parentName": "Default", "parentType":
"Project" }
    ]
}
```

Incremental load

The following request body creates an incremental load task named oracle_to_snowflake_cdc_incremental. The task uses the query-based change data capture (CDC) method to read changes from the SRC_ALLNUM_8K table in the QUERYBASEDCDC schema every five minutes, starting from the latest change. The task uses the QUERY_BASED_COL timestamp column to identify changed rows and loads the data to the NUM_SPIPE2 table in the SNOW_PB schema in Snowflake. The task replicates added and modified columns and ignores renamed and dropped columns:

```
{
    "type": "dbmi",
    "general": {
        "name": "oracle_to_snowflake_cdc_incremental",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "cdc"
    },
    "source": {
        "connection": "Oracle_19RDS_yk-CDC",
        "schema": "QUERYBASEDCDC",
        "restartPointForIncrementalLoad": "LATEST",
        "cdcTechnique": "QUERY_BASED_CDC",
        "cdcQueryBasedColumnType": "COLUMN_TYPE_TIMESTAMP",
        "cdcQueryBasedColumnName": "QUERY_BASED_COL",
        "cdcIntervalDays": "0",
        "cdcIntervalHours": "0",
        "cdcIntervalMins": "5",
        "readerInputIsPersisted": "false",
        "readEventBatchSize": "32",
        "readerHelperThreadCount": "3",
        "selectionRules": [
            { "include": "SRC_ALLNUM_8K" }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "SNOW_PB",
        "renamingRules": [
            { "source": "SRC_ALLNUM_8K", "target": "NUM_SPIPE2" }
        ],
        "stage": "gkn",
        "addLastReplicatedTime": "false",
        "cycleId": "false",
        "caseTransformation": "none"
    },
    "runtimeOptions": {
        "executeInTaskflow": false,
        "enableAutoTuning": false,
        "schemaDriftOptions": {
            "addColumn": "replicate",
            "renameColumn": "ignore",
            "modifyColumn": "replicate",
            "dropColumn": "ignore"
        }
    },
    "replicationRules": {
        "source": "QUERYBASEDCDC",
        "target": "SNOW_PB",
        "overrides": {
            "tableRules": [
                { "source": "SRC_ALLNUM_8K", "target": "NUM_SPIPE2" }
            ],
            "fieldRules": []
        },
        "sourceSet": [
            { "schema": "", "include": "SRC_ALLNUM_8K" }
        ],
```

```
            "columnTransformations": []
        }
    }
```

The following table describes the properties in the incremental load request body:

Property	Description
general.type	Load type. The value *cdc* replicates changes from the source continuously, starting from the restart point.
source.restartPointForIncrementalLoad	Point from which the task starts reading changes. The value LATEST starts from the most recent change.
source.cdcTechnique	CDC method that the task uses. The value QUERY_BASED_CDC queries the source tables for changes.
source.cdcQueryBasedColumnType	Data type of the column that the task uses to identify changed rows. The value COLUMN_TYPE_TIMESTAMP is a timestamp column.
source.cdcQueryBasedColumnName	Name of the column that the task uses to identify changed rows. The name is case sensitive.
source.cdcIntervalDays, cdcIntervalHours, cdcIntervalMins	Interval at which the task checks the source for changes. In this example, the task checks every 5 minutes.
source.readerInputIsPersisted	Indicates whether the task stores transaction data in a disk buffer. In this example, the task stores transaction data in a disk buffer.
source.readEventBatchSize	Number of change events that the task writes in a batch to the internal event queue.
source.readerHelperThreadCount	Number of helper threads that convert change data into a format that the task can write to the target.
target.renamingRules	Renames the SRC_ALLNUM_8K target table to NUM_SPIPE2.
runtimeOptions.schemaDriftOptions	Replicates added and modified columns, and ignores renamed and dropped columns.
replicationRules.overrides	Repeats the renaming rule for the replication.

A successful request returns HTTP status code 201. The response is similar to the following example:

```
{
    "location": "Default",
    "taskId": "757659",
    "frsId": "3tNf8WcQd5ZyJr2AxBvK7m",
    "name": "oracle_to_snowflake_cdc_incremental",
    "createdBy": "6r2IItttmU3ibDwPqxnRwb",
    "documentType": "DBMI_TASK",
    "parentInfo": [
        { "parentId": "7cCn5thwWFLhiZoSosphKL", "parentName": "REG", "parentType":
"Space" },
        { "parentId": "3uDIOqah80qbMK3cXAceIp", "parentName": "Default", "parentType":
"Project" }
    ]
}
```

Combined load

The following request body creates a combined load task named oracle_to_snowflake_combined. The task loads the COMPO8 table in the SP_UNLOAD schema once, and then uses the log-based CDC method to check for changes every five minutes, starting from the latest change. The task renames the target table to COMPO8_O9 and adds audit columns that describe each change, including the operation type, time, owner, transaction ID, and sequence:

```
{
    "type": "dbmi",
    "general": {
        "name": "oracle_to_snowflake_combined",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "combined"
    },
    "source": {
        "connection": "Oracle_19RDS_yk-CDC",
        "schema": "SP_UNLOAD",
        "restartPointForIncrementalLoad": "LATEST",
        "cdcTechnique": "LOG_BASED_CDC",
        "cdcIntervalDays": "0",
        "cdcIntervalHours": "0",
        "cdcIntervalMins": "5",
        "readerInputIsPersisted": "true",
        "lobsEnabled": "true",
        "selectionRules": [
            { "include": "COMPO8" }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "SNOW_PB",
        "renamingRules": [
            { "source": "COMPO8", "target": "COMPO8_O9" }
        ],
        "stage": "gkn",
        "addBeforeImages": "true",
        "addLastReplicatedTime": "true",
        "cycleId": "true",
        "auditData": {
            "applyMode": "audit",
            "auditColumnPrefix": "INFA_",
            "addOperationType": "true",
            "addOperationTime": "true",
            "addOperationOwner": "true",
            "addOperationTransactionId": "true",
            "addOperationSequence": "true"
        },
        "caseTransformation": "none"
    },
    "runtimeOptions": {
        "executeInTaskflow": false,
        "enableAutoTuning": false,
        "schemaDriftOptions": {
            "addColumn": "replicate",
            "renameColumn": "ignore",
            "modifyColumn": "replicate",
            "dropColumn": "ignore"
        }
    },
    "replicationRules": {
        "source": "SP_UNLOAD",
        "target": "SNOW_PB",
        "overrides": {
            "tableRules": [
                { "source": "COMPO8", "target": "COMPO8_O9" }
            ],
```

```
            "fieldRules": []
        },
        "sourceSet": [
            { "schema": "", "include": "COMPO8" }
        ],
        "columnTransformations": []
    }
}
```

The following table describes the properties in the combined load request body:

Property	Description
general.type	Load type. The value *combined* loads a snapshot of the source data and then replicates changes.
source.cdcTechnique	CDC method that the task uses. The value LOG_BASED_CDC reads changes from the database logs.
source.cdcIntervalDays, cdcIntervalHours, cdcIntervalMins	Interval at which the task checks the source for changes. In this example, the task checks every 5 minutes.
source.readerInputIsPersisted	Indicates whether the task stores transaction data in a disk buffer. In this example, the task stores transaction data in a disk buffer.
target.addBeforeImages	Indicates whether the task adds the before images of changed rows to the target.
target.auditData	Settings for the audit columns. The value audit for applyMode applies an audit trail of every change to the target. The other properties add columns that record the operation type, time, owner, transaction ID, and sequence. The column names start with INFA_.

A successful request returns HTTP status code 201. The response is similar to the following example:

```
{
    "location": "Default",
    "taskId": "757421",
    "frsId": "8bHj4VsLm2PqXc6DwTnY1g",
    "name": "oracle_to_snowflake_combined",
    "createdBy": "6r2IItttmU3ibDwPqxnRwb",
    "documentType": "DBMI_TASK",
    "parentInfo": [
        { "parentId": "7cCn5thwWFLhiZoSosphKL", "parentName": "REG", "parentType":
"Space" },
        { "parentId": "3uDIOqah80qbMK3cXAceIp", "parentName": "Default", "parentType":
"Project" }
    ]
}
```

Deploy a database or application ingestion and replication task

Use the deploy resource to deploy a database ingestion and replication task or application ingestion and replication task.

To deploy a task, perform the following tasks:

- Get the task ID.
- Deploy the task using the task ID.

Get the task ID

Before you deploy a task, you need to retrieve the task ID.

Use the following GET request to retrieve the task ID:

```
GET /dbmi/public/api/v2/task/fetchId?
taskName={taskName}&projectId={projectId}&folderId={folderId}
```

You can include the following optional attributes in the request:

Field	Type	Description
projectId	string	The ID of the project where the task resides.
folderId	string	The ID of the folder where the task resides in the project.
taskName	string	Name of the task.

Get the project ID, folder ID, and task name

You can get the project ID, folder ID, and task name for the task that you want to deploy by using one of the following methods:

Use the FRS API to get the folder ID and project ID by filtering documents with the task name.

```
GET /frs/api/v1/Documents?$filter=name eq 'taskName'
```

For example:

```
https://pod.ics.dev:444/frs/api/v1/Documents?$filter=name eq 'zendeskToSlfk'
```

Alternatively, you can get the details from the task user interface as follows:

- To find the project ID where your task resides, go to **Explore** and select the project. The project ID is visible in the URL.
- To find the folder ID, select the folder in the project. The folder ID appears in the URL.

Sample request

Use the following sample as a reference to get the task ID:

```
GET https://pod-ing.ics.dev:11447/dbmi/public/api/v2/task/fetchId?
projectId=1lHbX3urKB8dHJ071tXV8Fg&folderId=5GX14m3CuFAeVWqnsSX9mC&taskName=zendeskToSlfk
```

Sample response

A successful response returns a summary including the task name and task ID similar to the following example:

```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "name": "check_comb_case2_feb4",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "33YxQayEoi1d5QgU02OQGV",
```

```
                    "parentName": "Oracle",
                    "parentType": "Project"
                },
                {
                    "parentId": "77uOlq0PAQWl3z2lDjAtWk",
                    "parentName": "Snowflake",
                    "parentType": "Folder"
                }
            ],
            "taskId": 593603
        }
    ]
}
```

Pagination attributes

To paginate the results, you can include the following pagination attributes in your GET request:

```
GET /dbmi/public/api/v2/task/fetchId?
orderBy={nameOfThecolumn}&pageNo={int}&pageSize={int}
```

You can include the following pagination attributes in the request:

Fields	Type	Description
orderBy	string	Column name to sort the results. You can use one of the following column names to specify the sorting order: - name - createdTime - lastUpdatedTime - lastAccessedTime
pageNo	Integer	Page number to retrieve after pagination.
pageSize	Integer	Number of records per page.

For more information about the request and response sample and attributes for pagination, see "Get database or application ingestion and replication task details" on page 648.

Failed responses and error codes

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions to perform this job.
404	CDIR_TASK_NOT_FOUND	Task{TaskId} was not found.
500	CDIR_INTERNAL_ERROR	Unexpected error occurred during deployment.
503	CDIR_SERVICE_ UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when you pass an invalid taskName in the request:

```
{
    "error": {
        "httpStatus": 404,
        "code": "CDIR_TASK_NOT_FOUND",
```

```
            "message": "Task {ora_2_snflk_api2_sn3_sep16AS} was not found.",
            "details": [
                {
                    "taskId": "ora_2_snflk_api2_sn3_sep16AS"
                }
            ],
            "traceId": "705922f2-87c0-4efe-8a03-438148562cab"
        }
    }
```

Deploy the task

After you get the `taskId`, deploy the task using the deploy resource.

Use the following POST request to deploy the task:

```
POST /dbmi/public/api/v2/task/deploy/{taskId}
```

Include the following attribute in the request:

Field	Type	Description
taskId	integer	The ID associated with the task.

Sample response

A successful deployment request returns a 202 status code with a summary including the job ID and deployment status, indicating that deployment has started:

```
        {
  "status": "success",
  "code": 202,
  "message": "Deployment started",
  "data": {
    "jobId": 4,
    "deploymentStatus": "processing_deploy"
  }
}
```

Note: Deployment runs asynchronously. For tasks that include many tables, deployment might take longer. The API responds immediately with a "Deployment started" message. To monitor the status, query the Get Status Status API with the job ID. For more information, see Get Job Status APIon page 637.

Failed responses

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION. INVALID_VALUE	Configuration value {field} is invalid.
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions to perform this job.
404	CDIR_TASK_NOT_FOUND	Task{TaskId} was not found.
409	CDIR_JOB_ALREADY_DEPLOYED	Job {jobId} is already deployed.

HTTP status code	Error code	Error message
500	CDIR_INTERNAL_ERROR	Unexpected error occurred during deployment.
503	CDIR_SERVICE_ UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when you deploy a task that is in an error state:

```
{
    "error": {
        "httpStatus": 409,
        "code": "CDIR_JOB_ALREADY_DEPLOYED",
        "message": "Job {696921} is already deployed.",
        "details": [
            {
                "jobId": "696921"
            }
        ],
        "traceId": "62956502-7e13-4bfb-920a-6089f7396831"
    }
}
```

Run a database or application ingestion and replication job

Use the job resource to run a database ingestion and replication job or application ingestion and replication job.

Perform the following tasks to run and monitor a task:

- Get the job ID associated with the task that you want to run.
- Run the job using the job ID.

Get the job ID

To start a job, you need to retrieve the job ID.

Use the following GET request to fetch the job ID:

```
GET /dbmi/public/api/v2/task/fetch/{taskId}/job
```

Include the following attribute in the request:

Field	Type	Description
taskId	integer	ID of the deployed task.

Sample request

Use the following sample as reference to get the job ID:

```
GET https://pod-ing.ics.dev:11447/dbmi/public/api/v2/task/fetch/2/job
```

Sample response

A successful response returns the job ID and related details for the specified task ID similar to the following example:

```
{
```

```
  "jobId": 15,
  "assetName": "sftosnw_15",
  "location": "Default"
}
```

Only one job ID is returned for the specified task ID.

Failed responses and error codes

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions to perform this job.
404	CDIR_JOB_NOT_FOUND	Job{JobId} was not found.
500	CDIR_INTERNAL_ERROR	Unexpected error occurred during deployment.
503	CDIR_SERVICE_ UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when the request to get the job ID specifies a task ID that does not exist:

```
{
    "error": {
        "httpStatus": 404,
        "code": "CDIR_JOB_NOT_FOUND",
        "message": "Job {73512912} was not found.",
        "details": [
            {
                "jobId": "73512912"
            }
        ],
        "traceId": "bdcf8f6c-ccb0-4e6a-9c43-2b102f338980"
    }
}
```

Start the job

Use the jobId to start a job instance.

Use the following POST request to run a task:

```
POST /dbmi/public/api/v2/job/start
```

Include the following attribute in the request body:

Field	Type	Description
jobId	integer	The ID of the job that you want to start.

Sample body

Use the following request body to pass the job ID to the resource:

```
{
  "jobId": "15"
}
```

Each task corresponds to a single job ID. Therefore, when you retrieve the job ID for a given task, only one job ID is returned.

Sample response

A successful response returns a 202 status code indicating the job is accepted to start:

```
        {
  "status": "Success",
  "code": 202,
  "message": "Job with org id 2HimcQ9cXW5kLUCOUkXGi8 and job name zendeskToSlfk-UserA-
test_8 has been accepted to start successfully."
}
```

Note: The start job API initiates the job asynchronously. The response confirms that the job has been accepted to start. To check if the job started successfully and monitor its progress, query the job status API. For more information, see Get Job Status APIon page 637.

Failed responses

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION_MISSING_FIELD	Required parameter {field} is missing.
400	CDIR_VALIDATION_ INVALID_VALUE	Value for {field} is invalid.
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
404	CDIR_JOB_NOT_FOUND	Job {jobId} was not found.
409	CDIR_JOB_ALREADY_RUNNING	Job {jobId} is already running.
409	CDIR_JOB_NOT_DEPLOYED	Deploy the job {jobId} before performing this operation.
409	CDIR_JOB_INVALID_STATE like failed/ stopped/aborted	Job {jobId} cannot perform the requested action while in state {state}. Verify the job's status before retrying.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when you start a job that is in a stopped state:

```
{
    "error": {
        "httpStatus": 409,
        "code": "CDIR_JOB_INVALID_STATE",
        "message": "Job {134609} cannot perform the requested action while in its
current state. Verify the job's status before retrying.",
        "details": [
            {
                "jobId": "134609"
            }
        ],
        "traceId": "464ca200-2f04-4bb3-bc90-365641aa65f7"
```

```
    }
}
```

Stop a database or application ingestion and replication job

Use the stop action of the job resource to stop a database ingestion and replication job or application ingestion and replication job that has the status Up and Running, Running with Warning, or On Hold.

POST request

Use the following POST request to stop a job:

```
POST /dbmi/public/api/v2/job/stop
```

Include the following attribute in the request body:

Field	Type	Description
jobId	integer	The ID of the job that you want to stop.

Request body

Use the following request body to pass the job ID to the resource:

```
{
  "jobId": "<jobId>"
}
```

Success response

A successful response returns a status indicating the job has been accepted to stop.

```
{
  "status": "Success",
  "code": 202,
  "message": "Job with org id 2HimcQ9cXW5kLUCOUkXGi8 and job name zendeskToSlfk-UserA-
test_8 has been accepted to stop successfully."
}
```

Note: The stop job API processes requests asynchronously. To verify whether the job stopped successfully, query the Get Status Status API with the job ID. For more information, see Get Job Status APIon page 637.

Failed responses

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION_MISSING_FIELD	Required parameter {field} is missing.
400	CDIR_VALIDATION_INVALID_VALUE	Value for {field} is invalid.
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
404	CDIR_JOB_NOT_FOUND	Job {jobId} was not found.

HTTP status code	Error code	Error message
409	CDIR_JOB_NOT_DEPLOYED	Deploy the job {jobId} before performing this operation.
409	CDIR_JOB_INVALID_STATE like failed, aborted	Job {jobId} cannot perform the requested action while in state {state}. Verify the job's status before retrying.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when you stop a job that is in a deployed state:

```
{
    "error": {
        "httpStatus": 409,
        "code": "CDIR_JOB_INVALID_STATE",
        "message": "Job {135332} cannot perform the requested action while in an
unexpected state. Verify the job's status before retrying.",
        "details": [
            {
                "jobId": "135332"
            }
        ],
        "traceId": "2a4d019f-fcc4-4eb9-9934-649f6a2e0ad3"
    }
}
```

Resume a database or application ingestion and replication task

Use the resume action of the job resource to resume a database ingestion and replication job or application ingestion and replication job that failed or was stopped or aborted because of a schema drift error.

POST request

Use the following POST request to resume a job:

```
POST /dbmi/public/api/v2/job/resume
```

Include the following required attributes in the request body:

Field	Type	Description
jobId	integer	The ID of the job that you want to resume.
parameters	Map<String, JSON>	Overrides schema drift options and controls how a job that is in a Stopped, Aborted, or Failed state resumes. For an incremental load job, resume options are: - **replicate**. Allows the job to replicate the DDL changes to the target. - **ignore**. Does not replicate DDL changes that occur on the source database to the target. - **stop**. Stops processing the source table on which the DDL change occurred. Set the resume option based on what your source supports: - **REPLICATE**. For incremental or combined load jobs that are in the Stopped, Aborted, or Failed state due to a schema drift error, allows the job to replicate the DDL change to the target. This override applies only to tables in an Error state caused by the configured **Stop Table** or **Stop Job** schema drift settings. - **IGNORE**. For incremental or combined load jobs that are in the Stopped, Aborted, or Failed state due to a schema drift error, does not replicate DDL changes that occur on the source database to the target. This override applies only to tables in an Error state caused by the **Stop Table** or **Stop Job** schema drift settings. - **STOP_TABLE**. For incremental or combined load jobs that are in the Stopped, Aborted, or Failed state due to a schema drift error, stops processing the source table on which the DDL change occurred. This override applies only to tables in an Error state caused by the configured **Stop Table** or **Stop Job** schema drift settings. - **RESYNC**. For combined load jobs that have Failed or Running With Warnings state due to a schema drift error, resynchronizes the tables that are in error. You can't use this command if the job uses a source that allows selecting individual columns for replication or if the source does not support schema drift. - **RESYNC_RETAIN**. For combined load jobs that are in the Stopped, Aborted, or Failed state and have a source that supports selecting individual columns for data replication, resynchronizes the same columns that have been processed for CDC, retaining the current structure of the source and target tables. No checks for changes to the source or target table definitions are performed. If source DDL changes affected the source table structure, those changes are not processed. - **RESYNC_REFRESH**. For combined load jobs that are in the Stopped, Aborted, or Failed state and have a source that supports selecting individual columns for data replication, resynchronizes the target tables with the latest source table definitions, including any DDL changes. After the target tables are refreshed, the structure of source and target tables match. **Note:** If you are resynchronizing a subtask for a database ingestion and replication combined load job that has a Db2 for i, Db2 for LUW Log-based CDC, Oracle, PostgreSQL, SAP HANA, or SQL Server source, or an application ingestion and replication combined load job that has a NetSuite, Salesforce, or SAP Mass Ingestion source, use RESYNC_RETAIN or RESYNC_REFRESH option instead of the **Resync** option.

Request body

Use the following request body to pass attributes without resume options:

```
{
  "jobId": <jobId>,
  "parameters": {
    "resumeOptions":null}
  }
```

Use the following request body to pass attributes with resume options. The example includes resume options to replicate all schema changes:

```
{
  "jobId": <jobId>,
  "parameters": {
    "resumeOptions":{"schemaChangeOptions":[{"pattern":"*.*","action":"REPLICATE"}]}}
  }
```

Note: If you specify the RESYNC or RESYNC_RETAIN resume option, the API automatically applies a generic pattern "*.*" to resyncPatterns, so you do not need to specify a pattern explicitly. For IGNORE, REPLICATE, and STOP_TABLE resume options, the API uses the pattern you specify in the resumeOptions field. The API creates a SchemaChangeHandlingOption for the pattern with a list of SchemaDriftItems for schema operations such as DROP_COLUMN, ADD_COLUMN, RENAME_COLUMN, and MODIFY_COLUMN. Each operation is mapped to a corresponding SchemaDriftAction derived from the resume action.

For example:

```
{
  "jobId": 15,
  "parameters": {
    "resumeOptions":{"schemaChangeOptions":[{"pattern":"*.*","action":"REPLICATE"}]}}
  }
```

In this request, all tables in the `sales` schema replicates the schema changes.

Success response

A successful response returns the Success status, which indicates the job has been accepted to resume.

```
{
    "status": "Success",
    "code": 202,
    "message": "Job with org id 2HimcQ9cXW5kLUCOUkXGi8 and job name zendeskToSlfk-UserA-
test_8 has been accepted to resume successfully."
}
```

Note: The resume job API processes requests asynchronously. To verify whether the job resumed successfully, query the Get Job Status API with the job ID. For more information, see Get Job Status APIon page 637.

Failed responses

If the request fails, the API returns one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION_MISSING_FIELD	Required parameter {field} is missing.
400	CDIR_VALIDATION_ INVALID_VALUE	Value for {field} is invalid.

HTTP status code	Error code	Error message
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
404	CDIR_JOB_NOT_FOUND	Job {jobId} was not found.
409	CDIR_JOB_ALREADY_RUNNING	Job {jobId} is already running.
409	CDIR_JOB_NOT_DEPLOYED	Deploy the job {jobId} before performing this operation.
409	CDIR_JOB_INVALID_STATE like deployed and completed	Job {jobId} cannot perform the requested action while in state {state}. Verify the job's status before retrying.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when you try to resume a job that is already in a running state:

```
{
    "error": {
        "httpStatus": 409,
        "code": "CDIR_JOB_ALREADY_RUNNING",
        "message": "Job {138593} is already running.",
        "details": [
            {
                "jobId": "138593"
            }
        ],
        "traceId": "381922d9-45ae-4669-a811-0c9ad363bae9"
    }
}
```

Undeploy a database or application ingestion and replication job

Use the undeploy action of the job resource to undeploy a database ingestion and replication job or application ingestion and replication job. Before you undeploy a job, ensure that it is not running and the status is Aborted, Completed, Deployed, Failed, or Stopped .

POST request

Use the following POST request to undeploy a job.

```
POST /dbmi/public/api/v2/job/undeploy
```

Include the following attribute in the request body:

Field	Type	Description
jobId	integer	The ID of the job that you want to undeploy.

Request body

Use the following request body to pass the job ID to the resource:

```
{
  "jobId": "<jobId>"
}
```

Success response

A successful response returns a Success status which indicates that the job is accepted for undeployment.

```
{
  "status": "Success",
  "code": 202,
  "message": "Job with org id 2HimcQ9cXW5kLUCOUkXGi8 and job name zendeskToSlfk-UserA-
test_8 has been accepted to undeploy successfully."
}
```

Note: The undeploy job API processes requests asynchronously. To verify whether the job undeployed successfully, query the Get Job Status API with the job ID. For more information, see Get Job Status APIon page 637.

Failed responses

If the request fails, the API returns one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION_MISSING_FIELD	Required parameter {field} is missing.
400	CDIR_VALIDATION_ INVALID_VALUE	Value for {field} is invalid.
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
404	CDIR_JOB_NOT_FOUND	Job {jobId} was not found.
409	CDIR_JOB_ALREADY_RUNNING	Job {jobId} is already running.
409	CDIR_JOB_NOT_DEPLOYED	Deploy the job {jobId} before performing this operation.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when you undeploy a job that is in an undeployed state:

```
{
    "error": {
        "httpStatus": 409,
        "code": "CDIR_JOB_NOT_DEPLOYED",
        "message": "Deploy the job {138514} before performing this operation.",
        "details": [
            {
                "jobId": "138514"
            }
        ],
        "traceId": "2fa22ed7-6d23-4f35-b209-881fe8ac5fad"
```

```
        }
    }
```

Get job status for a database or application ingestion and replication task

Use the status action of the job resource to retrieve the status of a database ingestion and replication or application ingestion and replication job.

GET request

Use the following GET request to fetch the status of a job.

```
GET /dbmi/public/api/v2/job/status
```

Include the following attribute in the request body:

Field	Type	Description
jobId	integer	The ID of the job for which you want to retrieve the status.

Request body

Use the following request body to pass the job ID to the resource:

```
{
  "jobId": "<jobId>"
}
```

Get response

If successful, the response includes the following information about the status of a job:

Field	Type	Description
jobId	Long	Unique identifier of the job.
assetName	String	Name of the task.
assetType	String	Type or category of the asset. Returns either APPMI_TASK or DBMI_TASK based on the task type you specified in the request.
startedBy	String	Email or identifier of the user who started the job.
orgId	String	Organization identifier to which the job belongs.
runtimeEnv	String	The name of the runtime environment in which the job ran.

Field	Type	Description
status	String	The status of the job. A job can have one of the following status: - **Up and Running**. The job is running. - **Running with Warning**. The job is running with a warning. This state can also occur when one or more table-specific subtasks fail but some subtasks are still running. - **On Hold**. The job is in a paused state while the DBMI agent is being updated. - **Stopping**. The job is stopping in response to a Stop request. - **Stopped**. The job was intentionally stopped. - **Failed**. The job ended abnormally, the task deployment to the job failed, or one or more table-specific subtasks failed. Also, for an initial load job, the job was stopped. - **Deploying**. The job is being deployed. - **Deployed**. The job has been deployed. - **Aborting**. The job is stopping immediately in response to an Abort request. - **Aborted**. The job has been aborted. - **Undeploying**. The job is being undeployed. - **Undeployed**. The job has been undeployed. - **Completed**. The job completed successfully.
durationInSeconds	Long	Duration of the job execution in seconds.
endTime	String (ISO 8601)	Timestamp when the job ended.
location	String	The project or project folder that contains the task definition.
startTime	String (ISO 8601)	Timestamp when the job started.
errorMessage	String or null	Error message if the job failed. Null if no error.
lastAction	String	Description of the last action performed on the job. For example, Job was started by a user.
jobConfig	Object (JobInfoExtraData)	Configuration details related to the task associated with the job.

The jobConfig parameter includes the following information:

Field	Type	Description
taskId	String	Unique identifier of the task associated with the job.
taskMode	String (Enum)	Represents the type of load operation performed. Options are: - **UNLOAD**. Loads source data read at a single point in time to a target. After the data is loaded, the ingestion and replication job ends. - **CDC**. Loads data changes continuously or until the ingestion and replication job is stopped or ends. The job loads the changes that have occurred since the last time it ran or from a specific start point. - **COMBINED**. Performs an initial load of point-in-time data to the target and then automatically switches to propagating incremental data changes made to the same source objects on a continuous basis.

Field	Type	Description
srcConnId	String	Source connection identifier used in the task.
tgtConnId	String	Target connection identifier used in the task.
deployTime	String (ISO 8601)	Timestamp when the task was deployed.
schedulerJobName	String or null	Name of the scheduler job if applicable. Null if not scheduled.
schedulerId	String	Identifier for the scheduler. Returns empty string if not applicable.
agentId	String	Identifier of the agent handling the job deployment. Returns empty if not assigned.
isRunOnOtherAgentEnabled	Boolean	Flag that indicates if the job can run on other agents.
isServerless	Boolean or null	Indicates if the job runs in a serverless environment.
deployVersion	String	Version of the deployment. For example, 58.0.0-SNAPSHOT.
featureTags	List or null	List of feature tags associated with the job. Returns Null if none.
srcVendor	String or null	Vendor or source system type. For example, WORKDAY.
tgtVendor	String or null	Vendor or target system type. For example, SNOWFLAKE.
cdcGroupJobId	Long or null	CDC group job ID. Returns this parameter only for CDC and combined jobs.
cdcGroupInmdtStrgConId	String or null	CDC group intermediate storage connection ID. Returns this parameters only for CDC and combined jobs.
mapOfApplyJobDetails	Map<String, Object>	Map of apply jobs in a CDC staging job and jobs for migrating jobs to a CDC staging group.

Success response example

A successful response returns details about the job status similar to the following example.


```
{
    "jobId": 7,
    "assetName": "Replication_Task_20251218120228_7",
    "assetType": "APPMI_TASK",
    "startedBy": "UserA@informatica.com",
    "orgId": "2HimcQ9cXW5kLUCOUkXGi8",
    "runtimeEnv": "0100012500000000002",
    "status": "failed",
    "durationInSeconds": 68,
    "endTime": "2026-01-21T06:22:10.496Z",
    "location": "Default",
    "startTime": "2026-01-21T06:21:02.847Z",
    "errorMessage": null,
    "lastAction": "Job was started by a user.",
    "jobConfig": {
        "taskId": "dip5eZ0BfeNk9vYzEhQA6E",
        "taskMode": "UNLOAD",
        "srcConnId": "0100010B000000000002",
        "tgtConnId": "0100010B000000000003",
```

```
            "deployTime": "2025-12-18T06:37:54.337256427Z",
            "schedulerJobName": null,
            "schedulerId": "",
            "agentId": "",
            "isRunOnOtherAgentEnabled": false,
            "isServerless": false,
            "deployVersion": "58.0.0-SNAPSHOT",
            "featureTags": null,
            "srcVendor": "WORKDAY",
            "tgtVendor": "SNOWFLAKE",
            "cdcGroupJobId": null,
            "cdcGroupInmdtStrgConId": null,
            "mapOfApplyJobDetails": {}
        }
    }
```

Failed responses

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION_MISSING_FIELD	Required parameter {field} is missing.
400	CDIR_VALIDATION_ INVALID_VALUE	Value for {field} is invalid.
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
404	CDIR_JOB_NOT_FOUND	Job {jobId} was not found.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when a job is not found:

```
    {
        "error": {
            "httpStatus": 404,
            "code": "CDIR_JOB_NOT_FOUND",
            "message": "Job {112606667} was not found.",
            "details": [
                {
                    "jobId": "112606667"
                }
            ],
            "traceId": "877ff167-9a12-4d61-8937-878e842a2026"
        }
    }
```

Get statistics for a database or application ingestion and replication job

Use the metric action of the job resource to retrieve detailed statistics for a database ingestion and replication job or application ingestion and replication job.

POST request

Use the following POST request to retrieve detailed job statistics:

```
POST /dbmi/public/api/v2/job/metrics
```

Include the following required attributes in the request body:

Field	Type	Description
jobId	integer	The ID of the job for which you want to retrieve detailed statistics.
parameters	Map<String ,json>	Map containing the metricsOptions and their values.

Include the following required metricsOptions attributes:

Field	Type	Description
stateFilter	string	Filter for the state of the objects for which you want to retrieve metrics. If you specify `null`, no filtering is applied.
sort	array	Defines the sorting order of the results. For example, to sort by `"srcTable"` in ascending (`"asc"`) order, pass the following attribute:" `"sort": [ "srcTable", "asc" ],`
search	string	Search string to filter objects by name or other searchable fields. Empty string means no filter applied.
offset	number	Maximum number of objects to return in one response or page size. For example, if you set the offset to 25, the request can returns metrics for up to 25 objects in one response.
limit	number	Number of objects to skip from the beginning for pagination. For example, 0 means start from the first object.

Request body

Use the following request body to pass the job ID and metrics options:

```
{
  "jobId": <jobId>,
  "parameters": {
    "metricsOptions": {
      "stateFilter": null,
      "sort": [ "srcTable", "asc" ],
      "search": "",
      "limit": 25,
      "offset": 0
    }
  }
}
```

Success response

A successful response includes the following detailed statistics about the job and its tasks:

Parameter	Type	Description
jobId	Long	Unique identifier of the job.
assetId	String	Asset identifier related to the job.
jobName	String	Name of the job.
assetType	String	Type or category of the asset. The asset type can be "APPMI_TASK" or "DBMI_TASK" based on the task type you specified.
startedBy	String	Email or identifier of the user who started the job.
correlationId	String	Correlation identifier for tracking related jobs or processes.
orgId	String	Organization identifier to which the job belongs.
runtimeEnv	String	The name of the runtime environment in which the job ran.
status	String	The status of the job. Options are: - **Up and Running**. The job is running. - **Running with Warning**. The job is running with a warning. This state can also occur when one or more table-specific subtasks fail but some subtasks are still running. - **On Hold**. The job is in a paused state while the Database Ingestion and Replication (DBMI) agent is being updated. - **Stopping**. The job is stopping in response to a Stop request. - **Stopped**. The job was intentionally stopped. - **Failed**. The job ended abnormally, the task deployment to the job failed, or one or more table-specific subtasks failed. Also, for an initial load job, the job was stopped. - **Deploying**. The job is being deployed. - **Deployed**. The job has been deployed. - **Aborting**. The job is stopping immediately in response to an Abort request. - **Aborted**. The job has been aborted. - **Undeploying**. The job is being undeployed. - **Undeployed**. The job has been undeployed. - **Completed**. The job completed successfully.
duration	Long	Duration of the job execution, in milliseconds or seconds.
endTime	String (ISO 8601 timestamp)	Timestamp when the job ended.
startTime	String (ISO 8601 timestamp)	Timestamp when the job started.
location	String	The project or folder that contains the task definition.
jobConfig	Object	Configuration details related to the job task.
metricsInfo	List	List of metrics for each task associated with the job.

Parameter	Type	Description
counts	Object	Summary counts of subtasks by status, including aggregate unload totals for the job.
currentThroughput	Double	Current throughput of the job, in records per second.

The jobConfig parameter includes the following information:

Parameter	Type	Description
taskId	String	Unique identifier of the task associated with the job.
taskMode	String (Enum)	Represents the type of load operation performed. Options are: - **UNLOAD**. Loads source data read at a single point in time to a target. After the data is loaded, the ingestion and replication job ends. - **CDC**. Loads data changes continuously or until the ingestion and replication job is stopped or ends. The job loads the changes that have occurred since the last time it ran or from a specific start point. - **COMBINED**. Performs an initial load of point-in-time data to the target and then automatically switches to propagating incremental data changes made to the same source objects on a continuous basis.
srcConnId	String	Source connection identifier used in the task.
tgtConnId	String	Target connection identifier used in the task.
deployTime	String (ISO 8601)	Timestamp when the task was deployed.
schedulerJobName	String or null	Name of the scheduler job if applicable. Null if not scheduled.
schedulerId	String	Identifier for the scheduler. Returns empty string if not applicable.
agentId	String	Identifier of the agent handling the job deployment. Returns empty if not assigned.
isRunOnOtherAgentEnabled	Boolean	Flag that indicates if the job can run on other agents.
isServerless	Boolean or null	Indicates if the job runs on a serverless environment.
deployVersion	String	Version of the deployment. For example, 58.0.0-SNAPSHOT.
featureTags	List or null	List of feature tags associated with the job. Returns Null if none.
srcVendor	String or null	Vendor or source system name. For example, ORACLE.
tgtVendor	String or null	Vendor or target system name. For example, SNOWFLAKE.

Parameter	Type	Description
cdcGroupJobId	Long or null	The CDC group job ID. Returns this parameter for database ingestion and replication CDC staging tasks.
cdcGroupInmdtStrgConId	String or null	CDC group intermediate storage connection ID. Returns this parameter for database ingestion and replication CDC staging tasks.
mapOfApplyJobDetails	Map<String, Object>	Map of apply jobs in database ingestion and replication CDC staging jobs and for migrating jobs to a CDC staging group.

The metricsInfo parameter includes the following information:

Parameter	Type	Description
jobName	String	Name of the job.
runId	String	Run identifier for the task execution.
recordsRead	Long	Number of records read during the task.
recordsWritten	Long	Number of records written during the task.
captureProgress	Object or null	Optional progress capture object. Null if not applicable.
duration	Long	Duration of the task execution, usually in milliseconds.
subTasks	List	List of subtasks metrics related to this task.
datavalidation	List	Data validation results for the task.

For an initial load task, the subTasks parameter includes the following information:

Parameter	Type	Description
srcName	String	Name of the source object for the subtask.
tgtName	String	Name of the target object for the subtask.
state	String	Current state of the subtask. For example, COMPLETED.
agentId	String	Identifier of the agent that processed the subtask.

For a CDC task, the subTasks parameter includes the following information:

Parameter	Type	Description
srcName	String	Name of the source object for the subtask.
tgtName	String	Name of the target object for the subtask.

Parameter	Type	Description
state	String	Current state of the subtask. For example, RUNNING.
inserts	Long	Number of insert operations applied for the subtask.
updates	Long	Number of update operations applied for the subtask.
deletes	Long	Number of delete operations applied for the subtask.
lobs	Long	Number of LOB (large object) values processed for the subtask.
unloadCount	Long	Number of records unloaded for the subtask during an initial load phase.
agentId	String	Identifier of the agent that processed the subtask.

The counts parameter includes the following information:

Parameter	Type	Description
total	Integer	Total number of subtasks or objects counted.
statusCounts	List	List of status and count pairs. For example, {"status": "COMPLETED", "counts": 1}.
totalUnload	Object	Aggregate record totals for the job.
totalUnload.totalRead	Long	Total number of records read across all subtasks.
totalUnload.totalWritten	Long	Total number of records written across all subtasks.

Sample response for initial load metrics

The following sample response shows the returned initial load metrics:


```
{
    "jobInfo": {
        "jobId": 138587,
        "assetId": "5tO0Swnq3ECfAMNT8gPAqA_138587",
        "jobName": "ora_2_snflk_api2_sn3_sep16_138587",
        "assetType": "DBMI_TASK",
        "startedBy": "spoorthi_bg1",
        "correlationId": "ZDFkZWZkNTItM2RjOS00YT_DBMI",
        "orgId": "dy5bpJwvZUcd6bKsIfP3wf",
        "runtimeEnv": "0195HS2500000000000J",
        "status": "completed",
        "duration": 458,
        "endTime": "2026-09-16T08:46:11.335Z",
        "jobConfig": {
            "taskId": "5tO0Swnq3ECfAMNT8gPAqA",
            "taskMode": "UNLOAD",
            "srcConnId": "0195HS0B000000000006J",
            "tgtConnId": "0195HS0B000000000043",
            "deployTime": "2026-09-16T08:37:21.917029462Z",
            "schedulerJobName": null,
            "schedulerId": null,
            "agentId": "",
            "isRunOnOtherAgentEnabled": false,
            "isServerless": false,
            "deployVersion": "59.0.0-SNAPSHOT",
```

```
            "featureTags": [
                "autoTuned"
            ],
            "srcVendor": "ORACLE",
            "tgtVendor": "SNOWFLAKE",
            "cdcGroupJobId": null,
            "cdcGroupInmdtStrgConId": null,
            "mapOfApplyJobDetails": {}
        },
        "location": "Oracle",
        "startTime": "2026-09-16T08:38:33.519Z"
    },
    "metricsInfo": [
        {
            "jobName": "ora_2_snflk_api2_sn3_sep16_138587",
            "runId": "901854",
            "recordsRead": 1000002,
            "recordsWritten": 1000002,
            "captureProgress": null,
            "subTasks": [
                {
                    "srcName": "SP_UNLOAD.ORA_1M_00001",
                    "tgtName": "sp5.1m_rec",
                    "state": "COMPLETED",
                    "agentId": "0195HS0800000000000H"
                }
            ],
            "duration": 410092,
            "datavalidation": [
                null
            ]
        }
    ],
    "counts": {
        "total": 1,
        "statusCounts": [
            {
                "status": "COMPLETED",
                "counts": 1
            }
        ],
        "totalUnload": {
            "totalRead": 1000002,
            "totalWritten": 1000002
        }
    },
    "currentThroughput": 2197.8065934065935
}
```


Sample response for CDC metrics

The following sample response shows the returned CDC metrics:


```
{
    "jobInfo": {
        "jobId": 139655,
        "assetId": "aKY1F2zC66VizIyboG3g0q_139655",
        "jobName": "check_comb_api_oct5_139655",
        "assetType": "DBMI_TASK",
        "startedBy": "spoorthi_bg1",
        "correlationId": "MzZlNTJiNTYtNjc1Yy00OT_DBMI",
        "orgId": "dy5bpJwvZUcd6bKsIfP3wf",
        "runtimeEnv": "0195HS2500000000000J",
        "status": "running",
        "duration": 751,
        "endTime": null,
        "jobConfig": {
            "taskId": "aKY1F2zC66VizIyboG3g0q",
            "taskMode": "CDC_COMBINED",
            "srcConnId": "0195HS0B000000000006J",
            "tgtConnId": "0195HS0B0000000000WR",
```

```
            "deployTime": "2026-10-05T07:49:21.396161757Z",
            "schedulerJobName": null,
            "schedulerId": "",
            "agentId": "0195HS0800000000000H",
            "isRunOnOtherAgentEnabled": true,
            "isServerless": false,
            "deployVersion": "59.0.0-SNAPSHOT",
            "featureTags": null,
            "srcVendor": "ORACLE",
            "tgtVendor": "SNOWFLAKE",
            "cdcGroupJobId": null,
            "cdcGroupInmdtStrgConId": null,
            "mapOfApplyJobDetails": {}
        },
        "location": "Default",
        "startTime": "2026-10-05T08:01:25.230Z"
    },
    "metricsInfo": [
        {
            "jobName": "check_comb_api_oct5_139655",
            "runId": "920930",
            "recordsRead": 35,
            "recordsWritten": 35,
            "captureProgress": {
                "sourceTime": "20261005081200"
            },
            "subTasks": [
                {
                    "srcName": "SP_UNLOAD.COMPO2",
                    "tgtName": "SNOW_PB.COMPO2",
                    "state": "RUNNING",
                    "inserts": 0,
                    "updates": 1,
                    "deletes": 0,
                    "lobs": 0,
                    "unloadCount": 10,
                    "agentId": "0195HS0800000000000H"
                },
                {
                    "srcName": "SP_UNLOAD.COMPO8",
                    "tgtName": "SNOW_PB.COMPO8",
                    "state": "RUNNING",
                    "inserts": 1,
                    "updates": 1,
                    "deletes": 3,
                    "lobs": 0,
                    "unloadCount": 19,
                    "agentId": "0195HS0800000000000H"
                }
            ],
            "duration": 724382,
            "datavalidation": []
        }
    ],
    "counts": {
        "total": 2,
        "statusCounts": [
            {
                "status": "RUNNING",
                "counts": 2
            }
        ],
        "totalUnload": {
            "totalRead": 0,
            "totalWritten": 0
        }
    },
    "currentThroughput": 0.04834254143646409
}
```

Failed responses

If the request fails, the API might return one of the following HTTP error codes:

HTTP status code	Error code	Error message
400	CDIR_VALIDATION_MISSING_FIELD	Required parameter {field} is missing.
400	CDIR_VALIDATION_ INVALID_VALUE	Value for {field} is invalid.
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed. Access token is missing or expired.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions for this request.
404	CDIR_JOB_NOT_FOUND	Job {jobId} was not found.
400	CDIR_VALIDATION_MISSING_METRICSOPTIONS	Required parameter metricsOptions is missing for job.
500	CDIR_INTERNAL_ERROR	An unexpected internal error occurred with this job.
503	CDIR_SERVICE_UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when a request is forbidden:

```
{
    "error": {
        "httpStatus": 403,
        "code": "CDIR_AUTHZ_FORBIDDEN",
        "message": "You do not have the required permissions for this request.",
        "details": [
            {
                "jobId": "137275"
            }
        ],
        "traceId": "8d6e7acc-6d16-4299-93dc-72590df5293d"
    }
}
```

Get database or application ingestion and replication task details

Use the details action of the task resource to retrieve detailed information about a database ingestion and replication task or application ingestion and replication task in the organization. This API provides detailed task payload information, which you can easily reuse when you create or update tasks.

GET request

Use the following GET request to retrieve task details:

```
GET /dbmi/public/api/v2/task/details?
taskId={taskId}&projectId={projectId}&folderId={folderId}
```

Request parameters

You can include the task ID in the URL to retrieve details for a specific task. Alternatively, provide the project ID and folder ID in the URL to retrieve details for all tasks within a particular project and folder. If you omit the task ID, project ID, and folder ID, the API returns details for all tasks in the organization.

Field	Type	Description
projectId	String	ID of the project where the task resides.
folderId	String	ID of the folder where the task resides in the project.
taskId	integer	ID of the task.

You can also include the following optional pagination attributes in the request:

Field	Type	Description
orderBy	string	Column name to sort the results. You can use one of the following column names to specify the sorting order: - name - createdTime - lastUpdatedTime - lastAccessedTime
pageNo	Integer	Page number to retrieve after pagination.
pageSize	Integer	Number of records per page.

Get request

Without pagination

Use the following GET request to retrieve task details based on task ID, project ID, and folder ID without pagination:

```
GET /dbmi/public/api/v2/task/details?
taskId={taskId}&projectId={projectId}&folderId={folderId}
```

For example:

```
GET https://pod-ing.ics.dev:11447/dbmi/public/api/v2/task/details?
taskId=2&folderId=5GX14m3CuFAeVWqnsSX9mC
```

With pagination

To paginate the results, you can include the following parameters in your GET request:

```
GET /dbmi/public/api/v2/task/details?
orderBy={nameOftheColumn}&pageNo={int}&pageSize={int}
```

For example:

```
GET https://pod-ing.ics.dev:11447/dbmi/public/api/v2/task/details?
orderBy=name&pageNo=1&pageSize=2
```

Successful response

A successful response returns HTTP status code 200 and includes the following header:

```
Content-Type: application/json
HTTP/2 200 Created
```

Response fields

The response includes the task details with the following fields:

Field	Type	Description
totalCount	int	Total number of documents returned in the response.
Documents	Object List	List of document objects, each representing a task or asset.

Each **document** object includes the following fields:

Field	Type	Description
taskId	int	Identifier of the task, retrieved from the repoInfo.repoHandle.
name	string	Name of the document or task.
documentState	string	Current state of the document, such as VALID.
documentType	string	Type of the document. For example, APPMI_TASK or DBMI_TASK.
parentInfo	Object List	List of parent entities related to the document, such as Space, Project, or Folder.
description	string	Description of the document. This field can be empty.
owner	string	Identifier of the owner of the document.
createdBy	string	Identifier of the user who created the document.
createdTime	string (ISO 8601)	Timestamp indicating when the document was created.
accessedTime	string (ISO 8601)	Timestamp indicating when the document was last accessed.
updateTime	string (ISO 8601)	Timestamp indicating when the document was last updated.
dbmiTask	JSON Node	Detailed JSON object containing task-specific configuration and metadata.
nativeData	NativeData	Optional native data associated with the document. The value can be null.
contentType	string	Content type of the document, which is ignored during JSON serialization.
docRef	DocRef	Reference to the document in the repository. The value can be null.
repoInfo	RepositoryInfo	Repository-related information including the repository handle. The value can be null.

The dbmiTask object includes the following top-level sections:

Field	Type	Description
type	string	Type of the task object, for example dbmi.
general	Object	General task settings, such as name, description, location, runtime environment, and load type.
source	Object	Source connection and configuration details for the task, including connector-specific custom properties.
target	Object	Target connection and configuration details for the task, including connector-specific custom properties.
runtimeOptions	Object	Runtime behavior settings for the task, such as checkpointing, auto-tuning, and schema drift options.
replicationRules	Object	Source and target object selection rules and column transformations applied by the task.

The **ParentInfo** object includes the following fields:

Field	Type	Description
parentId	string	Identifier of the parent entity, such as a Space, Project, or Folder.
parentName	string	Name of the parent entity.
parentType	string	Type of the parent entity, for example, Space, Project, or Folder.

Sample response without pagination

The following example shows detailed information returned for a single task without pagination:


```
{
    "totalCount": 1,
    "pageNo": 0,
    "pageSize": 25,
    "documents": [
        {
            "taskId": 754889,
            "name": "Check_cdc_case1_ora_2_snflk_oct5",
            "documentState": "VALID",
            "documentType": "DBMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "3uDIOqah80qbMK3cXAceIp",
                    "parentName": "Default",
                    "parentType": "Project"
                }
            ],
            "description": "",
            "owner": "6r2IIttttmU3ibDwPqxnRwb",
            "createdBy": "6r2IIttttmU3ibDwPqxnRwb",
            "createdTime": "2026-10-05T07:19:22.000+00:00",
            "accessedTime": "2026-10-05T07:35:18.961+00:00",
```

```
"updateTime": "2026-10-05T07:35:18.961+00:00",
"dbmiTask": {
    "type": "dbmi",
    "general": {
        "name": "Check_cdc_case1_ora_2_snflk_oct5",
        "description": null,
        "location": "Default",
        "runtimeEnvironment": "invyaminirh01.informatica.com",
        "type": "cdc"
    },
    "source": {
        "connection": "Oracle_19RDS_yk-CDC",
        "customProperties": {
            "readerInputIsPersisted": "false",
            "loadType": "CDC",
            "journalName": "",
            "dbmi.cdc.query.based.column.type": "COLUMN_TYPE_TIMESTAMP",
            "dbmi.cdc.technique": "LOG_BASED_CDC",
            "pwx.cdcreader.postgresql.connection.repl.slotname": "",
            "lobsEnabled": "false",
            "pwx.cdcreader.postgresql.connection.repl.publication": "",
            "dbmi.cdc.interval.mins": "5",
            "selectionMode": "RULE_BASED"
        },
        "restartPointForIncrementalLoadTimestamp": null,
        "schema": "SP_UNLOAD",
        "includeViews": null,
        "replicationSlotName": "",
        "replicationPlugin": null,
        "publication": "",
        "journalName": "",
        "restartPointForIncrementalLoad": "LATEST",
        "restartPointForIncrementalLoadPosition": null,
        "cdcTechnique": "LOG_BASED_CDC",
        "cdcQueryBasedColumnType": "COLUMN_TYPE_TIMESTAMP",
        "cdcQueryBasedColumnName": null,
        "cdcQueryBasedDateColumn": null,
        "cdcQueryBasedTimeColumn": null,
        "context": null,
        "accountId": null,
        "propertyId": null,
        "viewId": null,
        "pathToReportConfigurationFile": null,
        "product": null,
        "services": null,
        "outputType": null,
        "salesforceAPI": null,
        "fetchSize": null,
        "fetchSizeForInitialLoad": null,
        "fetchSizeForIncrementalLoad": null,
        "startDate": null,
        "endDate": null,
        "cdcIntervalDays": null,
        "cdcIntervalHours": null,
        "cdcIntervalMins": "5",
        "extractNonDefaultFields": null,
        "includeArchivedAndDeletedRows": null,
        "includeBase64Fields": null,
        "maximumBase64BodySize": null,
        "batchSize": null,
        "mid": null,
        "readerInputIsPersisted": "false",
        "readerHistoricalCacheUseCloud": null,
        "lobsEnabled": "false",
        "unloadFlashbackDisabled": null,
        "enableAlternateSource": null,
        "alternateSourceId": null,
        "cdcStagingMigration": null,
        "cdcStagingMigrationTasks": null,
        "jdbcPartitioningTechnique": null,
```

```
        "sourceMaxParallelPartitions": null,
        "unloadHelperThreadCount": null,
        "readEventBatchSize": null,
        "readerHelperThreadCount": null,
        "salesforceBulkV2Partitioning": null,
        "salesforceBulkV2RecordsPerPartition": null,
        "salesforceBulkV2MaxParallelPartitions": null,
        "workdayReplicationType": null,
        "workdayReportsNumber": null,
        "workdayReportName": null,
        "workdayReportsConfigFile": null,
        "oracleFusionInterfaceType": null,
        "oracleFusionModuleName": null,
        "oracleFusionEnableChildObjects": null,
        "formattedStartDate": "",
        "formattedEndDate": "",
        "selectionRules": [
            {
                "include": "COMPO2"
            },
            {
                "include": "COMPO8"
            }
        ]
    },
    "target": {
        "connection": "Snowflake_pat_sp",
        "schema": "ADOBE_PB",
        "outputFormat": "CSV",
        "fileCompressionType": "None",
        "parquetFormat": "true",
        "fixedDirectoryForEachTable": "false",
        "renamingRules": [],
        "dataTypeRules": [],
        "stage": "gkn",
        "bucket": "",
        "directory": "",
        "addBeforeImages": "false",
        "directoryTags": "",
        "useTableNameAsTopicName": "false",
        "includeSchemaName": "false",
        "asyncWrite": "true",
        "writerSnowflakeIngestionMethod": "",
        "writerSnowflakeDeferredMergeInterval": "3600",
        "customProperties": {
            "rat.audit.columns.optype": "false",
            "applyMode": "standard",
            "targetBucket": "",
            "targetDirectory": "",
            "rat.cdcfile.target.directory": "",
            "writerSnowflakeIngestionMethod": "",
            "writerSnowflakeDeferredMergeInterval": "3600",
            "targetIdentifiersEnableCaseTransformation": "false",
            "auditColumnsPrefix": "INFA_"
        }
    },
    "runtimeOptions": {
        "numberOfRowsInOutputFile": null,
        "fileExtensionBasedOnFileType": null,
        "applyCycleChangeLimit": null,
        "applyCycleIntervalDays": null,
        "applyCycleIntervalHours": null,
        "applyCycleIntervalMins": null,
        "applyCycleIntervalSecs": null,
        "lowActivityFlushHours": null,
        "lowActivityFlushMins": null,
        "checkpointAllRows": null,
        "checkpointEveryCommit": null,
        "checkpointRowCount": null,
        "checkpointFrequencySecs": null,
```

```
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": {
                        "addColumn": "replicate",
                        "renameColumn": "ignore",
                        "modifyColumn": "replicate",
                        "dropColumn": "ignore"
                    },
                    "customProperties": {}
                },
                "replicationRules": {
                    "source": "SP_UNLOAD",
                    "target": "ADOBE_PB",
                    "overrides": {
                        "tableRules": [],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "schema": "",
                            "include": "COMPO2"
                        },
                        {
                            "schema": "",
                            "include": "COMPO8"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```

Sample response with pagination

The following example shows a paginated response containing multiple task documents:

```
{
    "totalCount": 15792,
    "pageNo": 1,
    "pageSize": 2,
    "documents": [
        {
            "taskId": 687091,
            "name": "-1e999",
            "documentState": "VALID",
            "documentType": "DBMI_TASK",
            "parentInfo": [
                {
                    "parentId": "7cCn5thwWFLhiZoSosphKL",
                    "parentName": "REG",
                    "parentType": "Space"
                },
                {
                    "parentId": "3uDIOqah80qbMK3cXAceIp",
                    "parentName": "Default",
                    "parentType": "Project"
                }
            ],
            "description": "",
            "owner": "31RpFJNQi86lWuZVRKB5ep",
            "createdBy": "31RpFJNQi86lWuZVRKB5ep",
            "createdTime": "2026-07-30T12:58:36.000+00:00",
            "accessedTime": "2026-10-05T07:37:38.894+00:00",
            "updateTime": "2026-10-05T07:37:38.894+00:00",
            "dbmiTask": {
                "type": "dbmi",
                "general": {
                    "name": "-1e999",
                    "description": null,
```

```
    "location": "Default",
    "runtimeEnvironment": "00_ec2_S3_IAM_Role_1",
    "type": "initial"
},
"source": {
    "connection": "AIN_Oracle_4",
    "customProperties": {
        "lobsEnabled": "false",
        "loadType": "UNLOAD",
        "unloadFlashbackDisabled": "true",
        "unloadIncludeViews": "false",
        "selectionMode": "BROWSE_BASED"
    },
    "restartPointForIncrementalLoadTimestamp": null,
    "schema": "ADMIN",
    "includeViews": "false",
    "replicationSlotName": null,
    "replicationPlugin": null,
    "publication": null,
    "journalName": null,
    "restartPointForIncrementalLoad": null,
    "restartPointForIncrementalLoadPosition": null,
    "cdcTechnique": null,
    "cdcQueryBasedColumnType": null,
    "cdcQueryBasedColumnName": null,
    "cdcQueryBasedDateColumn": null,
    "cdcQueryBasedTimeColumn": null,
    "context": null,
    "accountId": null,
    "propertyId": null,
    "viewId": null,
    "pathToReportConfigurationFile": null,
    "product": null,
    "services": null,
    "outputType": null,
    "salesforceAPI": null,
    "fetchSize": null,
    "fetchSizeForInitialLoad": null,
    "fetchSizeForIncrementalLoad": null,
    "startDate": null,
    "endDate": null,
    "cdcIntervalDays": null,
    "cdcIntervalHours": null,
    "cdcIntervalMins": null,
    "extractNonDefaultFields": null,
    "includeArchivedAndDeletedRows": null,
    "includeBase64Fields": null,
    "maximumBase64BodySize": null,
    "batchSize": null,
    "mid": null,
    "readerInputIsPersisted": null,
    "readerHistoricalCacheUseCloud": null,
    "lobsEnabled": "false",
    "unloadFlashbackDisabled": "true",
    "enableAlternateSource": null,
    "alternateSourceId": null,
    "cdcStagingMigration": null,
    "cdcStagingMigrationTasks": null,
    "jdbcPartitioningTechnique": null,
    "sourceMaxParallelPartitions": null,
    "unloadHelperThreadCount": null,
    "readEventBatchSize": null,
    "readerHelperThreadCount": null,
    "salesforceBulkV2Partitioning": null,
    "salesforceBulkV2RecordsPerPartition": null,
    "salesforceBulkV2MaxParallelPartitions": null,
    "workdayReplicationType": null,
    "workdayReportsNumber": null,
    "workdayReportName": null,
    "workdayReportsConfigFile": null,
```

```
            "oracleFusionInterfaceType": null,
            "oracleFusionModuleName": null,
            "oracleFusionEnableChildObjects": null,
            "formattedStartDate": "",
            "formattedEndDate": "",
            "selectionRules": [
                {
                    "exclude": "*"
                },
                {
                    "include": "AA_DERIVED2"
                }
            ]
        },
        "target": {
            "connection": "OneLake_RG",
            "schema": "",
            "outputFormat": "CSV",
            "fileCompressionType": "Gzip",
            "parquetFormat": "true",
            "fixedDirectoryForEachTable": "false",
            "renamingRules": [],
            "dataTypeRules": [],
            "stage": "",
            "bucket": "",
            "directory": "{TableName}_{Timestamp}",
            "addBeforeImages": "false",
            "useTableNameAsTopicName": "false",
            "includeSchemaName": "false",
            "asyncWrite": "true",
            "useConnectionDir": "true",
            "customProperties": {
                "formatEncoderIncludeInfaBigIntSequence": "false",
                "rat.target.useConnectionDir": "true",
                "auditColumnsPrefix": "INFA_",
                "targetBucket": "",
                "targetDirectory": "{TableName}_{Timestamp}"
            }
        },
        "runtimeOptions": {
            "numberOfRowsInOutputFile": "100000",
            "fileExtensionBasedOnFileType": null,
            "applyCycleChangeLimit": null,
            "applyCycleIntervalDays": null,
            "applyCycleIntervalHours": null,
            "applyCycleIntervalMins": null,
            "applyCycleIntervalSecs": null,
            "lowActivityFlushHours": null,
            "lowActivityFlushMins": null,
            "checkpointAllRows": null,
            "checkpointEveryCommit": null,
            "checkpointRowCount": null,
            "checkpointFrequencySecs": null,
            "executeInTaskflow": false,
            "enableAutoTuning": false,
            "schemaDriftOptions": null,
            "customProperties": {
                "rowsPerTargetFile": "100000"
            }
        },
        "replicationRules": {
            "source": "ADMIN",
            "target": "",
            "overrides": {
                "tableRules": [],
                "fieldRules": []
            },
            "sourceSet": [
                {
                    "schema": "",
```

```
                    "exclude": "*"
                },
                {
                    "schema": "",
                    "include": "AA_DERIVED2"
                }
            ],
            "columnTransformations": []
        }
    }
},
{
    "taskId": 687147,
    "name": "-2147483649",
    "documentState": "VALID",
    "documentType": "DBMI_TASK",
    "parentInfo": [
        {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
        },
        {
            "parentId": "3uDIOqah80qbMK3cXAceIp",
            "parentName": "Default",
            "parentType": "Project"
        }
    ],
    "description": "",
    "owner": "31RpFJNQi86lWuZVRKB5ep",
    "createdBy": "31RpFJNQi86lWuZVRKB5ep",
    "createdTime": "2026-07-30T12:59:31.000+00:00",
    "accessedTime": "2026-10-05T07:37:38.894+00:00",
    "updateTime": "2026-10-05T07:37:38.894+00:00",
    "dbmiTask": {
        "type": "dbmi",
        "general": {
            "name": "-2147483649",
            "description": null,
            "location": "Default",
            "runtimeEnvironment": "00_ec2_S3_IAM_Role_1",
            "type": "initial"
        },
        "source": {
            "connection": "AIN_Oracle_4",
            "customProperties": {
                "lobsEnabled": "false",
                "loadType": "UNLOAD",
                "unloadFlashbackDisabled": "true",
                "unloadIncludeViews": "false",
                "selectionMode": "BROWSE_BASED"
            },
            "restartPointForIncrementalLoadTimestamp": null,
            "schema": "ADMIN",
            "includeViews": "false",
            "replicationSlotName": null,
            "replicationPlugin": null,
            "publication": null,
            "journalName": null,
            "restartPointForIncrementalLoad": null,
            "restartPointForIncrementalLoadPosition": null,
            "cdcTechnique": null,
            "cdcQueryBasedColumnType": null,
            "cdcQueryBasedColumnName": null,
            "cdcQueryBasedDateColumn": null,
            "cdcQueryBasedTimeColumn": null,
            "context": null,
            "accountId": null,
            "propertyId": null,
            "viewId": null,
```

```
            "pathToReportConfigurationFile": null,
            "product": null,
            "services": null,
            "outputType": null,
            "salesforceAPI": null,
            "fetchSize": null,
            "fetchSizeForInitialLoad": null,
            "fetchSizeForIncrementalLoad": null,
            "startDate": null,
            "endDate": null,
            "cdcIntervalDays": null,
            "cdcIntervalHours": null,
            "cdcIntervalMins": null,
            "extractNonDefaultFields": null,
            "includeArchivedAndDeletedRows": null,
            "includeBase64Fields": null,
            "maximumBase64BodySize": null,
            "batchSize": null,
            "mid": null,
            "readerInputIsPersisted": null,
            "readerHistoricalCacheUseCloud": null,
            "lobsEnabled": "false",
            "unloadFlashbackDisabled": "true",
            "enableAlternateSource": null,
            "alternateSourceId": null,
            "cdcStagingMigration": null,
            "cdcStagingMigrationTasks": null,
            "jdbcPartitioningTechnique": null,
            "sourceMaxParallelPartitions": null,
            "unloadHelperThreadCount": null,
            "readEventBatchSize": null,
            "readerHelperThreadCount": null,
            "salesforceBulkV2Partitioning": null,
            "salesforceBulkV2RecordsPerPartition": null,
            "salesforceBulkV2MaxParallelPartitions": null,
            "workdayReplicationType": null,
            "workdayReportsNumber": null,
            "workdayReportName": null,
            "workdayReportsConfigFile": null,
            "oracleFusionInterfaceType": null,
            "oracleFusionModuleName": null,
            "oracleFusionEnableChildObjects": null,
            "formattedStartDate": "",
            "formattedEndDate": "",
            "selectionRules": [
                {
                    "exclude": "*"
                },
                {
                    "include": "AA_DERIVED2"
                }
            ]
        },
        "target": {
            "connection": "OneLake_RG",
            "schema": "",
            "outputFormat": "CSV",
            "fileCompressionType": "Gzip",
            "parquetFormat": "true",
            "fixedDirectoryForEachTable": "false",
            "renamingRules": [],
            "dataTypeRules": [],
            "stage": "",
            "bucket": "",
            "directory": "{TableName}_{Timestamp}",
            "addBeforeImages": "false",
            "useTableNameAsTopicName": "false",
            "includeSchemaName": "false",
            "asyncWrite": "true",
            "useConnectionDir": "true",
```

```
                    "customProperties": {
                        "formatEncoderIncludeInfaBigIntSequence": "false",
                        "rat.target.useConnectionDir": "true",
                        "auditColumnsPrefix": "INFA_",
                        "targetBucket": "",
                        "targetDirectory": "{TableName}_{Timestamp}"
                    }
                },
                "runtimeOptions": {
                    "numberOfRowsInOutputFile": "100000",
                    "fileExtensionBasedOnFileType": null,
                    "applyCycleChangeLimit": null,
                    "applyCycleIntervalDays": null,
                    "applyCycleIntervalHours": null,
                    "applyCycleIntervalMins": null,
                    "applyCycleIntervalSecs": null,
                    "lowActivityFlushHours": null,
                    "lowActivityFlushMins": null,
                    "checkpointAllRows": null,
                    "checkpointEveryCommit": null,
                    "checkpointRowCount": null,
                    "checkpointFrequencySecs": null,
                    "executeInTaskflow": false,
                    "enableAutoTuning": false,
                    "schemaDriftOptions": null,
                    "customProperties": {
                        "rowsPerTargetFile": "100000"
                    }
                },
                "replicationRules": {
                    "source": "ADMIN",
                    "target": "",
                    "overrides": {
                        "tableRules": [],
                        "fieldRules": []
                    },
                    "sourceSet": [
                        {
                            "schema": "",
                            "exclude": "*"
                        },
                        {
                            "schema": "",
                            "include": "AA_DERIVED2"
                        }
                    ],
                    "columnTransformations": []
                }
            }
        }
    ]
}
```


Failed responses

If the request fails, the API returns one of the following HTTP error codes:

HTTP status code	Error code	Error message
401	CDIR_AUTH_UNAUTHORIZED	Authentication failed.
403	CDIR_AUTHZ_FORBIDDEN	You do not have the required permissions to perform this job.
404	CDIR_TASK_NOT_FOUND	Task{taskId} was not found.

HTTP status code	Error code	Error message
500	CDIR_INTERNAL_ERROR	Unexpected error occurred during deployment.
503	CDIR_SERVICE_ UNAVAILABLE	Service is temporarily unavailable.

The following example shows a sample error response when the specified task ID that is not valid:

```
{
    "error": {
        "httpStatus": 404,
        "code": "CDIR_TASK_NOT_FOUND",
        "message": "Task {73544312} was not found.",
        "details": [
            {
                "taskId": "73544312"
            }
        ],
        "traceId": "5593b442-a71c-43cf-9894-5bee71e13bdc"
    }
}
```

File Ingestion and Replication REST API

Use the file ingestion and replication resources to run and monitor file ingestion and replication tasks.

When you use file ingestion and replication resources, note the following rules:

- Use JSON format.
- Use the following base URL:

  ```
  <serverUrl>/mftsaas/api/v1/<API name>
  ```

- Use the following request header format:

  ```
  <METHOD> <serverUrl>/<URI> HTTP/<HTTP version>
  Content-Type: application/json
  Accept: application/json
  IDS-SESSION-ID: <SessionId>
  ```

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Jobs

Use the job resource to start a file ingestion and replication job. You can also use the job resource to retrieve job status or job logs for a file ingestion and replication task. Use the file ingestion and replication REST API version 1 task resource to retrieve the ID and name of the task.

Run Request

To start a file ingestion and replication task job, use the following URI:

```
mftsaas/api/v1/job
```

Include the following information in the request:

Field	Type	Required	Description
taskId	String	Yes	File ingestion and replication ID.
taskName	String	-	File ingestion and replication name.

Use the following source directory and target directory keys for the specified connectors when you start a file ingestion and replication job:

Connector	srcDir	tgtDir
local	sourceDirectory	targetDirectory
ftp,ftps,sftp	sourceDirectory	targetDirectory
gcs	sourceDirectory	gcsTargetLocation
hdfs	sourceDirectory	hdfsTargetLocation
adlsgen2	sourceDirectory	adlsGen2TargetLocation
s3	s3SourceLocation	s3TargetLocation
blob	blobSourceLocation	blobContainer
ocs	sourceDirectory	ocsTargetLocation

You can overwrite the following parameters using the job resource REST API:

Category	Parameter	ID
General	Source Connection	sourceConnection
General	Target Connection	targetConnection
General	Parallel Batch Log Level	parallelBatch
General	Log Level	logLevel
Source	Source Directory	sourceDirectory
Source	File Pattern	filePattern
Source	Batch Size	batchSize
Source	Include files from sub-folders	includeSubfolder
Source	Skip Duplicate files	checkDuplicate
Source	Check File Stability	fileStability

Category	Parameter	ID
Source	Stability Check Interval	stabilityCheckInterval
Target	Target Directory	targetDirectory

Note: You must pass the connection ID to overwrite the source and target connection parameters.

Use the following sample as a reference to start a file ingestion and replication task job:

```
{
        "taskId": "k1YHA1blhcBjbJvCIRQX2s",
        "taskName": "localtolocal_param2"
}
```

Use the following sample to overwrite the source option values that were passed in the user interface:

```
"variables": [{
        "variable": "<string>",
        "value": "<string>"
    }]
```

In the following example, the parameter value that were passed in the user interface is overwritten to corresponding values provided in JSON POST while using the job resource REST API:

```
POST <serverUrl>/mftsaas/api/v1/job HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
    "taskId": "0efdVUEZeV2cB0quomeksd",
    "taskName": "localtolocal_param2",
    "parameters": {
        "category": [{

                "id": "General",

                "parameter": [

                    {

                        "id":"sourceConnection",

                        "value":"AdvancedSFTPV2"

                    },

                    {

                        "id":"targetConnection",

                        "value":"AdvancedSFTPV2"

                    },

                    {

                        "id":"parallelBatch",

                        "value":"10"

                    },

                    {

                        "id":"logLevel",
```

```
            "value":"DEBUG"
        }
    ]
},{
    "id": "Source",
    "parameter": [{
            "id": "sourceDirectory",
            "value": "/root/test1"
        },
        {
            "id":"filePatternType",
            "value":"reg"
        },
        {
            "id": "filePattern",
            "value": "*.txt"
        },
        {
            "id": "batchSize",
            "value": "5"
        },
        {
            "id":"includeSubfolder",
            "value":"true"
        },
        {
            "id":"checkDuplicate",
            "value":"true"
        },
        {
            "id":"fileStability",
            "value":"true"
        },
        {
            "id":"stabilityCheckInterval",
```

```
                    "value":"30"
                }
            ]
        },
        {
            "id": "Target",
            "parameter": [{
                "id": "targetDirectory",
                "value": "/root/test2"
            }]
        }
    ]
  }
}
```

The following example shows to override a file ingestion and replication task with filename as a variable:

```
POST <serverUrl>/mftsaas/api/v1/job HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "taskId": "4m24k3UFWMkkqd55YDefIB",
  "taskName": "R41_Local_Local",
  "parameters": {
    "category": [
      {
        "id": "Source",
        "parameter": [
          {
            "id": "sourceDirectory",
            "value": "/${Parentfolder}"
          },
          {
            "id": "filePickupFilePath",
            "value": "${filename}"
          },
          {
            "id": "batchSize",
            "value": "5"
          }
        ]
      },
      {
        "id": "Target",
        "parameter": [
          {
            "id": "targetDirectory",
            "value": "/${Parentfolder}/Target"
          }
        ]
      }
    ]
  },
  "variables": [
    {
```

```
      "variable": "Parentfolder",
      "value": "root/Arun"
    },
    {
      "variable": "filename",
      "value": "filepath.txt"
    }
  ]
}
```

The following exampleshows to override a file ingestion and replication task with filelist as a variable:

```
POST <serverUrl>/mftsaas/api/v1/job HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "taskId": "4m24k3UFWMkkqd55YDefIB",
  "taskName": "R41_Local_Local",
  "parameters": {
    "category": [
      {
        "id": "Source",
        "parameter": [
          {
            "id": "sourceDirectory",
            "value": "/${Parentfolder}"
          },
          {
            "id": "filePickupFileList",
            "value": "${filelist}"
          },
          {
            "id": "batchSize",
            "value": "5"
          }
        ]
      },
      {
        "id": "Target",
        "parameter": [
          {
            "id": "targetDirectory",
            "value": "/${Parentfolder}/Target"
          }
        ]
      }
    ]
  },
  "variables": [
    {
      "variable": "Parentfolder",
      "value": "root/Arun"
    },
    {
      "variable": "filelist",
      "value": "File1.txt,File2.txt,File3.txt,File4.txt"
    }
  ]
}
```

Run Response

If successful, file ingestion and replication returns the run ID for the job. Use the run ID to monitor the job status and request log files for the job.

If unsuccessful, the response includes a reason for the failure.

GET Status Request

To retrieve the status of a specific file ingestion and replication task job, use the following URI:

```
mftsaas/api/v1/job/<runId>/status
```

GET Status Response

If successful, file ingestion and replication returns the job status and the job details, which includes a list of files and the details and status of each file.

If unsuccessful, the response includes a reason for the failure.

GET Job Logs Request

To retrieve the log files for a specific file ingestion and replication task job, use the following URI:

```
mftsaas/api/v1/job/<runId>/logs
```

GET Job Logs Response

If successful, file ingestion and replication returns the log files for the job.

If unsuccessful, the response includes a reason for the failure.

Activity logs

Use the activityLog resource to retrieve details for a completed job using the task ID, run ID, or both.

REST API version 1 resource

Use the file ingestion and replication task REST API version 1 resource to retrieve details for a completed job using the task ID, run ID, or both.

GET Request

To request the details for a completed job using the task ID, use the following URI:

```
mftsaas/api/v1/mitasks/activityLog?taskId=<taskId>
```

To request the details for active or a completed job using the run ID, use the following URI:

```
mftsaas/api/v1/mitasks/activityLog?runId=<runId>
```

To specify the number of rows to skip, use the following URI:

```
mftsaas/api/v1/mitasks/activityLog?taskId={{taskID}}&<offset>
```

To specify a row limit, use the following URI:

```
mftsaas/api/v1/mitasks/activityLog?taskId={{taskID}}&<rowLimit>
```

You can use a combination of these options. For example, you can use the following URI:

```
mftsaas/api/v1/mitasks/activityLog?
runId=<runId>&taskId=<taskId>&rowLimit=<rowLimit>&offset=<offset>
```

You can use the following attributes in the activityLog GET URI:

Field	Description
taskId	File ingestion and replication task ID.
runId	File ingestion and replication run ID.

Field	Description
offset	The number of rows to skip. For example, you might want to skip the first three rows.
rowLimit	The maximum number of rows to return. The maximum number you can specify is 100. Default is 25.

Note: You must specify either the taskId or the runId attribute in the GET URI.

GET Response

The activityLog object returns the following attributes:

Field	Description
id	File ingestion and replication job ID.
totaljobCount	Total number of jobs.
taskId	File ingestion and replication task ID.
runId	File ingestion and replication run ID.
startedBy	Name of the user who created the file ingestion and replication task.
startTime	Start time for the job. Uses Coordinated Universal Time (UTC).
endTime	End time for the job. Uses Coordinated Universal Time (UTC).
status	Whether the job completed successfully.
messageText	Error message associated with the job.
successFiles	The number of files that are successfully transferred from source to target.
failedFiles	The number of files that were not transferred from source to target.

GET Example

The following example shows a response to get details for a file ingestion and replication job using task ID:


```
{
    "totalJobCount": 7,
    "jobActivityLog": [
        {
            "id": 1000000200272,
            "taskId": 89882,
            "runId": 137205,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:55:13Z",
            "endTime": "2021-09-13T09:55:15Z",
            "status": "FAILED"
        },
        {
            "id": 1000000200270,
            "taskId": 89882,
            "runId": 137204,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:52:44Z",
            "endTime": "2021-09-13T09:53:02Z",
```

```
            "status": "SUCCESS"
        },
        {
            "id": 1000000200268,
            "taskId": 89882,
            "runId": 137202,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:49:55Z",
            "endTime": "2021-09-13T09:50:12Z",
            "status": "SUCCESS"
        },
        {
            "id": 1000000200264,
            "taskId": 89882,
            "runId": 137199,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:43:27Z",
            "endTime": "2021-09-13T09:43:42Z",
            "status": "SUCCESS"
        },
        {
            "id": 1000000200262,
            "taskId": 89882,
            "runId": 137198,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:13:58Z",
            "endTime": "2021-09-13T09:14:04Z",
            "status": "FAILED"
        },
        {
            "id": 1000000200261,
            "taskId": 89882,
            "runId": 137197,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:13:09Z",
            "endTime": "2021-09-13T09:13:28Z",
            "status": "SUCCESS"
        },
        {
            "id": 1000000200260,
            "taskId": 89882,
            "runId": 137196,
            "startedBy": "b2b_pod1",
            "startTime": "2021-09-13T09:12:21Z",
            "endTime": "2021-09-13T09:12:35Z",
            "status": "SUCCESS"
        }
    ]
}
```


The following example shows a response to get details for a file ingestion and replication job using run ID:


```
{
    "jobActivityLog": [
        {
            "jobStatusResponse": {
                "jobStatus": "FAILED",
                "errorMessage": "[8008 - Create File List] Directory '/root/testnot' not
found ",
                "jobDetails": {
                    "jobNumber": 1000000200262,
                    "status": "Failed",
                    "startTime": "2021-09-13T09:13:58Z",
                    "endTime": "2021-09-13T09:14:04Z",
                    "messageText": "[8008 - Create File List] Directory '/root/testnot'
not found ",
                    "successFiles": 0,
                    "failedFiles": 0,
                    "fileDetails": []
                }
            }
```

```
        }
    ]
}


{
    "jobActivityLog": [
        {
            "jobStatusResponse": {
                "jobStatus": "FAILED",
                "errorMessage": "[8008 - Create File List] Directory '/root/testnot' not
found ",
                "jobDetails": {
                    "jobNumber": 1000000200262,
                    "status": "Failed",
                    "startTime": "2021-09-13T09:13:58Z",
                    "endTime": "2021-09-13T09:14:04Z",
                    "messageText": "[8008 - Create File List] Directory '/root/testnot'
not found ",
                    "successFiles": 0,
                    "failedFiles": 0,
                    "fileDetails": []
                }
            }
        }
    ]
}
```

REST API version 2 resource

Use the file ingestion and replication task REST API version 2 resource to retrieve details for a given job type using the task ID, run ID, both, or neither.

GET Request

To request details for all jobs in a file ingestion and replication task, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog
```

To request the details for all jobs using the task ID, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?taskId=<taskId>
```

To request the details for all jobs using the run ID, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?runId=<runId>
```

To specify the number of rows to skip, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?taskId=<taskId>&offset=<offset>
```

To specify a row limit, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?taskId=<taskId>&rowLimit<rowLimit>
```

To specify a job type, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?jobType=<jobType>
```

To specify the number of file events to display and include the file event limit, use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?
runId={{runID}}&fetchFileEvents=true&fileEventsLimit=10
```

You can use a combination of these options. For example, you can use the following URI:

```
mftsaas/api/v2/mitasks/activityLog?
runId=<runId>&taskId=<taskId>&rowLimit=<rowLimit>&offset=<offset>
```

You can use the following attributes in the activityLog GET URI:

Field	Description
taskId	File ingestion and replication task ID.
runId	File ingestion and replication run ID.
offset	The number of rows to skip. For example, you might want to skip the first three rows.
rowLimit	The maximum number of rows to return. The maximum number you can specify is 100. Default is 25.
jobType	Types of jobs to include in the response. You can use one of the following options: - all - completed - active Default is all.
fetchFileEvents	Determines if you want to display the file events. Set to one of the following values: - true. The file ingestion and replication task displays the job file events. - false. The file ingestion and replication task does not display the job file events. Default is false.
fileEventsLimit	The number of file events to return. Applies when **fetchFileEvents** is set to `true`. The maximum number you can specify is 1000. Default is 100.

GET Response

The activityLog object returns the following attributes:

Field	Description
totaljobCount	Total number of jobs.
taskId	File ingestion and replication task ID.
runId	File ingestion and replication run ID.
startedBy	Name of the user who created the file ingestion and replication task.
startTime	Start time of the job. Uses Coordinated Universal Time (UTC).
endTime	End time of the job. Uses Coordinated Universal Time (UTC).
status	Whether the job completed successfully.
logLocation	The location of the session log.
messageText	Remarks associated with the job status.

Field	Description
successFiles	The number of files that are successfully transferred from source to target.
failedFiles	The number of files that were not transferred from source to target.

GET Example

The following example shows a response to a request to get details for a file ingestion and replication job using task ID:


```
{
    "totalJobCount": 1,
    "jobActivityLog": [
        {
            "taskId": "gS7ivoMYoOli6v7TR7MIIe",
            "jobs": [
           {
               "runId": 490176,
               "startedBy": "b2b_pod1",
               "startTime": "2023-05-08T00:20:14Z",
               "endTime": "2023-05-08T00:20:19Z",
               "status": "SUCCESS"
                "logLocation": "data/taskLogs/2023-05-08/1000000916286.log"
                "messageText": "Job completed",
                "successFiles": 8,
                "failedFiles": 0

            }
        }
    ]
}
```


The following example shows a response to a request to get details for a file ingestion and replication job with fetchFileEvents set to true:


```
{
    "totalJobCount": 1,
    "jobActivityLog": [
        {
            "taskId": "34owubT0kvFe18LdELjXop",
            "jobs": [
                {
                    "runId": 496420,
                    "startedBy": "atl",
                    "startTime": "2023-05-08T07:25:25Z",
                    "endTime": "2023-05-08T07:25:54Z",
                    "status": "SUCCESS",
                    "logLocation": "data/taskLogs/2023-05-08/1000000855619.log",
                    "messageText": "Job completed normally",
                    "successFiles": 1003,
                    "failedFiles": 0,
                    "fileDetails": [
                        {
                            "path": "/root/Arun/May/Target/File_5.txt",
                            "size": 12,
                            "lastModified": "2023-05-04T09:00:30Z",
                            "startTime": "2023-05-08T07:25:12Z",
                            "status": "SUCCESS",
                            "duration": 1,
                            "transferDirection": "UPLOAD"
                        },
                        {
                            "path": "/root/Arun/May/Target/File_12.txt",
                            "size": 12,
                            "lastModified": "2023-05-04T09:00:30Z",
                            "startTime": "2023-05-08T07:25:12Z",
```

```
        "status": "SUCCESS",
        "duration": 0,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_2.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 0,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_8.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 0,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_10.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 1,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_14.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 1,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_16.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 0,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_18.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 0,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_6.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
        "startTime": "2023-05-08T07:25:12Z",
        "status": "SUCCESS",
        "duration": 0,
        "transferDirection": "UPLOAD"
    },
    {
        "path": "/root/Arun/May/Target/File_13.txt",
        "size": 12,
        "lastModified": "2023-05-04T09:00:30Z",
```

```
                                "startTime": "2023-05-08T07:25:12Z",
                                "status": "SUCCESS",
                                "duration": 0,
                                "transferDirection": "UPLOAD"
                            }
                        ]
                    }
                ]
            }
        ]
    }
```

Tasks

Use the tasks resource to create, update, delete, and view file ingestion and replication tasks.

Running and monitoring file ingestion and replication tasks involves a series of requests and responses. Use the followings methods to perform file ingestion and replication tasks:

- Send a tasks GET request to view a list of all file ingestion and replication tasks. See "View file ingestion and replication tasks" on page 673.
- Send a tasks POST request to create a file ingestion and replication task. See "Create a file ingestion and replication task" on page 677.
- Send a tasks PUT request to update a file ingestion and replication task. See "Update a file ingestion and replication task" on page 683.
- Send a tasks GET request to view the location of a file ingestion and replication task. See "View the location of a file ingestion and replication task" on page 686.
- Send a tasks DELETE request to delete a file ingestion and replication task. See "Delete a file ingestion and replication task" on page 687.

View file ingestion and replication tasks

Use the GET request to view file ingestion and replication tasks.

GET request

To view the details of a particular file ingestion and replication task, include the file ingestion and replication in the following URI:

```
mftsaas/api/v1/mitasks/{{TASK-ID}}
```

To view the details for all file ingestion and replication tasks in the organization, omit the file ingestion and replication ID.

```
mftsaas/api/v1/mitasks
```

For example, use the following request:

```
GET https://na1.dm-us.informaticacloud.com/mftsaas/api/v1/mitasks HTTP/<HTTP version>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

GET response

Returns the task object if successful or an error object if errors occur.

The task object includes the following information about each of the file ingestion and replication tasks in the organization:

Field	Type	Description
taskId	String	ID number associated with the task.
taskName	String	Name of the task.
description	String	Description of the task.
location	String	Project and folder path where the task exists.
createTime	Date/time	Time when the task was created.
updateTime	Date/time	Time when the task was last updated.

Note: The create and update time in the response are in UTC time.

GET response example to view all file ingestion and replication tasks

The following sample response shows that there are three file ingestion and replication tasks in the organization:


```
{
    "mitasks": [
        {
            "id": "1ONE5Vewzztl0tuKR0EDum",
            "name": "A01_UMAR_MITASK2318",
            "description": "",
            "sourceType": "CONNECTION",
            "sourceConnection": {
                "id": "",
                "name": "",
                "type": "local"
            },
            "targetConnection": {
                "id": "0100000B000000000002",
                "name": "ftps",
                "type": "Advanced FTPS"
            },
            "agentGroupId": "01000025000000000002",
            "updatedTime": "2019-01-30T11:17:49Z"
        },
        {
            "id": "9D1tGkAxopJeFmUWoG4s48",
            "name": "A01_UMAR_MITASK3354",
            "description": "",
            "sourceType": "CONNECTION",
            "sourceConnection": {
                "id": "0100000B00000000000M",
                "name": "AzureBlob",
                "type": "Azure Blob"
            },
            "targetConnection": {
                "id": "0100000B00000000000L",
                "name": "SFTP_Conn",
                "type": "Advanced SFTP"
            },
            "agentGroupId": "01000025000000000002",
            "updatedTime": "2019-01-30T06:42:19Z"
        },
        {
            "id": "4hcTFqKVOQrl1z4d6pGUMP",
```

```
            "name": "A01_UMAR_MITASK5124",
            "description": "",
            "sourceType": "CONNECTION",
            "sourceConnection": {
                "id": "0100000B0000000004IO",
                "name": "S3",
                "type": "AmazonS3"
            },
            "targetConnection": {
                "id": "",
                "name": "",
                "type": "local"
            },
            "agentGroupId": "01000025000000000002",
            "updatedTime": "2019-01-30T06:35:01Z"
        }]
        }
```

Get response example showing a file ingestion and replication task with file pattern as the file pickup option

The following sample response shows details of a file ingestion and replication task.

```
IDS-SESSION-ID:{{IDS-SESSION-ID}}
Accept:application/json
{
    "id": "j9OLB12nqYObykdFSUMpO2",
    "name": "FTPSrcTarget",
    "location": {
        "projectId": "dNC6zbp2lI8ghrKPo6hpwn",
        "projectName": "Hardening"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "0100000B00000000028M",
        "name": "CCI_FTPS",
        "type": "Advanced FTPS V2"
    },
    "targetConnection": {
        "id": "0100000B0000000001JR",
        "name": "CCI_FTP_Lin",
        "type": "Advanced FTP V2"
    },
    "sourceParameters": {
        "filePattern": "*.txt",
        "sourceTransferMode": "AUTO",
        "filePatternType": "WILDCARD",
        "includeSubfolder": "false",
        "sourceDirectory": "/root/suraj/qa/test/automation/RSFiles",
        "checkDuplicate": "false",
        "fileStability": "true",
        "stabilityCheckInterval": "60",
        "postPickupAction": "KEEP"
    },
    "targetParameters": {
        "fileExistsAction": "APPEND_TIMESTAMP",
        "targetDirectory": "/",
        "targetTransferMode": "AUTO"
    },
    "agentGroupId": "01000025000000000003",
    "createdTime": "2019-02-04T10:34:08Z",
    "updatedTime": "2019-02-04T11:04:02Z",
    "filePickupOption": "PATTERN"
}
```

GET response example showing a file ingestion and replication task with file list (file path) as the file pickup option

The following sample response shows a file ingestion and replication task with filePickupOption type as FILELIST and a filePickupFilePath in its sourceParameters, indicating that this task reads the designated pickup file to identify which files need to be processed.


```
{
    "id": "aFHWKrr1RwycuBRBLTtt2t",
    "name": "FilePath_CheckStability",
    "location": {
        "projectId": "0ggRhrI8ZziguyBxHBzuG0",
        "projectName": "Default"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "",
        "name": "",
        "type": "local"
    },
    "targetConnection": {
        "id": "",
        "name": "",
        "type": "local"
    },
    "sourceParameters": {
        "filePickupFilePath": "test.txt",
        "sourceDirectory": "/root/test",
        "checkDuplicate": "false",
        "stabilityCheckInterval": "60",
        "postPickupAction": "KEEP",
        "filepickupByName": "FILEPATH",
        "batchSize": "5",
                "fileStability": "true",
                "stabilityCheckInterval": "60"
    },
    "targetParameters": {
        "fileExistsAction": "OVERWRITE",
        "targetDirectory": "/root/testCheckStability"
    },
    "agentGroupId": "01001D25000000000002",
    "createdTime": "2021-08-13T09:38:03Z",
    "updatedTime": "2021-08-13T09:39:02Z",
    "logLevel": "NORMAL",
    "filePickupOption": "FILELIST"
}
```


GET response example showing a file ingestion and replication tasks with file list as the file pickup option

The following sample response shows a file ingestion and replication task with filePickupOption type as FILELIST, filepickupByName as LISTOFFILES, and a filePickupFileList in its sourceParameters, indicating that this task reads and identifies the designated pickup files to be processed.


```
{
    "id": "2bTlAolXbAGlE7I5qauSAW",
    "name": "DedupFilelist_pushdown",
    "location": {
        "projectId": "0ggRhrI8ZziguyBxHBzuG0",
        "projectName": "Default"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "01001D0B0000000005PP",
        "name": "ADLSGen2",
```

```
        "type": "Azure Data Lake Gen2"
    },
    "targetConnection": {
        "id": "01001D0B0000000005PU",
        "name": "AzureDW_Gen2",
        "type": "Azure DW"
    },
    "sourceParameters": {
        "sourceDirectory": "/B2B/MI",
        "checkDuplicate": "true",
        "postPickupAction": "KEEP",
        "filepickupByName": "LISTOFFILES",
        "blockSize": "8388608",
        "filePickupFileList": "File1.txt,File2.txt",
        "batchSize": "5",
        "timeoutInterval": "60",
        "fileStability": "true",
        "stabilityCheckInterval": "60"
    },
    "targetParameters": {
        "commandType": "auto",
        "targetTableName": "test1234",
        "isPushdown": "true",
        "ingestionMethod": "polybase",
        "targetSchemaName": "testing",
        "isTruncateTarget": "true"
    },
    "agentGroupId": "01001D25000000000002",
    "createdTime": "2021-04-29T08:47:57Z",
    "updatedTime": "2021-04-29T08:47:57Z",
    "logLevel": "NORMAL",
    "filePickupOption": "FILELIST"
}
```


Create a file ingestion and replication task

Use a POST request to create a file ingestion and replication task.

POST request

To create a file ingestion and replication task through the API, use the following URI:

```
mftsaas/api/v1/mitasks
```

Include the following fields in the request:

Field	Type	Required	Description
name	String	Yes	Name of the task.
location	String	-	Location of the project.
projectId	String	-	ID number associated with the project.
projectName	String	-	Name of the project.
description	String	-	Description of the task.
sourceConnection	String	-	Directory from where files are transferred.

Field	Type	Required	Description
sourceType	String	Yes	Determines the type where files are transferred. Enter one of the following options: - `CONNECTION`. Use connection as a source. - `FILELISTENER`. Use file listener as a source.
includesubfolder	String	-	Determines whether to include the files in sub-folders in the transfer. Set the value to `true` to transfer files from all sub-folders under the defined source directory. Values are `true` or `false`.
checkDuplicate	String	-	Determines whether to check for duplicate files. Values are `true` or `false`. Set the value to `true` to check duplicate files and deny file transfer. If the value is set to `false` all files are transferred.
filePickupOption	String	Yes	Determines the file pickup method. Enter one of the following options: - `FILELIST`. The file ingestion and replication task picks up files based on a file list. - `PATTERN`. The file ingestion and replication task picks up files by pattern.
allowConcurrency	String	-	Determines whether to run multiple jobs concurrently. Set the value to `true` to run multiple jobs concurrently, else set the value to `false`. **Warning:** Running concurrent jobs might cause unexpected results if the targets include duplicate files.
filePatternType	String	Yes	This applies when filePickupOption is PATTERN. File pattern type used to select files to transfer. Enter one of the following options: - wildcard - regex
filePattern	String	Yes	Enter file pattern types, depending on the file pattern that you have selected. - wildcard. You can use the following wildcard character filters: - An asterisk (*) matches any number of characters. - A question mark (?) matches a single character. - regex. Use regular expression to match the file pattern. Consider the following examples: - Use the following syntax to listen to all files except for files with a name that contains out, foo, and baz: `^(?!.*(?:out|baz|foo)).*$ all except` - Use the following syntax to listen to all files with doc, docx, and pdf extensions: `([a-zA-Z0-9\s_\\.\-\(\):])+(.doc|.docx|.pdf)$`
filepickupByName	String	Yes	This applies when filePickupOption is FILELIST. Enter one of the following options: - `filepath`. Provide the path that contains the list of files to pick up and enter the file path. - `listoffiles`. Provide the list of files to pick up and enter a comma-separated list of file names. Ensure there is no space before or after specifying the file name.

Field	Type	Required	Description
fileStability	Boolean	-	Determines if the task verifies whether the file is stable before picking it up. Enter one of the following values. - `true`. The file ingestion and replication task verifies whether the file is stable before picking it up. - `false`. The file ingestion and replication task does not verify whether the file is stable before picking it up. Default is `false`.
stabilityCheckInterval	Int	-	Time in seconds that a file ingestion and replication task waits to check the file stability. You can specify a value in the stabilityCheckInterval field only if the fileStability option is set to `true`. The stability check interval ranges between 10 seconds to 300 seconds.
postPickupAction	String	-	Determines what to do with source files after the transfer of files. The following options are available: - KEEP. Keep the files in the source directory. - DELETE. Delete the files from the source directory. - RENAME. Rename the files in the source directory. You must specify a file name suffix that File ingestion and replication adds to the file name when renaming the files. - ARCHIVE. Archive the files to a different location. You must specify an archive directory.
targetConnection	String	Yes	Directory details to which files are transferred.
taskActions	String	-	Actions to process files in the file ingestion and replication task. If you add multiple actions, file ingestion and replication processes files in a sequence.

Field	Type	Required	Description
actions			File processing action. Enter the following file processing actions: - To compress files, enter **Compression**. - To decompress files, enter **Decompression**. - To encrypt files, enter **Encryption**. - To dencrypt files, enter **Decryption**. - To move files from multiple folders to a single folder and to rename file in the target directory, enter **File Operations**. - To scan files for viruses by using the ICAP protocol, enter **Virus Scan**.
action type			Enter the action type depending on the action that you add. To compress files use one of the following methods. - Zip - Tar - Gzip - Bzip2 To decompress files use one of the following methods. - Unzip - Untar - Gunzip - Bunzip2 To encrypt files add PGP. Enter the key ID in the properties. **Note:** The file ingestion and replication task uses the PGP method to encrypt files. Generate a key ring using the CLI. Enter the key ring in the **Key ID**. For more information about the keyring CLIs, refer to key ring command reference in *Tasks*. To decrypt files, add PGP. Enter the key passphrase in the properties. **Note:** The file ingestion and replication task uses the PGP method to encrypt files. Generate the key passphrase using the CLI. Enter the key passphrase in the **Key Passphrase**. For more information about the keyring CLIs, refer to key ring command reference in *Tasks*.

POST request example

Use this sample as a reference to create a file ingestion and replication task with file pattern as the file pickup option

```
POST <serverURL>/public/core/v1/mitasks
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "name": "Green Green v2",
    "location": {
        "projectId": "9JDNOBX9M31e2AD1dIUv6M",
        "projectName": "Default"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "",
        "name": "",
        "type": "local"
},
        "sourceParameters": {
```

```
            "filePattern": "*.txt",
            "filePatternType": "WILDCARD",
            "includeSubfolder": "false",
            "sourceDirectory": "C:\\Monitor",
            "checkDuplicate": "false",
            "fileStability": "true",
            "stabilityCheckInterval": "60",
            "postPickupAction": "KEEP"

    },
    "targetConnection": {
        "id": "0100000B000000000002",
        "name": "ADLS",
        "type": "Azure Data Lake"
},
        "targetParameters": {
        "adlsTargetLocation": "/satyen/green"

    },
    "agentGroupId": "01000025000000000002",
    "filePickupOption": "PATTERN",
    "logLevel": "NORMAL",
    "allowConcurrency": "true",
        taskActions":[
                     {
                    "action": "Compression",
                    "actionType": "Zip",
                    "properties": {}
                     }
                    ]
}
```

Use this sample as a reference to create a file ingestion and replication task with file path as the file pickup option.

```
POST <serverURL>/public/core/v1/mitasks
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "name": "FilePath_RestAPI1",
    "location": {
        "projectId": "0ggRhrI8ZziguyBxHBzuG0",
        "projectName": "Default"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "",
        "name": "",
        "type": "local"
    },
    "targetConnection": {
        "id": "",
        "name": "",
        "type": "local"
    },
    "sourceParameters": {
        "filePickupFilePath": "test.txt",
        "sourceDirectory": "/root/test",
        "checkDuplicate": "false",
        "fileStability": "true",
        "stabilityCheckInterval": "60",
        "postPickupAction": "KEEP",
        "filepickupByName": "FILEPATH",
        "batchSize": "5"

    },
    "targetParameters": {
```

```
    "fileExistsAction": "OVERWRITE",
    "targetDirectory": "/root/testCheckStability"
    },
    "agentGroupId": "01001D25000000000002",
    "logLevel": "NORMAL",
    "filePickupOption": "FILELIST",
    "allowConcurrency": "true"
}
```

Use this sample as a reference to create a file ingestion and replication task with file list as the file pickup option.

```
POST <serverURL>/public/core/v1/mitasks
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{

    "name": "DedupFilelist_RestAPI",
    "location": {
        "projectId": "0ggRhrI8ZziguyBxHBzuG0",
        "projectName": "Default"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "01001D0B0000000005PP",
        "name": "ADLSGen2",
        "type": "Azure Data Lake Gen2"
    },
    "targetConnection": {
        "id": "01001D0B0000000005PU",
        "name": "AzureDW_Gen2",
        "type": "Azure DW"
    },
    "sourceParameters": {
        "sourceDirectory": "/B2B/MI",
        "checkDuplicate": "true",
        "postPickupAction": "KEEP",
        "filepickupByName": "LISTOFFILES",
        "blockSize": "8388608",
        "filePickupFileList": "File1.txt,File2.txt",
        "batchSize": "5",
        "timeoutInterval": "60",
        "fileStability": "true",
        "stabilityCheckInterval": "60"

    },
    "targetParameters": {
        "commandType": "auto",
        "targetTableName": "test1234",
        "isPushdown": "true",
        "ingestionMethod": "polybase",
        "targetSchemaName": "testing",
        "isTruncateTarget": "true"
    },
    "agentGroupId": "01001D25000000000002",
    "logLevel": "NORMAL",
    "filePickupOption": "FILELIST",
    "allowConcurrency": "true"
}
```

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "id": "cEMWKpibm44bNf5aMjbJ4U",
    "name": "Green Green v2",
```

```
    "location": {
        "projectId": "9JDNOBX9M31e2AD1dIUv6M",
        "projectName": "Default"
    },
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "",
        "name": "",
        "type": "local"
},
        "sourceParameters": {
            "filePattern": "*.txt",
            "filePatternType": "WILDCARD",
            "includeSubfolder": "false",
            "sourceDirectory": "C:\\Monitor",
            "checkDuplicate": "false",
            "fileStability": "true",
            "stabilityCheckInterval": "60",
            "postPickupAction": "KEEP"

    },
    "targetConnection": {
        "id": "0100000B000000000002",
        "name": "ADLS",
        "type": "Azure Data Lake"
},
        "targetParameters": {
            "adlsTargetLocation": "/satyen/green"

    },
    "agentGroupId": "01000025000000000002",
    "createdTime": "2018-08-27T07:03:32Z",
    "updatedTime": "2018-08-29T12:14:58Z""
                taskActions":[
                 {
                            "action": "Compression",
                            "actionType": "Zip",
                            "properties": {}
                    }
                ]
}
}
```

Note: The created and updated time in the response is displayed in the UTC time.

Update a file ingestion and replication task

Use a PUT request to update a file ingestion and replication task.

PUT request

To update a file ingestion and replication task, use the following URI:

```
mftsaas/api/v1/mitasks/<taskID>
```

Include the following fields in the PUT request:

Field	Type	Required	Description
id	String	-	ID number of the task.
name	String	Yes	Name of the task.
description	String	-	Description of the task.

Field	Type	Required	Description
sourceType	String	Yes	Determines the type where files are transferred. Enter one of the following options: - `CONNECTION`. Use connection as a source. - `FILELISTENER`. Use file listener as a source.
sourceConnection	String	-	Directory from where files are transferred.
includeSubfolder	String	-	Values are `true` or `false`. Set the value to `true` to transfer files from all sub-folders under the defined source directory.
checkDuplicate	String	-	Values are `true` or `false`. Set the value to `true` to check duplicate files and deny file transfer. If the value is set to `false` all files are transferred.
filePatternType	String	Yes	File name pattern used to select the files to transfer. Enter one of the following options: - Wildcard - Regex
filePattern	String	Yes	Enter pattern types, depending on the file pattern that you have selected. - wildcard. You can use the following wildcard character filters: - An asterisk (*) matches any number of characters. - A question mark (?) matches a single character. - Regex. Use regular expression to match the file pattern. Consider the following examples: - Use the following syntax to listen to all files except for files with a name that contains out, foo, and baz: `^(?!.*(?:out|baz|foo)).*$ à all except` - Use the following syntax to listen to all files with doc and docx, pdf extensions: `([a-zA-Z0-9\s_\\.\-\(\):])+(.doc|.docx|.pdf)$ à`
fileStability	Boolean	-	Determines if the task verifies whether the file is stable before picking it up. Enter one of the following values. - `true`. The file ingestion and replication task verifies whether the file is stable before picking it up. - `false`. The file ingestion and replication task does not verify whether the file is stable before picking it up. Default is `false`.
stabilityCheckInterval	Int	-	Time in seconds that a file ingestion and replication task waits to check the file stability. You can specify a value in the stabilityCheckInterval field only if the fileStability option is set to `true`. The stability check interval ranges between 10 seconds to 300 seconds.

Field	Type	Required	Description
postPickupAction	String	-	Determines what to do with source files after the files transfer. The following options are available: - KEEP. Keep the files in the source directory. - DELETE. Delete the files from the source directory. - RENAME. Rename the files in the source directory. You must specify a file name suffix that file ingestion and replication adds to the file name when renaming the files. - ARCHIVE. Archive the files to a different location. You must specify an archive directory.
targetConnection	String	Yes	Directory details to which files are transferred.

PUT request example

Use this sample as a reference to update a file ingestion and replication task.

```
PUT <serverUrl>/public/core/v1/mitasks
Content-Type: application/json
Accept:application/json
Content-Type:application/json
IDS-SESSION-ID:{{IDS-SESSION-ID}}
{
    "id": "cEMWKpibm44bNf5aMjbJ4U",
    "name": "Green Green v2",
    "description": "Green Green v2 Description",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "",
        "name": "",
        "type": "local"
},
        "sourceParameters": {
            "filePattern": "*.txt",
            "filePatternType": "WILDCARD",
            "includeSubfolder": "false",
            "sourceDirectory": "C:\\Monitor",
            "checkDuplicate": "false",
            "fileStability": "true",
            "stabilityCheckInterval": "60",
            "postPickupAction": "KEEP"

    },
    "targetConnection": {
        "id": "0100000B000000000002",
        "name": "ADLS",
        "type": "Azure Data Lake"
},
        "targetParameters": {
            "adlsTargetLocation": "/satyen/green"
    },
    "agentGroupId": "01000025000000000002
}
```

PUT response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "id": "cEMWKpibm44bNf5aMjbJ4U",
    "name": "Green Green v2",
    "description": "",
    "sourceType": "CONNECTION",
    "sourceConnection": {
        "id": "",
```

```
        "name": "",
        "type": "local"
},
        "sourceParameters": {
            "filePattern": "*.txt",
            "filePatternType": "WILDCARD",
            "includeSubfolder": "false",
            "sourceDirectory": "C:\\Monitor",
            "checkDuplicate": "false",
            "fileStability": "true",
            "stabilityCheckInterval": "60",
            "postPickupAction": "KEEP"

    },
    "targetConnection": {
        "id": "0100000B000000000002",
        "name": "ADLS",
        "type": "Azure Data Lake"
},
        "targetParameters": {
            "adlsTargetLocation": "/satyen/green"

    },
    "agentGroupId": "01000025000000000002",
    "createdTime": "2018-08-27T07:03:32Z",
    "updatedTime": "2018-08-29T12:14:58Z"
}
```

Note: The created and updated time in the response is displayed in the UTC time.

View the location of a file ingestion and replication task

Use the GET request to view the location of a file ingestion and replication task.

GET request

Use the following URI to get the location of a file ingestion and replication task.

```
/api/v1/mitasks?resolveLocation=true
```

GET response example

If the request to get the file location of a file ingestion and replication task is successful, you might receive a response similar to the following example:

```
{
    "miTasks": [
        {
            "id": "1ONE5Vewzztl0tuKR0EDum",
            "name": "A01_UMAR_MITASK2318",
            "location": {
                "folderId": "digFZU6HMo4gCKYghtQvgD",
                "folderName": "A_01_UMAR",
                "projectId": "503RTpKDSSLlwmkwTXL0Qx",
                "projectName": "Default"
            },
            "description": "",
            "sourceType": "CONNECTION",
            "sourceConnection": {
                "id": "",
                "name": "",
                "type": "local"
            },
            "targetConnection": {
                "id": "0100000B000000000002",
                "name": "ftps",
                "type": "Advanced FTPS"
            },
            "agentGroupId": "01000025000000000002",
```

```
            "createdTime": "2019-01-28T09:54:53Z",
            "updatedTime": "2019-01-30T11:17:49Z"
        },
        {
            "id": "9D1tGkAxopJeFmUWoG4s48",
            "name": "A01_UMAR_MITASK3354",
            "location": {
                "folderId": "digFZU6HMo4gCKYghtQvgD",
                "folderName": "A_01_UMAR",
                "projectId": "503RTpKDSSLlwmkwTXL0Qx",
                "projectName": "Default"
            },
            "description": "",
            "sourceType": "CONNECTION",
            "sourceConnection": {
                "id": "0100000B00000000000M",
                "name": "AzureBlob",
                "type": "Azure Blob"
            },
            "targetConnection": {
                "id": "0100000B00000000000L",
                "name": "SFTP_Conn",
                "type": "Advanced SFTP"
            },
            "agentGroupId": "01000025000000000002",
            "createdTime": "2019-01-30T06:36:28Z",
            "updatedTime": "2019-01-30T06:42:20Z"
        }
    ]
}
```


Delete a file ingestion and replication task

Use the DELETE request to delete a file ingestion and replication task.

DELETE request

To delete a file ingestion and replication include the task ID of the task through the API, in the following URI:

```
mftsaas/api/v1/mitasks/<taskID>
```

Streaming Ingestion and Replication REST API

Use Streaming Ingestion and Replication REST API resources to create, deploy, undeploy, start, stop, copy, and update streaming ingestion and replication tasks and to monitor streaming ingestion and replication jobs.

When you use the streaming ingestion and replication resource, use the following request header format:

```
<METHOD><base URL>
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>
```

Creating a streaming ingestion and replication task

Use the CreateEntity/Documents resource to create a streaming ingestion and replication task.

POST request

To create a streaming ingestion and replication task, use the following URL:

```
POST <server URI>/sisvc/restapi/v1/CreateEntity/Documents
```

Use the following request header:

```
POST <server URI>/sisvc/restapi/v1/CreateEntity/Documents
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID: <SessionId>
```

POST request sample

Use this sample as a reference to create a streaming ingestion and replication task:

```
POST <server URI>/sisvc/restapi/v1/CreateEntity/Documents
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
{
    "name": "FileToFile17",
    "description": "FileToFile_V2",
    "runtimeId": "0100002500000000003",
    "locationId": "8ubL3nIupMqk6bJC2mYtkh",
    "currentVersion": "2",
    "messageFormat": "binary",
    "documentState": "VALID",
    "parentInfo": [
        {
            "parentId": "8ubL3nIupMqk6bJC2mYtkh",
            "parentName": "ng",
            "parentType": "Project"
        }
    ],
    "nodes": [
        {
            "name": "FileToFile_source",
            "type": "source",
            "connectionId": "0100000B000000000002",
            "transformationType": "",
            "config": [
                {
                    "key": "File",
                    "value": "siagent.log"
                },
                {
                    "key": "initialPosition",
                    "value": "Current Time"
                },
                {
                    "key": "rolloverPattern",
                    "value": ""
                },
                {
                    "key": "tailingMode",
                    "value": "Single file"
                }
            ]
        },
        {
           "name":"Filter",
           "serviceType":"transformation",
           "type":"filter",
           "metaMetadata":"",
```

```
            "config": [{
                    "key":"messageFormat",
                    "value":"binary"
                }, {
                    "key":"transformationName",
                    "value":"Filter"
                }, {
                    "key":"filterType",
                    "value":"regEx"
                }, {
                    "key":"expression",
                    "value":"*"
                }, {
                    "key":"name",
                    "value":"filter"
                }
            ]
        },
        {
            "name": "FileToFile_target",
            "type": "target",
            "connectionId": "0100000B000000000002",
            "transformationType": "",
            "config": [
                {
                    "key": "File Name",
                    "value": "testing.log"
                },
                {
                    "key": "interimDirectory",
                    "value": "/home/agent/infa/test_file_target"
                },
                {
                    "key": "rolloverSize",
                    "value": 100
                },
                {
                    "key": "rolloverEvents",
                    "value": 100
                },
                {
                    "key": "rolloverTime",
                    "value": 100
                }
            ]
        }
    ],
    "edges": [
        {
            "from": "FileToFile_source",
            "to": "Filter"
        },
        {
            "from": "Filter",
            "to": "FileToFile_target"
        }
    ],
    "runtimeOptions": {
        "maxLogSize": {
            "value": 10,
            "unit": "MB"
        },
        "logLevel": "INFO"
    }
}
```

POST response

If the request is successful, the service returns an HTTP status code 200 OK.

Deploying, undeploying, starting, and stopping streaming ingestion and replication tasks

Use the dataflows resource to deploy, undeploy, start, and stop streaming ingestion and replication tasks.

Use the following base URL:

```
<server URI>/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.<API name>
```

Note: If you use a tool such as Postman that automatically includes the HTTP version, do not enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Deploying a streaming ingestion and replication task

Use a POST request to deploy a streaming ingestion and replication task.

POST request

To deploy a streaming ingestion and replication task, use the following URL:

```
<server URI>/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.Deploy
```

A request body is not required because the URL passes the dataflow ID.

POST request example

To deploy a streaming ingestion and replication task, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/api/v1/Dataflows('50077311-d4a4-437c-9218-c3596d1f182f')/
OData.SI.Deploy
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "@odata.context": "$metadata#OData.SI.DeploymentResult",
    "successful": true,
    "code": null,
    "errorMessage": null
}
```

Undeploying a streaming ingestion and replication task

Use a POST request to undeploy a streaming ingestion and replication task.

POST request

To undeploy a streaming ingestion and replication task, use the following URL:

```
<server URI>/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.Undeploy
```

A request body is not required because the URL passes the dataflow ID.

POST request example

To undeploy a streaming ingestion and replication task, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/api/v1/Dataflows('50077311-d4a4-437c-9218-c3596d1f182f')/
OData.SI.Undeploy
Content-Type: application/json
```

```
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "@odata.context": "$metadata#OData.SI.DeploymentResult",
    "successful": true,
    "code": null,
    "errorMessage": null
}
```

Starting a streaming ingestion and replication task

Use a POST request to start a streaming ingestion and replication task.

POST request

To start a streaming ingestion and replication task, use the following URL:

```
<server URI>/sisvc/api/v1/Dataflows('<dataflow ID>')/OData.SI.Start
```

A request body is not required because the URL passes the dataflow ID.

POST request example

To start a streaming ingestion and replication task, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/api/v1/Dataflows('50077311-d4a4-437c-9218-c3596d1f182f')/
OData.SI.Start
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "@odata.context": "$metadata#OData.SI.DeploymentResult",
    "successful": true,
    "code": null,
    "errorMessage": null
}
```

Stopping a streaming ingestion and replication task

Use a POST request to stop a streaming ingestion and replication task.

POST request

To stop a streaming ingestion and replication task, use the following URL:

```
<server URI>/sisvc/api/v1/Dataflows('<dataflowID>')/OData.SI.Stop
```

A request body is not required because the URL passes the dataflow ID.

POST request example

To stop a streaming ingestion and replication task, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/api/v1/Dataflows('d7572789-dc4c-4c56-bbeb-3772736d61aa')/
OData.SI.Stop
```

```
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
    "@odata.context": "$metadata#OData.SI.DeploymentResult",
    "successful": true,
    "code": null,
    "errorMessage": null
}
```

Copying a streaming ingestion and replication task

Use the CopyEntities resource to copy streaming ingestion and replication tasks.

POST request

To copy streaming ingestion and replication tasks, use the following URL:

```
<server URI>/sisvc/restapi/v1/CopyEntities
```

You can include the following fields in the request:

Field	Type	Required	Description
targetLocationID	String	Yes	ID of the target location to copy the objects to.
sourceEntities	Array	Yes	Configuration of the source and target connections.
sourceId	String	Yes	ID of the source object.
targetName	String	Yes	Name of the target object.
targetDescription	String	-	Description of the target object.

POST request example

To copy two streaming ingestion and replication tasks, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/CopyEntities
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
{
  "targetLocationID": "2RGmVdwN15PbfnQP5PSoSB",
  "sourceEntities": [
    {
      "sourceId": "5Ff6jeaSh2UfAqiV01ldKD",
      "targetName": "Test_Copy_A",
      "targetDescription": "Description_1"
    },
    {
      "sourceId": "fZnCSqcWTOQkJOr8VCWZQE",
      "targetName": "Test_Copy_B",
      "targetDescription": "Description_2"
    }
  ]
}
```

If the request is unsuccessful, the response includes a reason for the failure.

POST response

When you use a POST request to copy streaming ingestion and replication tasks, it returns a success response if successful or an error object if an error occurs.

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
  "Status Message": "Operation succeeded on 2 artifacts.",
  "Success": {
    "Test_Copy_A": "ideNJw6l54gizxofF53HQH",
    "Test_Copy_B": "cOQ3gcWKSYikzVqqg6IOok"
  }
}
```

Updating a streaming ingestion and replication task

Use the UpdateEntity resource to update a streaming ingestion and replication task. You can update streaming ingestion and replication tasks that use the following connectors: Amazon Kinesis, Amazon S3 V2, Microsoft Azure Event Hub, Microsoft Azure Data Lake Storage Gen2, Flat file, JDBC V2, JMS, Kafka, or MQTT.

POST request

Use a POST request to update a streaming ingestion and replication task.

To update a streaming ingestion and replication task, use the following URL:

```
<server URI>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
```

You can include the following fields in the request:

Field	Type	Required	Description
name	String	Yes	Name of the task.
description	String	-	Description of the task.
runtimeId	String	Yes	ID of the runtime environment.
currentVersion	String	Yes	The latest dataflow object version.
nodes	Array	Yes	Details of the task source and target connections.

Fields of the nodes array

The fields in the array provide the name, type, and connection ID of the connection. It includes the configuration of the source and target connections in key-value pairs which you can edit. You can include the following fields in the nodes array:

Field	Type	Required	Description
name	String	Yes	Name of the connection.
type	String	Yes	The connection type, source or target.

Field	Type	Required	Description
connectionId	String	Yes	ID of the connection.
transformationType	String	-	Not applicable.
config	Array	Yes	Configuration of the source and target connections.

POST response

When the REST API successfully performs an action, it returns a 200 or 201 success response. When the REST API encounters an error, it returns an appropriate error code.

If the request is successful, the response returns the following fields:

Field	Type	Description
name	String	Name of the task.
description	String	Description of the task, if available.
runtimeId	String	ID of the runtime environment.
currentVersion	String	The latest dataflow object version.
nodes	Array	Details of the task source and target connections.

Fields of the nodes array

The response includes the following fields in the nodes array:

Field	Type	Description
name	String	Name of the connection.
type	String	The connection type.
connectionId	String	ID of the connection.
transformationType	String	The type of transformation.
config	String	Configuration of the source and target connections in key-value pairs. The keys in the array depend on the type of source and target connections.

If the request is unsuccessful, the response includes a reason for the failure.

MQTT sources

When the source connection of the task source is MQTT, you can include the following fields and key-value pairs in the config array of the source connection:

Key	Type	Required	Description
ClientID	String	-	Unique identifier of the connection between the MQTT source and the MQTT broker. The client ID is the file-based persistence store that the MQTT source uses to store messages while they are processed. You can enter a string of up to 255 characters.
MaxQueueSize	Integer	-	The maximum number of messages that the processor can store in memory. You can enter a value between 1 and 2147483647.
Topic	String	Yes	Name of the MQTT topic.

POST request example

To update a streaming ingestion and replication task with an MQTT source and a flat file target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "mqtt to flatfile",
  "description": "mqtt to flatfile",
  "runtimeId": "01000025000000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "mqtt to flatfile_source",
      "type": "source",
      "connectionId": "012MGS0B00000000001O",
      "transformationType": "",
      "config": [
        {
          "key": "ClientID",
          "value": "test"
        },
        {
          "key": "MaxQueueSize",
          "value": 1024
        },
        {
          "key": "Topic",
          "value": "test"
        }
      ]
    },
    {
      "name": "mqtt to flatfile_target",
      "type": "target",
      "connectionId": "012MGS0B00000000002N",
      "transformationType": "",
      "config": [
        {
          "key": "interimDirectory",
          "value": "/home/agent/test"
        },
```

```
        {
          "key": "rolloverSize",
          "value": 1024
        },
        {
          "key": "rolloverEvents",
          "value": 100
        },
        {
          "key": "rolloverTime",
          "value": 300000
        },
        {
          "key": "File Name",
          "value": "test"
        }
      ]
    }
  ],
  "edges": [
    {
      "from": "mqtt to flatfile_source",
      "to": "mqtt to flatfile_target"
    }
  ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
  "Success": {
    "name": "mqtt to flatfile",
    "description": "mqtt to flatfile",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "mqtt to flatfile_source",
        "type": "source",
        "connectionId": "012MGS0B000000000010",
        "transformationType": "",
        "config": [
          {
            "key": "ClientID",
            "value": "test"
          },
          {
            "key": "MaxQueueSize",
            "value": 1024
          },
          {
            "key": "Topic",
            "value": "test"
          }
        ]
      },
      {
        "name": "mqtt to flatfile_target",
        "type": "target",
        "connectionId": "012MGS0B00000000002N",
        "transformationType": "",
        "config": [
          {
            "key": "interimDirectory",
```

```
            "value": "/home/agent/test"
          },
          {
            "key": "rolloverSize",
            "value": 1024
          },
          {
            "key": "rolloverEvents",
            "value": 100
          },
          {
            "key": "rolloverTime",
            "value": 300000
          },
          {
            "key": "File Name",
            "value": "test"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "mqtt to flatfile_source",
        "to": "mqtt to flatfile_target"
      }
    ]
  }
}
```

JMS sources

When the source connection of the task source is JMS, you can include the following fields and key-value pairs in the config array of the source connection:

Key	Type	Required	Description
destinationType	String	Yes	Type of destination that the source service sends JMS messages to. Enter one of the following values: - `QUEUE`. The JMS provider delivers messages to a single consumer who is registered for the queue. - `TOPIC`. The JMS provider delivers messages to all active consumers that subscribe to the topic.
clientId	String	Yes	Unique ID of the JMS connection. You can enter a string of up to 255 characters.
sharedSubscription	String	Yes	Enables multiple consumers to access a single subscription. Applies to the TOPIC destination type. Enter one of the following values: - `True` - `False`
durableSubscription	String	Yes	When set to True, the JMS source service enables inactive subscribers to retain messages and then deliver them when the subscriber reconnects. Applies to the TOPIC destination type. Enter one of the following values: - `True` - `False`

Key	Type	Required	Description
subscriptionName	String	Yes	Name of the subscription. Applies to the TOPIC destination type, when the topic subscription type is shared, durable, or both.
JMS Destination	String	Yes	Name of the queue or topic that the JMS provider delivers messages to.

POST request example

To update a streaming ingestion and replication task with an JMS source and a flat file target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "crud",
  "description": "JMS to FileToFile",
  "runtimeId": "0100002500000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "crud_source",
      "type": "source",
      "connectionId": "012MGS0B000000000003",
      "transformationType": "",
      "config": [
        {
          "key": "destinationType",
          "value": "QUEUE"
        },
        {
          "key": "clientId",
          "value": ""
        },
        {
          "key": "JMS Destination",
          "value": "test"
        }
      ]
    },
    {
      "name": "crud_target",
      "type": "target",
      "connectionId": "012MGS0B00000000000H",
      "transformationType": "",
      "config": [
        {
          "key": "interimDirectory",
          "value": "/home/agent/test"
        },
        {
          "key": "rolloverSize",
          "value": 1024
        },
        {
          "key": "rolloverEvents",
          "value": 100
        },
        {
          "key": "rolloverTime",
          "value": 300000
```

```
        },
        {
          "key": "File Name",
          "value": "test"
        }
      ]
    }
  ],
  "edges": [
    {
      "from": "crud_source",
      "to": "crud_target"
    }
  ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
  "Success": {
    "name": "crud",
    "description": "JMS to FileToFile",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "crud_source",
        "type": "source",
        "connectionId": "012MGS0B000000000003",
        "transformationType": "",
        "config": [
          {
            "key": "destinationType",
            "value": "QUEUE"
          },
          {
            "key": "clientId",
            "value": ""
          },
          {
            "key": "JMS Destination",
            "value": "test"
          }
        ]
      },
      {
        "name": "crud_target",
        "type": "target",
        "connectionId": "012MGS0B00000000000H",
        "transformationType": "",
        "config": [
          {
            "key": "interimDirectory",
            "value": "/home/agent/test"
          },
          {
            "key": "rolloverSize",
            "value": 1024
          },
          {
            "key": "rolloverEvents",
            "value": 100
          },
          {
```

```
            "key": "rolloverTime",
            "value": 300000
          },
          {
            "key": "File Name",
            "value": "test"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "crud_source",
        "to": "crud_target"
      }
    ]
  }
}
```

Microsoft Azure Data Lake Storage Gen2 (ADLS Gen2) targets

When the target connection of the task target is ADLS Gen2, you can include the following fields and key-value pairs in the config array of the target connection:

Key	Type	Required	Description
writeStrategy	String	Yes	The action to take when a file by the same name exists in the ADLS Gen2 storage. Enter one of the following values: - Append. Add data to the existing file. - Overwrite. Replaces the existing file with the new file. - Fail. Fail the request. - Rollover. Close the current file and create a new file based on the configured rollover value.
rolloverSize *	Integer	-	Target file size, in KB, at which to trigger rollover. Applies to a Rollover write strategy. You can enter a value between 1 and 2147483647.
rolloverEvents *	Integer	-	Number of events or messages to accumulate before a rollover. Applies to a Rollover write strategy. You can enter a value between 1 and 2147483647.
rolloverTime *	Integer	-	Length of time, in milliseconds, after which to trigger a rollover. Applies to a Rollover write strategy. You can enter a value between 1 and 2147483647.
filesystemNameOverride	String	-	Overrides the default file system name provided in the connection. This file system name is used write to a file at run time. You can enter a string of up to 1,280 characters.
directoryOverride	String	-	Overrides the default directory path. The ADLS Gen2 directory path to write data to. If left blank, the default directory path is used. You can enter a string of up to 1,280 characters.

Key	Type	Required	Description
compressionFormat	String	-	Compression format to use before the streaming ingestion task writes data to the target file. Enter one of the following values: - None - GZIP - BZIP2 - DEFAULT1 Enter this value to use the Zlib format. - DEFAULT2 Enter this value to use the Deflate format.
File Name/Expression	String	Yes	ADLS Gen2 file name or a regular expression. You can enter a string of up to 249 characters.
* Enter a value for at least one of the fields.			

POST request example

To update a streaming ingestion and replication task with a flat file source and an ADLS Gen2 target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "flatfile to adls",
  "description": "flatfile to adls",
  "runtimeId": "01000025000000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "flatfile to adls_source",
      "type": "source",
      "connectionId": "012MGS0B00000000002N",
      "transformationType": "",
      "config": [
        {
          "key": "File",
          "value": "logfile"
        },
        {
          "key": "initialPosition",
          "value": "Current Time"
        },
        {
          "key": "rolloverPattern",
          "value": "test"
        },
        {
          "key": "tailingMode",
          "value": "Single file"
        }
      ]
    },
    {
      "name": "flatfile to adls_target",
```

```
        "type": "target",
        "connectionId": "012MGS0B00000000003D",
        "transformationType": "",
        "config": [
          {
            "key": "writeStrategy",
            "value": "Rollover"
          },
          {
            "key": "filesystemNameOverride",
            "value": "test"
          },
          {
            "key": "File Name/Expression",
            "value": "test"
          },
          {
            "key": "compressionFormat",
            "value": "NONE"
          },
          {
            "key": "directoryOverride",
            "value": "/test"
          },
          {
            "key": "interimDirectory",
            "value": "/home/agent/test"
          },
          {
            "key": "rolloverSize",
            "value": 1024
          },
          {
            "key": "rolloverEvents",
            "value": 100
          },
          {
            "key": "rolloverTime",
            "value": 300000
          }
        ]
      }
    ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
  "Success": {
    "name": "flatfile to adls",
    "description": "flatfile to adls",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "flatfile to adls_source",
        "type": "source",
        "connectionId": "012MGS0B00000000002N",
        "transformationType": "",
        "config": [
          {
            "key": "File",
            "value": "logfile"
          },
```

```
            {
              "key": "initialPosition",
              "value": "Current Time"
            },
            {
              "key": "rolloverPattern",
              "value": "test"
            },
            {
              "key": "tailingMode",
              "value": "Single file"
            }
          ]
        },
        {
          "name": "flatfile to adls_target",
          "type": "target",
          "connectionId": "012MGS0B00000000003D",
          "transformationType": "",
          "config": [
            {
              "key": "writeStrategy",
              "value": "Rollover"
            },
            {
              "key": "filesystemNameOverride",
              "value": "test"
            },
            {
              "key": "File Name/Expression",
              "value": "test"
            },
            {
              "key": "compressionFormat",
              "value": "NONE"
            },
            {
              "key": "directoryOverride",
              "value": "/test"
            },
            {
              "key": "interimDirectory",
              "value": "/home/agent/test"
            },
            {
              "key": "rolloverSize",
              "value": 1024
            },
            {
              "key": "rolloverEvents",
              "value": 100
            },
            {
              "key": "rolloverTime",
              "value": 300000
            }
          ]
        }
      ]
    }
}
```

Amazon S3 targets

When the target connection of the task target is Amazon S3, you can include the following fields and key-value pairs in the config array of the target connection:

Key	Type	Required	Description
partitionTime	String	-	The time interval according to which the streaming ingestion task creates partitions in the Amazon S3 bucket. Enter one of the following values: - None - 5min - 10min - 15min - 20min - 30min - 1hr - 1day
minUploadPartSize	Integer	-	Minimum part size when uploading a large file as a set of multiple independent parts, in megabytes. Use this property to tune the file load to Amazon S3. You can enter a value between 50 and 5120.
multipartUploadThreshold	Integer	-	Multipart threshold when uploading objects in multiple parts in parallel. You can enter a value between 50 and 5120.
Object Name/Expression	String	Yes	Amazon S3 target file name or a regular expression for the Amazon S3 file name pattern.

POST request example

To update a streaming ingestion and replication task with a flat file source and an Amazon S3 as target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "flatfile to amazon S3",
  "description": "flatfile to amazon S3",
  "runtimeId": "0100002500000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "flatfile to amazon S3_source",
      "type": "source",
      "connectionId": "012MGS0B00000000002N",
      "transformationType": "",
      "config": [
        {
          "key": "File",
          "value": "logfile"
        },
        {
          "key": "initialPosition",
          "value": "Current Time"
        },
```

```
            {
              "key": "rolloverPattern",
              "value": "test"
            },
            {
              "key": "tailingMode",
              "value": "Single file"
            }
          ]
        },
        {
          "name": "flatfile to amazon S3_target",
          "type": "target",
          "connectionId": "012MGS0B0000000000I7",
          "transformationType": "",
          "config": [
            {
              "key": "partitionTime",
              "value": "None"
            },
            {
              "key": "minUploadPartSize",
              "value": 5120
            },
            {
              "key": "multipartUploadThreshold",
              "value": 5120
            },
            {
              "key": "Object Name/Expression",
              "value": "test"
            }
          ]
        }
      ],
      "edges": [
        {
          "from": "flatfile to amazon S3_source",
          "to": "flatfile to amazon S3_target"
        }
      ]
    }
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in the `Success` node:

```
    {
        "Success": {
        "name": "flatfile to amazon S3",
        "description": "flatfile to amazon S3",
        "runtimeId": "01000025000000000003",
        "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
        "currentVersion": "2",
        "messageFormat": "binary",
        "nodes": [
          {
            "name": "flatfile to amazon S3_source",
            "type": "source",
            "connectionId": "012MGS0B00000000002N",
            "transformationType": "",
            "config": [
              {
                "key": "File",
                "value": "logfile"
              },
```

```
            {
              "key": "initialPosition",
              "value": "Current Time"
            },
            {
              "key": "rolloverPattern",
              "value": "test"
            },
            {
              "key": "tailingMode",
              "value": "Single file"
            }
          ]
        },
        {
          "name": "flatfile to amazon S3_target",
          "type": "target",
          "connectionId": "012MGS0B0000000000I7",
          "transformationType": "",
          "config": [
            {
              "key": "partitionTime",
              "value": "None"
            },
            {
              "key": "minUploadPartSize",
              "value": 5120
            },
            {
              "key": "multipartUploadThreshold",
              "value": 5120
            },
            {
              "key": "Object Name/Expression",
              "value": "test"
            }
          ]
        }
      ],
      "edges": [
        {
          "from": "flatfile to amazon S3_source",
          "to": "flatfile to amazon S3_target"
        }
      ]
    }
}
```

Azure Event Hubs targets

When the target connection of the task target is Azure Event Hubs, you can include the following fields and key-value pairs in the config array of the target connection:

Key	Type	Required	Description
sasPolicyName	String	-	The name of the Event Hub Namespace Shared Access Policy. You can enter a string of up to 255 characters.
sasPolicyPrimaryKey	String	-	The primary key of the Event Hub Namespace Shared Access Policy. You can enter a string of up to 255 characters.
Event Hub	String	Yes	The name of the Azure Event Hubs. You can enter a string up to 255 characters. The name can contain lower case characters, upper case characters, numbers, and the special characters - and _.

POST request example

To update a streaming ingestion and replication task with a flat file source and an Azure Event Hubs target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "flatfile to azure event hub",
  "description": "flatfile to azure event hub",
  "runtimeId": "010000250000000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "flatfile to azure event hub_source",
      "type": "source",
      "connectionId": "012MGS0B00000000002N",
      "transformationType": "",
      "config": [
        {
          "key": "File",
          "value": "logfile"
        },
        {
          "key": "initialPosition",
          "value": "Current Time"
        },
        {
          "key": "rolloverPattern",
          "value": "test"
        },
        {
          "key": "tailingMode",
          "value": "Single file"
        }
      ]
    },
    {
      "name": "flatfile to azure event hub_target",
      "type": "target",
      "connectionId": "012MGS0B00000000001S",
      "transformationType": "",
```

```
      "config": [
        {
          "key": "sasPolicyName",
          "value": "test"
        },
        {
          "key": "sasPolicyPrimaryKey",
          "value": "test"
        },
        {
          "key": "Event Hub",
          "value": "test"
        }
      ]
    }
  ],
  "edges": [
    {
      "from": "flatfile to azure event hub_source",
      "to": "flatfile to azure event hub_target"
    }
  ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
  "Success": {
    "name": "flatfile to azure event hub",
    "description": "flatfile to azure event hub",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "flatfile to azure event hub_source",
        "type": "source",
        "connectionId": "012MGS0B00000000002N",
        "transformationType": "",
        "config": [
          {
            "key": "File",
            "value": "logfile"
          },
          {
            "key": "initialPosition",
            "value": "Current Time"
          },
          {
            "key": "rolloverPattern",
            "value": "test"
          },
          {
            "key": "tailingMode",
            "value": "Single file"
          }
        ]
      },
      {
        "name": "flatfile to azure event hub_target",
        "type": "target",
        "connectionId": "012MGS0B00000000001S",
        "transformationType": "",
        "config": [
          {
```

```
            "key": "sasPolicyName",
            "value": "test"
          },
          {
            "key": "sasPolicyPrimaryKey",
            "value": "test"
          },
          {
            "key": "Event Hub",
            "value": "test"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "flatfile to azure event hub_source",
        "to": "flatfile to azure event hub_target"
      }
    ]
  }
}
```

JDBC V2 targets

When the target connection of the task target is JDBC V2, you can include the following fields and key-value pairs in the config array of the target connection:

Key	Type	Required	Description
Table Name	String	Yes	Name of the table to insert data to in JSON format. Enter a string of up to 988 characters.

POST request example

To update a streaming ingestion and replication task with a flat file source and a JDBC V2 target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "FileFile to jdbc",
  "description": "FileToFile to jdbc_target",
  "runtimeId": "0100002500000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "flatfile to jdbc_source",
      "type": "source",
      "connectionId": "012MGS0B00000000002N",
      "transformationType": "",
      "config": [
        {
          "key": "initialPosition",
          "value": "Current Time"
        },
        {
          "key": "tailingMode",
          "value": "Single file"
        },
```

```
        {
          "key": "rolloverPattern",
          "value": "test"
        },
        {
          "key": "File",
          "value": "logfile"
        }
      ]
    },
    {
      "name": "flatfile to jdbc_target",
      "type": "target",
      "connectionId": "012MGS0B0000000000KF",
      "transformationType": "",
      "config": [
        {
          "key": "Table Name",
          "value": "table"
        }
      ]
    }
  ],
  "edges": [
    {
      "from": "flatfile to jdbc_source",
      "to": "flatfile to jdbc_target"
    }
  ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
  "Success": {
    "name": "FileFile to jdbc",
    "description": "FileToFile to jdbc_target",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "flatfile to jdbc_source",
        "type": "source",
        "connectionId": "012MGS0B00000000002N",
        "transformationType": "",
        "config": [
          {
            "key": "initialPosition",
            "value": "Current Time"
          },
          {
            "key": "tailingMode",
            "value": "Single file"
          },
          {
            "key": "rolloverPattern",
            "value": "test"
          },
          {
            "key": "File",
            "value": "logfile"
          }
        ]
      },
```

```
      {
        "name": "flatfile to jdbc_target",
        "type": "target",
        "connectionId": "012MGS0B0000000000KF",
        "transformationType": "",
        "config": [
          {
            "key": "Table Name",
            "value": "table"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "flatfile to jdbc_source",
        "to": "flatfile to jdbc_target"
      }
    ]
  }
}
```

Amazon Kinesis Streams sources and targets

When the source and target connection of the task is Amazon Kinesis Streams, you can include the following fields and key-value pairs in the config array of the source and target connection:

Key	Type	Required	Description
appendGUID	Boolean		Specifies whether or not to add a GUID as a suffix to the Amazon DynamoDB table name. Enter one of the following values: - true - false
dynamoDB	String		Amazon DynamoDB table name where to store the checkpoint details of the Kinesis source data. You can enter a string of up to 128 characters.
Stream	String	Yes	Name of the Kinesis Stream to read data from. Enter a string of up to 128 characters. Appears in the source node.
Stream Name/ Expression	String	Yes	Kinesis Stream name or a regular expression to write data to. Enter a string of up to 128 characters. Appears in the target node.

POST request example

To update a streaming ingestion and replication task with an Amazon Kinesis Streams source and target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "kinesis to kinesis",
  "description": "kinesis to kinesis",
  "runtimeId": "01000025000000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
```

```
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "kinesis to kinesis_source",
      "type": "source",
      "connectionId": "012MGS0B00000000000F",
      "transformationType": "",
      "config": [
        {
          "key": "appendGUID",
          "value": true
        },
        {
          "key": "dynamoDB",
          "value": "table"
        },
        {
          "key": "Stream",
          "value": "test"
        }
      ]
    },
    {
      "name": "kinesis to kinesis_target",
      "type": "target",
      "connectionId": "012MGS0B00000000000F",
      "transformationType": "",
      "config": [
        {
          "key": "Stream Name/Expression",
          "value": "trgt"
        }
      ]
    }
  ],
  "edges": [
    {
      "from": "kinesis to kinesis_source",
      "to": "kinesis to kinesis_target"
    }
  ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
    "Success": {
    "name": "kinesis to kinesis",
    "description": "kinesis to kinesis",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "kinesis to kinesis_source",
        "type": "source",
        "connectionId": "012MGS0B00000000000F",
        "transformationType": "",
        "config": [
          {
            "key": "appendGUID",
            "value": true
          },
          {
```

```
            "key": "dynamoDB",
            "value": "table"
          },
          {
            "key": "Stream",
            "value": "test"
          }
        ]
      },
      {
        "name": "kinesis to kinesis_target",
        "type": "target",
        "connectionId": "012MGS0B00000000000F",
        "transformationType": "",
        "config": [
          {
            "key": "Stream Name/Expression",
            "value": "trgt"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "kinesis to kinesis_source",
        "to": "kinesis to kinesis_target"
      }
    ]
  }
}
```

Flat file sources and targets

When the source and target connection of the task is flat file, you can include the following fields and key-value pairs in the config array of the source and target connection:

Key	Type	Required	Description
File	String	Yes	Absolute path and name of the source file. Enter the base directory for multiple files mode.
initialPosition	String	Yes	Starting position to read data from the file to tail. Enter one of the following values: - Beginning of File. Read from the beginning of the file. Don't ingest any data that has already been rolled over. - Current Time. Read from the most recently updated part of the file. Don't ingest data that was rolled over or data in the file that was written.
rolloverPattern	String	-	File name pattern for the file that rolls over. If the file to tail rolls over, the Secure Agent uses the file name pattern to identify files that have rolled over. If the Secure Agent stops during a file rollover, when it restarts, it picks up the file where it was left off. You can use asterisk (*) and question mark (?) as wildcard characters to indicate that the files are rolled over in the same directory. For example,`${filename}.log.*`. Here, asterisk (*) represents the successive version numbers that would be appended to the file name.

Key	Type	Required	Description
tailingMode	String	Yes	Tail a file or multiple files based on the logging pattern. Enter one of the following values: - Single file. Tail one file. - Multiple files. Tail all the files indicated in the base directory. You can enter a regular expression to indicate the files to tail.
File Name	String	Yes	The name of the target file.
interimDirectory	String	Yes	Path to the staging directory on the Secure Agent.
rolloverSize	Integer	Yes	The file size, in KB, at which the task moves the file from the staging directory to the target. You can enter a value between 1 and 2147483647.
rolloverEvents	Integer	Yes	Number of events or messages to accumulate before a file rollover. You can enter a value between 1 and 2147483647.
rolloverTime	Integer	-	Length of time, in milliseconds, after which the target file rolls over. You can enter a value between 1 and 2147483647.
edges	Array	-	Sequence of dataflow execution.

POST request example

To update a streaming ingestion and replication task with a flat file source and target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "FileToFile",
  "description": "FileToFile_V2",
  "runtimeId": "0100002500000000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "FileToFile_source",
      "type": "source",
      "connectionId": "0100000B000000000002",
      "transformationType": "",
      "config": [
        {
          "key": "File",
          "value": "siagent.log"
        },
        {
          "key": "initialPosition",
          "value": "Current Time"
        },
        {
          "key": "rolloverPattern",
          "value": ""
        },
        {
          "key": "tailingMode",
```

```
            "value": "Single file"
          }
        ]
      },
      {
        "name": "FileToFile_target",
        "type": "target",
        "connectionId": "0100000B000000000002",
        "transformationType": "",
        "config": [
          {
            "key": "File Name",
            "value": "testing.log"
          },
          {
            "key": "interimDirectory",
            "value": "/home/agent/infa/test_file_target"
          },
          {
            "key": "rolloverSize",
            "value": 100
          },
          {
            "key": "rolloverEvents",
            "value": 100
          },
          {
            "key": "rolloverTime",
            "value": 100
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "FileToFile_source",
        "to": "FileToFile_target"
      }
    ],
    "runtimeOptions": {
      "maxLogSize": {
        "value": 10,
        "unit": "MB"
      },
      "logLevel": "INFO"
    }
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example:

```
{
  "Success": {
    "name": "FileToFile",
    "description": "FileToFile_V2",
    "runtimeId": "0100002500000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "FileToFile_source",
        "type": "source",
        "connectionId": "0100000B000000000002",
        "transformationType": "",
        "config": [
          {
```

```
            "key": "File",
            "value": "siagent.log"
          },
          {
            "key": "initialPosition",
            "value": "Current Time"
          },
          {
            "key": "rolloverPattern",
            "value": ""
          },
          {
            "key": "tailingMode",
            "value": "Single file"
          }
        ]
      },
      {
        "name": "FileToFile_target",
        "type": "target",
        "connectionId": "0100000B000000000002",
        "transformationType": "",
        "config": [
          {
            "key": "File Name",
            "value": "testing.log"
          },
          {
            "key": "interimDirectory",
            "value": "/home/agent/infa/test_file_target"
          },
          {
            "key": "rolloverSize",
            "value": 100
          },
          {
            "key": "rolloverEvents",
            "value": 100
          },
          {
            "key": "rolloverTime",
            "value": 100
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "FileToFile_source",
        "to": "FileToFile_target"
      }
    ],
    "runtimeOptions": {
      "maxLogSize": {
        "value": 10,
        "unit": "MB"
      },
      "logLevel": "INFO"
    }
  }
}
```

Kafka sources and targets

When the source and target connection of the task is Kafka, you can include the following fields and key-value pairs in the config array of the source and target connection:

Key	Type	Required	Description
Topic	String	Yes	Kafka source topic name or a Java supported regular expression for the Kafka source topic name pattern to read the events from. Enter a string of up to 249 characters.
consumerProperties	String	-	Provide a comma-separated list of optional consumer configuration properties. Specify the values as key-value pairs. For example, `key1=value1, key2=value2`. You can enter a string of up to 4000 characters.
producerProperties	String	-	The configuration properties for the producer. Provide a comma-separated list and specify the values as key-value pairs. You can enter a string of up to 4000 characters.
mdFetchTimeout	Integer	-	The time after which the metadata is not fetched. Enter a value between 1 and 2147483647.
batchSize	Integer	-	The batch size of the events after which a streaming ingestion task writes data to the target. Enter a value between 1 and 2147483647.
Topic Name/ Expression	String	Yes	Kafka topic name or a Java supported regular expression for the Kafka topic name pattern. You can enter a string of up to 249 characters.

POST request example

To update a streaming ingestion and replication task with a Kafka source and target, you might send a request similar to the following example:

```
POST <serverUrl>/sisvc/restapi/v1/UpdateEntity/Documents('<document ID>')
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: <SessionId>

{
  "name": "kafka to kafka",
  "description": "kafka to kafka",
  "runtimeId": "0100002500000000003",
  "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
  "currentVersion": "2",
  "messageFormat": "binary",
  "nodes": [
    {
      "name": "kafka to kafka_source",
      "type": "source",
      "connectionId": "012MGS0B000000000002",
      "transformationType": "",
      "config": [
        {
          "key": "consumerProperties",
          "value": "key=value"
        },
        {
```

```
            "key": "Topic",
            "value": "test"
          }
        ]
      },
      {
        "name": "kafka to kafka_target",
        "type": "target",
        "connectionId": "012MGS0B000000000002",
        "transformationType": "",
        "config": [
          {
            "key": "producerProperties",
            "value": "key=value"
          },
          {
            "key": "mdFetchTimeout",
            "value": 5000
          },
          {
            "key": "batchSize",
            "value": 1048576
          },
          {
            "key": "Topic Name/Expression",
            "value": "test"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "kafka to kafka_source",
        "to": "kafka to kafka_target"
      }
    ]
}
```

The response returns only the fields that you entered in the request. If the request is unsuccessful, the response includes a reason for the failure.

POST response example

If the request is successful, you might receive a response similar to the following example in a `Success` node:

```
{
  "Success": {
    "name": "kafka to kafka",
    "description": "kafka to kafka",
    "runtimeId": "01000025000000000003",
    "locationId": "5sJ0JDyJyWLlrosS5qJjsQ",
    "currentVersion": "2",
    "messageFormat": "binary",
    "nodes": [
      {
        "name": "kafka to kafka_source",
        "type": "source",
        "connectionId": "012MGS0B000000000002",
        "transformationType": "",
        "config": [
          {
            "key": "consumerProperties",
            "value": "key=value"
          },
          {
            "key": "Topic",
            "value": "test"
          }
        ]
      },
      {
```

```
        "name": "kafka to kafka_target",
        "type": "target",
        "connectionId": "012MGS0B000000000002",
        "transformationType": "",
        "config": [
          {
            "key": "producerProperties",
            "value": "key=value"
          },
          {
            "key": "mdFetchTimeout",
            "value": 5000
          },
          {
            "key": "batchSize",
            "value": 1048576
          },
          {
            "key": "Topic Name/Expression",
            "value": "test"
          }
        ]
      }
    ],
    "edges": [
      {
        "from": "kafka to kafka_source",
        "to": "kafka to kafka_target"
      }
    ]
  }
}
```

Getting details about a streaming ingestion and replication job

Use the jobs resource to get the details of a streaming ingestion and replication job.

GET request

To request the details of a streaming ingestion and replication job, use the following URL:

```
<server URI>/sisvc/monitor/v1/jobs/<dataflow ID>/<run ID of the job>
```

GET request example

To request the details of a streaming ingestion and replication job, you might send a request similar to the following example:

```
GET https://usw1-ing.dm2-us.informaticacloud.com/sisvc/monitor/v1/jobs/
1948938e-3923-4602-aba8-f122e3d66faf/42559
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

GET response

Returns the jobs object if successful or an error object if an error occurs.

If successful, the response includes the following information about a streaming ingestion and replication job:

Parameter	Type	Description
assetId	String	ID of the streaming ingestion and replication job.
assetName	String	Name of the streaming ingestion and replication job.
duration	Integer	The time it took to deploy the job.
endTime	Integer	End time of deploying the job, in UTC time.
startTime	Integer	Start time of deploying the job, in UTC time.
extraData	String	Additional information including the task ID, deployed version, and the Secure Agent group ID.
runId	Integer	Run ID of the streaming ingestion and replication job. The ID changes for every deployment.
orgId	String	ID of the organization the logged in user belongs to.
runtimeEnv	String	ID of the Secure Agent that deployed the streaming ingestion and replication job.
startedBy	String	Name of the user who created the streaming ingestion and replication task.
status	String	The status of the streaming ingestion and replication job. A job can be in one of the following status: - Deploying. The job is being deployed. - Up and Running. The job is running. - Running with Warning. The job is running with warnings. - Running with Error. The job is running with error. - Undeployed. The job is undeployed. - Stopped. The job was intentionally stopped.

GET response example

If the request to get the details of a streaming ingestion and replication job is successful, you might receive a response similar to the following example:

```
{
    "assetId": "1948938e-3923-4602-aba8-f122e3d66faf",
    "assetName": "testmonitor",
    "assetType": "SI_DATAFLOW",
    "correlationId": null,
    "duration": 1543,
    "endTime": "2022-02-14T04:04:13.000+0000",
    "extraData": "{\"id\":\"0RwiUUb9bVwjL67dWOKjoI\",\"version\":1,\"agentGroupId
\":null}",
    "location": "Default",
    "runId": 42559,
    "orgId": "2lFy0UUNnlnbjhaoT3TSqw",
    "runtimeEnv": "011ZFB2500000000000N",
    "startedBy": "siqa_new",
    "status": "Undeployed",
    "startTime": "2022-02-14T03:38:30.000+0000",
    "deployedVersion": 1
}
```

Getting a list of streaming ingestion and replication jobs

Use the MIJobs resource to get a list of the available streaming ingestion and replication jobs.

GET request

To request a list of the available streaming ingestion and replication jobs, use the following URL:

```
<server URI>/mijobmonitor/api/v1/MIJobs
```

You can include the following query parameters in the URI:

Parameter	Type	Required	Description
$count	Boolean	No	Displays the number of ingestion and replication jobs in the database.
$filter	String	No	Filters the job based on the input. You can filter using one of the following fields: - assetName - assetType - startedBy - status You can filter jobs using single or multiple fields.
$orderby	String	No	Sorts the order of the jobs. You can sort the jobs using the following fields: - assetName - assetType - status - runtimeEnv - startTime You can sort jobs using single or multiple fields.
$skip	Integer	No	Skips the number of streaming ingestion and replication jobs that you specify. For example, you might want to skip the first five streaming ingestion and replication jobs. Consider the $filter and $orderby parameter values, if specified.
$top	Integer	No	Displays the number of top streaming ingestion and replication jobs that you specify. For example, you might want to view the top ten streaming ingestion and replication jobs. Consider the $filter and $orderby parameter values, if specified.

GET request example

To get a list of the available streaming ingestion and replication jobs, you might send a request similar to the following example:

```
POST https://usw1-ing.dm2-us.informaticacloud.com/mijobmonitor/api/v1/MIJobs?$count=true&
$filter=(startedBy eq 'siqa_new')&$orderby=deployTime desc&$skip=0&$top=25
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

GET response

Returns the MIjobs object if successful or an error object if an error occurs.

If successful, the response includes the following information about the streaming ingestion and replication job:

Parameter	Type	Description
assetName	String	Name of the streaming ingestion and replication job.
runId	Integer	Run ID of the streaming ingestion and replication job. The ID changes for every deployment.
orgId	String	ID of the organization the logged in user belongs to.
runtimeEnv	String	ID of the Secure Agent that deployed the streaming ingestion and replication job.
startTime	Integer	Date and start time of deploying the job, in UTC time.
endTime	Integer	Date and end time of deploying the job, in UTC time.
deployTime	Integer	Date and time of deploying the job, in UTC time.
undeployTime	Integer	Date and time of undeploying the job, in UTC time.
startedBy	Integer	Name of the user who created the streaming ingestion and replication task.
status	String	The status of the streaming ingestion and replication job. A job can be in one of the following status: - Deploying. The job is being deployed. - Up and Running. The job is running. - Running with Warning. The job is running with warnings. - Running with Error. The job is running with error. - Undeployed. The job is undeployed. - Stopped. The job was intentionally stopped.
extraData	String	Additional information including the task ID, the location of the streaming ingestion job, and the Secure Agent ID.

GET response example

If the request to get a list of available streaming ingestion and replication jobs is successful, you might receive a response similar to the following example:


```
{
    "@odata.context": "$metadata#Collection(OData.MI.JobMonitor.MIJob)",
    "@odata.count": 421,
    "value": [
        {
            "assetId": "7ce6bbc7-f0e2-4278-bd6d-d1187f4a1420",
            "assetName": "SIdeployJms",
            "assetType": "SI_DATAFLOW",
            "runId": 33015,
            "duration": 300000,
            "orgId": "1Pm6cSfPcAqfgeV57Fn3u4",
            "runtimeEnv": "011U5M08000000000003",
            "startTime": "2021-04-29T13:09:48.000+0000",
            "endTime": "2021-04-29T13:14:48.000+0000",
            "deployTime": "2021-04-29T13:09:48.000+0000",
            "undeployTime": "2021-04-29T13:14:48.000+0000",
            "startedBy": "siqa_new",
            "status": "Undeployed",
            "outOfSync": true,
            "extraData": "{\"taskId\":\"7Z4ZZjXc9QViT4t2okiHuz\",\"runtimeEnv
\":\"011U5M25000000000002\",\"location\":\"RestAutomation\"}",
```

```
            "deployedVersion": 1,
            "replace": null,
            "lastUpdateTime": 0
        },
        {
            "assetId": "a03b9aa1-4a4a-47ee-808d-ddc0ee7b3a4a",
            "assetName": "kafka to kafka test",
            "assetType": "SI_DATAFLOW",
            "runId": 33527,
            "duration": 204988000,
            "orgId": "1Pm6cSfPcAqfgeV57Fn3u4",
            "runtimeEnv": "011U5M08000000000002",
            "startTime": "2021-05-04T05:41:39.000+0000",
            "endTime": "2021-05-06T14:38:07.000+0000",
            "deployTime": "2021-05-04T05:41:39.000+0000",
            "undeployTime": "2021-05-06T14:38:07.000+0000",
            "startedBy": "siqa_new",
            "status": "Undeployed",
            "outOfSync": true,
            "extraData": "{\"taskId\":\"8V21nib7Sqgiw3QoDRi5uK\",\"runtimeEnv
\":\"011U5M25000000000002\",\"location\":\"Default\"}",
            "deployedVersion": 1,
            "replace": null,
            "lastUpdateTime": 0
        }
    ]
}
```


Job status

Use the status resource to get the status of a streaming ingestion and replication job.

GET request

To request the status of a streaming ingestion and replication job, use the following URL:

```
<server URI>/sisvc/monitor/v1/status/dataflows/<dataflow ID>
```

GET request example

To get the status of a streaming ingestion and replication job, you might send a request similar to the following example:

```
GET https://usw1-ing.dm2-us.informaticacloud.com/sisvc/monitor/v1/status/dataflows/
1948938e-3923-4602-aba8-f122e3d66faf
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

GET response

Returns the job status object if successful or an error object if an error occurs.

If successful, the response includes the following information about the status of a streaming ingestion and replication job:

Parameter	Type	Description
dataflowName	String	Name of the streaming ingestion and replication job.
dataflowId	Integer	ID of the streaming ingestion and replication job.

Parameter	Type	Description
status	String	The status of the streaming ingestion and replication job. A job can be in one of the following status: - Deploying. The job is being deployed. - Up and Running. The job is running. - Running with Warning. The job is running with warnings. - Running with Error. The job is running with error. - Undeployed. The job is undeployed. - Stopped. The job was intentionally stopped.
timestamp	Integer	Time, in milliseconds, when the Secure Agent records the status of the streaming ingestion and replication job.
reports	Array	Status details of each node.
graph	String	The throughput information for the source and target of the job.
runId	Integer	Run ID of the streaming ingestion and replication job. The ID changes for every deployment.

GET response example

If the request to get the status of a streaming ingestion and replication job is successful, you might receive a response similar to the following example:


```
{
    "dataflowName": "testmonitor",
    "dataflowId": "1948938e-3923-4602-aba8-f122e3d66faf",
    "status": "Running",
    "timestamp": 1644839755000,
    "reports": [
        {
            "name": "testmonitor_testmonitor_source",
            "id": "a5684428-f41f-4d24-b73f-33c232314a91",
            "status": "Running",
            "timestamp": 1644839756000,
            "message": null
        },
        {
            "name": "testmonitor_testmonitor_target",
            "id": "4f59b5fb-b5b2-4b83-994b-0d3e56f67e22",
            "status": "Running",
            "timestamp": 1644839756000,
            "message": null
        }
    ],
    "graph": "{\"agentId\":\"011ZFB0800000000000N\",\"nodes\":[{\"id\":\"a5684428-
f41f-4d24-b73f-33c232314a91\",\"name\":\"testmonitor_source\",\"serviceType\":\"source
\",\"config\":[{\"key\":\"_nativeName\",\"value\":\"src\"},{\"key\":\"consumerProperties
\",\"value\":null}],\"connectionId\":\"011ZFB0B0000000000KJ\",\"type
\":\"\",\"metaMetadata\":\"\"},{\"id\":\"4f59b5fb-b5b2-4b83-994b-0d3e56f67e22\",\"name
\":\"testmonitor_target\",\"serviceType\":\"target\",\"config\":[{\"key\":\"_nativeName
\",\"value\":\"trgt\"},{\"key\":\"batchSize\",\"value\":\"1048576\"},{\"key
\":\"mdFetchTimeout\",\"value\":\"5000\"},{\"key\":\"producerProperties\",\"value
\":null}],\"connectionId\":\"011ZFB0B0000000000KJ\",\"type\":\"\",\"metaMetadata
\":\"\"}],\"edges\":[{\"id\":\"6ae185ea-7e6e-4bf6-bd9e-0be5ef3a8e78\",\"name
\":\"testmonitor_source_testmonitor_target\",\"from\":\"testmonitor_source\",\"to
\":\"testmonitor_target\",\"type\":\"success\",\"config\":[],\"metaMetadata
\":\"\"}],\"runtimeOptions\":null}",
    "version": 1,
    "runId": 42563
}
```

Job statistics

Use the statistics resource to get the statistics of a streaming ingestion and replication job.

The streaming ingestion job should be in one of the following status before you can view its statistics:

- Deploying
- Up and Running
- Running with Warning
- Running with Error
- Stopped

GET request

To request the statistics of a streaming ingestion and replication job, use the following URL:

```
<server URI>/sisvc/monitor/v1/statistics/dataflows/<dataflow ID>
```

You can include the following query parameters in the URI:

Parameter	Type	Required	Description
intervals	Integer	Yes	Time, in seconds, to display statistics for a streaming ingestion job. For example, if you specify 30 seconds, the response displays job statistics for the last 30 seconds.
overall	Boolean	No	Displays the statistics from the time the job is deployed.

GET request example

To request the statistics of a streaming ingestion and replication job, you might send a request similar to the following example:

```
GET https://usw1-ing.dm2-us.informaticacloud.com/sisvc/monitor/v1/statistics/dataflows/
7f1daca9-3983-4677-930f-a9529802c56b?intervals=30&overall=true
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

GET response

Returns the statistics object if successful or an error object if an error occurs.

If successful, the response includes the following information about the statistics of a streaming ingestion and replication job:

Parameter	Type	Description
dataflowId	String	ID of the streaming ingestion and replication job.
dataflowRunId	Integer	Run ID of the streaming ingestion and replication job.
startTime	Integer	Start time of the streaming ingestion job, in milliseconds.
stopTime	Integer	Stop time of the streaming ingestion job, in milliseconds.

Parameter	Type	Description
inMessages	Integer	The number of messages that arrive at a node. A node is a source, transformation, or target, that is used in the streaming ingestion task. The value is zero for a source node.
outMessages	Integer	The number of messages that transfer from a node. The value is zero for a target node.
inBytes	Integer	The total size of incoming messages in bytes. The value is zero for a source node.
outBytes	Integer	The total size of outgoing messages in bytes. The value is zero for a target node.
nodes	Array	Information about streaming data in the source and the target used in the task.
intervals	Integer	The statistics of the job for the time interval you specify in the request. Applies when you set an interval.

GET response example

If the request to get the statistics of a streaming ingestion and replication job is successful, you might receive a response similar to the following example:


```
{
    "dataflowId": "7f1daca9-3983-4677-930f-a9529802c56b",
    "dataflowName": "newnew",
    "dataflowVersion": 1,
    "dataflowRunId": 54231,
    "snapshotCount": 171,
    "overall": {
        "dataflowId": "7f1daca9-3983-4677-930f-a9529802c56b",
        "dataflowName": "newnew",
        "dataflowVersion": 1,
        "dataflowRunId": 54231,
        "traits": {},
        "interval": 6007,
        "startTime": 1646649995000,
        "stopTime": 1646656000000,
        "nodes": [
            {
                "name": "newnew_newnew_source",
                "id": "17a51cdf-1f27-481e-81b8-d2e8ff60ec28",
                "inMessages": 0,
                "outMessages": 0,
                "inBytes": 0,
                "outBytes": 0,
                "nodeType": "Unknown"
            },
            {
                "name": "newnew_newnew_target",
                "id": "c30d6db4-6a3b-40d3-adfb-88779a972098",
                "inMessages": 0,
                "outMessages": 0,
                "inBytes": 0,
                "outBytes": 0,
                "nodeType": "Unknown"
            }
        ]
    },
    "intervals": {
        "30": {
```

```
            "dataflowId": "7f1daca9-3983-4677-930f-a9529802c56b",
            "dataflowName": "newnew",
            "dataflowVersion": null,
            "dataflowRunId": 54231,
            "traits": {},
            "interval": 30,
            "startTime": 1646655972683,
            "stopTime": 1646656002683,
            "nodes": []
        }
    }
}
```

Job history

Use the history resource to get the history of a streaming ingestion and replication job.

GET request

To request the history of a streaming ingestion and replication job, use the following URL:

```
<server URI>/sisvc/monitor/v1/history/dataflows/<dataflow ID>
```

GET request example

To get the history of a streaming ingestion and replication job, you might send a request similar to the following example:

```
GET https://usw1-ing.dm2-us.informaticacloud.com/siscv/monitor/v1/history/dataflows/
1948938e-3923-4602-aba8-f122e3d66faf
Content-Type: application/json
Accept:application/json
IDS-SESSION-ID:2l0oeVx22Rujiej7yTokmT
```

GET response

Returns the job history object if successful or an error object if an error occurs.

If successful, the response includes the following information about the history of a streaming ingestion and replication job:

Parameter	Type	Description
dataflowName	String	Streaming ingestion and replication job name.
dataflowId	Integer	Streaming ingestion and replication job ID.
deployedAt	Integer	The start time of deploying the job, in UTC time.
undeployedAt	Integer	The time when the job finished undeploying, in UTC.
runID	Integer	Run ID of the streaming ingestion and replication job. The ID changes for every deployment.

GET response example

If the request to get the history of a streaming ingestion and replication job is successful, you might receive a response similar to the following example:

```
[
    {
        "dataflowId": "1948938e-3923-4602-aba8-f122e3d66faf",
        "dataflowName": "testmonitor",
        "deployedAt": 1644809910000,
```

```
            "undeployedAt": 1644811453000,
            "dataflowVersion": 1,
            "runId": 42559,
            "overall": null,
            "intervals": {},
            "graph": null
        },
        {
            "dataflowId": "1948938e-3923-4602-aba8-f122e3d66faf",
            "dataflowName": "testmonitor",
            "deployedAt": 1644811513000,
            "undeployedAt": 1644838813000,
            "dataflowVersion": 1,
            "runId": 42561,
            "overall": null,
            "intervals": {},
            "graph": null
        }
    ]
```


Customer Managed REST APIs for Data Ingestion and Replication

Use the REST API resources in this section to work with Data Ingestion and Replication jobs on Secure Agents in a Customer Managed runtime environment.

First, log in to the Secure Agent API in the Customer Managed runtime environment to get a token. Then use the token to call the resources through the Secure Agent proxy. These calls differ from calls to Secure Agents in a standard Secure Agent group. For more information, see "Calling APIs through the proxy" on page 743.

You can change the HTTPS proxy port on the Secure Agent host if you don't use the default value. For more information, see "Configure the proxy port" on page 742.

When you use Customer Managed REST API resources, note the following rules:

- Use the JSON format for request and response payloads.
- If you use a tool such as Postman that automatically includes the HTTP version, don't enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Before you can call the APIs, ensure that you've met the following conditions:

- You have obtained a token. For more information on getting the token, see "Logging in" on page 743.
- You have a role that allows access to Customer Managed Secure Agent APIs.
- You have deployed the job to the Customer Managed runtime environment, synchronized the deployed task, and activated the synced assets.

Database and application ingestion and replication Customer Managed REST APIs

Use these resources to start, stop, abort, and resync database ingestion and replication jobs and application ingestion and replication jobs in a Customer Managed runtime environment. You can also get the job status and job details.

For other actions, such as deploy, redeploy, and undeploy, use the user interface when IDMC can reach the Customer Managed runtime environment.

To call resources, use the following base URL, where <agent-host> is the host name or IP address of the machine where the Customer Managed runtime environment runs:

```
https://<agent-host>:9443/rm/dbmi/api/v1
```

For example, if the agent host is invrlx7b2b8.informatica.com, the base URL is https://invrlx7b2b8.informatica.com:9443/rm/dbmi/api/v1.

Authentication

Before you call a resource, log in and get a token. For more information, see "Logging in" on page 743. Send the token in the RM-USER-TOKEN header of every request. Replace <rm-token> with the token from the login response.

```
RM-USER-TOKEN: <rm-token>
```

For example, to get the status of a job, run the following curl command with your token in the RM-USER-TOKEN header:

```
curl -k https://invrlx7b2b8.informatica.com:9443/rm/dbmi/api/v1/job/150768/status \
     -H "RM-USER-TOKEN:
eyJhbGciOiJIUzI1NiJ9.eyJzdWIiOiJzYW1wbGUtdXNlciJ9.c2FtcGxlLXNpZ25hdHVyZQ"
```

Keep the following in mind when you call the APIs:

- The token expires after about 30 minutes. Log in again to get a new token.
- Use straight quotes in the JSON body. Curly quotes make the body invalid and return a 400 error.
- The curl examples use -k because the endpoint can serve a self-signed certificate. Remove -k when a trusted certificate is installed.

Identifiers

The following table describes the identifier that these resources use:

Identifier	Description
jobId	The ID of the job that you want to work with. Add it to the URL path of the request, for example /job/150768/status.

Starting a job

Use this resource to start a database ingestion and replication job or application ingestion and replication job in a Customer Managed runtime environment.

POST request

To start a job, use the following API call:

```
POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/start
RM-USER-TOKEN: <rm-token>
```

To start a job with curl, use the following command:

```
curl -ik -X POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/start \
         -H "RM-USER-TOKEN: <rm-token>"
```

The following table describes the URL parameter:

Field	Type	Required	Description
job-id	Number	Yes	ID of the job to start.

POST response

If the request is successful, the resource returns 200 OK and the text ACCEPTED in the response body.

Stopping a job

Use this resource to stop a database ingestion and replication job or application ingestion and replication job in a Customer Managed runtime environment.

Post request

To stop a job, use the following API call:

```
POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/stop
RM-USER-TOKEN: <rm-token>
```

To stop a job with curl, use the following command:

```
curl -ik -X POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/stop \
   -H "RM-USER-TOKEN: <rm-token>"
```

The following table describes the URL parameter:

Field	Type	Required	Description
job-id	Number	Yes	ID of the job to stop.

POST response

If the request is successful, the resource returns 200 OK and the text ACCEPTED in the response body.

Aborting a job

Use this resource to abort a database ingestion and replication job or application ingestion and replication job forcefully in a Customer Managed runtime environment.

Post request

To abort a job, use the following API call:

```
POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/abort
RM-USER-TOKEN: <rm-token>
```

To abort a job with curl, use the following command:

```
curl -ik -X POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/abort \
   -H "RM-USER-TOKEN: <rm-token>"
```

The following table describes the URL parameter:

Field	Type	Required	Description
job-id	Number	Yes	ID of the job to abort.

POST response

If the request is successful, the resource returns 200 OK and the text ACCEPTED in the response body.

Resynchronizing a table

Use this resource to resynchronize a table in a database ingestion and replication job or application ingestion and replication job in a Customer Managed runtime environment. This job resource accepts a request body.

Post request

To resynchronize a table, use the following API call:

```
POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/resync
Content-Type: application/json
RM-USER-TOKEN: <rm-token>
```

Use the following attributes in the request body:

```
{
    "schemaName": "TKG",
    "tableName": "Table_schema1.Table_01",
    "retainTargetOnResync": false
}
```

To resynchronize a table with curl, use the following command:

```
curl -ik -X POST https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/resync \
   -H "RM-USER-TOKEN: <rm-token>" \
   -H "Content-Type: application/json" \
   -d
'{"schemaName":"TKG","tableName":"Table_schema1.Table_01","retainTargetOnResync":false}'
```

The following table describes the attributes:

Field	Type	Required	Description
job-id	Number	Yes	URL parameter. ID of the job.
schemaName	String	Yes	Name of the source schema.
tableName	String	Yes	Fully qualified table name in the format <schema>.<table>.
retainTargetOnResync	Boolean	Yes	Determines what happens to the target data. Set to true to keep the existing target rows. Set to false to reload the target.

POST response

If the request is successful, the resource returns 200 OK and the text ACCEPTED in the response body.

Getting the job operation status

Use this resource to get the current run status of a database ingestion and replicationjob or application ingestion and replication job in a Customer Managed runtime environment.

GET request

To get the job operation status, use the following API call:

```
GET https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/status
RM-USER-TOKEN: <rm-token>
```

To start a job with curl, use the following command:

```
curl -ik -X GET https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>/status \
   -H "RM-USER-TOKEN: <rm-token>"
```

The following table describes the URL parameter:

Field	Type	Required	Description
job-id	Number	Yes	ID of the job.

GET response

Returns the job ID and status if the request is successful. Returns an error if errors occur.

A successful request returns the following response:

```
{"jobStatus":"RUNNING","operation":"STOP","operationState":"DONE"}
```

The following table describes the attributes:

Field	Type	Description
jobStatus	String	Current status of the job. Valid values are: - DEPLOYED - AWAITING_AUTO_RESTART - RUNNING - WARNING - FAILED - STOPPED - ABORTED - COMPLETED
Operation	String	Latest operation requested for the job. Valid values are: - STOP - ABORT The value is null if you haven't requested a stop or abort operation for the job.
operationState	String	State of the latest operation. Options are: - REQUESTED. The operation was received but isn't yet applied to the job. - DONE. The operation was applied. The value is null if the operation field is null.

The following examples show how the response changes when you stop a running job, and the response after you abort a job:

Scenario	Response
Running job with no operation requested.	{"jobStatus":"RUNNING","operation":null,"operationState":null}
Stop requested but not yet applied	{"jobStatus":"RUNNING","operation":"STOP","operationState":"REQUESTED"}
Stop applied and the job still running	{"jobStatus":"RUNNING","operation":"STOP","operationState":"DONE"}
Job stopped	jobStatus":"STOPPED","operation":"STOP","operationState":"DONE"}
Job aborted	{"jobStatus":"ABORTED","operation":"ABORT","operationState":"DONE"}

Getting job details

Get the status, metrics, and alerts of a database ingestion and replication job or application ingestion and replication job in a Customer Managed runtime environment.

Use this resource when the Secure Agent in your Customer Managed runtime environment can't connect to IDMC for an extended period. When the agent is connected, it synchronizes the job details to IDMC and purges them locally. In that case, retrieve the job details from IDMC instead.

GET request

To start a job details, use the following API call:

```
GET https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id>
RM-USER-TOKEN: <rm-token>
```

To start a job details with curl, use the following command:

```
curl -ik -X GET https://<agent-host>:9443/rm/dbmi/api/v1/job/<job-id> \
   -H "RM-USER-TOKEN: <rm-token>"
```

The following table describes the URL parameter:

Field	Type	Required	Description
job-id	Number	Yes	ID of the job to get the details.

GET response

Returns the job object if the request is successful. Returns an error if errors occur.

A successful request returns the following response:

```
{
"jobId": 150775,
"jobName": "MYSQL-to-Redshift_comb_offline_150775",
"ingestionType": "DBMI",
"payloadType": "CDC_COMBINED",
"status": "RUNNING",
"runtimeEnvId": "01C09125000000000002",
"runs": [
{
"metrics": {
"rowsProcessed": 0,
"tablesInProgress": 0
}
}
],
"alerts": []
}
```

The following table describes the attributes:

Field	Type	Description
jobId	Number	ID of the job.
jobName	String	Name of the job.
ingestionType	String	Type of ingestion. Options are: - dbmi. Database ingestion and replication job. - appmi. Application ingestion and replication job.

Field	Type	Description
payloadType	String	Type of the job payload. Options are: - INITIAL. An initial load type that loads a snapshot of the source data one time. - CDC. An incremental load type. The task replicates only the changes that occur in the source after the restart point. - CDC_COMBINED. A initial and combined load type that loads a snapshot of the source data and then replicates changes. - CDC_GROUP. A CDC staging load type. The job reads changes from the source database once and writes them to common storage, where the apply jobs in the staging group read them and apply them to their targets.
status	String	State of the job after the call.
runtimeEnvId	String	ID of the runtime environment where the job runs.
runs	Array	Runs of the job. Each run contains a metrics object.
runs.metrics	Object	Job metrics. The sample shows rowsProcessed and tablesInProgress.
alerts	Array	Alerts for the job. The array is empty if the job has no alerts.

Database and application ingestion and replication errors

The following table describes the errors that the database ingestion and replication job and application ingestion and replication job resources can return in a Customer Managed runtime environment:

HTTPS status	Applicable resources	Description
400 Bad Request	Resync	The JSON body is missing or not valid, or the Content-Type header is missing. Curly quotes in the request also cause this error. Send JSON with straight quotes and Content-Type: application/json.
400 Bad Request	Stop, abort, status	The job ID doesn't exist. Message: no such job.
401 Invalid JWT signature	All	The token expired, or a different environment or key issued it. Log in again on the same host that you call.
409 Conflict	Start, stop, abort	An operation is already in progress for the job. Message: operation not performed — an operation is already in progress.
409 Conflict	Stop	The job has no active run, so there is nothing to stop. Message: job not running — nothing to stop.
409 Conflict	Stop	An abort is already pending for the job. Message: operation not performed — the job is already aborting.
409 Conflict	Start, stop, abort	The job type doesn't support this operation. Message: operation not supported for this job type.

File Ingestion and Replication Customer Managed REST APIs

Use these resources to run deployed file ingestion and replication tasks in a Customer Managed runtime environment. You can also get the job status, download the job log, and abort a job.

To call resources, use the following base URL, where <agent-host> is the host name or IP address of the machine where the Customer Managed runtime environment runs:

```
https://<agent-host>:9443/rm/mftsaas/api/v1/offline
```

If you changed the proxy port, use that port instead of 9443. For more information, see "Configure the proxy port" on page 742.

For example, if the agent host is invrlx7b2b8.informatica.com, the base URL is https://invrlx7b2b8.informatica.com:9443/rm/mftsaas/api/v1/offline.

Authentication

Before you call a resource, log in and get a token. For more information, see "Logging in" on page 743. Send the token in the Authorization header of every request. Replace <rm-token> with the token from the login response.

```
RM-USER-TOKEN: <rm-token>
```

For example, to get the status of a job, run the following curl command with your token in the RM-USER-TOKEN header:

```
curl -k https://invrlx7b2b8.informatica.com:9443/rm/mftsaas/api/v1/offline/job/150768/
status \
     -H "RM-USER-TOKEN:
eyJhbGciOiJIUzI1NiJ9.eyJzdWIiOiJzYW1wbGUtdXNlciJ9.c2FtcGxlLXNpZ25hdHVyZQ"
```

Keep the following in mind when you call the APIs:

- The token expires after about 30 minutes. Log in again to get a new token.
- Use straight quotes in the JSON body. Curly quotes make the body invalid and return a 400 error.
- The curl examples use -k because the endpoint can serve a self-signed certificate. Remove -k when a trusted certificate is installed.

Identifiers

The following table describes the identifiers that these resources use:

Identifier	Description
taskId	The FRS ID of the deployed task. This is the asset ID that IDMC shows for the task.
jobNumber	Job number that the run resource returns.

The job audit log records the token user who ran the job.

Running a task

Use this resource to start a task in a Customer Managed runtime environment.

Before you run a task, ensure that you synchronize the task to the Customer Managed runtime environment, and then activate the synced assets.

POST request

To run a task, use the following API call:

```
POST https://<agent-host>:9443/rm/mftsaas/api/v1/offline/job/<taskId>/run
RM-USER-TOKEN: <rm-token>
Content-Type: application/json
```

The taskId is the FRS ID of the deployed task.

The request body is optional. Use it to override the values of user-defined variables in the task. You can also set the thread count and the log level. If you omit the body, the task runs with its deployed settings. Add Content-Type only when you send parameters in a request body.

You can use the following attributes in the request body:

```
{
   "variables": {
      "sourceDir": "/data/inbound"
   },
   "threadCount": 4,
   "logLevel": "NORMAL"
}
```

To run a task with curl, use the following command:

```
curl -k -X POST \
   https://<agent-host>:9443/rm/mftsaas/api/v1/offline/job/<taskId>/run \
   -H "RM-USER-TOKEN: <rm-token>" \
   -H "Content-Type: application/json" \
   -d '{"variables":{"sourceDir":"/data/inbound"},"threadCount":4,"logLevel":"NORMAL"}'
```

The following table describes the optional attributes in the request body:

Field	Type	Required	Description
variables	Object	No	Values for user-defined ${variable} parameters in the task. Each key is a variable name, such as ParentFolder, and each value is a string.
threadCount	Integer	No	Number of threads for this run.
logLevel	String	No	Session log level for this run. Valid values are SILENT, NORMAL, VERBOSE, and DEBUG. The value is not case sensitive.

Note: To skip duplicate files for your task, set the agent-dedup-repository property to true in the Mass Ingestion agent service properties for your Customer Managed runtime environment in Administrator. By default, the property is false.

Post response

Returns the job number and status if the request is successful. Returns an error if errors occur.

A 200 OK response does not mean the job succeeded. Call the job status resource until the job finishes.

A successful request returns the following response:

```
{
   "agentId": "0a1B2c3D4e5F6g7H8i9J0k",
   "status": "SUBMITTED",
   "failMessage": null,
   "jobNumber": 1728712345678,
   "jobFilePath": null
}
```

The following table describes the attributes:

Field	Type	Description
agentId	String	ID of the agent that accepted the job.
status	String	The status of the job. Options are: - SUBMITTED. The agent accepted the job and the job waits to start. - RUNNING. The job started. - FAILED. The job could not start.
failMessage	String	Reason for the failure when the status is FAILED. For example, a missing variable.
jobNumber	Number	Job number. Save this value. The status, log, and abort resources need it.

The following table describes the errors:

HTTP status	Response	Description
400	{"error":"taskId is required"}	The path has no task ID.
400	{"error":"Invalid run parameters"}	The request body is not valid JSON.
404	{"error":"No ACTIVE MI_TASK deployed for frsId=<id>"}	No task with this ID is deployed to this agent.
404	{"error":"No active deployment for frsId=<id> found"}	The task is deployed, but the deployment is not live yet. A newer deployment might also have replaced it.
409	{"error":"<detail>"}	The integrity check of the deployed task definition failed. Deploy the task again.
500	{"error":"Database error: ..."} or {"error":"Rehydrate error: ..."}	Internal error. A log level value that is not valid also returns this error.

Getting the job status

Use this resource to get the stored status and run metrics of a job in a Customer Managed runtime environment.

GET Request

To get the job status, use the following API call:

```
GET https://<agent-host>:9443/rm/mftsaas/api/v1/offline/job/<jobNumber>/status
RM-USER-TOKEN: <rm-token>
```

The jobNumber is the job number that the run resource returns.

To get the job status with curl, use the following command:

```
curl -k https://<agent-host>:9443/rm/mftsaas/api/v1/offline/job/<jobNumber>/status \
   -H "RM-USER-TOKEN: <rm-token>"
```

Call this resource until the status is SUCCESS, FAILED, or ABORTED. A poll every 10 to 30 seconds is enough for most jobs.

Get response

Returns the job object if the request is successful. Returns an error if errors occur.

A successful request returns the following response:

```
{
   "jobId": 1728712345678,
   "rteId": "rte-01",
   "frsId": "3fhK2xYqLpWeZ9AbCdEfGh",
   "taskName": "Daily_Inbound_Transfer",
   "status": "SUCCESS",
   "startTime": "2026-10-12 09:15:02.114",
   "endTime": "2026-10-12 09:15:47.902",
   "agentId": "0a1B2c3D4e5F6g7H8i9J0k",
   "failMessage": null,
   "successFileCount": 25,
   "downloadVolume": 10485760,
   "uploadVolume": 10485760
}
```

The following table describes the attributes:

Field	Type	Description
jobId	Number	Job number.
rteId	String	Runtime environment ID.
frsId	String	Task ID (FRS ID) of the task that ran.
taskName	String	Name of the task.
status	String	The status of the job. Options are: - SUBMITTED. The agent accepted the job and the job waits to start. - RUNNING. The job started. - FAILED. The job failed.. - Aborted. A user stopped the job.
startTime	String	Time that the job started, in the local time of the agent.
endTime	String	Time that the job ended, in the local time of the agent. The value is null while the job runs.
agentId	String	ID of the agent that ran the job.
failMessage	String	Reason for the failure when the status is FAILED.
successFileCount	Number	Number of files transferred successfully.
downloadVolume	Number	Amount of data the job read from the source, in bytes.
uploadVolume	Number	Amount of data the job wrote to the target, in bytes.

Call this resource until the status is SUCCESS, FAILED, or ABORTED. A poll every 10 to 30 seconds is enough for most jobs.

The following table describes the errors:

HTTP status	Response	Description
404	{"error":"Job not found","jobId":"<n>"}	No job with this number exists for this organization.
500	{"error":"Internal server error"}	Internal error.

Getting the job log

Use this resource to download the session log file of a job in a Customer Managed runtime environment.

GET Request

To download the log, use the following API call:

```
GET https://<agent-host>:9443/rm/mftsaas/api/v1/offline/job/<jobNumber>/logs
RM-USER-TOKEN: <rm-token>
```

To download the job log with curl, use the following command:

```
curl -k https://<agent-host>:9443/rm/mftsaas/api/v1/offline/job/<jobNumber>/logs \
   -H "RM-USER-TOKEN: <rm-token>" \
   -o job_1728712345678.log
```

The following table describes the URL parameter:

Field	Type	Required	Description
jobNumber	Number	Yes	Job number that the run resource returns.

Get response

Returns the log file if the request is successful. Returns an error if errors occur.

The response is a file download that has no JSON body. The following table describes the errors:

HTTP status	Response	Description
404	{"error":"<message>","jobId":"<n>"}	No job with this number exists, or its log file is not available.
500	{"error":"Internal server error"}	Internal error.

Aborting a job

Use this resource to stop a running job and its child jobs in a Customer Managed runtime environment.

In the URL, use tasks instead of job. The request body is required and must include the job number to abort.

PUT Request

To abort a job, use the following API call:

```
PUT https://<agent-host>:9443/rm/mftsaas/api/v1/offline/tasks/<taskId>/abort
RM-USER-TOKEN: <rm-token>
Content-Type: application/json
```

Use the following attributes in the request body:

```
{
   "jobNumber": 1728712345678
}
```

To abort a job with curl, use the following command:

```
curl -k -X PUT \
   https://<agent-host>:9443/rm/mftsaas/api/v1/offline/tasks/<taskId>/abort \
   -H "RM-USER-TOKEN: <rm-token>" \
   -H "Content-Type: application/json" \
   -d '{"jobNumber":1728712345678}'
```

The following table describes the attributes:

Field	Type	Required	Description
taskId	String	Yes	URL parameter. FRS ID of the task.
jobNumber	Long	Yes	Job number that the run resource returns.
userName	String	No	Not used when a token is present. The token user is recorded as the user who stopped the job.

Put response

Returns the job number and status if the request is successful. Returns an error if errors occur.

If the job stops, the request returns the following response:

```
{
   "agentId": "0a1B2c3D4e5F6g7H8i9J0k",
   "status": "ABORTED",
   "failMessage": null,
   "jobNumber": 1728712345678,
   "jobFilePath": null
}
```

If the job is no longer running, the request returns the following response:

```
{
   "agentId": "0a1B2c3D4e5F6g7H8i9J0k",
   "status": "FAILED",
   "failMessage": "Task must have finished.",
   "jobNumber": 1728712345678,
   "jobFilePath": null
}
```

A FAILED result means the job had already finished. Call the job status resource to see the final outcome.

The following table describes the attributes:

Field	Type	Description
agentId	String	ID of the agent.
status	String	The status of the job. Options are: - FAILED. The job was no longer running when you tried to stop it. - ABORTED. The job stopped.

Field	Type	Description
failMessage	String	Reason when the status is FAILED.
jobNumber	Number	Job number.

The following table describes the errors:

HTTP status	Response	Description
400	{"error":"taskId is required"}	The path has no task ID.
400	{"error":"Request body is required"}	The request has no body.

File ingestion and replication errors

The following table describes the authentication and authorization errors that a file ingestion and replication resource can return:

HTTP status	Description
401 Unauthorized	The token is missing, not valid, or expired. Log in again.
403 Forbidden	The token belongs to a different organization than the agent. Response: {"error":"JWT orgId does not match agent orgId"}
403 Forbidden	The agent has no organization configured. Response: {"error":"agent orgId not configured"}

CHAPTER 8

Customer Managed REST API

The REST API resources in this section apply specifically to Secure Agents running in a Customer Managed runtime environment.

Use the REST APIs to log in to a Customer Managed runtime environment and to call IDMC APIs through the proxy. This is different from API calls to Secure Agents in a standard Secure Agent group. For more information, see "Calling APIs through the proxy" on page 743.

You can change the HTTPS proxy port on the Secure Agent host if you don't use the default value.

When you use Customer Managed runtime environments, note the following rules:

- Use the base URL:

  ```
  https://<serverUrl>/rm/saas
  ```

  Where `<serverUrl>` is comprised of `<host-ip>:<port>`.

  For example, to run a job in a Customer Managed runtime environment, use the following call:

  ```
  POST https://<serverUrl>/rm/saas/api/v2/job/42
  ```

- Use the JSON format for request and response payloads.
- When you log in, you obtain a token that you'll use for calling IDMC APIs through the proxy.
- If you use a tool such as Postman that automatically includes the HTTP version, don't enter the HTTP version in the URL. If the HTTP version appears twice in the URL, the request fails.

Configure the proxy port

A customer-facing HTTP proxy on the Secure Agent host authenticates and calls IDMC APIs through the agent.

The proxy listens to port 9443 by default and this port serves all customer-callable endpoints. This is the base URL pattern:

```
https://<agent-host>:9443
```

You can change this port by updating the ResilientManagerApp Secure Agent service.

1. In Administrator, select **Runtime Environments**.
2. Select the Customer Managed runtime environment and open the **Service Configuration** tab.
3. Select the **ResilientManagerApp** service from the drop-down list.
4. Edit the **port** property to set your desired port number.
5. Save the changes and restart the service.

After the service restarts, the proxy begins listening on the new port.

Logging in

Use this resource to log in to the Secure Agent API in a Customer Managed runtime environment.

The login response includes a token that you will use for subsequent API calls through the proxy. No client certificate is required.

POST Request

To log in, use the following API call:

```
POST https://<agent-host>:9443/rm/api/v2/login
Content-Type: application/json
```

Use the following attributes in the request body:

```
{
  "username": "jdoe@example.com",
  "password": "s3cr3t"
}
```

The following is a login example using `curl`:

```
curl -sk -X POST https://<agent-host>:9443/rm/api/v2/login \
  -H "Content-Type: application/json" \
  -d '{"username":"jdoe@example.com","password":"s3cr3t"}'
```

The following table describes the attributes:

Field	Type	Required	Description
username	String	Yes	IDMC user name for the organization that you want to log in to.
password	String	Yes	The user's configured Customer Managed Secure Agent API password. This is not the IDMC password.

POST Response

Returns the user object if the request is successful. Returns the error object if errors occur.

The following is a sample successful response:

```
{
  "token": "eyJhbGciOiJIUzI1NiJ9...",
  "expiresAt": "2025-06-01T12:00:00Z"
}
```

The response includes a `token` that you need to include in the `RM-USER-TOKEN` header of all subsequent REST API calls through the proxy. For more information, see .“Calling APIs through the proxy” on page 743

Calling APIs through the proxy

You send API requests in a Customer Managed environment through the Secure Agent proxy.

All requests sent through `/rm/<product-api-path>` automatically forward to the appropriate backend service on the Secure Agent. Requests and responses are relayed verbatim.

You can use the following methods in your API calls: GET, POST, PUT, DELETE, PATCH

Before you can call APIs, ensure that you've met the following conditions:

- You have obtained a token from the log in step. Add this token in the `RM-USER-TOKEN` header. For more information on obtaining the token, see "Logging in" on page 743.
- You have a role that allows access to Customer Managed Secure Agent APIs.

API call

Use the appropriate method with this API call:

```
<METHOD> https://<agent-host>:9443/rm/<api-path>
RM-USER-TOKEN: <token>
```

Examples

The following is a `curl` example using GET:

```
curl -sk -X GET https://<serverUrl>:9443/rm/product1/api/v2/startJob \
  -H "RM-USER-TOKEN: <token>"
```

The following is a `curl` example using POST:

```
curl -X POST 'https://<serverUrl>:9443/rm/saas/api/v2/job' \
  -H 'Content-Type: application/json' \
  -H 'RM-USER-TOKEN: <offline user jwt>' \
  -d '{
    "taskId": "01C08X0Z000000000003",
    "@type": "job",
    "taskType": "MTT"
  }'
```

The following is a POST request example:

```
POST <serverUrl>/api/v2/job HTTP/1.1
Content-Type: application/json
Accept: application/json
icSessionId: <icSessionId>
{
  "taskId": "01C08X0Z000000000003",
  "@type": "job",
  "taskType": "MTT"
}
```

The following might be a typical response:

```
{
  "@type": "job",
  "taskId": "01C08X0Z000000000003",
  "taskType": "MTT",
  "runId": 1,
  "runInParallel": false
}
```

CHAPTER 9

RunAJob utility

You can use the RunAJob utility to run jobs or check job status instead of making calls directly through the IDMC REST API.

The RunAJob utility runs a JAR file that calls an IDMC REST API to run a job. After the job completes, the utility provides the following job details:

- The user who initiated the job.
- The time the job was initiated.
- The run ID for the job.

You can use the RunAJob utility for certain Data Integration and Data Ingestion and Replication asset types.

For Data Integration, you can run jobs for the following tasks and taskflows:

- Mapping tasks
- Synchronization tasks
- Replication tasks
- Masking tasks
- PowerCenter tasks
- Linear taskflows
- Published taskflows

For Data Ingestion and Replication, you can run file ingestion task jobs.

You must have the RunAJobCli package enabled in your IDMC organization to use the RunAJob utility.

To see if your organization is licensed to use the utility, log in to your organization and click **Administrator** > **Licenses**, and then look for the RunAJobCli package toward the bottom of the page. If you do not see the package, contact Informatica Global Customer Support to enable it.

When the package is enabled, the utility can be found in the following location:

```
<Secure Agent installation directory>\apps\runAJobCli
```

To use the RunAJob utility, the Secure Agent host must have Java version 1.8 or higher installed.

RunAJob utility setup

To set up the RunAJob utility, create copies of the template files that are included with the utility and configure the new files.

The following table describes the RunAJob utility template files:

File name	Description
`Restenv_default.properties`	Specifies login credentials and job polling behavior.
`Set_cli_vars_default.bat`	On Windows machines, specifies the keystore password that stores the encryption key and the initial and maximum heap sizes that the RunAJob utility uses to run Java commands.
`Set_cli_vars_default.sh`	On Linux machines, specifies the keystore password that stores the encryption key and the initial and maximum heap sizes that the RunAJob utility uses to run Java commands.
`Log4j2_default.properties`	Specifies the level of detail to return in log files.

You can find the template files in the following location:

```
<Secure Agent installation directory>\apps\runAJobCli
```

To customize the RunAJob properties, copy the template files, remove `_default` from the file names, and then configure the properties. Alternatively, you can update existing copied files if you already have them. Use the template files that are included with the utility as a reference.

Note: When you copy the template files, ensure that you duplicate the file itself rather than creating a symbolic link. If you create a symbolic link, Informatica might overwrite your changes to the file during a service upgrade.

Login properties

Specify IDMC login credentials in the `restenv.properties` file or include the login parameters as arguments in a task command.

Use login credentials for a native IDMC user account. You can't use a SAML user account for the RunAJob utility.

Include the following parameters in the `restenv.properties` file or in task commands:

Parameter	Description
baseUrl	Base URL. Default is `https://dm-us.informaticacloud.com/ma`.
username	IDMC user name.
password	IDMC password or encrypted password string. For more information about password encryption, see "Encrypting a password on Linux" on page 747 or "Encrypting a password on Windows" on page 747.

Parameter	Description
use.encryption	Enables use of an encrypted password. Set the value to *true* when you use an encrypted password.
CONNECT_TIMEOUT_SECONDS	Connection timeout period to accommodate network issues or latency specific to your environment. Default is 30 seconds.

The following example shows the `restenv.properties` file with an encrypted password:

```
username=saki
password=:1xCGDTC0oD9B2Rmd8Sr4IZWaWWkcEmiK5fy+GkycA==
ACTIVITYMONITORWAIT=2000
TOTALWAIT=60000
PROXYHOST=
PROXYPORT=
RETRYCOUNT=30
use.encryption=true
CONNECT_TIMEOUT_SECONDS=30
```

For more information, see "RunAJob utility arguments" on page 751.

Encrypting a password on Linux

You can encrypt your login password before you specify it in the `restenv.properties` file or a task command. On a Linux machine, use the shell script to encrypt your password.

1. Use the `cp` command to copy the template file `set_cli_vars_default.sh`.
2. Change the name of the copied file to `set_cli_vars.sh`.
3. Edit the file and set a password for the keystore that stores the encryption key. Use the following format:
   `export RUNAJOB_KEYSTORE_PASSWORD=<password>`
4. To encrypt your login password, run one of the following commands:
   - `./cli.sh encryptText -t <password>`
   - `./cli.sh encryptText -text <password>`

   If your login password includes non-alphanumeric characters, enclose the password within double quotation marks.

Encrypting a password on Windows

You can encrypt your login password before you specify it in the `restenv.properties` file or a task command. On a Windows machine, use the batch file to encrypt your password.

1. Use the `copy` command to copy the template file `set_cli_vars_default.bat`.
2. Change the name of the copied file to `set_cli_vars.bat`.
3. Edit the file and set a password for the keystore that stores the encryption key. Use the following format:
   `set RUNAJOB_KEYSTORE_PASSWORD=<password>`
4. To encrypt your login password, run one of the following commands:
   - `cli.bat encryptText -t <password>`
   - `cli.bat encryptText -text <password>`

   If your login password includes non-alphanumeric characters, enclose the password within double quotation marks.

Job status

Specify the frequency at which the RunAJob utility polls for status in the `restenv.properties` file.

You can use the following parameters:

Parameter	Description
ACTIVITYMONITORWAIT	Amount of time the utility waits before retrying if an internal exception occurs, such as a login failure or network problem. Default is 5000 milliseconds.
TOTALWAIT	Maximum amount of time the utility waits for a job to complete before polling the activity monitor and activity log again for status. Default is 5000 milliseconds.
RETRYCOUNT	Number of times the utility polls for status. Default is six. This parameter is used for polling the activity monitor and activity log for job status and for internal exceptions such as network failures. Login failures are retried up to five times. **Note:** IDMC adds 10 seconds between each API call to prevent server issues.

When you configure the `restenv.properties` file to poll job status, consider the values you set for TOTALWAIT and RETRYCOUNT, and keep in mind the amount of time you expect a job to run.

For example, if you expect a job to run for approximately 25 minutes, you might set the the following parameters:

```
TOTALWAIT=60000
RETRYCOUNT=30
```

With these settings, the utility polls the job status every 60 seconds up to 30 times with 10 seconds between each retry, which totals 35 minutes. If the job runs for more than 35 minutes, the command exits with return code 6, which means the job is running. The job continues to run in IDMC.

When you configure the `restenv.properties` file for internal exceptions, consider the values you set for ACTIVITYMONITOR and RETRYCOUNT.

For example, you might set the following parameters:

```
ACTIVITYMONITORWAIT=5000
RETRYCOUNT=30
```

With these settings, if the network fails, the utility retries the login every five seconds up to five times with an additional 10 seconds between each retry.

Log file detail

You can set the level of job detail to include in log files in the `log4j2.properties` file.

By default, the level of detail is set to INFO. At this level, log files include basic information such as user ID, job ID, and the time that the task was initiated. If you want log files to include job details for debugging purposes, you can change the level of detail to DEBUG. Or, for fine-grained details, you can change the level to TRACE.

To set the level of detail, change the value of the following parameter in the `log4j2.properties` file:

```
rootLogger.level=INFO
```

Java heap sizes

For optimal use of virtual memory, specify the initial heap size and maximum heap size for Java commands that the RunAJob utility uses. Set the heap size values using the CLI_JAVA_OPTS parameter.

Specify the following properties for the CLI_JAVA_OPTS parameter:

Property	Description
Xms	Specifies the initial heap size that the JVM will allocate.
Xmx	Specifies the maximum heap size that the JVM is allowed to allocate.

You might configure the CLI_JAVA_OPTS parameter as shown in the following example of a `set_cli_vars.sh` file:

```
@echo off
REM This variable is used to override the default KeyStore password.
set RUNAJOB_KEYSTORE_PASSWORD=
REM This variable is used to set the Java initial heap size and maximum heap size.
set CLI_JAVA_OPTS =Xms256m -Xmx512m
```

Configuring Java heap sizes on Linux

Configure the initial and maximum Java heap sizes on a Linux machine in the `set_cli_vars.sh` file.

1. Open the `set_cli_vars.sh` file.

   If you don't already have a `set_cli_vars.sh` file, use the `cp` command to copy the template file `set_cli_vars_default.sh` and then rename the copied file to `set_cli_vars.sh`.

2. Edit the file to specify the initial and maximum heap sizes. Use the following format:

   `export CLI_JAVA_OPTS="-Xms<initial heap size>m -Xmx<maximum heap size>m"`

   For example: `export CLI_JAVA_OPTS="-Xms256m -Xmx512m"`

3. Save the file.

Configuring Java heap sizes on Windows

Configure the initial and maximum Java heap sizes on a Windows machine in the `set_cli_vars.bat` file.

1. Open the `set_cli_vars.bat` file.

   If you don't already have a `set_cli_vars.bat` file, use the `copy` command to copy the template file `set_cli_vars_default.bat` and then rename the copied file to `set_cli_vars.bat`.

2. Edit the file to specify the initial and maximum heap sizes. Use the following format:

   `set CLI_JAVA_OPTS=-Xms<initial heap size>m -Xmx<maximum heap size>m`

   For example: `set CLI_JAVA_OPTS=-Xms256m -Xmx512m`

3. Save the file.

Using the RunAJob utility

To use the RunAJob utility, type the RunAJob utility command followed by arguments.

The following string is the RunAJob utility command:

```
cli.bat runAJobCli
```

For each job, you must specify the task or taskflow to run. The syntax that you use to run a Data Integration taskflow is slightly different from the syntax you use to run a task.

Running tasks

The following command is an example of the syntax you can use to run a task using the task name and location to specify the task:

```
cli.bat runAJobCli -t <tasktype> -n <task name> -fp <folder path to the task>
```

For example, to run a Data Ingestion and Replication file ingestion and replication task, you might use the following command:

```
cli.bat runAJobCli -t MI_TASK -n mitask_Arch_2308 -fp myproject/folder1
```

The following command is an example of the syntax you can use to run a job using the federated task ID to specify the task:

```
cli.bat runAJobCli -t <tasktype> -fi <federated task ID>
```

For example, to run a Data Integration synchronization task using the federated task ID, you might use the following command:

```
cli.bat runAJobCli -t DSS -fi kvOF40yLXyUihm7wYYskmh
```

Running Data Integration taskflows

To run a taskflow using the RunAJob utility, the taskflow must be published and you must include values for **Allowed Users** and **Allowed Groups** in the taskflow designer. For more information, see *Taskflows* in the Data Integration help.

For each job, you must specify the taskflow to run using the taskflow's name.

To run a taskflow, use the following syntax:

```
cli.bat runAJobCli -t TASKFLOW -un <taskflow name>
```

For example, you might use the following command:

```
cli.bat runAJobCli -t TASKFLOW -un myPublishedTaskflow
```

Running Data Integration taskflows using parameter sets

You can use a parameter set to provide values for taskflow input parameters and run the taskflow using the RunAJob utility.

For more information about running taskflows with parameter sets using the RunAJob utility, see https://knowledge.informatica.com/s/article/DOC-19232. This article also includes a link to download the utility.

When you run a taskflow that uses a parameter set, type the RunAJob utility command followed by the `-pun` or `--parameterSetUniqueName` argument.

To run a taskflow using the RunAJob utility, the taskflow must be published and you must include values for **Allowed Users** and **Allowed Groups** in the taskflow designer. For more information, see *Taskflows* in the Data Integration help.

To run a taskflow that uses a parameter set, use one of the following syntaxes:

```
cli.bat runAJobCli -t TASKFLOW -un <taskflow_name> -fp <folder_path> -pun
<unique_param_set_name>

cli.bat runAJobCli -t TASKFLOW -un <taskflow_name> -fp <folder_path> --
parameterSetUniqueName <unique_param_set_name>
```

For example:

```
cli.bat runAJobCli -t TASKFLOW -un myTaskflow -fp myproject/folder1 -pun sampleParamSet

cli.bat runAJobCli -t TASKFLOW -un myTaskflow -fp myproject/folder1 --
parameterSetUniqueName sampleParamSet
```

All taskflows run by using the `/tf` endpoint from the RunAJob utility.

Note: If you use the utility on Linux and you use another script or wrapper script to call cli.sh, be sure to comment the following line in the cli.sh file:

```
cd "$SCRIPT_DIR"
```

If you do not comment this line, you might receive the following error:

```
Could not find or load main class com.informatica.saas.utilities.plugins.RunAJobPlugin.
```

Task location

If you do not include a folder path or federated task ID in the command, the utility runs the task in the Default folder.

If the task is not located in the Default folder or you have multiple tasks with the same name located in different folders, be sure to include the folder path or federated task ID in the command.

To find the federated task ID, send a POST request using the REST API version 3 lookup resource.

RunAJob utility arguments

The RunAJob utility supports short and long options for arguments. Precede a short argument with a single hyphen. Precede a long argument with two hyphens.

You can use the following arguments in a RunAJob command:

Parameter	Short argument	Long argument	Description
username	-u	--user	IDMC user name.
password	-p	--password	IDMC password.
baseUrl	-bu	--baseUrl	Base URL. Default is `https://dm-us.informaticacloud.com/ma`. Required.
taskId	-i	--taskId	Task ID. Required when the command does not include the task name or federated task ID. Not applicable for taskflows.

Parameter	Short argument	Long argument	Description
folderPath	-fp	--folderPath	Folder path to the location of the task such as `myproject/folder1`. Required when the task isn't in the Default folder and the command doesn't include the federated task ID. Not applicable for taskflows.
frsId	-fi	--frsId	Federated task ID, which is a global unique identifier. Required when the task is not in the Default folder and the command does not include the folder path. Not applicable for taskflows.
taskflowUniqueName	-un	--taskflowUniqueName	Taskflow unique name. Required for Data Integration taskflows. Use instead of taskName.
taskName	-n	--taskName	Task name. Not applicable for taskflows.
taskType	-t	--taskType	Task type. Required. Use one of the following values: - DMASK. Masking task. - DRS. Replication task. - DSS. Synchronization task. - MTT. Mapping task. - PCS. PowerCenter task. - Workflow. Linear taskflow. - MI_TASK. File ingestion and replication task. - TASKFLOW. Taskflow.
parameterSetUniqueName	-pun	--parameterSetUniqueName	Unique name of the parameter set. Can be used for taskflow.
parameterDir	-pd	--parameterDir	Parameter file directory. Include with parameterFile. Default is: <SecureAgentInstallDir>/apps/Data_Integration_Server/data/userparameters
parameterFile	-pf	--parameterFile	Parameter file. Can be used for mapping tasks.
waitFlag	-w	--waitFlag	Wait flag. Determines whether to wait for the job to complete or run the job in the background.
insecure	-k	--insecure	Insecure mode.

Parameter	Short argument	Long argument	Description
instanceName	-in	--instanceName	Custom name to be added to a taskflow name.
coldStart	-cs	--coldstart	Restarts a mapping task that performs change data capture from the beginning of the task. Not applicable for taskflows.

Job status codes

If a job is successful, the RunAJob utility returns a SUCCESS value of 0. If the job fails, the utility returns errors.

The utility can return the following status codes:

Code	Description
-1	Exception
0	Success
1	Warning
2	No wait
3	Failure
4	Timeout
5	Error
6	Running
7	Failure to start

If any required parameters are missing or are not valid in a command, an error message displays and the REST API call does not run.

CHAPTER 10

ParamSetCli utility

ParamSetCli is Informatica's command line interface utility that is used only for taskflows that use parameter sets.

ParamSetCli enables you to perform the following actions on a parameter set:

1. Upload a parameter set to the cloud-hosted repository.
2. Download a parameter set from the cloud-hosted repository.
3. Delete a parameter set from the cloud-hosted repository.
4. List all the parameter sets available in the cloud-hosted repository.

The following video shows you how to upload, download, delete, and list the parameter set within the cloud-hosted repository:

https://www.youtube.com/watch?v=zDPYS9e0ryM

ParamSetCli utility requirements

Before you run the ParamSetCli utility, you must have a Java Runtime Environment.

To use the ParamSetCli utility with proxy settings, you must have the Secure Agent installed on the same machine as the ParamSetCli utility.

You can download the ParamSetCli utility from the following community article:

https://network.informatica.com/docs/DOC-19232

ParamSetCli utility setup

To set up the ParamSetCli utility, unzip the downloaded `paramsetcli.zip` to a directory other than the Secure Agent installation directory.

The ParamSetCli utility contains the following files:

- `restenv.properties`. Specifies login credentials.
- `log4j.properties`. Specifies the level of detail to return in log files.

To customize the ParamSetCli properties, you can update the existing `restenv.properties` and `log4j.properties` files.

Login properties

Specify the Informatica Intelligent Cloud Services login credentials in the `restenv.properties` file. Or, you can pass the login parameters through cli using the `-u` and `-p` arguments.

You can use a password string or an encrypted password for the password parameter and the PROXYPWD parameter.

To create an encrypted password, use one of the following commands:

```
./paramsetcli.sh encryptText -t <password>
```

```
./paramsetcli.sh encryptText -text <password>
```

You can use `paramsetcli.bat` for Windows and `paramsetcli.sh` for Unix-like operating systems.

Copy the encrypted password string and replace the password or proxy password in the `restenv.properties` file with the encrypted string, and then set the `use.encryption` flag to `true`.

The following example shows the `restenv.properties` file with an encrypted password, an encrypted proxy password, and the `use.encryption` flag set to true:

```
baseUrl=https://dm-us.informaticacloud.com/ma
username=testuser
password=:1xCGDTC0oD9B2Rmd8Sr4IZWaWWkcEmiK5fy+GkycA==
ACTIVITYMONITORWAIT=2000
PROXYHOST=
PROXYPORT=
PROXYUSERNAME=
PROXYPWD=x2UNmQ1nxXbKvKs1+ZOkvQ==
RETRYCOUNT=
use.encryption=true
paramSetBaseUrl=https://na1.dm-us.informaticacloud.com/active-bpel
```

Include the following parameters in the `restenv.properties` file or in action commands:

Parameter	Description
baseUrl	Informatica Intelligent Cloud Services MA service URL. Default is `https://dm-us.informaticacloud.com/ma`.
username	Informatica Intelligent Cloud Services user name.
password	Informatica Intelligent Cloud Services password or encrypted password string.
ACTIVITYMONITORWAIT	The amount of time the utility waits before retrying if an internal exception occurs, such as a login failure or network problem. Default is **5000** milliseconds.
PROXYHOST	Host name or an IP address of the HTTP(s) proxy server.
PROXYPORT	Port number of the HTTP(s) proxy server.
PROXYUSERNAME	Authenticated user name for the HTTP(s) proxy server. Required if the proxy server requires authentication.
PROXYPWD	Password for the authenticated user or an encrypted password string for the authenticated user. Required if the proxy server requires authentication.

Parameter	Description
RETRYCOUNT	The number of times the utility polls for status. This parameter is used for polling the activity monitor and activity log for job status and for internal exceptions such as login failure or network problems. Default is **6**. **Note:** Informatica Intelligent Cloud Services adds 10 seconds between each API call to prevent server issues.
use.encryption	Enables the use of an encrypted password. To use an encrypted password or an encrypted proxy password, set the value to **true**.
paramSetBaseUrl	Base URL of Informatica Cloud Data Integration suffixed with active-bpel. Default is `https://na1.dm-us.informaticacloud.com/active-bpel`.

Using the ParamSetCli utility

To use the ParamSetCli utility, type the `runParamSetCli` command followed by the arguments.

Use `paramsetcli.bat runParamSetCli` for Windows. Use `paramsetcli.sh runParamSetCli` for Unix-like operating systems.

For each action that you want to perform, you must specify the action type.

ParamSetCli utility arguments

You can use the following arguments in a ParamSetCli command:

Parameter	Argument	Description
username	-u	Required. The user name to log in to Informatica Intelligent Cloud Services.
password	-p	Required. The password or encrypted password string to log in to Informatica Intelligent Cloud Services.
baseUrl	-bu	Required. Informatica Intelligent Cloud Services MA service URL. Default is https://dm-us.informaticacloud.com/ma.
paramsetbaseUrl	-psbu	Base URL of Informatica Cloud Data Integration suffixed with active-bpel. For example, https://na1.dm-us.informaticacloud.com/active-bpel You can provide the paramset base URL in the `restenv.properties` file or you can pass it through the CLI using the `-psbu` argument. If it is available in both locations, the `-psbu` value in the action command takes precedence.
debug	-d	Optional. Displays debugging information.
insecure	-k	Optional. Enables the insecure mode.

Parameter	Argument	Description
action	-a	Required. Defines the action to be performed on the parameter set. You can specify one of the following actions: upload- Upload a parameter set to the cloud-hosted repository by using the unique name. Optionally, you can specify the `-f` force argument to override the existing parameter set. download- Download a parameter set from the cloud-hosted repository by using the unique name of an uploaded parameter set. If the specified file already exists on your local machine, the CLI does not download the parameter set. To forcefully download and overwrite the existing file, you can use the `-f` force argument. list- List the parameter sets with basic information such as created by, creation date, parameter set name, parameter file name, and parameter directory available in the cloud-hosted repository. delete- Permanently delete the specified parameter set from the cloud-hosted repository.
Force	-f	Optional. Enables you to force upload or download the parameter set.
Parameter Set Unique Name	-un	Required. A name used to identify a parameter set when performing different operations such as upload, download, or delete a parameter set, or use it in a taskflow. The name must be unique within the IICS organization.
Parameter directory	-pd	Specifies the directory where the parameter files are located.
Parameter file name	-pf	Parameter file name.
Parameter Set List Page	-page	Optional. Page number. Specifies the page number that you want to list.
Page size	-ps	Optional. Specifies the number of entries per page. The default and the maximum number of entries that you can list is 50 per page.

Running the ParamSetCli commands

You can use the following command to run an action using the action name.

```
paramsetcli.bat runParamSetCli -a <actionName>
```

You can perform different actions such as upload, download, and delete a parameter set and list all of the uploaded parameter sets. For each action, you must provide the `-a` argument and appropriate arguments specific to the action as shown below:

Upload a parameter set

You can use the upload action to upload a parameter set to the cloud-hosted repository. You can upload a file with a size up to 5 MB.

To upload a parameter set, use the following syntax:

```
paramsetcli.bat runParamSetCli -un <unique_param_set_name> -pf <parameter_file_name> -pd <parameter_directory> -a <action>
```

For example:

```
paramsetcli.bat runParamSetCli -un Paramset.params -pf Paramsetfile.params -pd C:\files -a upload
```

Here, `-un`, `-pf`, and `-pd` are mandatory arguments. If a parameter set already exists in the cloud-hosted repository, you cannot upload a parameter set with the same name. However, if you want to force an update of the content in the existing parameter set, you can use the `-f` force argument.

If you update the parameter set after uploading it to the cloud-hosted repository, you must reupload the parameter set for the changes to take effect.

After you run this command, the parameter set is uploaded to the cloud-hosted repository. The unique name of the parameter set is used in a taskflow to read the inputs.

Download a parameter set

You can use the unique name of an uploaded parameter set to download it from the cloud-hosted repository.

To download a parameter set, use the following syntax:

```
paramsetcli.bat runParamSetCli -un <unique_param_set_name> -pf <parameter_file_name> -pd
<parameter_directory> -a <action>
```

For example:

```
paramsetcli.bat runParamSetCli -un Paramset.params -pf Paramsetfile.paramsDownload -pd
C:\files -a download
```

Here, `-un`, `-pf`, and `-pd` are mandatory arguments. `-pf` specifies the file name with which you want to download the parameter set, and `-pd` specifies the directory where the parameter set is to be downloaded. If the specified file already exists on the local machine, the ParamSetCli utility does not download the parameter set. To forcefully download and overwrite the existing file, you can use the `-f` force argument.

After you run this command, the parameter set is downloaded to the specified directory.

Delete a parameter set

You can use the unique name of the parameter set to delete it from the cloud-hosted repository.

To delete a parameter set, use the following syntax:

```
paramsetcli.bat runParamSetCli -un <unique_param_set_name> -a <action>
```

For example:

```
paramsetcli.bat runParamSetCli -un Paramset.params -a delete
```

Here, `-un` is a mandatory argument.

After you run this command, the parameter set is permanently deleted from the cloud-hosted repository.

List the parameter sets

You can list the parameter sets that you have uploaded to the cloud-hosted repository.

To list the parameter sets, use the following syntax:

```
paramsetcli.bat runParamSetCli -a list
```

When you run the above command, the first page with 50 entries is listed. It displays basic information such as created by, creation date, parameter set name, parameter file name, and parameter directory for the parameter sets available in the cloud-hosted repository.

The default and the maximum number of entries that you can list is 50 per page. If you want a customized list, you can specify the page number and page size as per the requirement.

To customize the parameter set list, use the following syntax:

```
paramsetcli.bat runParamSetCli -a list -page <page_number> -ps <page_size>
```

For example: `paramsetcli.bat runParamSetCli -a list -page <5> -ps <10>`

Here, `-page` is the page number that you want to list and `-ps` is the number of entries you want to display on that page.

After you run this command, the fifth page with 10 entries are listed.

CHAPTER 11

REST API codes

The IDMC REST API uses codes to represent data such as country names. Use the codes to pass information to the REST API and to interpret the data returned by the REST API.

The IDMC REST API uses codes for the following information:

- State codes. Represent the names of the United States.
- Country codes. Represent country names.
- Time zone codes. Represent time zones.

State codes

The IDMC REST API uses the following codes to represent the names of the United States.

- AL. Alabama.
- AK. Alaska.
- AZ. Arizona.
- AR. Arkansas.
- CA. California.
- CO. Colorado.
- CT. Connecticut.
- DE. Delaware.
- FL. Florida.
- GA. Georgia.
- HI. Hawaii.
- ID. Idaho.
- IL. Illinois.
- IN. Indiana.
- IA. Iowa.
- KS. Kansas.
- KY. Kentucky.
- LA. Louisiana.
- ME. Maine.

- MD. Maryland.
- MA. Massachusetts.
- MI. Michigan.
- MN. Minnesota.
- MS. Mississippi.
- MO. Missouri.
- MT. Montana.
- NE. Nebraska.
- NV. Nevada.
- NH. New Hampshire.
- NJ. New Jersey.
- NM. New Mexico.
- NY. New York.
- NC. North Carolina.
- ND. North Dakota.
- OH. Ohio.
- OK. Oklahoma.
- OR. Oregon.
- PA. Pennsylvania.
- RI. Rhode Island.
- SC. South Carolina.
- SD. South Dakota.
- TN. Tennessee.
- TX. Texas.
- UT. Utah.
- VT. Vermont.
- VA. Virginia.
- WA. Washington.
- WV. West Virginia.
- WI. Wisconsin.
- WY. Wyoming.

Country codes

The Informatica Cloud REST API uses the following codes to represent country names.

- AF. Afghanistan.
- AX. Aland Islands.
- AL. Albania.

- DZ. Algeria.
- AS. American Samoa.
- AD. Andorra.
- AO. Angola.
- AI. Anguilla.
- AQ. Antarctica.
- AG. Antigua and Barbuda.
- AR. Argentina.
- AM. Armenia.
- AW. Aruba.
- AU. Australia.
- AT. Austria.
- AZ. Azerbaijan.
- BS. Bahamas.
- BH. Bahrain.
- BD. Bangladesh.
- BB. Barbados.
- BY. Belarus.
- BZ. Belize.
- BE. Belgium.
- BJ. Benin.
- BM. Bermuda.
- BT. Bhutan.
- BO. Bolivia.
- BA. Bosnia and Herzegovina.
- BW. Botswana.
- BV. Bouvet Island.
- BR. Brazil.
- IO. British Indian Ocean Territory.
- BN. Brunei Darussalam.
- BG. Bulgaria.
- BF. Burkina Faso.
- BI. Burundi.
- KH. Cambodia.
- CM. Cameroon.
- CA. Canada.
- CV. Cape Verde.
- KY. Cayman Islands.
- CF. Central African Republic.

- TD. Chad.
- CL. Chile.
- CN. China.
- CX. Christmas Island.
- CC. Cocos (Keeling) Islands.
- CO. Colombia.
- KM. Comoros.
- CG. Congo.
- CD. Congo, the Democratic Republic of the.
- CK. Cook Islands.
- CR. Costa Rica.
- CI. Cote d'Ivoire.
- HR. Croatia.
- CU. Cuba.
- CY. Cyprus.
- CZ. Czech Republic.
- DK. Denmark.
- DM. Dominica.
- DO. Dominican Republic.
- DJ. Djibouti.
- EC. Ecuador.
- EG. Egypt.
- SV. El Salvador.
- GQ. Equatorial Guinea.
- ER. Eritrea.
- EE. Estonia.
- ET. Ethiopia.
- FK. Falkland Islands (Malvinas).
- FO. Faroe Islands.
- FJ. Fiji.
- FI. Finland.
- FR. France.
- GF. French Guiana.
- PF. French Polynesia.
- TF. French Southern Territories.
- GA. Gabon.
- GM. Gambia.
- GE. Georgia.
- DE. Germany.

- GH. Ghana.
- GI. Gibraltar.
- GR. Greece.
- GL. Greenland.
- GD. Grenada.
- GP. Guadeloupe.
- GU. Guam.
- GT. Guatemala.
- GG. Guernsey.
- GN. Guinea.
- GW. Guinea-Bissau.
- GY. Guyana.
- HT. Haiti.
- HM. Heard Island and McDonald Islands.
- HN. Honduras.
- HK. Hong Kong.
- HU. Hungary.
- IS. Iceland.
- IN. India.
- ID. Indonesia.
- IR. Iran, Islamic Republic of.
- IQ. Iraq.
- IE. Ireland.
- IL. Israel.
- IM. Isle of Man.
- IT. Italy.
- JM. Jamaica.
- JP. Japan.
- JE. Jersey.
- JO. Jordan.
- KZ. Kazakhstan.
- KE. Kenya.
- KI. Kiribati.
- KP. Korea, Democratic People's Republic of.
- KR. Korea, Republic of.
- KW. Kuwait.
- KG. Kyrgyzstan.
- LA. Lao People's Democratic Republic.
- LV. Latvia.

- LB. Lebanon.
- LS. Lesotho.
- LR. Liberia.
- LY. Libyan Arab Jamahiriya.
- LI. Liechtenstein.
- LT. Lithuania.
- LU. Luxembourg.
- MO. Macao.
- MK. Macedonia, the former Yugoslav Republic of.
- MG. Madagascar.
- MW. Malawi.
- MY. Malaysia.
- MV. Maldives.
- ML. Mali.
- MT. Malta.
- MH. Marshall Islands.
- MR. Mauritania.
- MU. Mauritius.
- MQ. Martinique.
- YT. Mayotte.
- MX. Mexico.
- FM. Micronesia, Federated States of.
- MD. Moldova, Republic of.
- MC. Monaco.
- MN. Mongolia.
- ME. Montenegro.
- MS. Montserrat.
- MA. Morocco.
- MZ. Mozambique.
- MM. Myanmar.
- NA. Namibia.
- NR. Nauru.
- NP. Nepal.
- NL. Netherlands.
- AN. Netherlands Antilles
- NC. New Caledonia.
- NZ. New Zealand.
- NI. Nicaragua.
- NE. Niger.

- NG. Nigeria.
- NU. Niue.
- NF. Norfolk Island.
- MP. Northern Mariana Islands.
- OM. Oman.
- PK. Pakistan.
- PW. Palau.
- PS. Palestinian Territory, Occupied.
- PA. Panama.
- PG. Papua New Guinea.
- PY. Paraguay.
- PE. Peru.
- PH. Philippines.
- PN. Pitcairn.
- PL. Poland.
- PT. Portugal.
- PR. Puerto Rico.
- QA. Qatar.
- RE. Reunion.
- RO. Romania.
- RU. Russian Federation.
- RW. Rwanda.
- BL. Saint Barthelemy.
- SH. Saint Helena.
- KN. Saint Kitts and Nevis.
- LC. Saint Lucia.
- MF. Saint Martin (French part).
- PM. Saint Pierre and Miquelon.
- VC. Saint Vincent and the Grenadines.
- WS. Samoa.
- SM. San Marino.
- ST. Sao Tome and Principe.
- SA. Saudi Arabia.
- SN. Senegal.
- RS. Serbia.
- SC. Seychelles.
- SL. Sierra Leone.
- SG. Singapore.
- SK. Slovakia.

- SI. Slovenia.
- SB. Solomon Islands.
- SO. Somalia.
- ZA. South Africa.
- GS. South Georgia and the South Sandwich Islands.
- ES. Spain.
- LK. Sri Lanka.
- SD. Sudan.
- SR. Suriname.
- SJ. Svalbard and Jan Mayen.
- SZ. Swaziland.
- SY. Syrian Arab Republic.
- SE. Sweden.
- CH. Switzerland.
- TW. Taiwan.
- TJ. Tajikistan.
- TZ. Tanzania, United Republic of.
- TH. Thailand.
- TL. Timor-Leste.
- TG. Togo.
- TK. Tokelau.
- TO. Tonga.
- TT. Trinidad and Tobago.
- TN. Tunisia.
- TR. Turkey.
- TC. Turks and Caicos Islands.
- TM. Turkmenistan.
- TV. Tuvalu.
- UG. Uganda.
- UA. Ukraine.
- AE. United Arab Emirates.
- GB. United Kingdom.
- US. United States.
- UM. United States Minor Outlying Islands.
- UY. Uruguay.
- UZ. Uzbekistan.
- VU. Vanuatu.
- VA. Holy See (Vatican City State).
- VE. Venezuela.

- VN. Viet Nam.
- VG. Virgin Islands, British.
- VI. Virgin Islands, U.S.
- WF. Wallis and Futuna.
- EH. Western Sahara.
- YE. Yemen.
- ZM. Zambia.
- ZW. Zimbabwe.

Time zone codes

The IDMC REST API uses the following time zone codes:

- ACT
- AET
- Africa/Cairo
- Africa/Casablanca
- Africa/Johannesburg
- Africa/Nairobi
- America/Barbados
- America/Bogota
- America/Buenos_Aires
- America/Caracas
- America/Chicago
- America/Costa_Rica
- America/Dawson_Creek
- America/Denver
- America/Dominica
- America/El_Salvador
- America/Guadeloupe
- America/Halifax
- America/Havana
- America/Jamaica
- America/La_Paz
- America/Los_Angeles
- America/Mexico_City
- America/Montreal
- America/New_York
- America/Panama

- America/Phoenix
- America/Puerto_Rico
- America/Santiago
- America/Tijuana
- America/Vancouver
- America/Winnipeg
- Asia/Baghdad
- Asia/Bahrain
- Asia/Dubai
- Asia/Hong_Kong
- Asia/Jerusalem
- Asia/Karachi
- Asia/Katmandu
- Asia/Kuala_Lumpur
- Asia/Kuwait
- Asia/Magadan
- Asia/Muscat
- Asia/Qatar
- Asia/Rangoon
- Asia/Riyadh
- Asia/Seoul
- Asia/Singapore
- AST
- Atlantic/Cape_Verde
- Atlantic/South_Georgia
- Australia/Lord_Howe
- Australia/Perth
- Brazil/Acre
- Brazil/DeNoronha
- Brazil/East
- Brazil/West
- BST
- CNT
- CTT
- Europe/Amsterdam
- Europe/Athens
- Europe/Belgrade
- Europe/Berlin
- Europe/Brussels

- Europe/Bucharest
- Europe/Budapest
- Europe/Copenhagen
- Europe/Istanbul
- Europe/London
- Europe/Luxembourg
- Europe/Madrid
- Europe/Moscow
- Europe/Paris
- Europe/Prague
- Europe/Rome
- Europe/Stockholm
- Europe/Vienna
- Europe/Warsaw
- Europe/Zurich
- GMT
- HST
- Indian/Mauritius
- IST
- JST
- Pacific/Apia
- Pacific/Auckland
- Pacific/Chatham
- Pacific/Enderbury
- Pacific/Fiji
- Pacific/Gambier
- Pacific/Kiritimati
- Pacific/Norfolk
- Pacific/Tahiti
- UTC
- VST

INDEX

A

activityLog
  REST API resource 58
activityMonitor
  REST API resource 68
Advanced FTP V2 441
agent
  REST API resource 130
arguments
  RunAJob utility 751
AS2 server
  sendfiles resource 431
asset migration
  exporting 168
  importing 182
assets
  dependencies 242
  finding 237
  in an organization 236
auditlog
  REST API resource 71

B

base URL 16
base URLs
  difference for REST API versions 14
body configuration
  REST API 17
bundleObject
  REST API resource 75
bundleObjectLicense
  REST API resource 77, 78

C

ChangePassword resource 250
changing passwords 250
checkin resource 311
checkout resource 303
Cloud Application Integration community
  URL 12
Cloud Developer community
  URL 12
ClusterConfig resource
  updating configuration 146
CodeTask
  REST API 344
commit resource
  getting commit details 314
commitHistory resource 317
common resources 14
compare resource 320
compress
  REST API resource 436
compress file transfer task 441
configuration
  associating with runtime environment 152
  creating 144
  getting link details 151
connection
  REST API resource 354
connection attributes and user interface fields 545
connections
  available connectors for an organization 378
connector 378
connector type data types 543
connectors
  available for an organization 354
custom roles
  adding and removing privileges 261
  creating 260
  deleting 262
customFunc
  REST API resource 508

D

Data Integration community
  URL 12
dataPreview
  REST API resource 379
date/time format
  REST API 21
decompress
  REST API resource 437
decrypt
  REST API resource 439

E

elastic runtime environment
  getting configuration details 142
elastic runtime environments 141
encrypt
  REST API resource 438, 444
error logs 58
error object
  REST API 25
export
  REST API v3 resource 168
expressionValidation
  REST API resource 542

F

fetchState
  REST API v3 resource 224
field
  REST API resource 405
file ingestion and replication tasks
  REST API 673, 677, 687
file ingestionand replication tasks
  REST API 683
file listener 411
file transfer
  monitoring using REST API 435
folders resource
  creating folders 255
  deleting folders 257
  updating folders 256
format
  difference for REST API versions 14
fwConfig
  REST API resource 453

G

guidelines
  REST API 26

H

h2h
  REST API resource 457
header configuration
  REST API 16

I

identity providers
  JWT access tokens 176
images
  getting new token 162
  listing 149
  revoking a token 163
import
  REST API v3 resource 182
Informatica Global Customer Support
  contact information 13
Informatica Intelligent Data Management Cloud
  web site 12
IP addresses 192

J

job
  REST API resource 79
job status
  job resource 79
  RunAJob utility 748

K

key rotation
  changing key rotation intervals 195
  getting key rotation interval settings 194
key rotation *(continued)*
  REST API v3 resource 194

L

license
  REST API v3 resource 196
linear taskflows
  workflow resource 468
loadState
  REST API v3 resource 230
log file detail
  RunAJob utility 748
logging in
  using Salesforce credentials 96
  using V2 login resource 84, 743
  using V3 login resource 199
login
  REST API resource 84, 199, 743
loginSaml
  REST API resource 88, 93
loginSf
  REST API resource 96
logout
  REST API resource 99
  REST API v3 resource 202
logoutall
  REST API resource 100
lookup
  REST API v3 resource 202
lstatus resource
  taskflows 527

M

maintenance outages 13
managing 284
mapping
  REST API resource 473
metering
  meter IDs 221
  REST API v3 resource 206
migrate
  REST API resource 376
migrating assets 166
migrating objects
  exporting 168
  importing 182
mttask
  REST API resource 480

O

OAuth
  identity providers for JWT 176
object configuration
  REST API, in XML and JSON 17
object dependencies 242
object IDs
  retrieving for the REST API 22
object migration
  exporting 168
  importing 182
object permissions
  deleting 247

object state synchronization
fetchState resource 224
loading states 230
objects
checking permissions 249
creating ACL permissions 245
getting permission details 248
REST API v3 resource 236
updating permissions 246
objects resource
permissions 244
org
REST API resource 100
Orgs resource
adding SAML group mappings 262
adding SAML role mappings 264
getting SAML group mapping details 266
getting SAML role mapping details 268
IP addresses 192
mapping roles with SAML groups and roles 262
removing SAML group mappings 265
removing SAML role mappings 265

P

partial updates 20
passwords
changing 250
resetting 251
permissions
checking for current user 249
creating for objects 244
deleting 247
platform REST API resources 14
PODs 14
privileges resource 251
projects resource
creating projects 253
deleting projects 255
updating projects 254
pull resource
pulling objects 293
pullByCommitHash resource
pulling objects 299

Q

quick reference
Data Ingestion and Replication resources 54
Data Integration resources 45
platform resources 27

R

receivefiles
REST API resource 433
register
REST API resource 105
remote
REST API resource 441
remote file transfer task
REST API resource 441
removing tags 328
ResetPassword resource 251
resetting passwords 250, 251
responses
REST API 24
REST API
activityLog resource 58
activityMonitor resource 68
agent resource 130
agent service 288
auditlog resource to view audit entries 71
body configuration 17
bundleObject resource to view bundle details 75
bundleObjectLicense resource 77, 78
codes 760
CodeTask 344
connection resource 354
copy streaming ingestion task 692
create file ingestion and replication tasks 677
create streaming ingestion and replication task 688
customFunc resource for PowerCenter mapplets 508
dataPreview resource 379
date/time values 21
delete file ingestion and replication tasks 687
deploy streaming ingestion task 690
details of a streaming ingestion jobs 719
documentation conventions 26
error object 25
expressionValidation 542
field resource 405
file ingestion and replication tasks 673
fwConfig resource 453
guidelines 26
h2h 457
header configuration 16
history 727
history of a streaming ingestion job 727
job resource 79
JSON example 18
list of available streaming ingestion jobs 721
login resource 84, 199, 743
loginSaml 88, 93
loginSf resource 96
logout resource 99
logoutall resource 100
mapping resource for working with mappings 473
migrate resource 376
MIJobs 719, 721
mttask resource to work with mapping tasks 480
org resource 100
quick reference for
Data Ingestion and Replication 54
quick reference for Data Integration 45
quick reference for platform 27
receivefiles resource 433
register resource 105
responses 24
retrieving and using object IDs 22
return lists 18
runtimeEnvironment resource 110
schedule resource 123
sendfiles resource 431
serverTime resource 135
start a streaming ingestion task 691
state codes 760, 761
statistics 725
statistics of a streaming ingestion job 725
status 723
status of a streaming ingestion job 723
stop a streaming ingestion task 691
task resource to view task details 135

REST API *(continued)*
time zone codes 768
undeploy a streaming ingestion task 690
update file ingestion and replication tasks 683
update streaming ingestion task 693, 695, 697, 700, 704, 707, 709, 711, 713, 717
user resource 136
versions 14
workflow resource for linear taskflows 468
XML example 19
REST API resources
types of 14
REST API v3
convert resource 513
export resource 168
fetchState resource 224
import resource 182
key resource 194
license resource 196
loadState resource 230
logout resource 202
lookup resource 202
objects resource 236
schedule resource 269
securityLog 290
return list configuration
REST API in XML and JSON 18
roles
adding to user groups 342
removing from user groups 342
updating role assignments 336
roles resource
getting role details 258
updating privileges 261
RunAJob utility
arguments 751
Java heap sizes 749
job status 748
job status codes 753
log file detail 748
login properties 746
overview 745
running jobs 750
setup 746
task folder 751
runtime environments 110
runtimeEnvironment
creating Secure Agent groups 114
deleting Secure Agent groups 114
requesting details 110
REST API resource 110
selecting services and connectors for Secure Agent groups 116
setting default property settings for Secure Agent groups 120
updating Secure Agent groups 114

S

SAML groups and roles
adding SAML group mappings 262
adding SAML role mappings 264
getting SAML group mapping details 266
getting SAML role mapping details 268
removing SAML group mappings 265
removing SAML role mappings 265
schedule
REST API resource 123
REST API v3 resource 269
SCIM tokens 284
Secure Agent groups
creating 114
default property settings 120
deleting 114
selecting services and connectors 116
updating 114
Secure Agent service
starting 288
stopping 288
securityLog
REST API v3 resource 290
sendfiles
REST API resource 431
serverTime
REST API resource 135
serverURL 14
service REST API resources 14
session IDs
difference for REST API versions 14
session logs 58
session status 22
source control
checking in objects 311
checking out objects 303
comparing object versions 320
getting commit details 314
getting commit history 317
pulling objects 293
pulling objects for a commit hash 299
status 325
undoing checkout 306
sourceControlAction resource 325
state codes
REST API 760, 761
state synchronization 223
status
IDMC 13
streaming ingestion and replication tasks
REST API 688, 690, 691
streaming ingestion jobs
REST API 721, 723, 725, 727
streaming ingestion tasks
REST API 692, 693, 695, 697, 700, 704, 707, 709, 711, 713, 717
synchronization tasks
converting to data transfer tasks 513
testing compatibility with data transfer tasks 513
synchronizing object states
exporting states 224
loading states 230
system status 13

T

TagObjects resource 328
tags
assigning to assets 328
removing from assets 328
task
REST API resource 135
taskflows
restart taskflow on Customer Managed Secure Agent group 541
time zone codes
REST API 768
tokens
listing 165
transformation details 473

trust site
description 13
@type
use with JSON REST API 17

U

undoCheckout resource 306
UntagObjects resource 328
update modes 20
upgrade notifications 13
user
REST API resource 136
user groups
assigning object permissions 245
creating 341
deleting 343
getting user group details 338
updating object permissions 246
updating user group assignments 337
userGroup resource
updating user groups 342
userGroups resource 338
users
adding to user groups 342
users *(continued)*
assigning object permissions 245
creating 333
deleting 333, 337
getting user details 330
removing from user groups 342
updating object permissions 246
users resource
updating role assignments 336
updating user group assignments 337

V

validating session IDs 22
version control 293

W

web site 12
workflow
REST API resource 468