Informatica® Cloud Data Integration
October 2026

Data Integration What's New

Informatica Cloud Data Integration Data Integration What's New
October 2026

© Copyright Informatica LLC 2016, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-29

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- IDMC Communities 5
- IDMC Marketplace 5
- Data Integration connector documentation 6
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- IDMC Pulse Dashboard 6
- Informatica Global Customer Support 6

Chapter 1: October 2026 7

Changelog October 2026 7

Important notices and upcoming changes 8

New features and enhancements 8

Changed behavior 11

Chapter 2: July 2026 13

Changelog July 2026 13

Important notices 13

Changed behavior 14

Chapter 3: April 2026 15

Changelog April 2026 15

Important notices 16

New features and enhancements 17

Changed behavior 19

Chapter 4: November 2025 22

Changelog November 2025 22

New features and enhancements 22

Chapter 5: October 2025 23

Important notices 23

New features and enhancements 23

Changed behavior 26

Chapter 6: Upgrade 28

Preparing for the upgrade 28

Disk space requirements and file preparation. 28
Dynamic files in preprocessing commands. 29

Index. 30

Preface

Read *What's New* to learn about new features, enhancements, and behavior changes in Informatica Cloud® Data Integration for the October 2026 release. You can also learn about upgrade steps that you might need to perform.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

October 2026

The October 2026 release of Data Integration includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 22, 2026	Added	"RunAJob utility" on page 10
October 8, 2026	Modified	"CLAIRE Copilot" on page 8
October 1, 2026	Modified	"Git repository verification" on page 12
October 1, 2026	Added	"Duplicate expression fields" on page 9
October 1, 2026	Added	"New fields" on page 10
September 24, 2026	Added	"Git repository verification" on page 12
September 24, 2026	Added	"Partitioned sources" on page 10
September 17, 2026	Modified	"CLAIRE Copilot" on page 8
September 17, 2026	Added	"Find transformations" on page 9
September 17, 2026	Added	"Target transformation" on page 11
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Data Integration includes the following important notices and upcoming changes.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Note: Don't enable JWT authentication if you use REST V2 Connector to call IDMC APIs.

Preview initiated

Effective in the October 2026 release, the following functionality is available for preview:

You can now select the Docling engine when you create an intelligent structure model. The Docling engine is an AI-powered document parser that is optimized for documents with complex layouts and tables. It supports text-based PDFs and preserves the hierarchical structure and metadata of the source document.

For more information, see "Intelligent structure models" in *Components*.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming change

We want to let you know that starting in the October 2026 release or later, JWT authentication token values will be limited to a maximum of 2000 characters.

New features and enhancements

The October 2026 release of Data Integration includes the following new features and enhancements.

Watch the What's New video to learn about new features and enhancements in the October 2026 release.

CLAIRE Copilot

When you create a mapping in SQL ELT mode that runs in the Snowflake ecosystem, you can prompt CLAIRE Copilot to add configured transformations to the data flow.

Connection parameters for mappings and mapplets

When you import a mapplet into a mapping, you can either reuse an existing mapping-level connection parameter or create a new one for the mapplet's connection parameters. You can manually select the connection parameter or accept Data Integration's suggestion based on connection type.


Duplicate expression fields

You can duplicate expression fields in Expression and Aggregator transformations. When you duplicate a field, Data Integration copies the configured expression and field metadata to the new field.

Find transformations

You can search for transformations by name or type on the Mapping Designer and Mapplet Designer. To find a transformation, enter a full or partial string in the Find transformation box.

The following image shows the Find transformation box on the Mapping Designer:

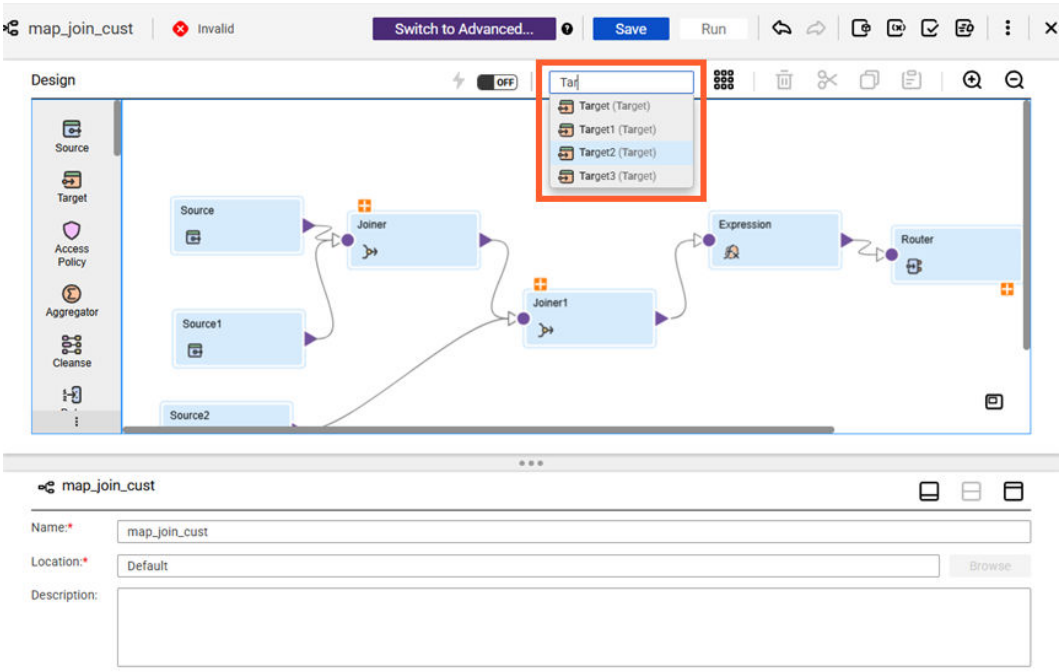

Fixed-width file formats

This release includes the following new features for fixed-width file formats:

- The Fixed-Width File Format page is updated with a new look and feel for increased usability.
- You can create a new flat file or FTP/SFTP connection directly from the Fixed-Width File Format page.
- You can add, delete, reorder, and search for fields in the Fields section.
- You can preview your sample data before and after you configure field widths and metadata.

Hierarchy Builder transformation

You can download the source file from which a hierarchical schema asset is created, so that you can review, reuse, or share the file. This applies to assets that are associated with the Hierarchy Builder transformation and that were created from an XML file or an XML Schema Definition (XSD) file.

For more information, see "Hierarchy Builder transformation" in *Transformations*.

Hierarchy Parser transformation

You can download the source file from which a hierarchical schema asset is created, so that you can review, reuse, or share the file. This applies to assets that are associated with the Hierarchy Parser transformation and that were created from an XML file or an XML Schema Definition (XSD) file.

For more information, see "Hierarchy Parser transformation" in *Transformations*.

Intelligent structure models

This release includes the following enhancements for intelligent structure models:

- When you create an intelligent structure model from an Excel file using Claire engine, you can read hidden sheets in the workbook at design time and run time.
- When you create an intelligent structure model using Claire engine, you can discover the structure of additional file formats, including email, Markdown, YAML, HTML, and PowerPoint, and to extract data from charts and graphs in your documents.

For more information, see "Intelligent structure models" in *Components*.

New fields

When you add a new field to the following transformations, the properties panel automatically scrolls to the new field:

- Aggregator
- Expression
- Lookup
- Normalizer
- Source
- SQL
- Target

Partitioned sources

When you use a partitioned source with a flat file target, you can write output data to a specified output file and directory. To write target data to the output file and directory that you specify, enable the **Use output file path for partitioned sources** advanced property in the Target transformation.

Preview error row files

You can preview error row files directly in Data Integration, even when you customize the error log directory. This enhancement enables you to view error logs regardless of directory configuration.

RunAJob utility

When you use the RunAJob utility to restart a mapping task that performs change data capture, you can restart the job from the beginning of the task.

Session logs

Mapping session logs now include both the connection ID and connection name, making it easier for you to identify connections while diagnosing failures. For the following connections and scenarios, the session log lists only the connection ID:

- Flat file
- FTP/SFTP
- Parameterized connection names that are passed through in-out or input parameters

Structure Parser transformation

You can configure the Structure Parser transformation to generate a single, complete JSON or XML output row instead of splitting the structured document across multiple rows.

For more information about generating a single output, see How to generate a single, complete JSON or XML output using Structure Parser transformation Knowledge article.

Target transformation

When you configure a Target transformation with an FTP connection, you can specify the Remote File Name advanced property. You can also parameterize the file name and override it at run time with a value that you specify in a parameter file.

Tasks

This release includes the following enhancements for tasks:

- When you configure a custom query source in a mapping task or dynamic mapping task, you can view and edit the field metadata.
- When you view details for a mapping task, the Task Details section displays the execution mode.

Changed behavior

The October 2026 release of Data Integration includes the following changed behaviors.

Fixed-width file formats

This release includes the following behavior changes for fixed-width file formats:

- When you configure column widths, you enter the width for each field that you add.
  Previously, you specified the column boundaries as a comma separated list or marked column boundaries on a ruler.
- You configure the default date format in the Date Format dialog box where you select the field width type, enter the width, and enter the datetime format.
  Previously, you entered the default date format as a single text string.
- You configure field metadata in the Fields section on the Fixed-Width File Format page.
  Previously you configured field metadata in the Edit Columns dialog box.
- You configure additional attributes for the fixed-width file format in the Advanced Properties section on the Fixed-Width File Format page.
  Previously you configured additional attributes in the Additional Attributes dialog box.
- Several advanced properties have been renamed:
  - Line Sequential is now Process File Line-by-Line.
  - Number of Rows to Skip is now Rows to Skip at Start
  - Number of Bytes to Skip After Column Ending is now Bytes to Skip After Field
  - Null Character Type is now Null Value Type
  - Null Character is now Null Value Character
  - Repeat Null Character is now Use Repeated Null Character

- Strip Trailing Blanks is now Remove Trailing Spaces

Functions in advanced mode

This release includes the following behavior changes for functions in advanced mode:

MAKE_DATE_TIME

If you pass a null value to the MAKE_DATE_TIME function in advanced mode, the function returns NULL.

Previously, the function failed.

TO_DATE

If you pass an invalid date to the TO_DATE function in advanced mode, the function returns NULL.

Previously, the function returned the next valid date.

Git repository verification

When you use an on-premise Git repository for source control, IDMC saves a local copy of the repository. To ensure that the correct repository is used, IDMC now verifies that the saved copy matches the repository that you request during a source control operation.

Previously, IDMC didn't perform verification, so IDMC could use a cached repository that didn't match your repository.

After the October 2026 upgrade, the first time you connect to a repository that was saved before the upgrade, IDMC creates a fresh copy instead of reusing the cached repository. This process can take extra time depending on the size of the repository and your network speed. Subsequent connections use the new copy as usual. IDMC doesn't delete the old saved copies automatically. Administrators can clear the old copies from the cache to free up disk space.

Intelligent Structure Models

When you create an intelligent structure model, Intelligent Structure Discovery generates normalized hierarchy relationships by default. This method generates output groups for each repeating element and provides faster performance and lower memory consumption. However, you can select a different option to generate output groups based on your requirement.

Previously, Intelligent Structure Discovery used the Default output groups option, which generated normalized or denormalized output groups.

For more information, see "Intelligent structure models" in *Components*.

Taskflows

You can view the taskflow execution details on the Monitor page with read permission. You can view the history, run status, timestamps, duration, step-level breakdowns, error messages, logs, and statistics.

This change allows administrators to grant the permissions to operations teams, data governance officers, and auditors who need to monitor taskflows without the authority to trigger or modify them.

Previously, you needed the execute permission to view the taskflow execution details.

For more information, *Monitor*.

CHAPTER 2

July 2026

The July 2026 release of Data Integration includes the following updates.

Changelog July 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
July 16, 2026	Added	"Upcoming change" on page 14
June 11, 2026	Initial publication	

Important notices

The July 2026 release of Data Integration includes the following important notices.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use API Manager or if you use REST V2 Connector to call IDMC APIs. API Center, which replaces API Manager, supports JWT authentication.

Upcoming change

We want to let you know that starting in the October 2026 release or later, JWT authentication token values will be limited to a maximum of 2000 characters.

Changed behavior

The July 2026 release of Data Integration includes the following changed behaviors.

REST API project and folder DELETE requests

When you send a REST API request to delete a project, IDMC validates that the ID or name included in the request is a project ID or name. If the ID or name is for a folder or asset, you receive an error.

Similarly, when you send a REST API request to delete a folder, IDMC validates that the ID or name included in the request is a folder ID or name. If the ID or name is for a project or asset, you receive an error.

Previously, IDMC didn't validate that the ID or name in a request to delete a project or folder was the appropriate object type for the request.

CHAPTER 3

April 2026

The April 2026 release of Data Integration includes the following updates.

Changelog April 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
April 16, 2026	Modified	"Taskflows" on page 21
April 10, 2026	Deleted	"New features and enhancements" on page 17
April 2, 2026	Modified	"Deprecated support" on page 16
April 2, 2026	Added	"Data Integration REST API" on page 18
March 19, 2026	Modified	"Deprecated support" on page 16
March 19, 2026	Added	"Bitbucket source control repositories" on page 19
March 19, 2026	Modified	"Data Quality assets" on page 17
March 19, 2026	Added	"Multi-schema object selection" on page 18
March 19, 2026	Added	"Mapping task details" on page 17
March 19, 2026	Modified	"Mapping tasks" on page 17
March 19, 2026	Modified	"Bitbucket source control repositories" on page 16
March 19, 2026	Modified	"Taskflows" on page 21

Publication Date	Type of Change	Section Title
March 19, 2026	Deleted	Parse files in Structure Parser transformationon page 17
March 19, 2026	Moved	"Intelligent structure models" on page 21
March 11, 2026	Initial publication	

Important notices

The April 2026 release of Data Integration includes the following important notices.

Bitbucket source control repositories

Bitbucket has deprecated app passwords and replaced them with API tokens. Bitbucket will no longer accept app passwords for repository access starting June 9, 2026. This change affects the source control authentication information that you enter in IDMC.

For more information, see "Changed behavior" on page 19.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in the October 2026 release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs used for user authentication with JSON Web Tokens (JWT). The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. If the administrator enables the JSON Web Token (JWT) authentication type, browser-based user interface communications seamlessly use JWT behind the scenes.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, REST API scripts must be updated to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the July 2026 release, JWT will be the default authentication method. By October 2026, session-based authentication will no longer be available.

Note: Effective in the April 2026 release, B2B Gateway supports JWT authentication. Don't enable JWT authentication if you use API Manager or if you use REST V2 Connector to call IDMC APIs. API Center, which replaces API Manager, supports JWT authentication.

New features and enhancements

The April 2026 release of Data Integration includes the following new features and enhancements.

Watch the What's New video to learn about new features and enhancements in the April 2026 release.

Data Quality assets

You can create and update the following Data Quality assets in Data Integration:

- Cleanse
- Deduplicate
- Dictionary
- Labeler
- Parse
- Rule Specification
- Verifier

The enhanced behavior enables you to create and configure a Data Quality asset and add it to a transformation wholly within Data Integration. Create Data Quality assets from the **New Asset** dialog box or from the transformation where you use the asset.

To create Data Quality assets, your organization must have the appropriate license.

For more information, see *Data Quality Assets*.

Field name length

You can create longer names for fields, objects, and schemas with names that now support 255 characters.

For more information, see *Mappings*.

Mapping tasks

Mapping tasks have the following new features and enhancements:

- When you configure a flat file source, lookup, or target in a mapping task, you can use a file on your local machine to generate field metadata. You can generate field metadata from a local file for single object and command sources and for single object targets and lookups.
- You can configure the number of cores and the amount of memory to reserve for mapping tasks that run in an elastic runtime environment by editing the runtime options in the mapping task.

For more information, see *Tasks*.

Mapping task details

The mapping task details page includes the following enhancements:

- You can expand and collapse all sections on the page by clicking **Expand All** or **Collapse All**.
- The Lookup transformation details displays the lookup condition.
- The SQL transformation details displays the query type and the entered query or object name.
- The transformation advanced properties indicate whether each property was overridden in the mapping task.

For more information, see *Tasks*.

Multi-schema object selection

When you select a source, lookup, or target object with a Teradata or relational database connection, you can choose to show all schemas. When you show all schemas, you can select an object from a database other than the database configured in the connection.

Data Integration REST API

You can request details for all the transformations used in a mapping or details for transformations of a specific transformation type in a mapping. The response includes advanced transformation properties. If the mapping includes a Sequence transformation, the response also includes sequence information.

To receive details for all transformations used in a mapping, use one of the following URIs:

```
/api/v2/mapping/additionalTransformationInfo/<mapping ID>
```

```
/api/v2/mapping/additionalTransformationInfoByName/<mapping name>
```

To include transformation details for a particular transformation type, include `?txType=<transformation type>` in the URI, for example:

```
/api/v2/mapping/additionalTransformationInfoByName/m_MyMapping?txType=Sequence
```

For more information, see *REST API Reference*.

Taskflows

Taskflows include the following new features and enhancements:

- In a Data Task step, you can now override a parametrized connection for an SQL transformation. In the **Input Parameters** section, use the new **Transformations** field to select a different connection to be used at run time.
- If you are assigned the Administrator, Deployer, Designer, or Operator role, you can use the update resource to update the value of the **Parameter Set** field.
  Use the following URI to update the value:

  ```
  PUT<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/update?
  assetType=Taskflow
  ```

  Use the request body to pass the value.

For more information, see *Taskflows*.

Source transformation

Source transformations include the following updates:

- When you configure an advanced relationship for multiple source objects, you can delete objects that you want to remove from the relationship.
- When you sort source data that use an ODBC or relational database connection, you can define the sort order for each field that you sort by.

For more information, see *Transformations*.

Hierarchy Builder transformation

You can update an existing hierarchical schema asset that is associated with the Hierarchy Builder transformation. For more information, see *Hierarchy Builder transformation*.

Hierarchy Parser transformation

You can update an existing hierarchical schema asset that is associated with the Hierarchy Parser transformation. For more information, see *Hierarchy Parser transformation*.

Transaction Control transformation

Transaction Control transformations include the following updates:

- You can define a condition that has multiple decision branches. Use a custom transaction control condition to define a condition that uses logic you can't express in other condition types.
- You can use a Transaction Control transformation in a pipeline that includes an upstream Sequence Generator transformation. However, use caution when you do so as this can result in gaps in sequence values, especially in cases involving rollbacks or when multiple mappings use the same sequence.

Intelligent structure models

This release includes the following enhancements for intelligent structure models:

- When you create an intelligent structure model, you can dynamically capture the length of the string and text data type from the uploaded sample file at design time.
- When you create an intelligent structure model using the CLAIRE engine, you can parse Avro messages originating from a Kafka source file.
- You can configure a Large Language Model connection to connect to a custom model provider through a REST API and use the chat model to process and interpret unstructured data within an intelligent structure model.

For more information, see *Components*.

Changed behavior

The April 2026 release of Data Integration includes the following changed behaviors.

Bitbucket source control repositories

If your organization uses a Bitbucket email address and API token for authentication, enter the following source control authentication information in the IDMC user settings page:

- **User name**. For cloud-hosted repositories, enter the email address associated with the Bitbucket repository.
  Previously, you entered a Bitbucket user name.
- **App password**. For cloud-hosted and on-premises repositories, enter the Bitbucket API token.
  Previously, you entered the Bitbucket app password.

The field labels in the IDMC user interface will change accordingly in an upcoming release.

Note: When you create a Bitbucket API token for IDMC, be sure to select the following scopes:

- read:workspace:Bitbucket
- read:project:Bitbucket
- read:pullrequest:Bitbucket
- read:repository:Bitbucket
- read:user:Bitbucket
- write:pullrequest:Bitbucket
- write:repository:Bitbucket

For more information about Bitbucket API tokens, see the Bitbucket documentation.

Mappings

To create a mapping, click **New** > **Data Integration** > **Mapping**.

Previously, to create a mapping, you clicked **New** > **Mappings** > **Mapping**.

For more information, see *Mappings*.

Mapplets

Mapplets include the following changed behaviors:

- To create a mapplet, click **New** > **Data Integration** > **Mapplet**.
  Previously, to create a mapplet, you clicked **New** > **Mapplets** > **Mapplet**.
- To create an SAP mapplet, click **New** > **Components**, and then select the type of SAP mapplet that you want to create.
  Previously, to create an SAP mapplet, you clicked **New** > **Mapplets** and then selected the type of SAP mapplet to create.
- To create a PowerCenter mapplet, click **New** > **Other Assets** > **Mapplet - PC Import**.
  Previously, to create a PowerCenter mapplet, you clicked **New** > **Mapplets** > **Mapplet - PC Import**.

For more information, see *Components*.

Saved queries

To create a saved query, click **New** > **Other Assets** > **Saved Query**.

Previously, to create a saved query, you clicked **New** > **Components** > **Saved Query**.

For more information, see *Components*.

Shared sequences

Shared sequences include the following changed behaviors:

- To reset the current value of a shared sequence, click **Reset**.
  Previously, to reset the current value of a shared sequence you clicked **Reset Current Value**.
- The Refresh button is located in the **Sequence Properties** area of the sequence details.
  Previously, the Refresh button was located in the header of the **Sequence Details** page.

For more information, see *Components*.

Source transformation

To rearrange or delete fields when you sort source data, select the field and then click **Move Up**, **Move Down**, or **Delete**.

Previously, to rearrange or delete fields, you clicked **Actions** in the row that contained the field and then clicked the action that you wanted to perform.

For more information, see *Transformations*.

Tasks

Tasks include the following changed behaviors:

- To create a data transfer task, click **New** > **Data Integration** > **Data Transfer Task**.
  Previously, to create a data transfer task, you clicked **New** > **Tasks** > **Data Transfer Task**.
- To create a mapping task, click **New** > **Data Integration** > **Mapping Task**.
  Previously, to create a mapping task, you clicked **New** > **Tasks** > **Mapping Task**.
- To create a masking task, click **New** > **Other Assets** > **Masking Task**.

Previously, to create a masking task, you clicked **New** > **Tasks** > **Masking Task**.

- To create a PowerCenter task, click **New** > **Other Assets** > **PowerCenter Task**.
  Previously, to create a PowerCenter task, you clicked **New** > **Tasks** > **PowerCenter Task**.
- To create a replication task, click **New** > **Other Assets** > **Replication Task**.
  Previously, to create a replication task, you clicked **New** > **Tasks** > **Replication Task**.
- To create a synchronization task, click **New** > **Other Assets** > **Synchronization Task**.
  Previously, to create a synchronization task, you clicked **New** > **Tasks** > **Synchronization Task**.

For more information, see *Tasks*.

Taskflows

Taskflows include the following changed behaviors:

- To create a new taskflow, click **New** > **Orchestration** > **Taskflow**.
  Previously, to create a new taskflow, you clicked **New** > **Taskflows** > **Taskflow**.
- To create a linear taskflow, click **New** > **Other Assets** > **Linear Taskflow**.
  Previously, to create a new linear taskflow you clicked **New** > **Taskflows** > **Linear Taskflow**.
- The taskflow status API now returns only the overall taskflow status by default. To get the overall taskflow status along with detailed status of each subtask within the taskflow, set the `subtaskDetails` parameter to **Yes**.
  Previously, the API returned the overall taskflow status along with detailed status of each subtask by default. You had to set the `subtaskDetails` parameter to **No** to get only the taskflow status.
- You get HTTP 503 errors when inbound messages are rejected due to queue limits or unresponsive nodes. These errors prompt you to retry the requests.
  Previously, you received a 500 error code.
- You can view taskflows with invalid XQuery expressions on the **My Jobs** page.
  Previously, taskflows with invalid XQuery expressions didn't appear on the **My Jobs** page.

For more information, see *Taskflows*.

Intelligent structure models

When the Intelligent Structure Discovery processes an Excel file to discover its structure for the model, the output displays the date in YYYY, a four-digit year format.

Previously, the output displayed the date in YY, a two-digit year format.

However, your existing assets and mappings are not impacted.

CHAPTER 4

November 2025

The November 2025 release of Data Integration includes the following updates.

Changelog November 2025

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
November 4, 2025	Deleted	Deleted upgrade section.
October 28, 2025	Initial publication	

New features and enhancements

The November 2025 release of Data Integration includes the following new features and enhancements.

Generate expressions using CLAIRE Copilot

You can use CLAIRE Copilot to generate expressions in the Aggregator and Expression transformations by entering a prompt in your own words or using pseudocode. CLAIRE Copilot can generate expressions in mappings and mappings in advanced mode using functions that are common to both mapping types.

CHAPTER 5

October 2025

The October 2025 release of Data Integration includes the following updates.

Important notices

The October 2025 release of Data Integration includes the following important notices.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in the October 2026 release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs used for user authentication with JSON Web Tokens (JWT). Organization administrators have the option to use either session-based authentication or JWT-based authentication on the **Settings** page in Administrator. When JWT authentication is enabled, browser-based user interface communications seamlessly use JWT behind the scenes.

For REST API calls, session IDs must still be included in request headers. However, now the session value carries a JWT with a fixed expiry time configured on the **Settings** page. As a result, REST API scripts must be updated to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

In the October 2025 release, session-based authentication is the default. In the April 2026 release, JWT is the default authentication method. By October 2026, session-based authentication will no longer be available.

Note: If your organization uses B2B Gateway, API Manager, or the REST V2 Connector, don't select the JWT option in the October 2025 release. The JWT option for B2B Gateway and REST V2 Connector will be available in a future release.

New features and enhancements

The October 2025 release of Data Integration includes the following new features and enhancements.

Watch the What's New video to learn about new features and enhancements in the October 2025 release.

Data transfer tasks

As of February 2026, we've rolled out the following updates to data transfer tasks as part of the October 2025 release:

- When you configure a source or target in a data transfer task you can edit the field data type, precision, and scale. You can also refresh fields to get the latest metadata from the object.
- When you configure advanced attributes for a source, lookup source, or target connection, you can provide a parameter in place of the attribute and specify the value to use at run time in a parameter file.

For more information about data transfer tasks, see *Tasks*.

For more information about parameters and parameter files, see *Mappings*.

Synchronization task conversion

As of February 2026, we've rolled out the following enhancements to synchronization task conversion as part of the October 2025 release.

When you convert a synchronization task that contains edited field metadata to a data transfer task, Data Integration copies the metadata changes to the new data transfer task. Data Integration also tags the new data transfer task with the tag “FIELD METADATA EDITED”.

For more information, see *Tasks*.

Public REST APIs for mapplets

As of November 2025, we've rolled out the following new feature as part of the October 2025 release:

You can expose a mapplet that includes the following data quality transformations as an API and design a custom endpoint for the API:

- Cleanse
- Labeler
- Parse
- Rule Specification

The mapplet that you expose can additionally include a Filter transformation and a range of expressions that you can specify in an Expression transformation or in a Rule Specification transformation.

For more information about how to expose a mapplet as an API, see *Components*.

Arguments in user defined functions

You can now create up to 100 arguments in user defined functions. Previously, you could only create up to 10 arguments.

For more information, see *Components*.

Convert synchronization tasks to data transfer tasks

You can use the convert resource to convert your existing synchronization tasks to data transfer tasks.

Use a GET request with the following URI to find out if a synchronization task can be converted to a data transfer task:

```
<serverURL>/dtt/dss/convert/test/{assetId}
```

Use a POST request with the following URI to convert the synchronization task to a data transfer task:

```
<serverURL>/dtt/dss/convert/{assetId}
```

For more information, see the REST API help.

Data transfer tasks

You can augment source data with data from up to five lookup sources. When you configure a lookup source, you can select the fields to return, rename the fields, and specify how the task handles multiple return values.

You can also configure the following runtime properties for the task:

- Pre- and post-processing commands
- Parameter file name
- Maximum number of log files to retain
- Execution mode

For more information, see *Tasks*.

Data preview jobs

When you run a data preview job in a mapping with one or more associated mapping tasks, you can select a mapping task to use as the basis for the preview. When you select a mapping task, the preview job runs with design time parameters, parameter file values, and advanced session properties configured in the task.

For more information, see *Mappings*.

Data Vault mapping and mapping task templates

You can use preconfigured mapping and mapping task templates to build Data Vault hub, link, and satellite tables.

Intelligent structure models

You can parse image-based PDF files when you create an intelligent structure model using the custom AI engine.

For more information, see *Components*.

Mapping task details

The **Task Details** page for a mapping task contains the following new features:

- The **Transformations with Connections** section displays general and advanced properties for transformations that use a connection.
- You can view, copy, and download the SQL queries used in the task.

The **Task Details** page is also updated with a new look and feel.

For more information, see *Tasks*.

Override source partitions using a parameter file

When you configure partitions for a parameterized flat file or relational source, you can override the partitions using a parameter file.

For more information, see *Mappings*.

Special characters in field names

When a mapping preserves special characters in source and target field names, field names can now include the following special characters:

. + - = ~ ` ! $ % ^ & * ( ) [ ] { } ' \ / ? < > |

For more information, see *Mappings*.

Taskflows

Taskflows include the following new features and enhancements:

- In a Data Task step that uses a mapping task, you can override the default data type, scale, and precision of the source fields in FTP and SFTP connections. Use the new **Source_defaultNativeDataType**, **Source_defaultScale**, and **Source_defaultPrecision** fields in the **Source** list to override the default data type, scale, and precision of the source fields.
- If you are assigned the Administrator, Deployer, Designer, or Operator role, you can use the update resource to update the values of the **API Name**, **Allowed Users**, and **Allowed Groups** fields. Use the request body to pass the values. The updates applied to one or more taskflows using the update resource.

  Use the following URI to update the values:

  ```
  PUT<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/update?
  assetType=<Taskflow>
  ```
- You can use the `subtaskDetails` optional parameter in the taskflow status API URL to return only the taskflow status without any task or step statuses within the taskflow.
  Use the following URL to return only the taskflow status:

  ```
  GET/active-bpel/services/tf/status/<runId>?subtaskDetails =<value>
  ```

  Provide the **Yes** or **No** value in the optional parameter to return only the taskflow status. Set the value of the subtaskDetails parameter to **No** to return only the taskflow status.

  For more information, see *Taskflows*.

Changed behavior

The October 2025 release of Data Integration includes the following changed behaviors.

Boolean properties in mapping tasks

In a mapping task, the advanced attributes of a connection show Boolean values as *true* and *false*.

Previously, the values appeared as *YES* and *NO*.

Data transfer tasks

Data transfer tasks include the following changed behaviors:

- You configure lookup sources on the **Lookup Sources** page.
  Previously, you could add one lookup source on the **Second Source** page.
- When you add a source or lookup source, you can prefix field names and specify the prefix to use.
  Previously, the task prefixed fields in the original source with SRC_ or IN_SRC_
- When a lookup returns multiple matches, the task returns an error by default.
  Previously, the task returned any row.

Mapping task details

The **Task Details** page for mapping tasks includes the following changed behaviors:

- The **Input Parameters** and **In-out Parameter** sections show parameter display labels.
  Previously, the sections showed the parameter name even if the parameter had a display label.
- Information about continuous tuning is displayed in the **Task Details** section.
  Previously, information about continuous tuning was displayed in the **Advanced Options** section.

Templates page

The **Templates** page contains the following categories:

- Integration
- Warehousing
- Industry Solutions
- Data Access Management
- Data Vault
- Data Quality

Previously, the page also contained the Cleansing category.

The Integration category includes templates for the following use cases:

- Augment data with lookup
- Join two sources with an inner join
- Load data to an existing SAP custom table

Previously, the category also contained templates for the following use cases:

- Copy data into an existing target
- Copy data to a new target
- Replicate a MySQL table or view incrementally to an existing target.
- Replicate a NetSuite ODBC object incrementally to a new target
- Replicate a NetSuite ODBC object incrementally to an existing target
- Replicate a Redshift table or view incrementally to a new target
- Replicate a relational table or view incrementally to a new target
- Replicate a SQL Server table or view incrementally to a new target
- Replicate an Oracle table or view incrementally to a new target
- Replicate an SAP table incrementally into a new target
- Replicate an SAP table incrementally into an existing target
- Replicate data incrementally to a new target
- Replicate data incrementally to an existing target
- Replicate Salesforce data incrementally into a new target
- Replicate Salesforce data incrementally into an existing target

CHAPTER 6

Upgrade

The following topics provide information about tasks that you might need to perform before or after an upgrade of Data Integration.

For information on the upgrade tasks in Data Integration Connectors, see the *Data Integration Connector What's New*.

Preparing for the upgrade

Perform the following tasks to prepare for upgrade to the latest release.

Disk space requirements and file preparation

The Secure Agent upgrades the first time that you access the system after the upgrade.

Files that you added to the following directory are preserved after the upgrade:

```
<Secure Agent installation directory>/apps/Data_Integration_Server/ext/deploy_to_main/bin/rdtm-extra
```

Note: After a major release upgrade, the old and new versions of the services might continue to run concurrently for up to 24 hours. Ensure that the Secure Agent machine has sufficient free memory to avoid memory depletion during this period.

Perform the following steps to ensure that the Secure Agent is ready for the upgrade:

1. Ensure that each Secure Agent machine has sufficient disk space and memory available for upgrade.

   The machine must have sufficient available memory to run two Secure Agents simulatenously.

   The machine must have at least 5 GB free space or the amount of disk space calculated using the following formula, whichever is greater:

   ```
   Minimum required free space = 3 * (size of current Secure Agent installation directory - space used for logs directory)
   ```

2. Close all applications and open files to avoid file lock issues, for example:
   - Windows Explorer
   - Notepad
   - Windows Command Processor (`cmd.exe`)

Dynamic files in preprocessing commands

Data Integration refreshes mapping and task metadata during an upgrade. If you have a task that uses preprocessing commands to create a dynamic file, ensure that a file with the referenced file name is present at the specified file path before the first task run after the upgrade.

If a file isn't present, Data Integration can't map the metadata between the preprocessing command and the referenced file, and the task fails. After the first task run, Data Integration retains the file path.

INDEX

C

Cloud Application Integration community
  URL 5
Cloud Developer community
  URL 5

D

Data Integration community
  URL 5

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6

S

Secure Agents
  upgrade preparation 28
status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6
upgrade preparation
  Secure Agent preparation 28

W

web site 5