Informatica® Cloud Application Integration
October 2026

What's New

Informatica Cloud Application Integration What's New
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-28

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- IDMC Communities 5
- IDMC Marketplace 5
- Data Integration connector documentation 6
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: October 2026 7

Changelog October 2026 7

Important notices and upcoming changes 8

New features and enhancements 8

Changed behavior 10

Upgrade 11

- Process Server restart 12

Chapter 2: July 2026 13

Changelog July 2026 13

New features and enhancements 13

Upgrade 13

- Process Server restart 14

Chapter 3: April 2026 15

Changelog April 2026 15

Important notices 16

New features and enhancements 16

Changed behavior 19

Upgrade 21

- Process Server restart 21

Chapter 4: February 2026 22

Changelog February 2026 22

New features and enhancements 22

Chapter 5: November 2025 23

Changelog November 2025 23

New features and enhancements 23

Changed behavior. 25

Chapter 6: October 2025. 26

Important notices. 26
New features and enhancements. 26
Changed behavior. 29
Upgrade. 30
Process Server restart. 30

Chapter 7: September 2025. 31

New features and enhancements. 31

Chapter 8: August 2025. 32

New features and enhancements. 32

Chapter 9: July 2025. 34

Important notices. 34
New features and enhancements. 34
Changed behavior. 36
Upgrade. 38
Process Server restart. 39

Index. 40

Preface

Read *What's New* to learn about new features and enhancements in IDMC Application Integration for the July 2026 release.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

You can also download individual connector guides: https://network.informatica.com/docs/DOC-15333.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the IDMC Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Data Management Cloud Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all IDMC components. Subscribing to all components is the best way to be certain you never miss an update.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

October 2026

The October 2026 release of Application Integration includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 28, 2026	Added	"Google PubSub Connector error codes" on page 10
October 28, 2026	Deleted	New IDMC Cloud Data Integration Job Log Capture recipe
September 24, 2026	Deleted	Standard HTTP fault status codes for process error handling
September 24, 2026	Deleted	Support for by-copy connection objects in the Turbo mode
September 17, 2026	Added	"Support for OData views in data access service connectors" on page 9
September 17, 2026	Added	"DAS connector caches schema metadata for improved performance" on page 11
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Application Integration includes the following important notices and upcoming changes.

Dropped support for SOAP API login() endpoints

Effective in June 2027, Salesforce will retire the SOAP API login() authentication operation for API versions `31.0` through `64.0`. This change strengthens account security by moving integrations away from legacy username-and-password authentication towards OAuth-based authentication.

After June 2027, Salesforce will no longer accept authentication through the SOAP API login() operation. Consequently, Informatica Salesforce connections that rely on SOAP API login() will fail to authenticate.

Before June 2027, you must reconfigure your Salesforce connections to use a supported OAuth authentication method. Processes and assets that use the reconfigured connections don't require any other changes.

Deprecated support

Effective in the October 2026 release, PostgreSQL database server version 14.6 is deprecated. Informatica intends to drop support for PostgreSQL database server version 14.6 in a future release. PostgreSQL database server 14.6 will reach end of life (EOL) on November 12, 2026, as noted on the PostgreSQL Versioning Policy page. Upgrade to PostgreSQL database server 18.4 before the EOL date.

New features and enhancements

The October 2026 release of Application Integration includes the following new features and enhancements.

Application Integration Console enhancements

You can view the input, output, and temporary field values directly when you view a process instance in Application Integration Console.

Note: You can view these fields only when you set the process tracing level to **Normal** or **Verbose**.

You don't need to open the process instance in the advanced view to inspect these values. You can trace step-by-step behavior, verify results, and troubleshoot completed runs faster.

Under process properties, you can also view the **Target Namespace** field, which uniquely identifies the process executed by the instance.

For more information, see *Monitor*.

Standard HTTP application failure fault codes in OpenAPI 3.0.1 process specifications

Auto-generated OpenAPI 3.0.1 process specifications in Application Integration automatically include seven standard HTTP application failure fault status codes.

This feature enables upstream API gateways and consumer clients to automatically parse, validate, and handle process error responses. As a result, you can streamline API gateway onboarding without manual specification edits or security exceptions, enforce built-in compliance across process assets, and improve runtime reliability through precise payload and error validation.

For more information, see *Design*

Support for publishing multiple messages to Google PubSub

You can use the event target in a Google PubSub app connection to publish multiple messages in a single Service step. The PubSubMessage element is a repeatable list type. Use it to bundle multiple payloads, each with its own headers, attributes, and body.

For more information, see the *Google PubSub* connector guide.

New XQuery function

In the **Miscellaneous** section of the Expression Editor's **Functions** list of Process Designer, use the new `util:toJSONWithSchema` XQuery function to convert the XML data structures and process objects inside a process into the JSON format with a defined schema. The schema enables the parser to identify array fields and preserve single-element arrays as arrays. Defining the schema ensures consistent array structures regardless of the payload size.

For more information, see *Design*.

OAuth 2.0 authentication through a Secure Agent

You can perform OAuth 2.0 authentication through a Secure Agent when you configure service connectors and application connections. Use a Secure Agent or Agent Group to authenticate with private OAuth providers in isolated networks that Informatica Cloud can't access directly.

For more information, see *Design*.

OAuth 2.0 PKCE support for service connectors and Email connections

You can configure OAuth 2.0 connections using the Proof Key for Code Exchange (PKCE) grant type in service connectors and Email connections. PKCE is an OAuth 2.0 security enhancement that eliminates the need to transmit client secrets during authentication, helping you meet stricter security and compliance requirements when connecting to external services.

For more information, see *Design*.

Hierarchical Mapper transformations on Secure Agents

Application Integration can route the Hierarchical Mapper transformation execution to a Secure Agent instead of to the cloud-hosted service. You activate agent-based execution by pointing a URN at the Secure Agent endpoint, which gives you control per organization and per environment.

For more information, see *Design*.

XQuery Update Facility support

Query expressions now support the XQuery Update Facility, a standard W3C extension to XQuery that adds copy-modify-return operations to insert, delete, rename, or replace nodes and node values directly within an expression without creating intermediate copies. This simplifies expression authoring and improves processing efficiency.

For more information, see *Process Developer*.

Support for OData views in data access service connectors

You can now expose database views as OData entities through a data access service connector and read data from them. Use views to model and query your data with more flexibility through OData.

For more information, see *Design*.

Changed behavior

The October 2026 release of Application Integration includes the following changed behavior:

Automatic removal of stale Salesforce mappings during synchronization

A Salesforce organization can now be mapped to only one IDMC organization at a time during synchronization from Salesforce. When you synchronize a Salesforce organization with a new IDMC organization, Application Integration automatically removes the Salesforce organization link from the IDMC organization that it was previously mapped to, so that only the most recent mapping remains active. This change is applied automatically during synchronization. No action is required on your part.

Previously, Application Integration retained the earlier mapping, which allowed a single Salesforce organization to remain mapped to multiple IDMC organizations at the same time.

For more information, see *Design*.

Process object generation for WSDL or XSD files with duplicate complex types

You can generate a unique process object when you create a service connector from a Web Services Description Language (WSDL) or XML Schema Definition (XSD) file that contains repeated complex type names. This change ensures that the process object mapping accurately captures and preserves action-specific request and response fields.

Previously, when you created a service connector by importing a WSDL or XSD file that contained repeated complex type names, Application Integration generated only a single process object based on the first occurrence of that metadata name. It mapped subsequent actions that used the same complex type name to this initial process object, ignoring the unique child elements and metadata structures defined for the other actions.

For more information, see *Design*.

Google PubSub Connector error codes

When a Google PubSub connection error occurs, you can view the exact Google API error code in the fault response under the GooglePubSubWriter properties in Application Integration Console. This change enables downstream processes to monitor the error and execute conditional retries based on the specific code.

Previously, the fault response displayed the **Unexpected fault** value instead of the exact error code making it difficult for you to identify the root cause of the failure or build conditional retry, routing, and monitoring logic based on specific error types.

For more information, see *Monitor*.

Connection mode options for Google BigQuery V2

Google BigQuery V2 connections support only the Simple and Hybrid connection modes. The Complex connection mode is no longer available in the **Connection Mode** field for Google BigQuery V2 connections.

Previously, you could set the connection mode to Complex. However, the Complex mode returned all the data as a single string field and did not support query-based use cases in Application Integration.

If you have existing Google BigQuery V2 connections configured in the Complex mode, reconfigure them to use the Simple or Hybrid mode.

For more information, see *Google BigQuery V2 Connector Guide*.

Default pagination for Microsoft Fabric JDBC connections

You can now run OData API requests and Informatica Process Designer process requests against Microsoft Fabric databases without pagination failures. To enable this behavior, add the `aeEnableDefaultPagination=true` parameter to your Microsoft Fabric JDBC connection URL. After you add the parameter, OData API requests and Process Designer processes can successfully retrieve paginated results from Microsoft Fabric databases.

Previously, requests with $skip=0 or incomplete pagination parameters returned errors because Microsoft Fabric does not support the T-SQL SET ROWCOUNT statement.

For more information, see *JDBC Connector Guide*.

Usage report time range limit

When you download an Application Integration usage report in Operational Insights, the time range between the start and end dates can't exceed 13 months.

Previously, a request for a range longer than 13 months returned a success response with no data, which made it unclear whether the range exceeded the limit or the period genuinely contained no data. Now, a request for a range longer than 13 months returns an error that explains the limit, so you can tell that you need to shorten the date range instead of assuming that no data exists for the period.

For more information, see *Operational Insights*.

Replication upgrade of the Process Server PostgreSQL database

To enable replication upgrade of the Process Server PostgreSQL database for a Secure Agent, access the following directory:

```
<Secure Agent installation directory>/apps/process-engine/data/db/util
```

Then, run the following command:

```
db_upgrade.sh enable_replication
```

Note: The command runs successfully only after the Process Server package for the October 2026 release is deployed and upgraded on the Secure Agent. To upgrade the package, stop and start Process Server.

Previously, to enable replication upgrade of the Process Server PostgreSQL database for a Secure Agent, you added a custom property for the Secure Agent.

For more information, see *Secure Agent Services*.

DAS connector caches schema metadata for improved performance

A data access service (DAS) connector caches schema metadata for improved performance. The connector now caches the list of tables and views for a schema after the first OData request, and reuses the cached list for subsequent requests.

Previously, the connector retrieved this list from the database on every OData request.

If you change the database structure, you must republish the connector to refresh the cached list and reflect the changes.

For more information, see *Design*.

Upgrade

The following topic provides information about the task that you must perform after you upgrade to the October 2026 release.

Process Server restart

As part of this release, updates were made to the Process Server service on the Secure Agent. The updates do not affect the service and the agent processes will continue to work as is. As a result of the deployment of the updates, you will see that the status of the Process Server service shows up as **Restart Required**.

If you would like to manually restart the Process Server at your own convenience and get the latest updates, perform the following steps:

1. Open the Administrator service and select **Runtime Environments**.
2. On the **Runtime Environments** page, click the name of the Secure Agent.

   Note: You might have to expand the Secure Agent group to see the list of Secure Agents within the group.
3. In the **Agent Service Details** section, hover over the row that contains the Process Server service and click the **Stop Service** icon.
4. Click the **Start Service** icon in the row to restart the Process Server service. After the service starts, the status changes to **Up and Running**. If the service fails to start, check the audit log in the **Monitor** tab to find the cause of the error.

For more information about Secure Agents, see *Runtime Environments* in the Administrator help.

CHAPTER 2

July 2026

The July 2026 release of Application Integration includes the following updates.

Changelog July 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
July 2, 2026	Modified	"Process Server restart" on page 12
June 26, 2026	Deleted	IP address changes
June 11, 2026	Initial publication	

New features and enhancements

The July 2026 release of Application Integration includes the following new feature and enhancement.

Support for multiple failover hosts in Advanced Message Queuing Protocol connections

You can configure multiple failover hosts in an Advanced Message Queuing Protocol (AMQP) connection to ensure high availability and continuous message delivery when a primary host becomes unavailable. When a connection is lost, the connector automatically retries through the configured host addresses, ensuring uninterrupted message streaming without manual intervention.

For more information, see *AMQP Connector Guide*.

Upgrade

The following topic provides information about the task that you must perform after you upgrade to the October 2026 release.

Process Server restart

As part of this release, updates were made to the Process Server service on the Secure Agent. The updates do not affect the service and the agent processes will continue to work as is. As a result of the deployment of the updates, you will see that the status of the Process Server service shows up as **Restart Required**.

If you would like to manually restart the Process Server at your own convenience and get the latest updates, perform the following steps:

1. Open the Administrator service and select **Runtime Environments**.
2. On the **Runtime Environments** page, click the name of the Secure Agent.

   Note: You might have to expand the Secure Agent group to see the list of Secure Agents within the group.
3. In the **Agent Service Details** section, hover over the row that contains the Process Server service and click the **Stop Service** icon.
4. Click the **Start Service** icon in the row to restart the Process Server service. After the service starts, the status changes to **Up and Running**. If the service fails to start, check the audit log in the **Monitor** tab to find the cause of the error.

For more information about Secure Agents, see *Runtime Environments* in the Administrator help.

CHAPTER 3

April 2026

The April 2026 release of Application Integration includes the following updates.

Changelog April 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
May 20, 2026	Added	"Improved service connector response parsing" on page 17
April 22, 2026	Added	"Preview initiated" on page 16
April 20, 2026	Deleted	Ability to preserve logs for completed processes.
April 17, 2026	Modified	"RabbitMQ header format update in Apache Camel 4.x" on page 21
April 10, 2026	Modified	" Support for new authentication methods in data access service connectors with Microsoft SQL Server databases " on page 17
April 2, 2026	Added	"Support for a new Cursor data type in Stored Procedure Output Parameters" on page 18
April 2, 2026	Modified	"REST API support for Universal Resource Name (URN) mappings" on page 18
March 26, 2026	Added	Inbound message rejections return HTTP 503 error to emable retryon page 21
March 11, 2026	Initial publication	

Important notices

The April 2026 release of Application Integration includes the following important notice.

Preview initiated

Auto-scaling Process Server using Kubernetes orchestration

Effective in the April 2026 release, you can configure and auto-scale your Secure Agent infrastructure on public and external clouds using Kubernetes orchestration, which actively simplifies agent deployment, reduces infrastructure costs, and executes jobs on a service level agreement (SLA). You can manage Secure Agents in an elastic runtime environment, configure data storage, and optimize database settings for Application Integration processes.

For more information, see the Auto-scaling Process Server using Kubernetes orchestration Knowledge Base article.

Technical preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

New features and enhancements

The April 2026 release of Application Integration includes the following new features and enhancements.

New Google BigQuery V2 Connector

You can use Google BigQuery V2 Connector to connect to tables in Google BigQuery and perform CRUD operations. For CRUD operations that need a primary key, you can define custom keys to assign single or composite primary keys. You can also enable OData in a Google BigQuery V2 connection.

For more information, see *Google BigQuery V2 Connector Guide*.

CLAIRE Copilot supports Slack Connector

In CLAIRE Copilot, you can use a Slack application connection to create a process.

For more information, see *CLAIRE Copilot for Application Integration*.

New UI experience for Application Integration Console

The Application Integration Console user interface has a new look and feel that presents the features you'll use in greater clarity.

For more information, see *Monitor*.

Support of array inputs in processes running in the Turbo mode

In the Turbo mode, you can provide an array as input when you invoke a process with a whole JSON payload. You can include multiple items within square brackets [] in the request payload, enabling batch processing of multiple inputs in a single request and thereby improving data handling efficiency.

For more information, see *Design*.

New search options for processes in Application Integration Console

In the Application Integration Console **Processes** page, you can use the following new options to easily search for processes:

- **Starts With**. Use this option to search for processes whose names start with the defined search term.

  Note: To enable this option on a Secure Agent, restart the agent.
- **Contains**. Use this option to search for processes whose names contain the defined search term.

For more information, see *Monitor*.

Validation of SVG files during recipe submission

When users create and submit their own recipes, SVG files are validated and potential malicious SVG files are blocked for improved security.

For more information, see *Getting Started with Recipes*.

Improved service connector response parsing

Use the new **Response Format** field to define how service connector response payloads are parsed. This field gives you better control over response handling and provides clear error messaging.

Additionally, you can enable the **Allow Multipart Response** option to support multipart response data.

For more information, see *Design*.

Support for OData for data access service connectors with Snowflake databases

You can enable OData when you create a data access service connector to connect to a Snowflake database using OAuth 2.0.
For more information, see *Design*.

Support for new authentication methods in data access service connectors with Microsoft SQL Server databases

When you use a data access service connector to connect to a Microsoft SQL Server database, you can configure Active Directory password authentication.

For more information, see *Design*.

Support for attachments in SOAP API calls using XML-binary Optimized Packaging (XOP) mechanism

You can send and receive attachments in SOAP APIs using multipart/form-data requests or XML payloads with the XOP mechanism. XOP efficiently serializes XML data containing binary content by encoding files and including them through dedicated file transfer endpoints. This feature enables seamless, efficient, and secure attachment handling within SOAP API workflows for integration with external systems.

For more information, see *Design*.

Support for returning result sets in data access service connectors

A stored procedure in a data access service connector can now return a result set. You can configure the maximum number of rows that the SQL query must return in the SQL response payload. For a result set, the maximum number of rows that you configure applies to each SQL statement within the stored procedure.

For more information, see *Design*.

Support for a new Cursor data type in Stored Procedure Output Parameters

In data access service connection, you can use the new **Cursor** data type in the output fields of a stored procedure. Use this data type to return a result set with multiple rows and complex data structures rather than just a single value from the stored procedure.

For more information, see *Design*.

Support for Client Credentials grant type with OAuth 2.0 authentication

You can now select Client Credentials as the grant type when using OAuth 2.0 authentication to enable streamlined and secure access management.

For more information, see *Design*.

SAP BAPI Connector supports load balancing and secure network communication

You can now configure an SAP BAPI connection for load balancing and Secure Network Communications (SNC). In the **SAP Additional Parameters** property, configure properties related to the specific authentication type.

For more information, see *SAP BAPI Connector Guide*.

New SAP IDoc connection property

In the **Connection Properties** section of an SAP IDoc connection, you can choose to prefix metadata with the IDoc type to make process objects unique when processing multiple IDocs.

For more information, see *SAP IDoc Connector Guide*.

New SAP IDoc writer properties

In the **Writer Properties** section of an SAP IDoc connection, you can configure the following new properties:

- **Destination Pool Capacity**. Defines the maximum number of idle connections that can be retained in the destination pool for write operations. Increase this value for better performance under high concurrency.
- **Destination Peak Limit**. Defines the maximum number of simultaneously active connections to the SAP destination. This option helps in managing the SAP-side resource limits.
- **Destination Expiration Time (ms)**. Defines the time in milliseconds before idle connections are closed.
- **Destination Expiration Check Period (ms)**. Defines the interval in milliseconds for checking and cleaning up expired connections.
- **Destination Max Get Client Time (ms)**. Defines the maximum time in milliseconds to wait for a connection from the pool.

For more information, see *SAP IDoc Connector Guide*.

REST API support for Universal Resource Name (URN) mappings

You can use REST APIs to perform the following tasks:

- Get details of all URN mappings
- Create a new URN mapping or update an existing one
- Delete a URN mapping

For more information, see *Monitor*.

Ability to export reports from Operational Insights

You can now export Application Integration usage reports from Operational Insights using a GraphQL API. The exported data uses your current page filters and includes process start and end times in Coordinated Universal Time.

You can export the following types of reports:

- Reports related to API calls, processes, connections, and licensing for a period of one month
- A full job report that includes the usage details of all processes, guides, and OData executions for a period of up to 13 months

These reports help you assess the status and usage of your Application Integration assets and take appropriate corrective actions as needed.

For more information, see *Operational Insights*.

Support for metering tags for Application Integration assets

In Administrator, you create and assign metering tags for Application Integration assets to organize and track IPU usage across various departments, projects, or initiatives. You can assign the tags to projects, folders, and assets.

After assigning metering tags to assets, you can view your IPU usage by metering tag on the **Tag Breakdown** tab on the **Metering** page.

For more information, see *Organization Administration* in the *Administrator* help.

Enhanced metering reports

In Administrator, the Metering page provides the following additional details to group and analyze the IPU usage:

- Project name
- Folder name
- Asset name
- Asset type

For more information, see *Organization Administration* in the *Administrator* help.

Changed behavior

The April 2026 release of Application Integration includes the following changed behavior:

Deprecation of session ID for Salesforce Outbound Message calls

Salesforce no longer sends session IDs in outbound messages (OBM) calls that you make from a Salesforce organization to an Informatica Intelligent Cloud Services (IICS) organization. This change impacts how Salesforce OBM calls authenticate when you invoke processes.

As a result of this change, you must provide the tenant ID in scenarios involving multiple Salesforce organizations or multiple IICS organizations to ensure proper authentication without session IDs. No URL changes are required in OBM calls that you make from a single Salesforce organization to a single IICS organization.

Previously, you had to provide session IDs in the URLs to authenticate OBM calls.

For more information, see the Informatica Knowledge Base article 000257332.

Changes to the Applies To list

The options in the **Applies To** list in a process are rearranged to improve the usability. When you select the entity, you can select one of the following asset types to view the corresponding assets:

- **Process Objects.** Select a process object
- **App Connections.** Select an app connection, and then select an object.

Previously, there was no segregation of process objects and app connections. For more information, see *Design*.

Changes to the Custom and Connection Defined Types list in a process

When you create an input, output, or temp field in the Start step of a process, the objects for custom types and connection-defined types are now displayed in two separate pages for better categorization of objects and improved usability. You can select an object for a custom type or connection-defined type from the corresponding types page.

Previously, all the available objects for custom types and connection-defined types were displayed on the same page.

For more information, see *Design*.

Enhanced util:toJSON XQuery function

The util:toJSON XQuery function doesn't remove the array brackets [] even when the input contains a single object in a list. This change preserves the array structure for downstream services.

The function has two arguments as shown in the following format:

```
toJSON(elements as element(), preserveSingleElementArray as xs:boolean?)
```

The first argument is the elements to be converted, and the second argument is a boolean value `True` or `False`.

If the second argument is `True`, the output of the function retains the array brackets [] even when the input contains a single object in a list.

Previously, you could only pass the elements as an argument in the util:toJSON XQuery function. The function removed the array brackets [] when the input payload contained a single object in a list.

For more information, see *Design*.

Process logging level change

When a process gets suspended due to a breach of the activity execution limit, the process logging level is automatically changed to FAULT to improve performance and reduce database storage spikes.

Previously, when a process got suspended under such circumstances, it remained in the database for 14 days before getting purged. This prolonged retention led to increased database storage usage and resource consumption, causing significant performance degradation.

For more information, see *Design*.

SAP IDoc reader property change

The **Idle Time** property is removed from the **Reader Properties** section in the SAP IDoc connection creation page because Application Integration always uses a default value of **-1** for this property.

For more information, see *SAP IDoc Connector Guide*.

Support for dynamic dispatch queue configuration on Secure Agents

If Process Server runs on a Secure Agent, you can enable the dispatch service to dynamically create dispatch queue configurations and avoid deadlocks.

To enable dynamic dispatch queue configuration, in the **Custom Configuration Details** section of the agent details page, add the `useDynamicDispatchService` property and set the value to `true`.

Previously, you used the dispatch service to manually create dispatch configurations that throttle requests made to the Process Server.

For more information, see *Secure Agent Services* in the *Administrator* help.

RabbitMQ header format update in Apache Camel 4.x

In Apache Camel version 4.x, RabbitMQ message headers use the `CamelSpringRabbitmq*` format. This format applies only to connections that you publish on Cloud Server.

Previously, the headers used the `rabbitmq.*` format.

For more information, see *RabbitMQ Connector Guide*.

Inbound message rejections return HTTP 503 error to enable retry

You receive HTTP 503 errors for inbound messages that were rejected immediately due to reasons such as, dispatch queue size limits. You can retry the requests.

Previously, you received HTTP 500 errors and the messages were discarded without attempting a retry.

Upgrade

The following topic provides information about the task that you must perform after you upgrade to the October 2026 release.

Process Server restart

As part of this release, updates were made to the Process Server service on the Secure Agent. The updates do not affect the service and the agent processes will continue to work as is. As a result of the deployment of the updates, you will see that the status of the Process Server service shows up as **Restart Required**.

If you would like to manually restart the Process Server at your own convenience and get the latest updates, perform the following steps:

1. Open the Administrator service and select **Runtime Environments**.
2. On the **Runtime Environments** page, click the name of the Secure Agent.

   Note: You might have to expand the Secure Agent group to see the list of Secure Agents within the group.
3. In the **Agent Service Details** section, hover over the row that contains the Process Server service and click the **Stop Service** icon.
4. Click the **Start Service** icon in the row to restart the Process Server service. After the service starts, the status changes to **Up and Running**. If the service fails to start, check the audit log in the **Monitor** tab to find the cause of the error.

For more information about Secure Agents, see *Runtime Environments* in the Administrator help.

CHAPTER 4

February 2026

The February 2026 release of Application Integration includes the following updates.

Changelog February 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
February 19, 2026	Initial publication	

New features and enhancements

The February 2026 release of Application Integration includes the following new features and enhancements.

New recipes

Application Integration provides the following new recipes:

Email Handler

Use the recipe to send emails using a preconfigured mailbox and trigger an agent flow in AI Agent Engineering with the message details.

Microsoft Teams Message Handler

Use the recipe to securely receive messages from Microsoft Teams and trigger an agent flow in AI Agent Engineering with the channel and message details.

Slack Message Handler

Use the recipe to securely receive messages from Slack and trigger an agent flow in AI Agent Engineering with the channel and message details.

For more information about these recipes, see the corresponding recipe guides.

CHAPTER 5

November 2025

The November 2025 release of Application Integration includes the following updates.

Changelog November 2025

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
November 21, 2025	Added	"New Actions in Azure OpenAI Connector" on page 24
November 21, 2025	Added	"Support for OAuth 2.0 Authentication" on page 24
November 21, 2025	Added	"New recipes" on page 23
November 5, 2025	Added	"CLAIRE Copilot supports Jira Connector" on page 24
November 4, 2025	Initial publication	

New features and enhancements

The November 2025 release of Application Integration includes the following new features and enhancements.

New recipes

Application Integration provides the following new recipes:

AI Agent for Customer Support Case Processing

Use the recipe to automate the analysis of incoming customer emails, identify user intent, and trigger appropriate follow-up actions.

IDMC System IPU Metering Log Capture

Use the recipe to simplify access to system IPU metering log entries in Informatica Intelligent Data Management Cloud (IDMC).

Multifunction Calling using Azure OpenAI Agent

Use the recipe to receive user queries from Microsoft Teams, send them to Azure OpenAI for function calling, which directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and returns the result to the Microsoft Teams channel.

Trigger and Monitor ADF Pipelines

Use the recipe to trigger and monitor status of the ADF pipelines using the Azure Resource Manager API.

Trigger and Monitor Databricks Jobs

Use the recipe to trigger jobs and check their status using the Databricks REST API.

Trigger and Monitor DBT Pipelines

Use the recipe to trigger jobs and check their status using the DBT REST API.

For more information about these recipes, see the corresponding recipe guides.

CLAIRE Copilot supports service connectors

You can now use natural language prompts in CLAIRE Copilot to create processes that leverage your existing service connectors.

For more information, see *CLAIRE Copilot for Application Integration*.

CLAIRE Copilot supports Jira Connector

You can now create processes using Jira Connector in CLAIRE Copilot.

For more information, see *CLAIRE Copilot for Application Integration*.

Support for OAuth 2.0 Authentication

You can enable OAuth 2.0 authentication when creating the following app connections:

- Databricks Mosaic AI
- Snowflake Cortex AI

OAuth 2.0 is an authorization protocol that provides specific authorization flows for web applications and ensures secure transmission of information between the client and the server. It uses access tokens, which represent authorization to access resources on behalf of the user and allow token issuers to retrieve the data securely.

For more information, see the corresponding connector guides.

New Actions in Azure OpenAI Connector

The following model response actions have been added to the Azure OpenAI Connector:

- **Create Response**: Creates the response object.
- **Get Response**: Returns a single response object.
- **Get List Input Items**: Returns the list of input items for a response.
- **Delete Response**: Deletes a response by the specified ID.

For more information, see *Azure OpenAI Connector Guide*.

Changed behavior

The November 2025 release of Application Integration includes the following changed behavior:

Improved XQuery code formatting in CLAIRE Copilot

To improve readability, all XQuery expressions are now displayed in a code block. You can copy the entire code, including comments.

Previously, you had to manually select and copy the XQuery expressions.

For more information, see *CLAIRE Copilot for Application Integration*.

CHAPTER 6

October 2025

The October 2025 release of Application Integration includes the following updates.

Important notices

The October 2025 release of Application Integration includes the following important notices.

JSON web tokens and session IDs

Effective November 3, 2025, your organization administrator can change the authentication type used for REST API requests. If the administrator selects the JSON Web Token (JWT) authentication type, custom scripts need to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

New features and enhancements

The October 2025 release of Application Integration includes the following new features and enhancements.

New recipes

Application Integration provides the following new recipes:

AI Agent for Database Access Review and Permission Auditing

Use the recipe to automate database access reviews and permission audits for enhanced security and compliance.

AI Agent for Slack with MCP Tool Support

Use the recipe to receive user queries by sending them to OpenAI, which calls the MCP server. The server adds relevant context, forwards the query to the Large Language Model (LLM), and returns the response to Slack.

MDM Data Tools for AI Agents

Use the recipe to seamlessly connect AI Agents with Informatica Master Data Management (MDM) SaaS, enabling them to instantly access and utilize master data to respond to user queries.

Salesforce Opportunity Attachment Insights using AI Agent

Use the recipe to gain insights from attachments in Salesforce Opportunities by uploading them to Amazon S3, analyzing their content for relevant answers, and updating the Opportunity with the extracted insights.

For more information about these recipes, see the corresponding recipe guides.

New Connectors

Google Pub/Sub Connector

Use the Google Pub/Sub Connector to pull messages from Google Pub/Sub and push messages to Google Pub/Sub. You can read, create, and delete Google Pub/Sub topics, subscriptions, and snapshots.

HubSpot Connector

Use the HubSpot Connector to facilitate seamless integration between your application or platform and HubSpot's CRM and marketing services. It enables automated data exchange, synchronization, and workflows between systems, empowering businesses to better manage contacts, deals, marketing campaigns, and customer interactions. You can also perform CRUD operations, such as create, read, update, and delete operations on existing resources, such as Users, Companies, and Notes in HubSpot.

For more information about these connectors, see the corresponding connector guides.

CLAIRE Copilot supports XQuery expression generation

CLAIRE Copilot can now generate XQuery expressions quickly and help you save time and reduce errors by eliminating manual coding. You can use natural language prompts to provide field information in a process and describe the XQuery that you want to generate on the process page. CLAIRE Copilot then quickly creates the XQuery expression. You can copy the XQuery and use it in the process.

For more information, see *CLAIRE Copilot for Application Integration*.

CLAIRE Copilot enhances process summaries

CLAIRE Copilot can now generate brief and detailed summaries of your saved and valid processes.

CLAIRE Copilot can create the following types of summaries:

Brief summary


A brief summary is a high-level summary that helps you quickly understand what a process does, the data sources it uses, and its purpose.

To get a brief summary, enter the prompt `Summarize` or `Summarize this process`.

Detailed summary

A detailed summary explains every step of the process to help you understand how each part is configured.

To get a detailed summary, click the **Detailed summary** option as shown in the following image:

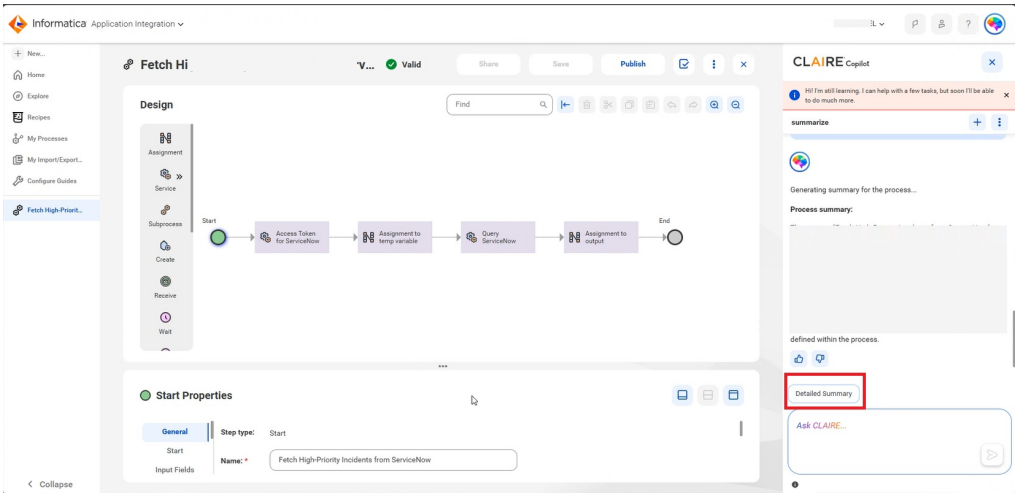

For more information, see *CLAIRE Copilot for Application Integration*.

REST API to fetch a list of assets based on query parameters

Application Integration provides a new REST API to fetch a list of all the assets used within an organization based on query parameters.

To fetch the list of assets, use a GET request with the following URI:

```
<Informatica Intelligent Cloud Services URL>/active-bpel/asset/v1/status?<query parameters>
```

The REST API supports the following query parameters:

Parameters	Allowed Values
MimeType	- process - screenflow - connection
PublicationStatus	- published - unpublished - out-of-date

For example, `https://na4.dm.us.informaticacloud.com/active-bpel/asset/v1/status?PublicationStatus=out-of-date&MimeType=process`

For more information, see *Asset Management*.

Salesforce Connection API supports API version 64.0 with the new Informatica Cloud Real Time managed package version 1.27

Application Integration supports Salesforce Connector API version 64.0 for password and OAuth authentication when creating new Salesforce connections. Application Integration now uses the Informatica Cloud Real Time Salesforce managed package version 1.27. You can access more data objects and metadata types with the new version.

Ability to create hierarchical mappers directly in the process designer

You can now create hierarchical mappers directly in the process designer page. This update eliminates the earlier dependency of first creating hierarchical mappers in Data Integration and then selecting them in the process designer.

For more information, see *Design*.

Changed behavior

The October 2025 release of Application Integration includes the following changed behavior:

Improved usability in field assignments for Service, Create, and Subprocess steps in processes

The process designer offers improved usability when you configure the field assignments for Service, Create, and Subprocess steps in processes. You can select multiple fields simultaneously and automap them. This is useful when you want to automap fields of a process object.

Previously, you could perform automap by selecting and adding only one field at a time.

For more information, see *Design*.

Data type updates for output fields in a data access service connector

When you use a stored procedure in a data access service connector, you see a modified list of data types to configure the output fields.

The new list includes the following data types:

- Binary
- Byte
- Clob
- Date
- Double
- Float
- Integer
- Long
- Short
- String

This change helps in preventing buffer-related errors and seamlessly retrieving large Character Large Object (CLOB) payloads from both queries and stored procedures.

Previously, the output fields included the following data types:

- Attachment
- Attachments
- Checkbox
- Currency
- Data
- Date Time
- Email
- Formatted Text
- Image

- Integer
- Multi-Select Picklist
- Number
- Percent
- Phone
- Picklist
- Rich Text Area
- Text
- Text Area
- Time
- URL

In existing data access service connectors, the old data types are automatically mapped to the closest matching new data types.

For more information, see *Design*.

Upgrade

The following topic provides information about the task that you must perform after you upgrade to the October 2025 release.

Process Server restart

As part of this release, updates were made to the Process Server service on the Secure Agent. The updates do not affect the service and the agent processes will continue to work as is. As a result of the deployment of the updates, you will see that the status of the Process Server service shows up as **Restart Required**.

If you would like to manually restart the Process Server at your own convenience and get the latest updates, perform the following steps:

1. Open the Administrator service and select **Runtime Environments**.
2. On the **Runtime Environments** page, click the name of the Secure Agent.

   Note: You might have to expand the Secure Agent group to see the list of Secure Agents within the group.
3. In the **Agent Service Details** section, hover over the row that contains the Process Server service and click the **Stop Service** icon.
4. Click the **Start Service** icon in the row to restart the Process Server service. After the service starts, the status changes to **Up and Running**. If the service fails to start, check the audit log in the **Monitor** tab to find the cause of the error.

For more information about Secure Agents, see *Runtime Environments* in the Administrator help.

CHAPTER 7

September 2025

The September 2025 release of Application Integration includes the following updates.

New features and enhancements

The September 2025 release of Application Integration includes the following new features and enhancements.

New recipes

Application Integration provides the following new recipes:

AI Agent with Multifunction Calling using Google Vertex AI

Use the recipe to leverage Google Vertex AI's function calling to dynamically generate, orchestrate, and run Application Integration processes based on user queries and seamlessly pass outputs between steps.

Create Uniqueness Data Quality Rule Occurrences in Data Governance and Catalog

Use the recipe to automate the creation or update of uniqueness data quality rule occurrences for the selected data elements in Informatica Data Governance and Catalog (CDGC).

For more information about these recipes, see the corresponding recipe guides.

New Microsoft SharePoint Connector

The Microsoft SharePoint Connector enables seamless integration with SharePoint, allowing users to read, write, and manage documents, lists, and libraries within workflows or custom applications. This automation streamlines collaboration, eliminates manual tasks, and enhances productivity.

For more information, see the Microsoft SharePoint Connector guide.

CHAPTER 8

August 2025

The August 2025 release of Application Integration includes the following updates.

New features and enhancements

The August 2025 release of Application Integration includes the following new features and enhancements.

New recipes

Application Integration provides the following new recipes:

AI Agent for Jira using NVIDIA NIM

Use the recipe to receive a user query from Slack, send it to an NVIDIA NIM-powered AI agent that analyzes the request and performs the required actions in Jira, and returns the result to the Slack channel.

Cohere Prompt Engineering

Use the recipe to design prompt chains, resolve them in sequence, and provide appropriate responses from a Large Language Model (LLM).

IDMC System Audit Log and Security Log Capture

Use the recipe to simplify access to system audit and security log entries in Informatica Intelligent Data Management Cloud (IDMC).

Multifunction Calling using Slack AI Agent

Use the recipe to receive user queries from Slack, send them to Google Vertex for function calling, which directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and returns the result to the Slack channel.

Multifunction Calling using Microsoft Teams AI Agent

Use the recipe to receive user queries from Microsoft Teams, sent them to Google Vertex for function calling, which directs the request to the appropriate AI agent. The AI agent analyzes the request, performs the required actions, and return the result to the Microsoft Teams channel.

Simple RAG Consumption with Databricks Mosaic AI

Use the recipe to receive a user query, search for relevant context in a vector database, send the query and context to the Databricks Mosaic AI Large Language Model (LLM), and return a comprehensive response.

For more information about these recipes, see the corresponding recipe guides.

Connectors

Application Integration provides the following new connectors:

Box

Use Box Connector to automate interaction with the Box API. It enables you to connect to, access, and manage files and folders stored in Box directly within workflows or applications, streamlining content collaboration and data management.

Cohere

Use Cohere Connector to leverage advanced multilingual models, sophisticated retrieval functionalities, and an AI workspace specifically designed to meet the needs of the modern enterprise, all integrated within a single, secure platform.

For more information about these connectors, see the corresponding connector guides.

New Actions in OpenAI Connector

The following model response actions have been added to the OpenAI Connector:

- The **Create Model Response** action creates a single model response.
- The **Get Model Response** action accepts the model response ID as input that is generated by the Create Model Response action and returns a single model response.
- The **Delete Model Response** action accepts the model response ID as input that is generated by the Create Model Response action, and deletes a model response and returns the deleted status.
- The **Cancel Model Response** action accepts the model response ID as input that is generated by the Create Model Response action and revokes it.
- The **Get List Items of Response** action returns a list of items from the generated model response. It accepts response ID that is generated by the Create Model Response action.

CHAPTER 9

July 2025

The July 2025 release of Application Integration includes the following updates.

Important notices

The July 2025 release of Application Integration includes the following important notice.

Dropped support

Effective in the July 2025 release, Informatica dropped support for the following services in DaaS Service Connector:

- Canadian Geocode Location
- Get Sales Tax
- Lookup Company
- Lookup Person
- Mobile ID
- North American AV
- Reverse Lookup by Phone Number
- Send SMS
- US Geocode Location
- Zip and PostalCode Information

New features and enhancements

The July 2025 release of Application Integration includes the following new features and enhancements.

New SAP IDoc Connector

You can use SAP IDoc Connector to read data from or write data to SAP through Intermediate Documents (IDocs). You can use event sources to consume events from SAP IDoc listeners and event targets to publish messages to SAP IDocs.

For more information, see *SAP IDoc Connector Guide*.

Community contribution enabled for recipes

Informatica has now enabled community contribution for recipes to promote collaboration amongst users. You can now share your own Application Integration recipes with other users and enrich the recipe collection. After you submit a community recipe, it undergoes a review process. After the recipe gets approved, the recipe will be published to the **Recipes** page in Application Integration.

As a user, apart from the Informatica-published recipes, you can use recipes contributed by other community users.

For more information, see *Getting Started with Recipes*.

New recipes

Application Integration provides the following new recipes:

Exporting Profiles from IDMC Data Profiling

Use the recipe to export the most recent run profile data to specified recipients. This recipe leverages the REST APIs of Informatica's IDMC Data Profiling to ensure seamless integration and efficient data handling.

Extract Structured JSON Data from Unstructured Data using Databricks Mosaic AI

Use the recipe to extract structured JSON data from unstructured text. This recipe leverages the Databricks Mosaic AI Large Language Model (LLM) to accurately identify and organize relevant information.

Simple RAG Consumption with NVIDIA NIM

Use the recipe to receive a user query from Slack, search for relevant context in a vector database, send the query and context to the NVIDIA NIM Large Language Model (LLM), and return the generated response back to the Slack channel.

For more information about these recipes, see the corresponding recipe guides.

Metering usage report for processes that run in the Turbo mode

In Administrator, you can download the metering usage reports for processes and subprocesses that run in the Turbo mode within an organization. The report includes execution details for processes, subprocesses, guides, and OData APIs.

For more information, see *Organization Administration* in the *Administrator* help.

Support for external secret vault in app connections

You can configure app connections that run on Secure Agents to retrieve sensitive connection credentials from an external secrets manager instead of retrieving them from the Informatica Intelligent Cloud Services repository. A secrets manager is also called a secret vault or a key vault.
You'll need to use one of the following external secret vaults:

- AWS Secrets Manager
- Azure Key Vault

For more information, see *Design*.

Support for IMAP protocol in Email connections

You can configure an event source in an Email connection to read emails sent by an email server. The Email connection uses the IMAP protocol to read unseen email messages.

For more information, see *Email Connector Guide*.

Support for OAuth 2.0 authentication in a data access connector

You can enable OAuth 2.0 authentication when you create a data access service connector. OAuth 2.0 is a protocol for authorization that provides specific authorization flows for web applications and helps in the secure transmission of information between the client and the server. OAuth 2.0 uses access tokens that represent the authorization to access resources on behalf of the user and enable the token issuers to access the data.

For more information, see *Design*.

New XQuery functions for encryption and decryption

You can use the following XQuery functions:

- **rsaEncryption**. Encrypts data using the RSA algorithm and the provided public key.
- **rsaDecryption**. Decrypts cipher text using the RSA algorithm with the provided private key and passphrase.

You can use the GPG and OpenSSL key types.

For more information, see *Miscellaneous functions* in *Design*.

Support for Transport Layer Security (TLS) version 1.3 protocol

Application Integration uses TLS version 1.3 as the protocol to encrypt communications between the clients and servers. It ensures confidentiality and integrity of the data that is transmitted across a connection.

TLS version 1.3 offers a faster TLS handshake.
It supports the following additional cipher suites for improved security:

- TLS_AES_128_GCM_SHA256
- TLS_AES_256_GCM_SHA384

Note: To use the TLS version 1.3 protocol on a Secure Agent, set the **ssl-enabled-protocols** attribute value to **TLSV1.3** in the **System Configuration Details** section of the **Runtime Environments** page in **Administrator**.

For more information, see *Secure Agent Services* in the Administrator help.

Support for hierarchical mapper

In the modern view of the Application Integration user interface, you can use a hierarchical mapper to easily map fields between objects. You can create a hierarchical mapper to map a hierarchical schema, such as the schema for an industry-standard message, to another hierarchical schema.

For example, to convert a process object from one type to another, you'll need to manually map the fields. To avoid the manual effort, you can use a hierarchical mapper. You can select an existing hierarchical mapper or create a new one.

For more information, see *Design*.


Changed behavior

The July 2025 release of Application Integration includes the following changed behavior:

Improved user experience for process object creation

The process object creation page is redesigned to provide a better user experience.

The following image shows the new process object creation page:

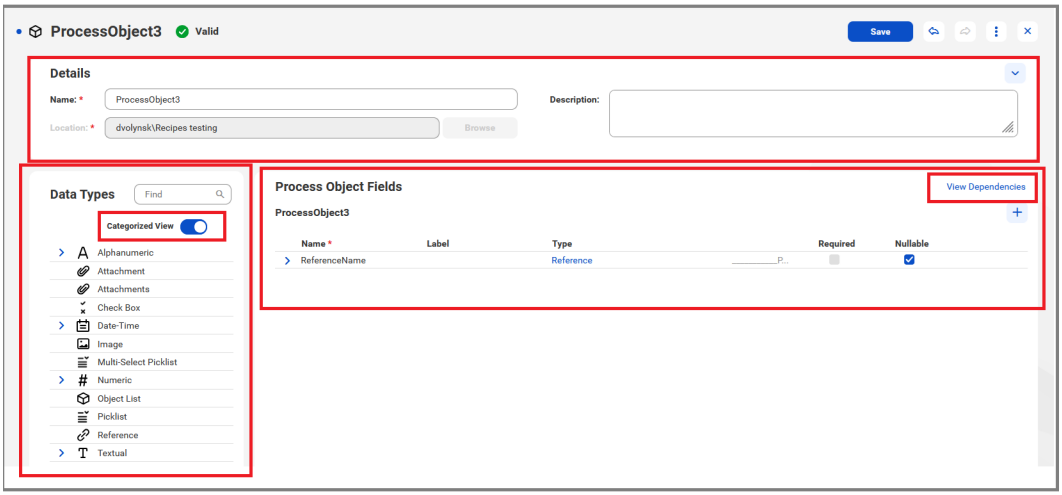

You can see the changes in the following sections of the process object creation page:


- **Details**. The **Details** section contains fields to configure basic information about the process object, such as name, description, and location. You can collapse the **Details** section.
- **Data Types**.
  - A new **Data Types** section is available on the left side of the **Process Object Fields** section. The section displays the data types that you can select to configure the field type. Previously, you had to select the field type from the **Types** list that was available for each of the fields in the **Fields** section.
  - A new **Categorized View** toggle is available in the **Data Types** section. Switch the toggle to view the data types in a categorized manner where related data types are grouped together. Previously, you could not view the data types based on categories.
- **Process Object Fields**.
  - The **Fields** section that was available in the earlier versions of the process object creation page is renamed to **Process Object Fields**.
  - A new **View Dependencies** link is available in the section. You can click the link to view the dependencies for a process object before saving the configuration.

For more information, see *Design*.

Improved user experience for Application Integration Console tabs

The **Process Server Health** and the **Process Metrics** tabs in **Application Integration Console** have a new theme with changes in the font size, component spacing, icons, and buttons for a better user experience.

The following image shows the redesigned **Process Server Health** tab in **Application Integration Console**:

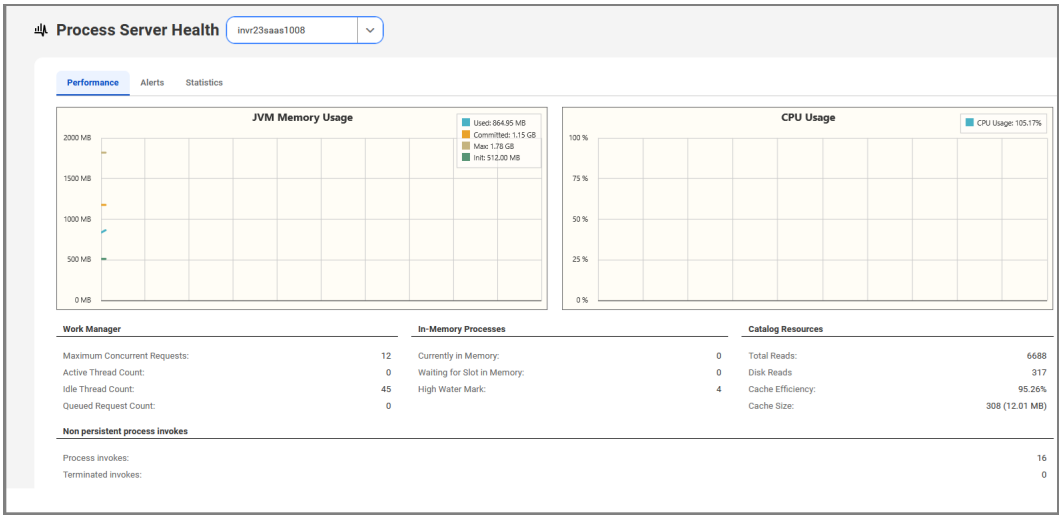

The following image shows the redesigned **Process Metrics** tab in **Application Integration Console**:



For more information, see *Monitor*.

Source file size restrictions for service connector creation

When you create a service connector from a WSDL file, Swagger JSON file, OpenAPI 3.0 file, or a Postman collection, the file and zip can have a maximum size of 5 MB. To further increase the size limit, contact Informatica Global Customer Support.

Previously, there was no size limit, which caused system overloads and denial of service.

For more information, see *Design* and *Monitor*.

Source file size restrictions for process object creation

When you create a process object from a Swagger JSON file, OpenAPI 3.0 file, JSON file, WSDL file, or XSD file, the file and zip can have a maximum size of 5 MB. To further increase the size limit, contact Informatica Global Customer Support.

Previously, the maximum file size was 5 MB and the maximum zip size was 3 MB.

For more information, see *Design* and *Monitor*.

Upgrade

The following topic provides information about the task that you must perform after you upgrade to the October 2026 release.

Process Server restart

As part of this release, updates were made to the Process Server service on the Secure Agent. The updates do not affect the service and the agent processes will continue to work as is. As a result of the deployment of the updates, you will see that the status of the Process Server service shows up as **Restart Required**.

If you would like to manually restart the Process Server at your own convenience and get the latest updates, perform the following steps:

1. Open the Administrator service and select **Runtime Environments**.
2. On the **Runtime Environments** page, click the name of the Secure Agent.

   Note: You might have to expand the Secure Agent group to see the list of Secure Agents within the group.
3. In the **Agent Service Details** section, hover over the row that contains the Process Server service and click the **Stop Service** icon.
4. Click the **Start Service** icon in the row to restart the Process Server service. After the service starts, the status changes to **Up and Running**. If the service fails to start, check the audit log in the **Monitor** tab to find the cause of the error.

For more information about Secure Agents, see *Runtime Environments* in the Administrator help.

INDEX

C

Cloud Application Integration community
  URL 5
Cloud Developer community
  URL 5

D

Data Integration community
  URL 5

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6

S

status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6

W

web site 5