Informatica® Cloud Application Integration
October 2026

Google PubSub Connector Guide

Informatica Cloud Application Integration Google PubSub Connector Guide
October 2026

© Copyright Informatica LLC 2024, 2026

Publication Date: 2026-10-28

Table of Contents

Preface. 4

Chapter 1: Introduction to Google PubSub Connector 5

Google PubSub Connector overview. 5

Chapter 2: Google PubSub connections. 6

Basic connection properties. 6

Google PubSub connection properties. 7

Google PubSub event source properties. 7

Google PubSub event target properties. 9

Google PubSub connection metadata. 9

Google PubSub event and events fields. 11

Using a Google PubSub connection in a process. 11

Preface

Read the *Google PubSub Connector Guide* to learn how to set up and use Google PubSub connections. This guide assumes that you have an understanding of Google PubSub concepts.

CHAPTER 1

Introduction to Google PubSub Connector

Google PubSub API Connector enables seamless integration with Google PubSub directly within workflows. You don't need to import or load external libraries.

Google PubSub Connector offers the following key features:

- **Asynchronous messaging** : Supports reliable, many-to-many messaging between applications.
- **Workflow triggering** : You can trigger workflow executions using messages published to a PubSub topic.
- **Out-of-the-box usage** : Connectors are built-in and ready to use in workflow call steps.

Google PubSub Connector overview

Google Pub/Sub Connector enables interaction with Pub/Sub topics and messages directly within Application Integration. It enables seamless integration with Google Cloud Pub/Sub, a fully managed real-time messaging service. It facilitates event-driven communication by allowing your application to publish messages to topics or subscribe to topics to receive messages asynchronously as events occur.

Some common use cases for Google Pub/Sub Connector include:

- Publishing messages
- Listening to messages
- Replaying messages

CHAPTER 2

Google PubSub connections

Use Google PubSub connections to interact with Google PubSub, which is a messaging service designed for real-time, asynchronous communication between systems.

Through this connection, applications can publish messages to specific topics, subscribe to incoming messages, manage snapshots for message retention, and replay messages when needed. It supports event-driven architectures and enables decoupled communication between services, making it ideal for real-time data processing and microservices integration. Authentication is handled through the Google Cloud service accounts, ensuring secure access to PubSub resources.

After you create a Google PubSub connection, you can validate, test, and save the connection.

You can then publish the Google PubSub connection and click the **Metadata** tab to view the generated process objects for the connection.

Basic connection properties

The following table describes the basic properties that you can configure on the **Properties** tab of the connection creation page:

Property	Description
Name	Required. Unique name for the Google PubSub connection that identifies it in the Process Designer. The name must start with an alphabet and can contain only alphabets, numbers, and hyphens (-).
Location	The location of the project or folder where you want to save the connection. Click **Browse** to select a location. If the **Explore** page is currently active and a project or folder is selected, the default location for the connection is the selected project or folder. Otherwise, the default location is the location of the most recently saved asset.
Description	Optional. Description of the connection.
Type	Required. The type of connection you want to use for the connector or service connector. Select **Google PubSub**.
Runtime Environment	Required. The runtime environment for the connection. **Note:** Google PubSub Connector is supported on Secure Agents and Cloud Server on AWS, GCP, and Azure PODs.

Property	Description
Connection Test	Indicates whether the connection test was successful or not.
OData-Enabled	Not supported for Google PubSub Connector.

Google PubSub connection properties

The following table describes the additional properties that you must configure in the **Connection Properties** section:

Property	Description
ProjectID	Required. The unique identifier of the project that your PubSub topics and subscriptions belong to.
Service Account Key	Required. The user-managed RSA key pair linked to a Google Cloud service account that is used to authenticate applications with Google APIs.
Other Attributes	A list of common Google PubSub configuration properties in the URL-encoded format. Use (&) to separate the values.

Google PubSub event source properties

You can configure an event source in a Google PubSub connection. For an event source, the action name is **GooglePubSubReader**.

After you define an event source for a Google PubSub connection, you can publish the connection on the Cloud Server or on a Secure Agent. You can then access the event source in a process and deploy the process to consume the events generated by the event source.

To create event sources for a Google PubSub connection, click **Add Event Source** on the **Event Sources** tab. Select the event source type as **Google PubSub Reader**. You can add one or more event sources for each Google PubSub connection that you create.

The following table describes the basic event source properties that you can configure:

Property	Description
Name	Required. The event source name that appears in the Process Designer. The name must be unique for the connection. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Description	Optional. A description for the Google PubSub event source that appears in the Process Designer.
Enabled	Select **Yes** to make the event source available immediately after it is published. Select **No** to disable the event source until you are ready to use it. Default is **Yes**.

The following table describes the advanced event source properties that you can configure:

Property	Description
Subscription Name	Required. The name of the subscription from which you want to read the messages. .
Concurrent Consumers	The maximum number of consumers that can read messages in parallel from the subscription. Default is **1**. You can't edit this value.
Content Format	Required. The message content type that needs to be processed. You can select one of the following values: - TEXT - XML - JSON Default is **TEXT**.
Simplify Content	Required. Enable this option to configure the event source to adjust XML or JSON content to match a valid process object structure. Default is **Yes**.
Max Messages Per Poll	The maximum number of messages that you can receive from the server in one poll. Default is **1**. You can't edit this value.
Synchronous Pull	Enable this option to pull batches of messages synchronously. Default is **Yes**.
Other Attributes	A list of additional configuration properties of the Google PubSub consumer in the URL-encoded format. Use (&) to separate the values.

Google PubSub event target properties

After you define an event target for a Google PubSub connection, you can publish the connection. You can then access the event target in a process and deploy the process to publish the events generated by the event target downstream.

To create event targets for a Google PubSub connection, click **Add Event Target** on the **Event Targets** tab. Select the event target type as **Google PubSub Writer**. You can add one or more event targets for each Google PubSub connection that you create.

The following table describes the basic event source properties that you can configure:

Property	Description
Name	Required. The event target name that appears in the Process Designer. The name must be unique for the connection. The name must start with an alphabet and can contain only alphabets, numbers, or hyphens (-).
Description	Optional. A description for the Google PubSub event target that appears in the Process Designer.

The following table describes the advanced event target properties that you can configure:


Property	Description
Topic Name	Required. The name of the topic to which the messages need to be sent.
Message Ordering Enabled	Required. Enable this option to preserve the message order. You must set 'GooglePubsubOrderingKey' as the header to specify the key. If you do not set the header, the system timestamp will be used. Default is **No**.
Content Format	Required. The message content type that needs to be written. You can select one of the following values: - TEXT - XML - JSON Default is **TEXT**.
Other Attributes	Optional. A list of additional configuration properties of the Google Pub/Sub producer in the URL-encoded format. Use (&) to separate the values.

Google PubSub connection metadata

After you create a Google PubSub connection, you can validate and save the connection. You can then publish the connection and view the generated process objects on the **Metadata** tab.

When you publish a Google PubSub Connection in Application Integration, a list of **Actions** and **Objects** appear on the **Metadata** tab.

The following image shows the **Metadata** tab for a published Google PubSub Connection:

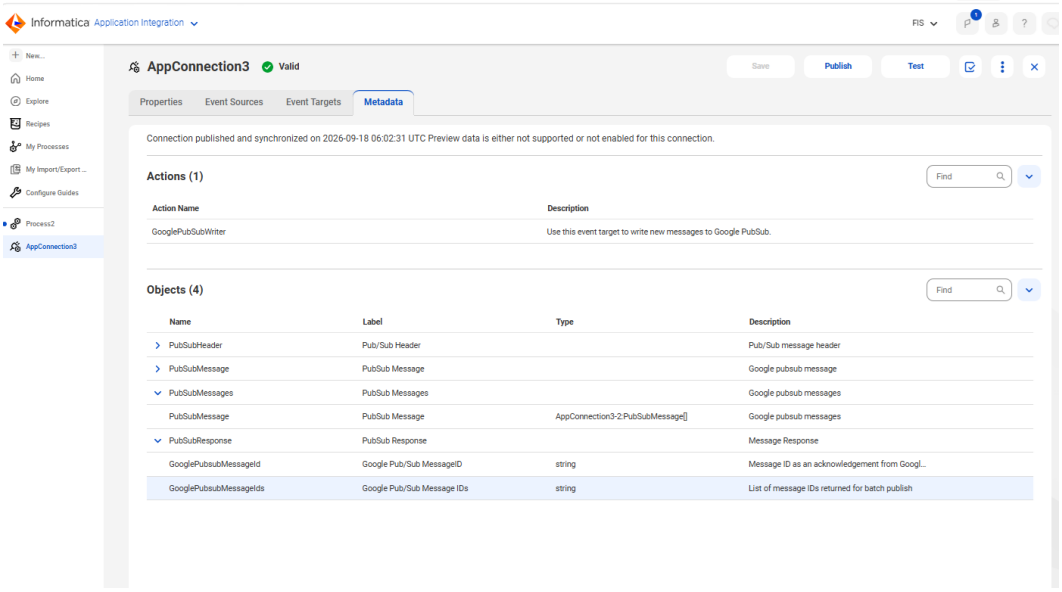

In the **Actions** section, you can view the event sources and event targets that you configured. For an event target, the action name is GooglePubSubWriter.

In the **Objects** section, you can view the process objects for the connection. The published metadata for a Google PubSub connection consists of the following objects:

1. **PubSubHeader**. The PubSubHeader object contains name and value fields. The fields represent a Google PubSub message header name and the value for that header.
2. **PubSubMessage**. A PubSubMessage object contains headers and a body. The headers are a list of PubSubHeader objects. The body contains the message payload.
3. **PubSubMessages**. The PubSubMessages object is a list of PubSubMessage objects. Use PubSubMessages to publish multiple messages in a single Service step. Each PubSubMessage in the list contains its own headers and body.
4. **PubSubResponse**. The PubSubResponse object contains the message IDs that Google PubSub returns after a publish.
   The following table describes PubSubResponse fields:

Field	Description
GooglePubsubMessageId	Message ID that Google PubSub returns as an acknowledgement for a single message.
GooglePubsubMessageIds	List of message IDs that Google PubSub returns for a batch publish.

Google PubSub event and events fields

You can publish one Google PubSub message or multiple messages from a Service step.

When you configure the GooglePubSubWriter action, use the **event** field or the **events** field based on the number of messages you want to publish:

- To publish one message, configure the **event** field. The **event** field uses the PubSubMessage object. Set the headers and body for that message.
- To publish multiple messages in the same call, configure the **events** field. The **events** field uses the PubSubMessages object, which is a list of PubSubMessage objects. Each message in the list can have its own headers and body.

The following XML sample shows a PubSubMessage object configured with one message:

```
<PubSubMessage>
    <headers>
        <name>val1</name>
        <value>val2</value>
    </headers>
    <body>This is body1</body>
</PubSubMessage>
```

The following XML sample shows a PubSubMessages object configured with multiple messages:

```
<PubSubMessages>
    <PubSubMessage>
        <headers>
            <name>val1</name>
            <value>val2</value>
        </headers>
        <body>This is body1</body>
    </PubSubMessage>
    <PubSubMessage>
        <headers>
            <name>val3</name>
            <value>val4</value>
        </headers>
        <body>This is body2</body>
    </PubSubMessage>
</PubSubMessages>
```


Note: You can publish a maximum of 100 messages in a single Service step. The total content size can't exceed 5 MB.

Using a Google PubSub connection in a process

After you create a Google PubSub connection, you can use it in a Service step in a process.

1. Add a Service step to the process.
2. Click the **Service** tab.
3. From the **Service Type** list, select **Connection**.
4. From the **Connection** list, browse and select the Google PubSub connection that you created.

5. From the **Action** list, select the action that you want to perform on Google PubSub. For example, select **GooglePubSubWriter** to write new messages to Google PubSub as shown in the following image:

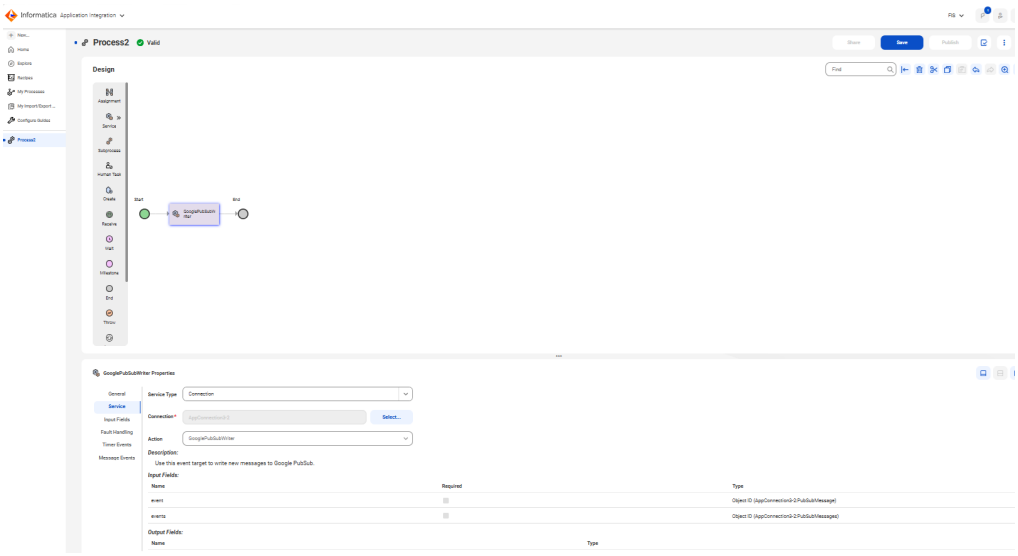

6. Configure the **event** or **events** field based on the number of messages you want to publish. If you configure both fields, the **events** field takes precedence.
7. Validate, save, and publish the process.