Informatica® Intelligent Data Management Cloud

October 2026

What's New

Informatica Intelligent Data Management Cloud What's New
October 2026

© Copyright Informatica LLC 2016, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-29

Table of Contents

Preface 7

Informatica Resources 7

- Informatica Documentation 7
- IDMC web site 7
- IDMC Communities 7
- IDMC Marketplace 7
- Data Integration connector documentation 8
- Informatica Knowledge Base 8
- IDMC Trust Center 8
- IDMC Pulse Dashboard 8
- Informatica Global Customer Support 8

Chapter 1: What's New in October 2026 9

Chapter 2: Administrator 10

Changelog October 2026 10

Important notices and upcoming changes 10

New features and enhancements 12

Changed behavior 14

Upgrade 15

- Preparing for the upgrade 15

Chapter 3: API Center 21

Changelog October 2026 21

New features and enhancements 21

Changed behavior 22

Chapter 4: Application Integration 23

Changelog October 2026 23

Important notices and upcoming changes 24

New features and enhancements 24

Changed behavior 26

Upgrade 27

- Process Server restart 27

Chapter 5: Business 360 Console 29

Changelog October 2026 29

Important notices and upcoming changes 30

New features and enhancements 35

Changed behavior 37

Post-upgrade tasks for the October 2026 release. . . . 40
Reimport the match and merge process to update explainability metrics. . . . 40
Advanced rule associations . . . 45
Migrate assets. . . . 46
Reindex records to view filter values. . . . 46
Import the process for the reprocess master data job. . . . 46
Import the process for matching external data. . . . 51
Reimport the process for matching external data. . . . 55
Reindex job to enhance search performance. . . . 60
Update validation process objects to include group IDs. . . . 61

Chapter 6: CLAIRE GPT . . . 63

Changelog October 2026. . . . 63
New features and enhancements. . . . 63

Chapter 7: Cloud Data Integration for PowerCenter (CDI-PC) . . . 65

Changelog October 2026. . . . 65
Important notices and upcoming changes. . . . 65
CDI-PC update strategy. . . . 65
Previews lifted. . . . 66
PowerCenter Modernization. . . . 67
New features and enhancements. . . . 68
Changed behavior. . . . 69

Chapter 8: Data Governance and Catalog . . . 71

Changelog October 2026. . . . 71
Important notices and upcoming changes. . . . 72
New features and enhancements. . . . 73
Changed behavior. . . . 91

Chapter 9: Data Ingestion and Replication . . . 95

Changelog October 2026. . . . 95
Important notices and upcoming changes. . . . 96
Preview lifted. . . . 96
Reinstated support. . . . 97
Deprecated support. . . . 97
New features and enhancements. . . . 97
Common. . . . 98
Application Ingestion and Replication. . . . 100
Database Ingestion and Replication. . . . 101
File Ingestion and Replication. . . . 103
Changed behavior. . . . 103

Chapter 10: Data Integration 105
Changelog October 2026 105
Important notices and upcoming changes 106
New features and enhancements 106
Changed behavior 109
Upgrade 111
Preparing for the upgrade 111

Chapter 11: Data Integration Connectors 112
Changelog October 2026 112
New and updated connector packages 112
Important notices and upcoming changes 114
Enhanced connectors 115
Changed behavior 119
Upgrade 121
Post-upgrade tasks for the October 2026 release 121

Chapter 12: Data Marketplace 122
Changelog October 2026 122
New features and enhancements 122
Changed behavior 123

Chapter 13: Data Validation 125
Changelog October 2026 125
New features and enhancements 125

Chapter 14: MDM - Customer 360 SaaS 126
Changelog October 2026 126
Important notices and upcoming changes 127
New features and enhancements 130
Changed Behavior 132

Chapter 15: MDM - Product 360 SaaS 134
Changelog October 2026 134
Important notices and upcoming changes 135
New features and enhancements 137
Changed Behavior 140

Chapter 16: MDM - Reference 360 141
Changelog October 2026 141
Important notices and upcoming changes 141

Chapter 17: MDM - Supplier 360 SaaS. 143
Changelog October 2026. 143
Important notices and upcoming changes. 144
New features and enhancements. 146
Changed Behavior. 148

Chapter 18: Monitor. 150
Changelog October 2026. 150
Changed behavior. 150

Chapter 19: Multidomain MDM SaaS. 151
Changelog October 2026. 151
Important notices and upcoming changes. 152
New features and enhancements. 154
Changed Behavior. 156

Chapter 20: Operational Insights. 158
Changelog October 2026. 158
Important notice and upcoming change. 158
Changed behavior. 158

Index. 160

Preface

Read *What's New* to learn about new features, enhancements, and behavior changes in Informatica Intelligent Data Management Cloud™ for the **October 2026** release. You can also learn about upgrade steps that you might need to perform.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

IDMC Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the IDMC Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

IDMC Pulse Dashboard

The IDMC Pulse Dashboard provides system status and upgrade information for all PODs and services across IDMC.

Follow the services you use and subscribe to alerts to receive notifications about upgrades, maintenance, production incidents, and upcoming releases. The IDMC Pulse Dashboard displays the production status of all the IDMC products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single service or all IDMC services. Subscribing to all services is the best way to be certain you never miss an update.

For more information, see the Service Status and Communications guide.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

What's New in October 2026

Informatica Intelligent Data Management Cloud™ (IDMC) includes new features, enhancements, and changed behaviors.

The following services include updates in the October 2026 release:

- Administrator
- API Center
- Application Integration
- Business 360 Console
- CLAIRE GPT
- Cloud Data Integration for PowerCenter (CDI-PC)
- Data Governance and Catalog
- Data Ingestion and Replication
- Data Integration
- Data Marketplace
- Data Validation
- MDM - Customer 360 SaaS
- MDM - Product 360 SaaS
- MDM - Reference 360
- MDM - Supplier 360 SaaS
- Monitor
- Multidomain MDM SaaS
- Operational Insights

Additionally, the October 2026 release includes updates to connectors that you can use in one or more services.

To learn about new features, enhancements, and behavior changes related to the latest release of Informatica MCP servers and IDMC AI Agent Engineering, see What's New in Informatica Headless.

CHAPTER 2

Administrator

The October 2026 release of Administrator includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 22, 2026	Added	"Dropped support" on page 11
October 8, 2026	Added	"OData query parameter restrictions" on page 14
October 1, 2026	Modified	"Git repository verification" on page 14
September 24, 2026	Added	"Git repository verification" on page 14
September 21, 2026	Modified	"Downloading metering data using REST API" on page 14
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Administrator includes the following important notices and upcoming changes.

Deprecated support

The following functionalities are deprecated:

Redeploying a serverless runtime environment

Effective in the October 2026 release, redeploying a serverless runtime environment is deprecated. Informatica intends to drop support for redeployment in a future release. Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

To update a serverless runtime environment, stop the runtime environment, edit it, and restart it. If the runtime environment fails or encounters an error, resolve the error and save the runtime environment to automatically restart it. For more information about stopping and starting a serverless runtime environment, see "New features and enhancements" on page 12.

Session-based authentication

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use REST V2 Connector to call IDMC APIs.

Source control repository access using Azure DevOps OAuth

Microsoft has deprecated Azure DevOps OAuth and plans to drop support soon. If your organization uses Azure DevOps OAuth to access its source control repository, the organization needs to switch to Microsoft Entra ID OAuth to prevent source control interruptions.

Note that Azure DevOps source control isn't going away. You can still use an Azure DevOps repository. Only the application that you use for repository access is changing.

An administrator can update the organization to use Microsoft Entra ID OAuth on the **Settings** page in Administrator. After the administrator switches the organization's repository access to Microsoft Entra ID OAuth, users can continue to use source control without any immediate action. However, each user needs to refresh their access token before support for Azure DevOps OAuth is dropped to avoid interruption in source control access. To refresh the token, click the User icon on the toolbar and select **Settings**. In the **Source Code Control Credentials** section, click **Drop Authentication** and then reconfigure OAuth authentication.

Note: After an organization switches to Microsoft Entra ID OAuth, it can't revert to using Azure DevOps OAuth.

Dropped support

Effective in the October 2026 release, Informatica drops support for HTTP/1.0.

All HTTP 1.0 requests receive an HTTP status code 426. To prevent this error, use HTTP/1.1 or later.

Upcoming change

We want to let you know that starting in an upcoming release, JWT authentication token values will be limited to a maximum of 2000 characters.

New features and enhancements

The October 2026 release of Administrator includes the following new features and enhancements.

America/Winnipeg time zone

You can use the America/Winnipeg time zone to schedule jobs through the IDMC user interface or REST API.

Starting November 1, 2026, Manitoba will observe Central Daylight Time (UTC-5) as a permanent, year-round time zone. If you have schedules that use the America/Chicago time zone, re-save them in the America/Winnipeg time zone so that your jobs continue to run at the correct local time after November 1, 2026.


For information about editing a schedule through the IDMC user interface, see Schedules.

For information about updating a schedule's time zone through the REST API, see Schedules in the *REST API Reference*.

Deployment ID

The Licenses page now displays the deployment ID for your organization. The deployment ID is a unique identifier for your organization hierarchy and is the same across your linked organizations. Use the deployment ID to compare consumption metrics from your IDMC metering dashboard with the IPU consumption reported in Salesforce.

The following image shows the Deployment ID property on the Licenses page:

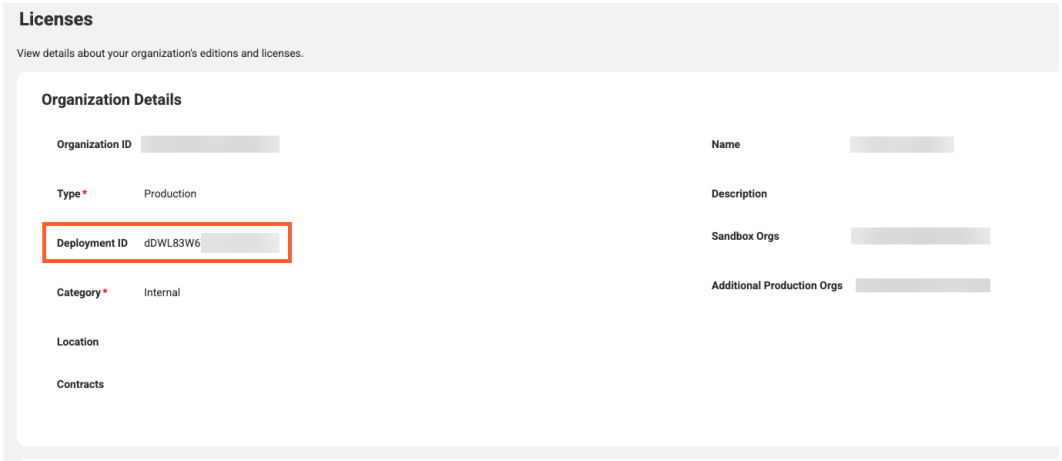

Elastic runtime environments

Elastic runtime environments include the following new features and enhancements:

- Flexible EFS directory projection for data storage. Organize your EFS data storage using any directory structure. You can now specify custom projected file paths in your environment configuration to route files to the appropriate paths within your Kubernetes Pods.
- Enhanced security with IMDSv2. Elastic runtime environments now enforce IMDSv2 (Instance Metadata Service Version 2) with a hop limit of 2 on both custom AMIs and master nodes.

- Improved reliability, security, and monitoring. Elastic runtime environments include improved cluster stability, clearer monitoring metrics, and better lifecycle management:
  - Installation messaging is more accurate.
  - Monitoring graphs separate master and worker node counts.
  - Configuration updates now avoid unnecessary node rotations when AMIs remain unchanged.
  - Updated kernel requirements ensure full compatibility with underlying Kubernetes components.
  - Expanded access controls, certificate validation, and automated cleanup routines improve cluster security and master node recovery.

For information about updating custom AMIs, see "Updated requirements for elastic runtime environments" on page 16.

Security audit log events

In addition to existing login and session events, the audit log now captures the following events:

- Failed login attempts
- Account lockouts
- Agent login failures
- Password changes
- IP whitelisting
- User group updates
- User role updates
- Organization attribute updates
- Organization name changes
- Password requirement changes
- Password reuse policy changes
- Password expiration policy changes
- Email notification changes
- CLAIRE preferences changes
- Organization environment type changes

These new events give administrators more visibility into security-related changes.

Stopping and starting a serverless runtime environment

You can now stop and start a serverless runtime environment to make platform configuration changes and bring the environment back online with its updated settings. You can also stop a serverless runtime environment to reduce costs during periods of inactivity.

Swagger files

The Swagger Files page is updated and reorganized for improved usability.

Large repositories in GitHub

You can now check in large repositories in GitHub. These are projects containing 500 or more assets in a single project or folder.

To enable this feature, you need to accept new permissions. If you've configured a GitHub OAuth App for IDMC source control, you may have received an email with a link leading directly to accepting the new permission. If you haven't received this email, follow the directions in the Checking in large repositories in source control Knowledge article.

Changed behavior

The October 2026 release of Administrator includes the following changed behavior.

Downloading metering data using REST API

When you use the version 3 metering resource to download usage data, the REST API can't export a ZIP file greater than 50 MB.

Previously there was no size limit, which could cause OutOfMemory errors.

Elastic RTE Manager role

We renamed the existing Elastic RTE Manager role, which was previously named Elastic RTE Dev Ops Engineer.

Field name changes in ClusterConfig API calls

In ClusterConfig API calls, the following field names were changed in the systemDiskConfig and dataDisksConfig objects:

- sourceMount is now sourceFilePath
- targetMount is now projectedFilePath

Fingerprint authentication always on

IDMC performs a fingerprint authentication check every time a Secure Agent starts up and sends an alert to the notifications tray when there's a mismatch.

Previously, you could turn off fingerprint authentication checks and IDMC sent mismatch alerts by email only.

Git repository verification

When you use an on-premise Git repository for source control, IDMC saves a local copy of the repository. To ensure that the correct repository is used, IDMC now verifies that the saved copy matches the repository that you request during a source control operation.

After the October 2026 upgrade, the first time you connect to a repository that was saved before the upgrade, IDMC creates a fresh copy instead of reusing the cached repository. This process can take extra time depending on the size of the repository and your network speed. Subsequent connections use the new copy as usual. IDMC doesn't delete the old saved copies automatically. Administrators can clear the old copies from the cache to free up disk space.

Master node requirements for elastic runtime environments

To set up an elastic runtime environment, the master node needs 60 GB of free disk space to account for additional libraries. Previously, the master node needed 50 GB.

Multi-factor authentication by default

IDMC enables multi-factor authentication by default for native human users in new organizations.

OData query parameter restrictions

If you have custom scripts or integrations that call OData endpoints directly, note that new restrictions apply to the following query parameters:

- `$top`, which limits the number of records returned per request
- `$select`, which controls which fields are returned

Note: This change doesn't affect use of IDMC APIs. The IDMC REST API has its own independent limits which are not changed

Review the restrictions below to avoid HTTP 400 errors or unexpected result truncation after the upgrade to the October 2026 release:

$select=* is no longer accepted

Requests that use `$select=*` to retrieve all fields now return an HTTP 400 error. This applies to all OData entities with no exceptions. Replace `$select=*` with an explicit list of the fields your integration requires. For example, use `$select=id,name` instead of `$select=*`.

$top values are subject to per-entity maximums

Each OData entity now has a configured maximum number of records that a single request can retrieve. If your request specifies a `$top` value that exceeds this maximum, the request might return a truncated result set or fail with an HTTP 400 error, depending on the enforcement configuration applied to that entity. In most cases, requests that omit `$top` are also capped to the entity maximum. Previously, many requests without an explicit `$top` returned the full result set. Review `$top` values in your queries. If your integration relies on receiving a complete, unpaginated result set by omitting `$top`, update it to use pagination or an explicit `$top` value within the entity limit.

The following data types are unaffected by this change:

- Job log entries
- Audit log entries
- Notification messages
- Users and groups

Password confirmation for email updates

When users update their email address, they are now required to enter their current password to initiate the change.

Previously, no password confirmation was needed to update an account's email address.

Resetting users

You can reset disabled SAML users who were not provisioned using SCIM.

Previously, the option to reset a user wasn't available for organizations configured to use SAML.

Scraping Secure Agent details

The Secure Agent details page changed in the October 2026 release. If you employed web scraping to extract information from this page, you must update the scraping script for the new user interface.

Upgrade

The following topics provide information about the tasks that you might need to perform before and after the upgrade of IDMC Administrator. Post-upgrade tasks for previous monthly releases are also included in case you haven't performed these tasks after the previous upgrade.

Preparing for the upgrade

Perform the following tasks to prepare for upgrade to the latest release.

Disk space requirements and file preparation

The Secure Agent upgrades the first time that you access the system after the upgrade.

Files that you added to the following directory are preserved after the upgrade:

```
<Secure Agent installation directory>/apps/Data_Integration_Server/ext/deploy_to_main/bin/rdtm-extra
```

Note: After a major release upgrade, the old and new versions of the services might continue to run concurrently for up to 24 hours. Ensure that the Secure Agent machine has sufficient free memory to avoid memory depletion during this period.

Perform the following steps to ensure that the Secure Agent is ready for the upgrade:

1. Ensure that each Secure Agent machine has sufficient disk space and memory available for upgrade.

   The machine must have sufficient available memory to run two Secure Agents simulatenously.

   The machine must have at least 5 GB free space or the amount of disk space calculated using the following formula, whichever is greater:

   ```
   Minimum required free space = 3 * (size of current Secure Agent installation directory - space used for logs directory)
   ```

2. Close all applications and open files to avoid file lock issues, for example:
   - Windows Explorer
   - Notepad
   - Windows Command Processor (`cmd.exe`)

Updated requirements for elastic runtime environments

When you upgrade to the October 2026 release, update your elastic runtime environments to ensure compatibility with the latest requirements.

Perform the following tasks to update an elastic runtime environment:

Update custom AMIs

Ensure that custom AMIs meet the following requirements:

- The operating system is Rocky Linux 10.x.
- IMDSv2 is enabled and the hop limit is set to 2.
- The kernel can load the following modules:

  br_netfilter

  nf_conntrack

  nfs

  nfsv4

  overlay

  vxlan

Previously, custom AMIs were required to use Rocky Linux 9.x, IMDSv2 had to be disabled, and only the br_netfilter and overlay modules were required.

Reserve additional disk space for the master node

Ensure that the master node has a minimum of 60 GB of free disk space to account for additional libraries.

Note: Previously, the master node needed 50 GB free disk space.

Advanced clusters on AWS

In April 2026, advanced clusters was upgraded to use Kubernetes 1.34. If you use an advanced cluster on AWS and use custom master and worker roles, update the IAM policies if you haven't done so already.

For the master role, update `minimal_master_policy` to the following policy:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeInstances",
        "ec2:DescribeRegions",
        "ec2:DescribeRouteTables",
        "ec2:DescribeSecurityGroups",
        "ec2:DescribeSubnets",
        "ec2:DescribeVolumes",
        "ec2:DescribeAvailabilityZones", // April 2026 release requirement
        "ec2:DescribeSnapshots", // April 2026 release requirement
        "ec2:DescribeTags" // April 2026 release requirement
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeVpcs",
        "ec2:CreateTags",
        "ec2:CreateVolume",
        "ec2:DescribeVolumesModifications",
        "ec2:ModifyInstanceAttribute",
        "ec2:ModifyVolume"
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:AttachVolume", // If enabling CLAIRE, move AttachVolume to the same section
as CreateVolume.
        "ec2:DeleteVolume",
        "ec2:DetachVolume"
      ],
      "Resource": [""],
      "Condition": {
        "StringLike": {
          "ec2:ResourceTag/KubernetesCluster": ".k8s.local"
        }
      }
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:CreateSnapshot", // April 2026 release requirement
        "ec2:DeleteSnapshot" // April 2026 release requirement
      ],
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "autoscaling:DescribeAutoScalingGroups",
        "autoscaling:DescribeLaunchConfigurations",
        "autoscaling:DescribeAutoScalingInstances",
        "autoscaling:DescribeTags",
```

```
      "autoscaling:DescribeScalingActivities"
    ],
    "Resource": [""]
  },
  {
    "Effect": "Allow",
    "Action": [
      "autoscaling:SetDesiredCapacity",
      "autoscaling:TerminateInstanceInAutoScalingGroup",
      "autoscaling:UpdateAutoScalingGroup"
    ],
    "Resource": [""],
    "Condition": {
      "StringLike": {
        "autoscaling:ResourceTag/KubernetesCluster": ".k8s.local"
      }
    }
  },
  {
    "Effect": "Allow",
    "Action": [
      "elasticloadbalancing:AddTags",
      "elasticloadbalancing:AttachLoadBalancerToSubnets",
      "elasticloadbalancing:ApplySecurityGroupsToLoadBalancer",
      "elasticloadbalancing:ConfigureHealthCheck",
      "elasticloadbalancing:DeleteLoadBalancer",
      "elasticloadbalancing:DeleteLoadBalancerListeners",
      "elasticloadbalancing:DescribeLoadBalancers",
      "elasticloadbalancing:DescribeLoadBalancerAttributes",
      "elasticloadbalancing:DetachLoadBalancerFromSubnets",
      "elasticloadbalancing:DeregisterInstancesFromLoadBalancer",
      "elasticloadbalancing:ModifyLoadBalancerAttributes",
      "elasticloadbalancing:RegisterInstancesWithLoadBalancer",
      "elasticloadbalancing:SetLoadBalancerPoliciesForBackendServer"
    ],
    "Resource": [""],
    "Condition": {
      "StringLike": {
        "elasticloadbalancing:ResourceTag/KubernetesCluster": ".k8s.local"
      }
    }
  },
  {
    "Effect": "Allow",
    "Action": [
      "elasticloadbalancing:AddTags",
      "elasticloadbalancing:DeleteListener",
      "elasticloadbalancing:DeleteTargetGroup",
      "elasticloadbalancing:DeregisterTargets",
      "elasticloadbalancing:DescribeListeners",
      "elasticloadbalancing:DescribeLoadBalancerPolicies",
      "elasticloadbalancing:DescribeTargetGroups",
      "elasticloadbalancing:DescribeTargetHealth",
      "elasticloadbalancing:ModifyListener",
      "elasticloadbalancing:ModifyTargetGroup",
      "elasticloadbalancing:RegisterTargets",
      "elasticloadbalancing:SetLoadBalancerPoliciesOfListener"
    ],
    "Resource": [""],
    "Condition": {
      "StringLike": {
        "elasticloadbalancing:ResourceTag/KubernetesCluster": ".k8s.local"
      }
    }
  },
  {
    "Effect": "Allow",
    "Action": [
      "iam:ListServerCertificates",
      "iam:GetServerCertificate"
    ],
```

```
      "Resource": [""]
    },
    {
      "Effect": "Allow",
      "Action": [
        "s3:Get*"
      ],
      "Resource": [
        "arn:aws:s3:::<cluster-staging-dir1>/"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "kms:Encrypt",
        "kms:Decrypt",
        "kms:ReEncrypt",
        "kms:GenerateDataKey*",
        "kms:DescribeKey"
      ],
      "Resource": ["*"]
    }
  ]
}
```

For the worker role, update `minimal_worker_policy` to the following policy:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Action": [
        "ec2:DescribeInstances",
        "ec2:DescribeRegions",
        "ec2:CreateVolume", // April 2026 release requirement
        "ec2:AttachVolume", // April 2026 release requirement
        "ec2:DeleteVolume", // April 2026 release requirement
        "ec2:DetachVolume", // April 2026 release requirement
        "ec2:ModifyVolume", // April 2026 release requirement
        "ec2:DescribeAvailabilityZones", // April 2026 release requirement
        "ec2:DescribeSnapshots", // April 2026 release requirement
        "ec2:DescribeTags", // April 2026 release requirement
        "ec2:DescribeVolumes", // April 2026 release requirement
        "ec2:DescribeVolumesModifications", // April 2026 release requirement
        "ec2:CreateSnapshot", // April 2026 release requirement
        "ec2:DeleteSnapshot" // April 2026 release requirement
      ],
      "Resource": [
        "*"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "ec2:CreateTags"
      ],
      "Resource": [
        "arn:aws:ec2:*:*:volume/*"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "autoscaling:DescribeAutoScalingInstances",
        "autoscaling:DescribeTags"
      ],
      "Resource": [
        "*"
      ]
    },
```

```
    {
      "Effect": "Allow",
      "Action": [
        "s3:Get*"
      ],
      "Resource": [
        "arn:aws:s3:::<cluster-staging-dir1>/*"
      ]
    },
    {
      "Effect": "Allow",
      "Action": [
        "kms:Encrypt",
        "kms:Decrypt",
        "kms:ReEncrypt*",
        "kms:GenerateDataKey*",
        "kms:DescribeKey"
      ],
      "Resource": [
        "*"
      ]
    }
  ]
}
```

CHAPTER 3

API Center

The October 2026 release of API Center includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
September 10, 2026	Initial publication	

New features and enhancements

The October 2026 release of API Center includes the following new features and enhancements.

Data Quality mapplet import to API Center

You can import Data Quality mapplets along with rule specifications to API Center to design and publish an API endpoint. When you create an API for Data Quality, you select the rule specifications and mapplets that you have enabled in Data Quality.

For more information, see https://docs.informatica.com/ipaas/api-center/current-version/rest-api-assets/rest-api-assets/api-definition/importing-data-quality-assets.html in the *REST API Assets* help.

Source control

You can use a source control repository with IDMC to manage and track changes made to IDMC objects such as projects, folders, and assets.

Your organization can be configured to have read/write access or read-only access to the source control repository. If you have read/write access, you can check in and check out objects, pull versions of objects, and revert objects to a previous version.

If you have read-only access, you can pull versions of source-controlled objects from the repository. However, you can't check out or check in objects.

You can use Atlassian Bitbucket, GitHub, GitLab, or a cloud-hosted Azure DevOps Git repository with IDMC to manage and track changes made to objects such as projects, folders, and assets. For more information about the available source control repositories, see *Source control configuration* in the *Administrator* help.

For more information about source control, see *Asset Management*.

For information about your organization's configuration, contact your organization administrator.

Changed behavior

The October 2026 release of API Center includes the following changed behavior.

Multiple request methods for custom APIs

When you publish a custom API in API Center, you can select one or more request methods. Based on the request methods you select, you can handle multiple operations through one URL instead of multiple separate URLs.

Previously, you could select only one request method for each custom API. To handle multiple methods for the same resource, you had to create and manage separate URLs for each method.

For more information, see https://docs.informatica.com/ipaas/api-center/current-version/manage-apis/custom-apis/publishing-a-custom-api.html in the *Manage APIs* help.

Improved sorting, searching, and inline filtering on the API Center pages

API Center has improved sorting, searching, and inline filtering across its pages, including the **Published APIs**, **Managed APIs**, **Managed API Groups**, and **Configuration** pages.

Search now queries across all pages, so you can find results that aren't visible on the page that you view. You can use inline filters for the protocol and version fields to narrow results directly within a page.

Previously, search on these pages highlighted matches only within the current page.

For more information, see *Introducing API Center*.

Selection-based asset list in the Data Quality API creation flow

When you create an API for Data Quality, you now select rule specifications and mapplets from a filtered list to quickly find the assets you want.

Previously, these assets were only presented in a flat list.

For more information, see https://docs.informatica.com/ipaas/api-center/current-version/rest-api-assets/rest-api-assets/api-definition/importing-data-quality-assets.html in the *REST API Assets* help.

CHAPTER 4

Application Integration

The October 2026 release of Application Integration includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
Oct 15, 2026	Added	"New IDMC Cloud Data Integration Job Log Capture recipe" on page 25
September 24, 2026	Deleted	Standard HTTP fault status codes for process error handling
September 24, 2026	Deleted	Support for by-copy connection objects in the Turbo mode
September 17, 2026	Added	"Support for OData views in data access service connectors" on page 25
September 17, 2026	Added	"DAS connector caches schema metadata for improved performance" on page 27
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Application Integration includes the following important notices and upcoming changes.

Dropped support for SOAP API login() endpoints

Effective in June 2027, Salesforce will retire the SOAP API login() authentication operation for API versions `31.0` through `64.0`. This change strengthens account security by moving integrations away from legacy username-and-password authentication towards OAuth-based authentication.

After June 2027, Salesforce will no longer accept authentication through the SOAP API login() operation. Consequently, Informatica Salesforce connections that rely on SOAP API login() will fail to authenticate.

Before June 2027, you must reconfigure your Salesforce connections to use a supported OAuth authentication method. Processes and assets that use the reconfigured connections don't require any other changes.

Deprecated support

Effective in the October 2026 release, PostgreSQL database server version 14.6 is deprecated. Informatica intends to drop support for PostgreSQL database server version 14.6 in a future release. PostgreSQL database server 14.6 will reach end of life (EOL) on November 12, 2026, as noted on the PostgreSQL Versioning Policy page. Upgrade to PostgreSQL database server 18.4 before the EOL date.

New features and enhancements

The October 2026 release of Application Integration includes the following new features and enhancements.

Application Integration Console enhancements

You can view the input, output, and temporary field values directly when you view a process instance in Application Integration Console.

Note: You can view these fields only when you set the process tracing level to **Normal** or **Verbose**.

You don't need to open the process instance in the advanced view to inspect these values. You can trace step-by-step behavior, verify results, and troubleshoot completed runs faster.

Under process properties, you can also view the **Target Namespace** field, which uniquely identifies the process executed by the instance.

.
For more information, see *Monitor*.

Standard HTTP application failure fault codes in OpenAPI 3.0.1 process specifications

Auto-generated OpenAPI 3.0.1 process specifications in Application Integration automatically include seven standard HTTP application failure fault status codes.

This feature enables upstream API gateways and consumer clients to automatically parse, validate, and handle process error responses. As a result, you can streamline API gateway onboarding without manual specification edits or security exceptions, enforce built-in compliance across process assets, and improve runtime reliability through precise payload and error validation.

For more information, see *Design*

Support for publishing multiple messages to Google PubSub

You can use the event target in a Google PubSub app connection to publish multiple messages in a single Service step. The PubSubMessage element is a repeatable list type. Use it to bundle multiple payloads, each with its own headers, attributes, and body.

For more information, see the *Google PubSub* connector guide.

New XQuery function

In the **Miscellaneous** section of the Expression Editor's **Functions** list of Process Designer, use the new `util:toJSONWithSchema` XQuery function to convert the XML data structures and process objects inside a process into the JSON format with a defined schema. The schema enables the parser to identify array fields and preserve single-element arrays as arrays. Defining the schema ensures consistent array structures regardless of the payload size.

For more information, see *Design*.

OAuth 2.0 authentication through a Secure Agent

You can perform OAuth 2.0 authentication through a Secure Agent when you configure service connectors and application connections. Use a Secure Agent or Agent Group to authenticate with private OAuth providers in isolated networks that Informatica Cloud can't access directly.

For more information, see *Design*.

OAuth 2.0 PKCE support for service connectors and Email connections

You can configure OAuth 2.0 connections using the Proof Key for Code Exchange (PKCE) grant type in service connectors and Email connections. PKCE is an OAuth 2.0 security enhancement that eliminates the need to transmit client secrets during authentication, helping you meet stricter security and compliance requirements when connecting to external services.

For more information, see *Design*.

Hierarchical Mapper transformations on Secure Agents

Application Integration can route the Hierarchical Mapper transformation execution to a Secure Agent instead of to the cloud-hosted service. You activate agent-based execution by pointing a URN at the Secure Agent endpoint, which gives you control per organization and per environment.

For more information, see *Design*.

XQuery Update Facility support

Query expressions now support the XQuery Update Facility, a standard W3C extension to XQuery that adds copy-modify-return operations to insert, delete, rename, or replace nodes and node values directly within an expression without creating intermediate copies. This simplifies expression authoring and improves processing efficiency.

For more information, see *Process Developer*.

Support for OData views in data access service connectors

You can now expose database views as OData entities through a data access service connector and read data from them. Use views to model and query your data with more flexibility through OData.

For more information, see *Design*.

New IDMC Cloud Data Integration Job Log Capture recipe

Use the recipe to simplify access to system Cloud Data Integration (CDI) job log entries in Informatica Intelligent Data Management Cloud (IDMC).

For more information, see *IDMC Cloud Data Integration Job Log Capture* recipe guide.

Changed behavior

The October 2026 release of Application Integration includes the following changed behavior:

Automatic removal of stale Salesforce mappings during synchronization

A Salesforce organization can now be mapped to only one IDMC organization at a time during synchronization from Salesforce. When you synchronize a Salesforce organization with a new IDMC organization, Application Integration automatically removes the Salesforce organization link from the IDMC organization that it was previously mapped to, so that only the most recent mapping remains active. This change is applied automatically during synchronization. No action is required on your part.

Previously, Application Integration retained the earlier mapping, which allowed a single Salesforce organization to remain mapped to multiple IDMC organizations at the same time.

For more information, see *Design*.

Process object generation for WSDL or XSD files with duplicate complex types

You can generate a unique process object when you create a service connector from a Web Services Description Language (WSDL) or XML Schema Definition (XSD) file that contains repeated complex type names. This change ensures that the process object mapping accurately captures and preserves action-specific request and response fields.

Previously, when you created a service connector by importing a WSDL or XSD file that contained repeated complex type names, Application Integration generated only a single process object based on the first occurrence of that metadata name. It mapped subsequent actions that used the same complex type name to this initial process object, ignoring the unique child elements and metadata structures defined for the other actions.

For more information, see *Design*.

Connection mode options for Google BigQuery V2

Google BigQuery V2 connections support only the Simple and Hybrid connection modes. The Complex connection mode is no longer available in the **Connection Mode** field for Google BigQuery V2 connections.

Previously, you could set the connection mode to Complex. However, the Complex mode returned all the data as a single string field and did not support query-based use cases in Application Integration.

If you have existing Google BigQuery V2 connections configured in the Complex mode, reconfigure them to use the Simple or Hybrid mode.

For more information, see *Google BigQuery V2 Connector Guide*.

Default pagination for Microsoft Fabric JDBC connections

You can now run OData API requests and Informatica Process Designer process requests against Microsoft Fabric databases without pagination failures. To enable this behavior, add the `aeEnableDefaultPagination=true` parameter to your Microsoft Fabric JDBC connection URL. After you add the parameter, OData API requests and Process Designer processes can successfully retrieve paginated results from Microsoft Fabric databases.

Previously, requests with $skip=0 or incomplete pagination parameters returned errors because Microsoft Fabric does not support the T-SQL SET ROWCOUNT statement.

For more information, see *JDBC Connector Guide*.

Usage report time range limit

When you download an Application Integration usage report in Operational Insights, the time range between the start and end dates can't exceed 13 months.

Previously, a request for a range longer than 13 months returned a success response with no data, which made it unclear whether the range exceeded the limit or the period genuinely contained no data. Now, a request for a range longer than 13 months returns an error that explains the limit, so you can tell that you need to shorten the date range instead of assuming that no data exists for the period.

For more information, see *Operational Insights*.

Replication upgrade of the Process Server PostgreSQL database

To enable replication upgrade of the Process Server PostgreSQL database for a Secure Agent, access the following directory:

```
<Secure Agent installation directory>/apps/process-engine/data/db/util
```

Then, run the following command:

```
db_upgrade.sh enable_replication
```

Note: The command runs successfully only after the Process Server package for the October 2026 release is deployed and upgraded on the Secure Agent. To upgrade the package, stop and start Process Server.

Previously, to enable replication upgrade of the Process Server PostgreSQL database for a Secure Agent, you added a custom property for the Secure Agent.

For more information, see *Secure Agent Services*.

DAS connector caches schema metadata for improved performance

A data access service (DAS) connector caches schema metadata for improved performance. The connector now caches the list of tables and views for a schema after the first OData request, and reuses the cached list for subsequent requests.

Previously, the connector retrieved this list from the database on every OData request.

If you change the database structure, you must republish the connector to refresh the cached list and reflect the changes.

For more information, see *Design*.

Upgrade

The following topic provides information about the task that you must perform after you upgrade to the October 2026 release.

Process Server restart

As part of this release, updates were made to the Process Server service on the Secure Agent. The updates do not affect the service and the agent processes will continue to work as is. As a result of the deployment of the updates, you will see that the status of the Process Server service shows up as **Restart Required**.

If you would like to manually restart the Process Server at your own convenience and get the latest updates, perform the following steps:

1. Open the Administrator service and select **Runtime Environments**.

2. On the **Runtime Environments** page, click the name of the Secure Agent.

   Note: You might have to expand the Secure Agent group to see the list of Secure Agents within the group.

3. In the **Agent Service Details** section, hover over the row that contains the Process Server service and click the **Stop Service** icon.
4. Click the **Start Service** icon in the row to restart the Process Server service. After the service starts, the status changes to **Up and Running**. If the service fails to start, check the audit log in the **Monitor** tab to find the cause of the error.

For more information about Secure Agents, see *Runtime Environments* in the Administrator help.

CHAPTER 5

Business 360 Console

The October 2026 release of Business 360 Console includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 22, 2026	Added	"Ingress jobs with no extracted records" on page 40
October 22, 2026	Added	Default values in "Preview initiated" on page 30
October 21, 2026	Deleted	Default values in "New features and enhancements" on page 35
October 21, 2026	Modified	"Preview initiated" on page 30
October 21, 2026	Deleted	Business events based on native workflows in "New features and enhancements" on page 35
October 21, 2026	Deleted	Preview lifted in Important notices and upcoming changeson page 30
October 16, 2026	Modified	"Enrichment and Validation Orchestrator" on page 36
October 15, 2026	Added	Decimal valueson page 40
October 12, 2026	Added	Org version in Important notices and upcoming changeson page 30
October 12, 2026	Modified	Apache NiFi 2.5.0 runtime engine for Streaming Ingestion and Replication in Important notices and upcoming changeson page 30

Publication Date	Type of Change	Section Title
October 9, 2026	Modified	"Preview initiated" on page 30
October 9, 2026	Added	Apache NiFi 2.5.0 runtime engine for MDM SaaS in Important notices and upcoming changeson page 30
October 8, 2026	Modified	"Preview initiated" on page 30
October 8, 2026	Modified	"Enrichment and Validation Orchestrator" on page 36
October 7, 2026	Modified	Important notices and upcoming changeson page 30
October 7, 2026	Modified	Business events based on native workflows
October 2, 2026	Added	Multilingual configuration in Important notices and upcoming changeson page 30
September 30, 2026	Modified	Important notices and upcoming changeson page 30
September 24, 2026	Added	"Field limits" on page 37
September 24, 2026	Added	Business events based on native workflows
September 24, 2026	Modified	Important notices and upcoming changeson page 30
September 18, 2026	Added	Localized picklist field valueson page 0
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Business 360 Console includes the following important notices:

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Configure privileges for custom user roles to access Reference 360 assets

You can configure privileges for custom user roles to control access to reference data assets, attributes, code values, and workflows.

For more information about configuring privileges for custom user roles, see *Getting started with Reference 360* in Reference 360 Help.

REST API Explorer

You can now browse, test, and download Business 360 REST APIs directly from the REST API Explorer, a Swagger UI in the Business 360 Console.

Business events based on native workflows

You can design native workflows in Business 360 Console for business events related to business entity records, relationships, and hierarchies. Configure these business events for create, update, and delete actions on data through business applications and REST API. You can configure business events for changes to all field types in a business entity, including dynamic fields.

You can also configure business events to skip workflows for record data that passes validation against objectives that you specify.

Users can view, assign, act on, and comment on the related tasks in the task inbox of business applications. They can assign, act on, or comment on tasks individually or on multiple tasks at once. Users can also track the status of their updates in the ticket manager. A ticket is created automatically when a workflow is triggered, and shows workflow milestones, statuses of all the tasks in a workflow, and the comments as reviewers complete their tasks.

For example, a ticket for a product onboarding workflow lists all the tasks, such as validation of product name, brand name, and description, and approval or rejection of the product. The ticket is closed after the product is approved or rejected.

Disabling and enabling business events

You can disable business events that are based on native or external workflows. Disable business events to prioritize other business events or to save them for future use. You can enable disabled business events when you want to use them.

Search enhancements

The search process includes the following changes:

Search within specific field group entries

When you search for records using multiple conditions on fields in the same field group or nested field group, the search evaluates the conditions within each entry, and returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has city New York and street Main Street. The office address has city Chicago and street Oak Avenue.

If you use the Search REST API to search for the record with the condition `city = Chicago` AND `street = Main Street`, the search doesn't return the record because no single address entry matches both conditions.

Previously, the search returned the record if the conditions matched across different entries.

Find records that exceed the field group entry limit

The generate search index job indexes a maximum of 25,000 field group and nested field group entries in a record. If a record contains more than 25,000 entries, only the first 25,000 entries are indexed. A search returns results only for indexed data.

If a record exceeds the field group entry index limit, the Search REST API response includes the error code `100002`, which you can use to identify the affected record. You can also pass the error code in your request to retrieve all records that exceed the index limit.

Note: To apply these changes, reindex the records in your business entities. To reindex the records, run the Generate Search and Report Indexes or Match Keys job by using the MDMSearchIndex process.

Localized picklist field values

You can now manage reference data assets in multiple languages using the following capabilities:

Multilingual configuration

You can now have multilingual reference data in Reference 360. Configure the languages that you want to localize reference data into, then add values for each one. Enable name and description attributes to store values in multiple languages, and enter reference data set or code list attribute values for each language. When business users access applications in a localized language, picklist fields display values in that same language.

Search in localized languages

If picklist values are multilingual, you can now search for records with picklist values in any enabled language, regardless of your browser locale in business applications. Additionally, when you use a filtered search, business applications display picklist values based on your browser locale. However, when you sort records or use auto-suggest in business applications, MDM SaaS continues to use the default language configured for the field values.

Note: To search for records with picklist values in localized languages from existing business entities, run the batch job to reindex records.

For more information, see *Manage localized assets* in Reference 360 Help.

Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following features and enhancements:

Enrich and validate master records during batch processing

You can now configure objectives to run on master records when they are processed in batches.

Enhanced user interface for trigger settings

The triggers settings in the advanced settings of an objective now appear in a tabular layout instead of individual sections. The tabular layout arranges triggers, the option to enable or disable each trigger, the option to reject records with errors, and trigger conditions in adjacent columns.

Draft records

If you configure objectives to reject records, MDM SaaS still allows users to save the drafts with validation errors. As a result, they can continue to work on the drafts with validation errors until they're ready to submit them.

Configurations for the product experience agent

Users of business applications can now use the product experience agent to classify and enrich records with product data.

You can configure the following settings for the product experience agent:

- On request. Determines whether CLAIRE can run objectives on request when users prompt CLAIRE Copilot to enrich records. You can now specify whether objectives run automatically or on request. Automatic objectives run when records are created or updated. The existing objectives are automatic objectives by default.
- CLAIRE as a trigger. Determines whether CLAIRE can run an objective.
- CLAIRE-Based Enrichment plugin. Classifies records with product data. When users prompt CLAIRE Copilot to classify records, MDM SaaS runs the data quality objectives that use the CLAIRE-Based Enrichment plugin and classifies the records.

New triggers for objectives

You can now configure objectives with the following triggers:


- Bulk edit. Triggers objectives when users edit records in bulk.
- Merge job. Triggers objectives when match and merge jobs run to merge records.
- Recalculate trust scores job. Triggers objectives when recalculate trust scores jobs run. When you run the job for updated survivorship configurations, objectives now enrich and validate records. The objectives run only for master records that have updated values because of survivorship configuration.
- Reprocess master data job. Triggers objectives when reprocess master data jobs run. If you update enrichment and validation configurations after master records are created, you can reprocess the master records to apply the updated enrichment and validation configurations. The objectives run only for master records that have updated values because of survivorship configuration.

Product experience agent

You can enable or disable the product experience agent for individual business entities. When users prompt the product experience agent to enrich and classify records in business applications, the agent shares the metadata and data with external LLMs. These external LLMs don't use them to train their models. The data residency and retention policies that apply to CLAIRE GPT also apply to the product experience agent. When you enable the product experience agent, you give MDM SaaS your consent to share the information.

The product experience agent is designed to enrich and classify only product data. Before you enable the agent for a business entity that doesn't represent product data, assess whether sharing the data of the business entity with external LLMs meets your organization's requirements.

The following image shows the properties of Person business entity with the option to allow the product experience agent to share data with external LLMs:

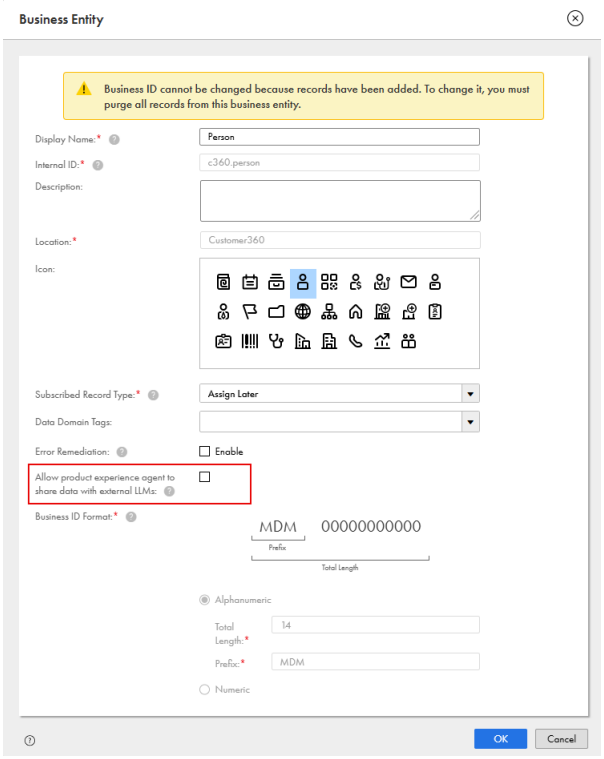

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming changes

We want to let you know about the following upcoming changes:

Validation and cleansing response parameter

In the February 2027 release or later, Informatica requires you to include the groupId parameter in root field objects in the response that an Application Integration process returns for a validation or cleansing request.

To prepare for this change, update existing validation and cleansing processes to include the groupId parameter for root fields.

Informatica intends to include this functionality in February 2027 or later but might choose not to in accordance with changing market or technical circumstances.

Validation of output payloads from Application Integration processes

In the February 2027 release or later, Informatica requires that all existing Application Integration processes that you use in rule associations return valid payloads. If the processes return empty payloads, the associated rule associations will result in the Exception status instead of the Undecided status.

To prepare for this change, ensure that existing processes return a valid response to MDM SaaS.

Informatica intends to include this functionality in February 2027 or later but might choose not to in accordance with changing market or technical circumstances.

JWT authentication

We want to let you know that starting in an upcoming release, JWT authentication token values will be limited to a maximum of 2000 characters.

Deprecated support

Session-based authentication

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use REST V2 Connector to call IDMC APIs.

Apache NiFi 2.5.0 runtime engine for Streaming Ingestion and Replication

Streaming Ingestion and Replication uses the Apache NiFi version 2.5.0 runtime engine. No user action is required. The upgrade includes key updates to custom processors and AMQP NAR components. Streaming Ingestion and Replication is now enhanced to ensure compatibility with JDK 21, as Apache NiFi 2.5 requires a minimum of JDK 21 version to run effectively.

Org version

The October 2026 release doesn't include any data model changes. As a result, the org version for all MDM SaaS business applications remains at `202607.01`.

For more information about the versions in MDM SaaS, see MDM SaaS versions.

New features and enhancements

The October 2026 release of Business 360 Console includes the following new features and enhancements.

Mapping fields

In modernization projects, you can now use an interactive user interface to review and map objects between the MDM Hub and MDM SaaS. You no longer need to generate mapping files to manually map fields.

You can continue to edit or modify manual mapping files for existing modernization projects that aren't completed.

For more information about mapping fields through the user interface, see *Mapping fields using custom mapping*.

Modernization project enhancements

The modernization projects now include the following enhancements:

- You can create a consolidated summary of modernization progress across selected modernization projects. The summary shows key metrics on a read-only page, such as the number of objects modernized, in progress, pending, and excluded from modernization.
- You can now archive modernization projects to accommodate more active projects. However, archived projects are read-only and you can't move them to the active state again.

For more information about creating a summary of modernization projects and archiving modernization projects, see *Summary of modernization projects* and *Archiving modernization projects*.

Search Match API version 2

When master records belong to multiple populations, you can now specify the population parameter in the Search Match API version 2 to search within a specific population. For example, if your customer data includes the Chinese, Japanese, and US populations, specify Chinese as the population parameter to return master records that match the Chinese population.

To search by population, the master records must have population names:

- For master records created after the April 2026 release, MDM SaaS automatically assigns population names to master records based on the populations of their source records.
- For records created before the April 2026 release, use the *Migrate API* to add population names to master records.

After you assign populations to master records, run the Generate Search Indexes or Match Keys job to generate match keys based on the assigned population.

For more information about multi-population support and how population names are assigned to master records, see *Search Match API version 2* and *Assigning populations to master records*.

Search

To enhance search accuracy, MDM SaaS now returns more relevant results. When you search for records, you might notice changes in your search results. For example, a search for a record with the first name Benjamin also returns records with the first names Ben and Benny.

Reset organization

You can reset your organization to its default, newly provisioned state. A reset permanently deletes all data, assets, configurations, jobs, and job schedules in MDM SaaS. Consider a reset when configurations or extensive customizations make a development or QA organization difficult to manage, and starting over is simpler than fixing it. To enable reset for your organization, contact Informatica Global Customer Support.

For more information about resetting organizations and monitoring reset organization jobs, see *Resetting organizations* and *Monitoring reset organization jobs*.

Ingress records

When you run an ingress job, you can update individual fields in a target record instead of replacing the entire record. The update applies only to the fields in the source system that are mapped to the target fields. Other fields remain unchanged. You can also control how the update handles empty values in mapped fields. When a mapped field is empty in the source system, you can overwrite the target value with null or leave it unchanged.

Note: This functionality is available only after you migrate your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release.

For more information about updating fields containing data, see *Defining ingress jobs*.

Dynamic pool

You can now create folders within a dynamic pool to group dynamic fields by topic or purpose. You can add dynamic fields to folders at any level and drag them to rearrange their order. When you design your custom page layout, you can add these folders to the fields component on the page.

For more information about dynamic pools, see *Define the Data Model*.

Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following new features and enhancements:

Error messages in Application Integration-based plugins

The Application Integration-based plugins for validation and cleansing can now return error messages for the fields that fail validation. If you configure the rule associations to show these messages, those fields display the error messages. As a result, you can now show specific reasons for validation failures instead of a generic message.

Non-anonymous process authentication

If you enable a data enhancement rule to use a process with non-anonymous access, your organization can now use the session ID authentication type in addition to the JWT authentication type.

Empty field handling

You can now choose to run objectives on empty fields in lenient mode or controlled mode.

In the lenient mode, an objective runs when sibling fields at different levels, such as root fields and field groups, are updated. You can map business entity fields to input fields that mirror the field structure of a business entity. When input fields of an objective are empty and their sibling fields change, the objective can run on empty fields even if those fields belong to different levels.

In the controlled mode, an objective runs only when sibling fields at the same level, such as a single field group or a nested field group, are updated. Use controlled mode when you want control over which fields an objective can run on when its input fields are empty.

REST API

Business 360 REST API includes the following new resource:

Hierarchy API

Use the hierarchy REST API to create, update, delete, and filter hierarchies. You can add, retrieve, and delete parent and child records. You can move records within a hierarchy or across hierarchies. You can also retrieve the exact location of a specific record in a hierarchy by returning all paths from the parent record to the child record. Additionally, you can find a list of hierarchies that a record is part of based on its business ID.

For more information about the REST APIs to manage hierarchies, see *Business 360 REST API Reference*.

Changed behavior

The October 2026 release includes the following changed behaviors.

Field limits

To maintain application performance as you read, create, or update data, MDM SaaS now limits a business entity to 350 enabled fields, including field groups. The system fields and disabled fields within a business entity don't count toward the limit. The limit applies when you create, edit, or import a business entity.

By default, for business entities that you created before the October 2026 release and that are close to or exceed the limit,Informatica sets its limit to the current field count plus a buffer of 20 fields. You can't import a business entity that has a buffer and more than 350 fields. Before you import such a business entity, ensure that it has 350 or fewer enabled fields. To increase the limit in the organization where you want to import the business entity, contact Informatica Global Customer Support.

Previously, MDM SaaS didn't limit the number of fields or field groups in a business entity.


For more information, see Limits and thresholds.

Migrate rule associations

You can now migrate your basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator from the **Global Settings** page. You can migrate the rule associations only once for each organization. Informatica recommends that you first migrate rule associations to use Enrichment and Validation Orchestrator in your development and QA organizations. After you complete testing the migrated rule associations, migrate them in your production organization.

When you migrate, MDM SaaS runs the migrate rule associations job. You can track the status of the job on the **Global Settings** page or monitor the job on the **My Jobs** page.

The following image shows the Rule Association Migration tab on the Global Settings page:

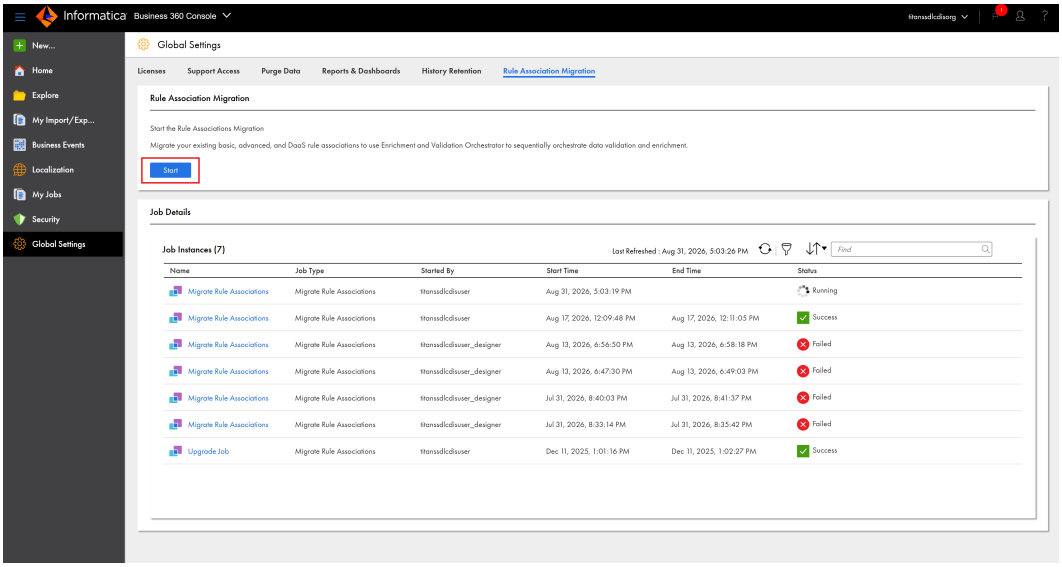

If you have already migrated your rule associations in existing organizations, the option to start the migration is disabled.

Previously, you migrated existing rule associations from the **Home** page of Business 360 Console.

For more information about migrating existing rule associations, see *Configure Global Settings*.

Match explainability metrics

You can now run match and merge jobs that only update match explainability metrics without performing matching. Normally, a match and merge job updates these metrics as part of performing matching, but you can now exclude the metrics update to complete the job faster.

Previously, the match process updated match explainability metrics only as part of a match and merge job.

For more information about updating match explainability metrics, see *Defining match and merge jobs*.

For more information about the post-upgrade tasks that you must perform to update match explainability metrics, see *Post-upgrade tasks for the October 2026 release*.

Candidate selection criteria

You can now configure candidate selection criteria separately and associate them with match models. As a result, match keys no longer regenerate each time you configure candidate selection criteria, which significantly improves match process performance. You can configure up to 10 candidate selection criteria for each business entity. Business entities that already exceed the limit retain the existing criteria, but you can't add new criteria.

Previously, you could create candidate selection criteria only as part of match model configuration.

For more information about candidate selection criteria, see *Candidate selection criteria*.

Search enhancements

The search process includes the following changes:

Search configuration for dynamic field values

You can now enable up to 5,000 searchable and 5,000 facetable dynamic fields in an organization.

Previously, you could enable only up to 50 searchable and 50 facetable dynamic fields in an organization.

Index limits

To optimize performance and enhance search results, the search process indexes 100 dynamic fields for each record. If a record exceeds this limit, MDM SaaS doesn't index the other fields, and searches on those fields don't return the record.

If a record exceeds the 100 index limit, the Search REST API response includes the error code `100001`, which you can use to identify the affected record. You can also pass the error code in your request to retrieve all records that exceed the index limit.

Previously, you couldn't identify records with fields that weren't completely indexed.

Note: To apply these changes, reindex the records in your business entities. To reindex the records, run the Generate Search and Report Indexes or Match Keys job by using the MDMSearchIndex process.

For more information about configuring search for dynamic field values and dynamic fields index limit, see *Getting Started with MDM SaaS* and *Business 360 REST API Reference*.

Internal ID of assets

After you delete an asset, you can reuse its internal ID for other assets.

Previously, you couldn't reuse the internal ID of a deleted asset.

For more information about deleting assets, see *Delete custom assets.*

Merge job

When you merge records, the merge job updates the first 1,000 relationships to the surviving master record and then ends its run. The resolve long-running operations job then updates the remaining relationships.

For example, when you merge records A and D, MDM SaaS updates the relationships of record D to reference master record A. If record D has more than 1,000 relationships, such as D-E and D-F, the merge job processes the first 1,000 updates. The job changes the business ID from D to A. As a result, the relationships become A-E and A-F. The merge job then ends its run, and the resolve long-running operations job updates the remaining relationships.

Previously, MDM SaaS considered a merge job complete only after it updated all relationships to reference the new master record.

Advanced rule associations

When you configure advanced rule associations in organizations that were created after the October 2025 release, MDM SaaS now displays error messages on all input fields. If you have existing advanced rule associations in these organizations, MDM SaaS doesn't apply this change until you update the rule associations.

However, MDM SaaS displays error messages on applied fields for advanced rule associations in organizations where you already migrated the rule associations during the April 2026 release.

Previously, MDM SaaS displayed error messages only on the applied fields for advanced rule associations that you created after the October 2025 release.

If you want to control how MDM SaaS displays error messages for advanced rule associations in both the organizations, see “Advanced rule associations ” on page 45.

For more information about configuring advanced rule associations, see *Configure Data Quality*.

Enrichment and Validation Orchestrator

A rule association configured with the Data Quality - Transformation plugin throws an exception if its output exceeds the maximum length of the target string field. Additionally, the rule association doesn’t return any value to the output field.

Previously, the rule association automatically trimmed the output to fit the length of the field.

For more information about the Data Quality - Transformation plugin, see *Configure Data Quality*.

Decimal values

When you run an ingress or file import job after you migrate your rule associations to use Enrichment and Validation Orchestrator, MDM SaaS removes trailing zeros after the decimal point. For example, if you import `145.00`, MDM SaaS retains the value as `145`. This change applies only to decimal fields that have no rule associations configured.

Previously, when you ran an ingress or file import job, MDM SaaS retained decimal values with trailing zeros.

For more information about migrating rule associations to Enrichment and Validation Orchestrator, see *Configure Data Quality*.

Ingress jobs with no extracted records

If the extract step of an ingress job that uses the Business 360 FEP Connector doesn't extract any records, MDM SaaS now sets the status of the Transform step and the job to Warning and ends the job.

This applies to organizations in which you migrated rule associations to Enrichment and Validation Orchestrator in the April 2026 and July 2026 releases. It also applies to new organizations that you created after the October 2025 release.

Previously, MDM SaaS ran the Transform, Load, Enrichment, Index for Search, and Generate Tokens steps and set the job status to Success.

For more information about ingress jobs, see Define Jobs.

Post-upgrade tasks for the October 2026 release

Perform the following tasks after your organization is upgraded to the October 2026 release.

Reimport the match and merge process to update explainability metrics

The `MDMMatchMerge` process is a predefined Cloud Application Integration process that matches the records, creates match pairs, merges the match pairs, and resets the matched records.

Effective in the October 2026 release, you can update the match explainability metrics independently without performing matching. To update the match explainability metrics independently, reimport the latest version of the `MDMMatchMerge` process.

To overwrite the existing `MDMMatchMerge` process with the latest version, perform the following steps:

1. "Step 1. Get the artifact ID of the existing process" on page 41
2. "Step 2. Assign write permission to the user" on page 42
3. "Step 3. Import the latest process" on page 43
4. "Step 4. Delete the write permission assigned to the user" on page 43
5. "Step 5. Publish the process" on page 45

After you successfully overwrite the existing `MDMMatchMerge` process, you can define a match and merge job to update the match explainability metrics without performing matching. For more information about defining a match and merge job that updates explainability metrics, see *Defining match and merge jobs*.

Step 1. Get the artifact ID of the existing process

To overwrite the existing `MDMMatchMerge` process, you require the artifact ID of the process to uniquely identify it.

Before you get the artifact ID, log in to MDM SaaS to get a session ID or JSON web token (JWT). To log in, use the Login API and submit a POST request with the following URI:

```
POST <baseApiURL>/saas/public/core/v3/login
```

The login response contains the session ID that you use in the subsequent API requests. To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Requests

Use the following POST request to log in to MDM SaaS:

```
POST https://use4.dm-us.informaticacloud.com/saas/public/core/v3/login
Content-Type: application/json
{
  "username": "<User name>",
  "password": "<Password>"
}
```

Use the following POST request to get the artifact ID of the `MDMMatchMerge` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
  "lookupParamPath": [
    {
      "name": "MDMMatchMerge",
      "type": "PROCESS",
      "location": [
        { "type": "Space", "name": "REG" },
        { "name": "Business360", "type": "Project" }
      ]
    }
  ]
}
```

Sample Response

After the POST request to log in to MDM SaaS is successful, you get the following response:

```
{
    "products": [
        {
            "name": "Integration Cloud",
            "baseApiUrl": "https://qa-pod1.rel.infaqa.com/saas"
        }
    ],
    "userInfo": {
        "sessionId": "<Session ID>",
        "id": "<User ID>",
        "name": "<username>",
        "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "orgId": "<Org ID>",
        "orgName": "<Org name>",
        "groups": {},
        "status": "Active"
    }
}
```

The sample response shows the HTTP 200 OK response code and contains the artifact ID of the `MDMMatchMerge` process. The response shows the artifact ID as `a7d1raphIOLdjfNVarUJaC` in the artifact section.

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    {
      "orgId": "lkV1tSYJzKYcdNHddSjsWN",
      "status": { "code": "FRS_200", "message": "" },
      "tags": [],
      "artifact": {
        "@odata.type": "#OData.frs.Document",
        "id": "a7d1raphIOLdjfNVarUJaC",
        "name": "MDMMatchMerge",
        "description": "",
        "owner": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastUpdatedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastAccessedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "documentType": "PROCESS",
        "contentType": "application/json; charset=utf-8",
        "documentState": "VALID",
        "aclRule": "org",
        "isSourceControlled": false,
        "checkedOutById": null
      },
      "docRef": null
    }
  ]
}
```

Step 2. Assign write permission to the user

To overwrite the existing `MDMMatchMerge` process, assign write permission to the user who logged in.

To assign write permission to the user, use the UpdateACL API and submit a POST request. To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiURL>/frs/api/v1/UpdateACL
```

Sample Request

Use the following POST request to assign write permission to the user:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
  "artifactId": "<Artifact ID from Step 1>",
  "aces": [
    {
      "operation": "CREATE_ACE",
      "permission": {
        "changePermission": true,
        "read": true,
        "update": true,
        "delete": false,
        "execute": true
      },
      "idsInfo": { "id": "<User ID from the login response>", "type": "USER" }
    }
  ]
}
```

Note: The user ID specifies the identifier of the user who logged in to reimport the `MDMMatchMerge` process.

Sample Response

After the POST request to assign write permission to the user is successful, you get the following response:

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    { "guid": "FRS_ID", "code": "FRS_200", "message": "Successfully Updated ACLs" }
  ]
}
```

Step 3. Import the latest process

You require the latest `MDMMatchMerge` process to update match explainability metrics. When you import the latest process, overwrite the existing process to retain its permissions and configuration.

1. To request the latest `MDMMatchMerge` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the latest `MDMMatchMerge` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, select the ZIP file that contains the latest `MDMMatchMerge` process, and click **Open**.
6. In the **Specify Import Job Details** section, select **Overwrite existing assets, excluding connections and runtime environments**.
7. Click **Import**.

Step 4. Delete the write permission assigned to the user

After you import the latest `MDMMatchMerge` process, delete the write permission that you assigned to the user and set the process to read only so that users can't modify it.

To identify the write permission to delete, use the GetACL API and submit a GET request with the following URI:

```
GET <baseApiURL>/frs/api/v1/GetACL?artifactId=<Artifact ID from Step 1>
```

To delete the write permission, use the UpdateACL API and submit a POST request with the following URI:

```
<baseApiURL>/frs/api/v1/UpdateACL
```

Sample Requests

Use the following GET request to retrieve the access control entries of the `MDMMatchMerge` process:

```
GET https://use4.dm-us.informaticacloud.com/frs/api/v1/GetACL?
artifactId=a7d1raphIOLdjfNVarUJaC
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

From the response, identify the access control entry for the write permission. To identify the correct entry, match the creation timestamp of the entry to the time when you assigned the write permission in Step 2.

Use the following POST request to delete the write permission:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
  "artifactId": "<Artifact ID from Step 1>",
  "aces": [
    {
```

```
      "aceId": "<Write Permission ID>",
      "operation": "DELETE_ACE",
      "operation": "DELETE_ACE",
      "idsInfo": {
           "id": "<User ID from Step 1>",
           "type": "USER"
    }
   ]
   "artifactId": "<Artifact ID from Step 1>"
}
```

Sample Response

After the GET request is successful, you get the following response:

```
{
    "@odata.context": "$metadata#Collection(OData.frs.Ace)",
    "value": [
        {
            "id": "9aMAeHngAJeezftidP23i9",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:42:51Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:42:51Z",
            "permission": {
                "create": null,
                "read": true,
                "update": true,
                "delete": true,
                "execute": true,
                "changePermission": true {{            }}
            }
        },
        {
            "id": "bmo9yhPqYc2fwBEHK9Timf",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "8OSrngWzLw3bgwgRbqUy2f",
                "type": "ORG"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:44:33Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:44:33Z",
            "permission": {
                "create": null,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true,
                "changePermission": true {\{}
                }
            }
        },
        {
            "id": "<Write Permission ID>",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "hIC3qRnQfqqj00zDeJnd6S",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-03-03T07:11:08Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-03-03T07:11:08Z",
            "permission": {
```

```
                "create": null,
                "read": true,
                "update": true,
                "delete": false,
                "execute": true,
                "changePermission": true
            }
        }
    ]
}
```

Note: Identify the ID of the write permission based on the date when you assigned the permission to the user.

After the POST request to delete the write permission is successful, you get the following response:

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    { "guid": "FRS_ID", "code": "FRS_200", "message": "Successfully Updated ACLs" }
  ]
}
```

Step 5. Publish the process

After you delete the write permission assigned to the user, publish the `MDMMatchMerge` process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the `MDMMatchMerge` process, and click **Actions**.
4. Click **Publish**.

Advanced rule associations

MDM SaaS now displays error messages on all input fields for advanced rule associations that are newly created in organizations created after the October 2025 release. However, MDM SaaS doesn't apply this change for advanced rule associations that are migrated during the April 2026 release.

If you want to display error messages only on the applied fields for advanced rule associations created in organizations after the October 2025 release, perform the following steps:

1. Disable the advanced rule association and save the business entity.
2. Create an objective group, objective, and rule association with the Data Quality - Validation plugin in Enrichment and Validation Orchestrator.
3. When you map the input field for the rule association, map only the applied field.

For more information about adding rule associations for data enrichment and validations in Enrichment and Validation Orchestrator, see *Configure Data Quality*.

If you have already migrated advanced rule associations during the April 2026 release and want to display error messages on all input fields, perform the following steps:

1. Disable the advanced rule association.
2. Enable the advanced rule association again.
3. Save the business entity.

Migrate assets

To ensure consistency and compatibility, MDM SaaS restricts asset migration from organizations that haven't migrated their basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator into organizations that have. However, if you have already migrated these rule associations in your source organization, you can import assets into the target organization even if it hasn't migrated to use Enrichment and Validation Orchestrator.

MDM SaaS doesn't support migration of assets between organizations containing basic, advanced, and DaaS rule associations that are partially migrated to use Enrichment and Validation Orchestrator.

For example, if some rule associations fail to migrate, the organization might end up with a partial migration. Rerun the job to resolve the issue. If the issue persists, contact Informatica Global Customer Support.

Additionally, ensure that you don't migrate assets and run the migrate rule associations job simultaneously.

For example, if you export assets while the migrate rule associations job is in progress, the exported file doesn't contain rule associations that are created as part of the migration process. If you import the exported file into a target organization that's migrated to use Enrichment and Validation Orchestrator, the import fails. When you import assets into an organization, if you simultaneously run the migrate rule associations job, the migration process doesn't consider the rule associations that are being imported.

For more information about migrating assets between organizations, see *Manage and Migrate Assets*.

Reindex records to view filter values

To get additional filter values, such as Blank, Not Blank, and Is in business applications, ensure that you reindex the records of business entities.

To reindex records of business entities, run a batch job to generate search indexes.

For more information about generating search indexes, see *Define Jobs*.

Import the process for the reprocess master data job

You need the predefined Cloud Application Integration process, `MDMProcessMasterData`, to recalculate the trust scores of the active and deleted master records.

To reprocess master data, ensure that you perform the following tasks after the organization is upgraded:

1. *Modify permissions for organizations in the July 2024* .
2. *Import the process to reprocess master data*.
3. *Get the artifact ID of the process*.
4. *Modify permissions and create a user for reprocessing master data*.
5. *Publish the process for reprocessing master data*.

Step 1. Modify permissions for the existing process

If you don't have the `MDMProcessMasterData` process in your organization, you can start by importing the process to reprocess master data. For more information about importing the process to reprocess master data, see *Import the process to reprocess master data*.

If you have the `MDMProcessMasterData` process from the July 2024 release, you need to get the latest process file that supports processing active and deleted records. Before you get the latest file, remove the read-only access to the process so that you can overwrite the existing file with the latest file.

To set the update permissions, use the UpdateACL API and submit a POST request.

To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiUrl>/frs/v1/UpdateACL
```

When you submit a POST request to set the update permissions, you require the `artifactId` of the process. To get the `artifactId` of the process, see *Get the artifact ID of the process*.

Sample Request

Use the following POST request to set the update permissions of the `MDMProcessMasterData` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
          {
              "artifactId": "<Artifact ID from Step 3>",
               "aces": [
                            {
                              "operation": "CREATE_ACE",
                              "permission": {
                                          "changePermission": true,
                                          "read": true,
                                          "update": true,
                                          "delete": true,
                                           "execute": true
                                                    },
                              "idsInfo": {
                                         "id": "3VMH0uFUXQVddwVkjrfJUv",
                                          "type": "USER"
                                             }
                            }
                         ]
            }
```

Note: The service user ID, `3VMH0uFUXQVddwVkjrfJUv`, remains a constant value for all the predefined Application Integration processes and doesn't vary between organizations.

Sample Response

After the POST request to modify the permissions of the `MDMProcessMasterData` process, you get the following response:

```
{
     "@odata.context": "$metadata#BaseEntities",
     "value": [
                          {
                              "guid": "FRS_ID",
                              "code": "FRS_200",
                               "message": "Successfully Updated ACLs"
                           }
                      ]
}
```

Step 2. Import the process to reprocess master data

To reprocess master data, import the `MDMProcessMasterData` process after you upgrade the organization.

1. To request the `MDMProcessMasterData` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the `MDMProcessMasterData` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.

5. On the **Import Assets** page, click **Choose File**, and select the ZIP file that contains the `MDMProcessMasterData` process, and click **Open**.
6. Click **Import**.

Step 3. Get the artifact ID of the process

To modify permissions and create a user to access the `MDMProcessMasterData` process, you require the artifact ID of the process to uniquely identify it.

To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Request

Use the following POST request to get the artifact ID of the `MDMProcessMasterData` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "lookupParamPath": [
        {
            "name": "MDMProcessMasterData",
            "type": "PROCESS",
            "location": [
                {
                    "type": "Space",
                    "name": "REG"
                },
                {
                    "name": "Business360",
                    "type": "Project"
                }
            ]
        }
    ]
}
```

Sample Response

The sample response shows the HTTP 200 OK response code and gets the artifact ID of the `MDMProcessMasterData` process. The response shows the artifact ID as `9TvdYgWHVOrhUHnMLMCc0z` in the `artifact` section.

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "orgId": "4MEN7vwklj8biicae7QiKX",
            "status": {
                "code": "FRS_200",
                "message": ""
            },
            "tags": [],
            "artifact": {
                "@odata.type": "#OData.frs.Document",
                "id": "9TvdYgWHVOrhUHnMLMCc0z",
                "name": "MDMProcessMasterData",
                "description": "",
                "owner": "2UQOrM7xtu1euGYkYlBeOr",
                "createdBy": "2UQOrM7xtu1euGYkYlBeOr",
                "lastUpdatedBy": "2UQOrM7xtu1euGYkYlBeOr",
                "lastAccessedBy": "2UQOrM7xtu1euGYkYlBeOr",
                "createdTime": "2024-07-25T04:01:13Z",
                "lastUpdatedTime": "2024-08-01T11:29:30Z",
```

```
                    "lastAccessedTime": "2024-08-01T11:29:30Z",
                    "expiresBy": "2038-01-18T00:00:00Z",
                    "parentInfo": [
                        {
                            "parentId": "7cCn5thwWFLhiZoSosphKL",
                            "parentName": "REG",
                            "parentType": "Space"
                        },
                        {
                            "parentId": "0XuRGcy4SdyehONacV75yq",
                            "parentName": "Business360",
                            "parentType": "Project"
                        }
                    ],
                    "documentType": "PROCESS",
                    "contentType": "application/json; charset=utf-8",
                    "documentState": "VALID",
                    "aclRule": "org",
                    "subcontainerCount": 0,
                    "customAttributes": {
                        "stringAttrs": [
                            {
                                "name": "publishedBy",
                                "value": "Delta_Apr4Adm"
                            },
                            {
                                "name": "SubType",
                                "value": ""
                            },
                            {
                                "name": "binding",
                                "value": "rest"
                            },
                            {
                                "name": "ReferencedPublishingAllowed",
                                "value": "true"
                            },
                            {
                                "name": "APIName",
                                "value": "MDMProcessMasterData"
                            },
                            {
                                "name": "publicationStatus",
                                "value": "published"
                            }
                        ],
                        "numberAttrs": [],
                        "dateAttrs": [
                            {
                                "name": "publicationDate",
                                "value": "2024-08-01T11:29:39Z"
                            }
                        ]
                    },
                    "repoInfo": {
                        "repoParams": [],
                        "repoPath": null,
                        "repoHandle": "tf2VR4109cjIw8j-
gt-3576941-2024-07-25T04:01:13.177Z::pd.xml",
                        "frsPath": null
                    },
                    "isSourceControlled": false,
                    "checkedOutById": null
                },
                "docRef": null
            }
        ]
}
```

Step 4. Modify permissions and create a user for reprocessing master data

After you import the `MDMProcessMasterData` process, set the process to read only so that users can't modify it. Additionally, the `MDMProcessMasterData` process includes a service user created and assigned to it by default.

You can remove the service user or modify its permission, but you can't create a new service user. When you upgrade your organizations to the latest release and the `MDMProcessMasterData` process has updates in the latest release, the service user requires the necessary permissions to upgrade the process. If you don't assign the necessary permissions to the service user, the upgrade might fail.

To set the read-only permission for the process and to assign necessary permissions to the service user, use the UpdateACL API and submit a POST request. To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiUrl>/frs/v1/UpdateACL
```

Sample Request

Use the following POST request to modify the permissions of the `MDMProcessMasterData` process to read only:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true
            },
            "idsInfo": {
                "id": "<Organization ID>",
                "type": "ORG"
            }
        }
    ]
}
```

Note: The `Organization ID` specifies the identifier of the organization to which the `MDMProcessMasterData` process was imported.

Use the following POST request to assign the necessary permissions for the service user assigned to the `MDMProcessMasterData` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": true,
                "delete": true,
                "execute": true
            },
```

```
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            }
        }
    ]
}
```

Sample Response

After the POST requests to modify the permissions of the `MDMProcessMasterData` process and create a user to access the `MDMProcessMasterData` process are successful, you get the following response:

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "guid": "FRS_ID",
            "code": "FRS_200",
            "message": "Successfully Updated ACLs"
        }
    ]
}
```

Step 5. Publish the process for reprocessing master data

After you modify permissions and create a user for the `MDMProcessMasterData` process, publish the process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the **MDMProcessMasterData** process, and click **Actions**.
4. Click **Publish**.

Import the process for matching external data

To match external data with master or source records without storing the external data, the match process requires match keys for master or source records. You can generate match keys for master records by using a generate search indexes or match keys job. The match keys for source records are generated during the ingress process.

Additionally, you need the predefined Cloud Application Integration process, `MDMExternalMatch`, to match external data with master or source records.

If you import the `MDMExternalMatch` process for the first time in your organization, perform the following steps:

1. “Step 1. Generate match keys for master records” on page 52
2. “Step 2. Import the process for matching external data” on page 52
3. “Step 3. Get the artifact ID of the process” on page 52
4. “Step 4. Modify permissions for matching external data orchestration” on page 54
5. “Step 5. Publish the process” on page 55

Note: If the `MDMExternalMatch` process is already imported in your organization during the previous releases, you must reimport the latest version of the `MDMExternalMatch` process. For more information about reimporting the process, see “Reimport the process for matching external data” on page 55.

Step 1. Generate match keys for master records

To match external data with master records, generate match keys for master records by running a generate search indexes or match keys job. The match process uses match keys of master records for matching.

For more information about the generate search indexes or match keys job, see Define and run the generate search indexes or match keys job.

Step 2. Import the process for matching external data

MDM SaaS uses the predefined `MDMExternalMatch` process to orchestrate the process for matching external data.

1. To request the `MDMExternalMatch` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the `MDMExternalMatch` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, and select the ZIP file that contains the `MDMExternalMatch` process, and click **Open**.
6. Click **Import**.

Step 3. Get the artifact ID of the process

To modify permissions of the `MDMExternalMatch` process, you require the artifact ID of the process to uniquely identify it.

To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Requests

Use the following POST request to get the artifact ID of the `MDMExternalMatch` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "lookupParamPath": [
        {
            "name": "MDMExternalMatch",
            "type": "PROCESS",
            "location": [
                {
                    "type": "Space",
                    "name": "REG"
                },
                {
                    "name": "Business360",
                    "type": "Project"
                }
            ]
        }
    ]
}
```

Sample Response

The sample response shows the HTTP 200 OK response code and contains the artifact ID of the `MDMExternalMatch` process. The response shows the artifact ID as `a7d1raphIOLdjfNVarUJaC` in the `artifact` section.


```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    {
      "orgId": "lkV1tSYJzKYcdNHddSjsWN",
      "status": {
        "code": "FRS_200",
        "message": ""
      },
      "tags": [],
      "artifact": {
        "@odata.type": "#OData.frs.Document",
        "id": "a7d1raphIOLdjfNVarUJaC",
        "name": "MDMExternalMatch",
        "description": "",
        "owner": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastUpdatedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastAccessedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdTime": "2024-06-11T09:22:29Z",
        "lastUpdatedTime": "2024-06-11T09:22:29Z",
        "lastAccessedTime": "2024-06-11T09:22:29Z",
        "expiresBy": "2038-01-18T00:00:00Z",
        "parentInfo": [
          {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
          },
          {
            "parentId": "9Lf4MSeHu5vkk8CS6pTcA2",
            "parentName": "Business360",
            "parentType": "Project"
          }
        ],
        "documentType": "PROCESS",
        "contentType": "application/json; charset=utf-8",
        "documentState": "VALID",
        "aclRule": "org",
        "subcontainerCount": 0,
        "customAttributes": {
          "stringAttrs": [],
          "numberAttrs": [],
          "dateAttrs": []
        },
        "repoInfo": {
          "repoParams": [],
          "repoPath": null,
          "repoHandle": "f2B7O2htghGZ5i4-gt-483987-2024-06-11T09:22:29.093Z::pd.xml",
          "frsPath": null
        },
        "isSourceControlled": false,
        "checkedOutById": null
      },
      "docRef": null
    }
  ]
}
```

Step 4. Modify permissions for matching external data orchestration

After you import the `MDMExternalMatch` process, set the process to read only so that users can't modify it. Additionally, the `MDMExternalMatch` process is assigned to a service user by default.

You can remove the service user or modify its permission, but you can't create a new service user. When you upgrade your organizations to the latest release and the `MDMExternalMatch` process has updates in the latest release, the service user requires the necessary permissions to upgrade the process. If you don’t assign the necessary permissions to the service user, the upgrade might fail.

To set the read-only permission for the process and to assign necessary permissions to the service user, use the UpdateACL API and submit a POST request. To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiUrl>/frs/v1/UpdateACL
```

Sample Requests

Use the following POST request to modify the permissions of the `MDMExternalMatch` process to read only:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true
            },
            "idsInfo": {
                "id": "<Organization ID>",
                "type": "ORG"
            }
        }
    ]
}
```

Note: The `Organization ID` specifies the identifier of the organization to which the `MDMExternalMatch` process was imported.

Use the following POST request to assign the necessary permissions for the service user assigned to the `MDMExternalMatch` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": true,
                "delete": true,
                "execute": true
            },
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            }
```

```
            }
        ]
    }
```

Note: The service user ID, `3VMH0uFUXQVddwVkjrfJUv`, remains a constant value for all the predefined Application Integration processes and doesn't vary between organizations.

Sample Response

After the POST requests to modify the permissions of the `MDMExternalMatch` process and the service user assigned to it are successful, you get the following response:

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "guid": "FRS_ID",
            "code": "FRS_200",
            "message": "Successfully Updated ACLs"
        }
    ]
}
```

Step 5. Publish the process

After you modify permissions for the `MDMExternalMatch` process, publish the process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the **MDMExternalMatch** process, and click **Actions**.
4. Click **Publish**.

Reimport the process for matching external data

If you already have the `MDMExternalMatch` process in your organization, you must reimport the latest version of the `MDMExternalMatch` process to match external data with master or source records.

To reimport the latest version of the `MDMExternalMatch` process, perform the following steps:

1. “Step 1. Get the artifact ID of the existing process” on page 55
2. “Step 2. Assign write permissions to the user ” on page 57
3. “Step 3. Import the latest process for matching external data” on page 58
4. “Step 4. Delete the write permission assigned to users” on page 58
5. “Step 5. Publish the process” on page 60

Note: If you import the `MDMExternalMatch` process for the first time in your organization, see “Import the process for matching external data” on page 51.

Step 1. Get the artifact ID of the existing process

To overwrite the existing `MDMExternalMatch` process, you need the artifact ID of the process to uniquely identify it. To get the artifact ID, log in to MDM SaaS.

To log in to MDM SaaS, use the Login API and submit a POST request with the following URI:

```
POST <baseApiURL>/saas/public/core/v3/login
```

To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Requests

Use the following POST request to log in to MDM SaaS:

```
POST https://use4.dm-us.informaticacloud.com/saas/public/core/v3/login
Content-Type: application/json
{
    "username": "<username>",
    "password": "<password>"
}
```

Use the following POST request to get the artifact ID of the existing `MDMExternalMatch` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "lookupParamPath": [
        {
            "name": "MDMExternalMatch",
            "type": "PROCESS",
            "location": [
                {
                    "type": "Space",
                    "name": "REG"
                },
                {
                    "name": "Business360",
                    "type": "Project"
                }
            ]
        }
    ]
```

Sample Responses

After the POST request to log in to MDM SaaS is successful, you get the following response:

```
{
    "products": [
        {
            "name": "Integration Cloud",
            "baseApiUrl": "https://qa-pod1.rel.infaqa.com/saas"
        }
    ],
    "userInfo": {
        "sessionId": "<Session ID>",
        "id": "<User ID>",
        "name": "<username>",
        "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "orgId": "<Org ID>",
        "orgName": "<Org name>",
        "groups": {},
        "status": "Active"
    }
}
```

After the POST request to get the artifact ID of the process is successful, you get the following response that shows the artifact ID as `a7d1raphIOLdjfNVarUJaC`.

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    {
      "orgId": "lkV1tSYJzKYcdNHddSjsWN",
      "status": {
        "code": "FRS_200",
```

```
        "message": ""
      },
      "tags": [],
      "artifact": {
        "@odata.type": "#OData.frs.Document",
        "id": "a7d1raphIOLdjfNVarUJaC",
        "name": "MDMExternalMatch",
        "description": "",
        "owner": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastUpdatedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastAccessedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdTime": "2024-06-11T09:22:29Z",
        "lastUpdatedTime": "2024-06-11T09:22:29Z",
        "lastAccessedTime": "2024-06-11T09:22:29Z",
        "expiresBy": "2038-01-18T00:00:00Z",
        "parentInfo": [
          {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
          },
          {
            "parentId": "9Lf4MSeHu5vkk8CS6pTcA2",
            "parentName": "Business360",
            "parentType": "Project"
          }
        ],
        "documentType": "PROCESS",
        "contentType": "application/json; charset=utf-8",
        "documentState": "VALID",
        "aclRule": "org",
        "subcontainerCount": 0,
        "customAttributes": {
          "stringAttrs": [],
          "numberAttrs": [],
          "dateAttrs": []
        },
        "repoInfo": {
          "repoParams": [],
          "repoPath": null,
          "repoHandle": "f2B7O2htghGZ5i4-gt-483987-2024-06-11T09:22:29.093Z::pd.xml",
          "frsPath": null
        },
        "isSourceControlled": false,
        "checkedOutById": null
      },
      "docRef": null
    }
  ]
}
```


Step 2. Assign write permissions to the user

To overwrite the existing `MDMExternalMatch` process, assign write permission to the user who logged in to MDM SaaS.

To assign write permission to the user, use the UpdateACL API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/UpdateACL
```

Sample Request

Use the following POST request to assign write permission to the user who logged in to MDM SaaS:

```
{
    "aces": [
        {
```

```
                "operation": "CREATE_ACE",
                "permission": {
                    "changePermission": true,
                    "read": true,
                    "update": true,
                    "delete": false,
                    "execute": true
                },
                "idsInfo": {
                    "id": "<User ID from Step 1>",
                    "type": "USER"
                }
            }
        ],
        "artifactId": "<Artifact ID from Step 1>"
    }
```

Sample Response

After the POST request to assign the write permission to the user is successful, you get the following response:

```
    {
        "@odata.context": "$metadata#BaseEntities",
        "value": [
            {
                "guid": "aEy8Tl6yhl2lgQBrdDCbEZ",
                "code": "FRS_200",
                "message": "Successfully Updated ACLs"
            }
        ]
    }
```

Step 3. Import the latest process for matching external data

You require the latest `MDMExternalMatch` process to match external data with source records.

1. To request the latest `MDMExternalMatch` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the `MDMExternalMatch` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, and select the ZIP file that contains the `MDMExternalMatch` process, and click **Open**.
6. In the **Specify Import Job Details** section, select **Overwrite existing assets, excluding connections and runtime environments**.
7. Click **Import**.

Step 4. Delete the write permission assigned to users

After you import the latest `MDMExternalMatchProcess` process, delete the write permission assigned to the user and set the process to read only so that users don't modify it.

To delete the write permission, you require the ID of the write permission. Use the GetACL API to get a list of permissions assigned to the process. You can identify the ID of the write permission based on the date when you assigned the permission.

To get a list of permissions assigned to the user, use the GetACL API and submit a GET request with the following URI:

```
GET <baseApiURL>/frs/api/v1/GetACL
```

To delete the write permission, use the UpdateACL API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/UpdateACL
```

Sample Requests

Use the following GET request to get the list of permissions assigned to the user:

```
GET https://use4.dm-us.informaticacloud.com/frs/api/v1/GetACL(artifactId='<Artifact ID
from Step 1>')
```

Use the following POST request to delete the write permission assigned to the user:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "aces": [
        {
            "aceId": "<Write Permission ID>",
            "operation": "DELETE_ACE",
            "idsInfo": {
                "id": "<User ID from Step 1>",
                "type": "USER"
            }
        }
    ],
    "artifactId": "<Artifact ID from Step 1>"
}
```

Sample Responses

After the GET request is successful, you get the following response:

```
{
    "@odata.context": "$metadata#Collection(OData.frs.Ace)",
    "value": [
        {
            "id": "9aMAeHngAJeezftidP23i9",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:42:51Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:42:51Z",
            "permission": {
                "create": null,
                "read": true,
                "update": true,
                "delete": true,
                "execute": true,
                "changePermission": true {{            }}
            }
        },
        {
            "id": "bmo9yhPqYc2fwBEHK9Timf",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "8OSrngWzLw3bgwgRbqUy2f",
                "type": "ORG"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:44:33Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:44:33Z",
            "permission": {
                "create": null,
                "read": true,
                "update": false,
                "delete": false,
```

```
                    "execute": true,
                    "changePermission": true {\{}
                    }
                }
            },
            {
                "id": "<Write Permission ID>",
                "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
                "idsInfo": {
                    "id": "hIC3qRnQfqqj00zDeJnd6S",
                    "type": "USER"
                },
                "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
                "createdTime": "2025-03-03T07:11:08Z",
                "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
                "lastUpdatedTime": "2025-03-03T07:11:08Z",
                "permission": {
                    "create": null,
                    "read": true,
                    "update": true,
                    "delete": false,
                    "execute": true,
                    "changePermission": true
                }
            }
        ]
    }
```


Note: Identify the ID of the write permission based on the date when you assigned the permission to the user.

After the POST request to delete the write permission assigned to the user is successful, you get the following response:


```
    {
        "@odata.context": "$metadata#BaseEntities",
        "value": [
            {
                "guid": "aEy8Tl6yhl2lgQBrdDCbEZ",
                "code": "FRS_200",
                "message": "Successfully Updated ACLs"
            }
        ]
    }
```


Step 5. Publish the process


After you delete the write permissions assigned to the user, publish the process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the **MDMExternalMatch** process, and click **Actions**.
4. Click **Publish**.

Reindex job to enhance search performance

To enhance search efficiency and performance, MDM SaaS runs an internal reindex job once for the existing business entities in your organization. The job indexes all records for search, and you can view the job on the **My Jobs** page.

The following image shows a sample internal reindex job that MDM SaaS runs:

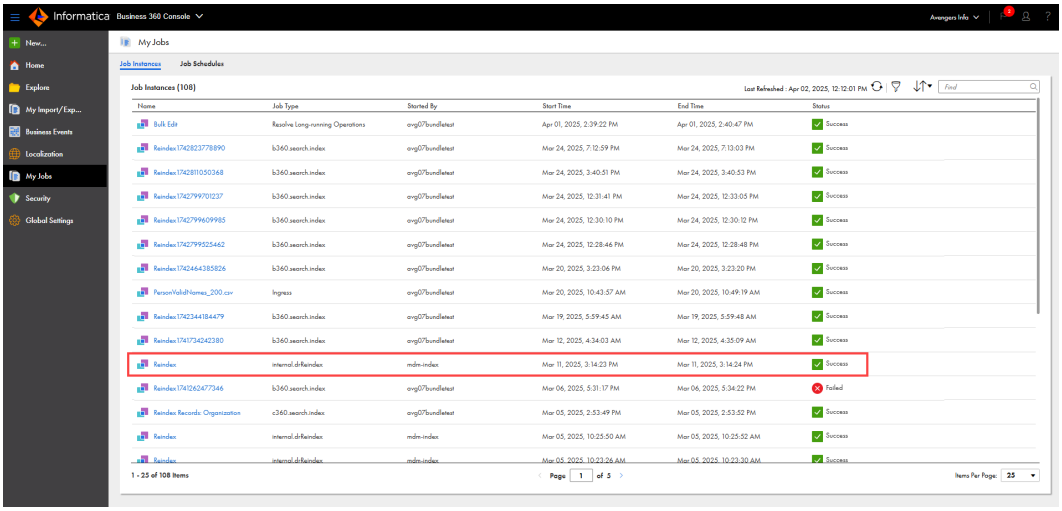

For more information about the internal reindex job, contact Informatica Global Customer Support.

Update validation process objects to include group IDs

Effective in the July 2026 release, `groupId` is a required parameter for root fields in responses that an Application Integration process returns for validation and cleansing requests.

To prepare for this change, update the validation process objects in existing processes to include the `groupId` parameter for root fields.

For example, a process that handles validation expects MDM SaaS to send values for the drugCode and approvalStatus, regulatoryAuthority, and patentExpiry input fields. A business entity root field is mapped to the drugCode input field. Also, fields from a field group in the business entity are mapped to the approvalStatus, regulatoryAuthority, and patentExpiry input fields, which belong to the regulatoryInformation field group.

The following sample JSON is an input payload that MDM SaaS sends to a validation process:

```
[
  {
    "docId": "business_entity_master_id1",
    "payload": [
      {
        "drugCode": " 12345 - 6789 -01 ",
        "regulatoryInformation": [
          {
            "approvalStatus": "apprved",
            "regulatoryAuthority": "fda ",
            "patentExpiry": "2038.08.14",
            "sys": {
              "groupId": "f88114db-461c-34c3-87b6-d2cebc76e85e"
            }
          }
        ],
        "sys": {
          "recordId": "payload-01"
        }
      }
    ]
  }
]
```

The root field mapped to the drugCode input field and the field mapped to the approvalStatus input field might fail validation. Currently, if the process sends a response without groupId for root fields, the validation errors appear in the record.

The following sample JSON is a response without the groupId parameter for root fields:

```
[
  {
    "docId": "business_entity-master_id1",
    "validation": [
      {
        "passed": false,
        "fields": [
          {
            "fieldName": "drugCode",
            "dtsp": 23
          },
          {
            "fieldName": "approvalStatus",
            "dtsp": 23,
            "sys": {
              "groupId": "f88114db-461c-34c3-87b6-d2cebc76e85e"
            }
          }
        ]
      }
    ]
  }
]
```

Effective in the July 2026 release, this output payload will be invalid and the associated rule association will result in the Exception status.

The following sample JSON is a valid response in the July 2026 release:

```
[
  {
    "docId": "business_entity-master_id1",
    "validation": [
      {
        "passed": false,
        "fields": [
          {
            "fieldName": "drugCode",
            "dtsp": 23,
            "sys": {
              "groupId": "rghh667-461c-34c3-87b6-45566"
            }
          },
          {
            "fieldName": "approvalStatus",
            "dtsp": 23,
            "sys": {
              "groupId": "f88114db-461c-34c3-87b6-d2cebc76e85e"
            }
          }
        ]
      }
    ]
  }
]
```

The sample payload includes the groupId parameter for the root fields. Before the July 2026 release, ensure that all root field objects in the response include a `sys` object with a `groupId`.

CHAPTER 6

CLAIRE GPT

The October 2026 release of CLAIRE GPT includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 15, 2026	Deleted	Important notices and upcoming changes
September 10, 2026	Initial publication	

New features and enhancements

The October 2026 release of CLAIRE GPT includes the following new features and enhancements.

Discover and explore Salesforce Data 360 assets

You can now discover and explore Salesforce Data 360 assets in CLAIRE GPT alongside your other data assets. The supported asset types include Data Model Objects, Data Lake Objects, Calculated Insights, Identity Resolution, and Data Streams.

Use the discovery agent and the data quality agent to perform the following tasks:

- Find Salesforce Data 360 assets alongside your other data assets.
- Explore the metadata and lineage of an asset, including its data elements, data profile, related assets, and the upstream and downstream assets in the data flow.
- Ask questions about the data in Salesforce Data 360 assets.
- Assess the data quality of Salesforce Data 360 assets.

For more information about the discovery agent and the data quality agent, see *Discovery Agent* and *Data Quality Agent* in Data Management Agents.

Open search results in Data Governance and Catalog

You can now open search results in Data Governance and Catalog from your CLAIRE GPT conversation to transition seamlessly from your conversation to the full catalog view. CLAIRE GPT conversations display 25 ranked assets from your search results. For broader discovery prompts, such as listing all columns in a large table, the list of matching assets often exceeds what a conversation can show. To view the complete list of assets in your search results without losing context, click **Open in Data Governance and Catalog**.

CLAIRE GPT doesn't generate search queries for lineage or aggregation-related prompts.

For more information about the opening large search results in Data Governance and Catalog , see *Discovery Agent* in Data Management Agents.

Prompt CLAIRE GPT in Japanese

You can interact with CLAIRE GPT in Japanese when you work with the data quality, discovery, and product help agents.

The product help agent generates its Japanese responses through real-time machine translation of the English source content, so it can cover any product help topic. Each response links to its English source so you can verify the details.

CHAPTER 7

Cloud Data Integration for PowerCenter (CDI-PC)

The October 2026 release of IDMC℠ Cloud Data Integration for PowerCenter (CDI-PC) includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 15, 2026	Added	"IPU metering for short-running sessions" on page 69
September 30, 2026	Added	"Skip rounding decimal and double data types for converted flat file targets" on page 69
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Cloud Data Integration for PowerCenter (CDI-PC) includes the following important notices and upcoming changes.

CDI-PC update strategy

Effective in the October 2026 release, CDI-PC moves to a mode of update with a mandatory April update and an optional October update. Previously, both the April and October updates were mandatory.

The April update remains mandatory and includes a 90-day update window. The October update is optional. You can skip the October update and roll forward to the next April update, which includes all the updates from the earlier October update.

For example, if you apply the April 2026 update and want to avoid updating CDI-PC towards the end of the year, you can skip the October 2026 update and choose the April 2027 update as necessary. The April 2027 update includes all the October 2026 updates.

Apply the October 2026 update only if you need specific PAM fixes or critical security patches from that release. Otherwise, you can choose to update in April 2027.

Informatica maintains both the April and October updates. This model gives you more flexibility while keeping the release schedule predictable and supportable.

For more information about the types of CDI-PC updates, see https://docs.informatica.com/integration-cloud/cloud-data-integration-for-powercenter/h2l/1839-release-readiness/landing-page.html.

Previews lifted

This section describes the features that are no longer in preview and are production ready effective in the October 2026 release.

Data Engineering Integration (Modernization) and Data Quality (Modernization)

Effective in the October 2026 release, the Data Engineering Integration (Modernization) and Data Quality (Modernization) alongwith the following products and services are production ready:

- Developer Tool
- Analyst Tool
- Analyst Service
- Data Integration Service
- Content Management Service
- Metadata Access Service
- Model Repository Service
- Monitoring Model Repository Service
- Search Service

Previously, these products and services were only available in preview.

Installation and migration of Data Engineering Integration (Modernization) and Data Quality (Modernization)

Effective in the October 2026 release, installation and migration of Data Engineering Integration (Modernization) and Data Quality (Modernization) are production ready. Previously, this functionality was only available in preview.

You can now use the CDI-PC installer to install CDI-PC and the following products:

- Data Engineering Integration (Modernization) on a Windows or Linux machine
- Informatica Data Quality (Modernization) on a Windows, Linux, or AIX machine

You can also use the same installer to migrate existing on-premises Data Engineering Integration and Informatica Data Quality services to the cloud.

On a Linux machine, you need to create a cluster configuration to connect to a non-native environment.

For more information, see *Installation Guide for Data Engineering Integration (Modernization)* and *Installation Guide for Informatica Data Quality (Modernization)*.

Installation of third-party distribution packages

Effective in the October 2026 release, Hadoop package installation is production ready. Previously, this functionality was only available in preview.

You can use third-party distribution packages to integrate a CDI-PC domain with the Hadoop environment.

The CDI-PC domain and client require the distribution packages for the following purposes:

- Process complex files within the CDI-PC domain
- Connect to the Hadoop environment when you process within the CDI-PC domain
- Push processing to the Hadoop environment

For more information about the supported distribution packages, see the Product Availability Matrix (PAM) for Informatica Intelligent Cloud Services.

You can use the CDI-PC installer to install a distribution package. Alternatively, you can install it using Integration Package Manager (the package manager). You can download the installers for all CDI-PC components and Hadoop packages from the CDI-PC home page.

For more information, see the *Installation Guide for Data Engineering Integration (Modernization)*.

DataProc and MapR for cluster configuration

Effective in the October 2026 release, the DataProc and MapR distribution packages are production ready. Previously, these distribution packages were only available in preview.

You can select the DataProc or MapR distribution package on the CDI-PC domain and Client when you configure a cluster for integration with Hadoop environments.

Note: DataProc and MapR support applies only to Data Engineering Integration modernization in the native environment.

For more information, see the *Installation Guide for Data Engineering Integration (Modernization)*.

PowerCenter Modernization

Re-pointing support for Data Engineering Integration sources

Effective in the October 2026 release, you can repoint the following source and target connections when you convert Data Engineering Integration mappings:

- Hive to Amazon S3
- Hive to Amazon Redshift
- HDFS to Amazon Redshift
- HDFS to Amazon S3

Non-repointing conversion support for Microsoft Azure Synapse

Effective in the October 2026 release, you can convert Data Engineering Integration mappings that use Azure Synapse as the source or target. When a converted mapping uses the Partition Type or Target Schema Strategy properties, the assessment report flags them as partially converted.

Bulk update support for Hadoop Files V2 connections

Effective in the October 2026 release, you can use the bulk update connection template to create and update Hadoop Files V2 connections.

New features and enhancements

The October 2026 release of Cloud Data Integration for PowerCenter (CDI-PC) includes the following new features and enhancements.

Manual update of a CDI-PC domain

You can update a CDI-PC domain manually by running installer commands instead of updating through IDMC. Manual updates are useful in customer-managed environments where you don't want to update the domain through IDMC .

You can update the domain from your current version to the next version. Before you update, shut down the domain completely and verify that no processes are running. Run the update commands from the directory that contains the extracted binaries.

For more information, see the *Domain Updates* help.

Automatic detection of the product during installation

When you run the CDI-PC installer, you don't need to select a product. The installer automatically detects the product to install based on your license key. The installer reads the license to identify CDI-PC, Data Engineering Integration (Modernization), or Informatica Data Quality (Modernization) and installs the required components and configures the required services.

The Hadoop options apply only to a Data Engineering Integration (Modernization) license.

For more information, see the *CDI-PC Installation Guide*.

Conversion of nested Data Engineering Integration mapplets

You can convert the following Data Engineering Integration mappings and mapplets to Cloud Data Integration:

- Mappings and mapplets that contain nested mapplets
- Mapplets that reference other mapplets

Each mapplet in the hierarchy converts as its own reusable object, so that the parent-child mapplet structure is preserved instead of flattening it into a single mapplet.

For more information, see *PowerCenter Modernization*.

Conversion of Data Engineering Integration dynamic mappings

You can convert Data Engineering Integration mappings that use dynamic ports to Cloud Data Integration. When you convert dynamic mappings, the Data Engineering Integration source and target definitions, port selector rules, dynamic expressions, and wildcard column configurations are converted to their equivalent assets of Cloud Data Integration. After conversion, the parameterized and runtime-resolution behavior are preserved in the converted CDI mappings.

The conversion report identifies dynamic mapping constructs that require manual review or that were partially converted.

For more information, see *PowerCenter Modernization*.

Conversion of PowerCenter XML sources and XML parser transformations

You can convert PowerCenter mappings that contain an XML source or XML Parser transformation. XML sources are converted to a fixed-width flat file source with a downstream structure parser transformation. The flat file uses a single column to hold the XML content with line sequential option enabled. XML Parser transformations are converted to structure parser transformations in Cloud Data Integration.

CDI-PC fully supports normalized (hierarchy) and entity-relationship parser types. For unsupported parser types, the converter generates a normalized structure definition and logs a warning. The resulting mapping might be invalid and require manual correction.

For more information, see *PowerCenter Modernization*.

Conversion of VSAM sources with a normalizer source qualifier

You can now convert PowerCenter mappings that use a VSAM source with a normalizer source qualifier. The converter replaces the VSAM source and normalizer with a flat file source. After conversion, create a Structure Parser transformation with the COBOL copybook definition and replace the flat file source with the Structure Parser transformation.

For more information, see *PowerCenter Modernization*.

Bulk update script information of command tasks

When you run a bulk update task for taskflows, you can now update the script information of command tasks.

For more information, see *PowerCenter Modernization*.

Changed behavior

Cloud Data Integration for PowerCenter (CDI-PC) includes the following changed behaviors in the October 2026 release.

IPU metering for short-running sessions

CDI-PC meters sessions that run for less than eight seconds based on the elapsed session runtime. After you update your domain to October 2026, you might see an increase in IPU consumption because metering now includes short-running workflows.

Previously, CDI-PC did not meter sessions that ran for less than eight seconds.

For more information, see *Metering* in the *Organization Administration* help.

Flat file target port ordering during conversion

When you convert a PowerCenter mapping with a non-parameterized flat file target set to create the file at runtime, the converted mapping now uses the native field-ordering target property of Cloud Data Integration to match the original PowerCenter column order.

Previously, the converter inserted an extra Expression transformation before the target to reorder the fields.

For more information, see *PowerCenter Modernization*.

Skip rounding decimal and double data types for converted flat file targets

When you convert a PowerCenter mapping that creates a flat file target at run time, by default CDI-PC selects the **Skip rounding decimal and double data types** option to preserve numeric precision from the original mapping.

Schema and table name retention during conversion

In Oracle, Microsoft SQL Server, and ODBC connections, when a source or target has the schema name or table name overridden at the session level, the converter now retains the overridden schema name and table name into the mapping task instead of parameterizing the source or target. This behavior applies when you set `OverrideOwnerNameSessionAttribute=false` and `OverrideTableNameSessionAttribute=false`. After

conversion, the retained schema name and table name appear under Advanced Properties of the mapping task.

Previously, when you used these flags, the converter created non-parameterized objects but ignored the schema name and table name from the session.

For more information, see *PowerCenter Modernization*.

Default value of HandleLKPOutputPortDefaultValue property

The default value of the `HandleLKPOutputPortDefaultValue` conversion property is now set to `true` since the property applies only to cloud data warehouse lookups.

Previously, the default value was `false` and the migration team had to set the property manually for cloud data warehouse repointing tasks.

For more information, see *PowerCenter Modernization*.

Schema and table name retention during conversion

When you convert mappings that contain a flat file target configured as Create New at Runtime, the converter now enables the **Skip Rounding for decimal and double datatypes** property on the target by default.

Previously, the converter did not set this property automatically.

For more information, see *PowerCenter Modernization*.

Default value handling for Snowflake and BigQuery lookups

When you convert a PowerCenter mapping with a connected lookup transformation on a Snowflake or Google BigQuery connection that has a default value on the return field, the converted mapping now sets the default value directly in the lookup return field metadata and enables the **Use Lookup Field Default Value** property.

Previously, the converter added an extra expression transformation after the lookup transformation to substitute the default value when the lookup returned null.

For more information, see *PowerCenter Modernization*.

CHAPTER 8

Data Governance and Catalog

The October 2026 release of Data Governance and Catalog includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 16, 2026	Added	"Changes to the Data Governance and Catalog help modules" on page 73
October 16, 2026	Added	"Changes to stakeholder management" on page 91
October 16, 2026	Added	"Changes to propagation jobs" on page 93
October 16, 2026	Modified	"Enhancements to stakeholder propagation for assets" on page 78
October 16, 2026	Modifed	"Enhancements to bulk import" on page 77
October 7, 2026	Modified	"Enhancements to stakeholder propagation for assets" on page 78
October 1, 2026	Modified	"Enhancements to bulk import" on page 77
October 1, 2026	Added	"Change in export behavior for rich text fields" on page 92
October 1, 2026	Added	"Changes to the CLAIRE Activity widget" on page 92
October 1, 2026	Added	#unique_87/unique_87_Connect_42_GUID-656E5D24-9B04-47AD-80A1-71B756F5315F

Publication Date	Type of Change	Section Title
October 1, 2026	Modified	"Enhancements to stakeholder propagation for assets" on page 78
October 1, 2026	Modified	"Changes to stakeholder management" on page 91
September 24, 2026	Modified	"Curation Center" on page 74
September 24, 2026	Modified	"Enhancements to data lineage" on page 75
September 24, 2026	Modified	"Customize the Create Asset page for business assets" on page 77
September 24, 2026	Added	"Include technical data elements in export" on page 93
September 24, 2026	Added	"Changes to stakeholder management" on page 91
September 24, 2026	Added	"Enhancements to stakeholder propagation for assets" on page 78
September 24, 2026	Added	"Enhancements to bulk import" on page 77
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Data Governance and Catalog includes the following important notices and upcoming changes.

Preview initiated

Effective in the October 2026 release, periodic review of assets is available for preview when you configure workflow events in Metadata Command Center.

Note: Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Preview lifted

Effective in the October 2026 release, the Salesforce Marketing Cloud catalog source and its functionalities are production-ready.

Previously, this catalog source was only available in preview.

Deprecated support

Effective in the October 2026 release, the Swagger API catalog source that was available for preview is deprecated. Informatica intends to drop support for the catalog source in a future release.

You can use the new API Design catalog source to extract metadata from an OpenAPI specification document provided as a JSON file or a public URL.

Post-upgrade tasks

Run a full metadata extraction job

Transformation Details information isn't available for assets whose last full extraction occurred before the upgrade. To view transformation details for an asset, the asset must be included in a full metadata extraction job run after the upgrade. After you upgrade to the October 2026 release, run a full metadata extraction job for each catalog source to view transformation details in the lineage.

If you continue running only incremental metadata extraction jobs, you won't be able to view transformation details in the lineage for those assets.

Unassign and re-run SAP ERP catalog source jobs

If you created SAP ERP catalog sources and performed connection assignment with SAP Table assets prior to the October 2026 release, perform the following tasks after you upgrade:

1. Unassign the assigned connections.
2. Run the SAP ERP catalog source job.
3. Run catalog source jobs for all previously-assigned reference catalog sources.
4. Perform connection assignment.

Lineage between source and target might not appear as expected unless you perform these tasks post upgrade.

For information about how to unassign and assign connections, see *Connections* in Administration.

Changes to the Data Governance and Catalog help modules

The information in the *Understanding Business Assets* help and *Understanding Technical Assets* help is consolidated into a single help called *Asset Reference* in the Data Governance and Catalog help system.

The *Understanding Business Assets* help module has been retired and is no longer available in the online help and Doc Portal.

New features and enhancements

The October 2026 release of Data Governance and Catalog includes the following new features and enhancements.

Enhancements to AI governance

To help your organization manage AI technologies and the data used by them responsibly and effectively, Data Governance and Catalog introduces the following enhancements:

New asset types

The October release introduces the following types of assets to Data Governance and Catalog:

- **AI Use Case**. An AI Use Case asset represents an initiative that uses AI to solve a specific problem or produce measurable outcomes.
- **AI Agent**. An AI Agent asset represents an AI-powered autonomous entity that uses a model and a set of tools to make decisions and take actions toward a goal.
- **Questionnaire Template**. A Questionnaire Template asset represents a set of questions that gathers information for a governance assessment, such as an impact, risk, or intake review. You can associate the template with an AI Use Case that you want to assess.
- **Risk Template**. A Risk Template asset helps you document details of a potential risk in an enterprise initiative. You can associate a risk with an AI Use Case, and associate one or more mitigation plans with the risk to address it.
- **Mitigation Plan Template**. A Mitigation Plan Template asset helps you document the plan of action for addressing a risk, and track its progress.

You can create the assets individually in Data Governance and Catalog interface or use bulk import templates to create multiple assets at once.

In Metadata Command Center, your organization administrator can customize these assets and enforce workflows for creating and updating them, as well as for associating them with an AI Use Case.

Agent Lineage

This release introduces a new lineage type that is unique to AI Agent assets, Agent Lineage. On the **Agent Lineage** tab of an AI Agent asset, you can view a visual representation of the tools, data, and other AI assets that are associated with the AI agent.

Importing AI agents

You can extract an AI Agent asset from the Google Vertex AI source system. You can then associate the extracted AI Agent technical asset with an AI Agent business asset.

Curation Center

Data Governance and Catalog introduces the **Curation Center**, a single page where you can review and act on all recommendations for the assets that you're responsible for, without the need to hunt through individual assets one at a time. **Curation Center** shows recommendations for glossary, business names, business descriptions, and classifications from all sources, including CLAIRE. You can curate recommendations and use Gen AI to generate business names and descriptions for assets.

You can use the following features of the Curation Center:

- View the summary of your recommendations from all enrichment sources at a glance. Summary charts show the number of assets that have pending, accepted, declined, or no recommendations.
- Act on recommendations from the new lineage propagation enrichment source. See Enrichment propagation based on lineage.
- Filter assets using various filter criteria to find recommendations you want to review.
- Review and act on one or more recommendations at once with full context.
- Use the **Advanced Edit** page to act on recommendations in bulk and edit them inline.

You can access the **Curation Center** page directly, or navigate to it from one of the following locations:

- The CLAIRE Activity widget
- In-app and email notifications you receive for recommendations in a catalog source

- The **Assets with Recommendations** widget on the catalog source asset page

For more information about Curation Center, see *Asset Management*.


Enhancements to data lineage

This release includes the following enhancements to data lineage:

View control flows

Show or hide control flow lines on an asset's lineage page. An asset's control flow reveals objects that influence how your data moves in the catalog. These lines show join conditions and expressions that apply to the transformation of data and appear as flow lines on the lineage interface.

The following image shows the control flow options for a lineage:

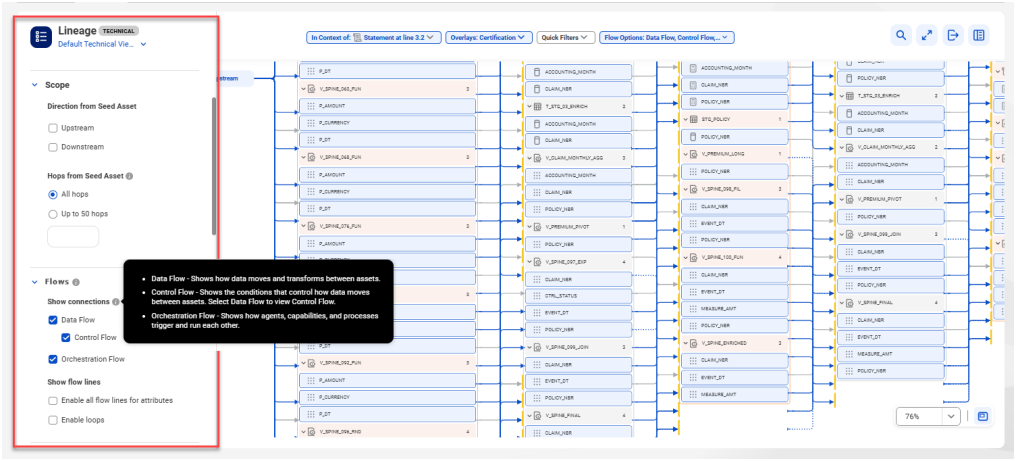


For more information about configuring an asset's lineage graph, see *Asset Discovery*.

Open transformation details

Open a lineage page that shows different transformation details for an asset in a lineage. On the lineage interface, click **Open Transformation Details** to view how your data moves from source to target. Detailed lineage for an asset show its data mapping, ETL pipeline, control flow, data type, data input and output, and applied SQL expressions.

The following image shows a data element's focused path and the asset's transformation details:

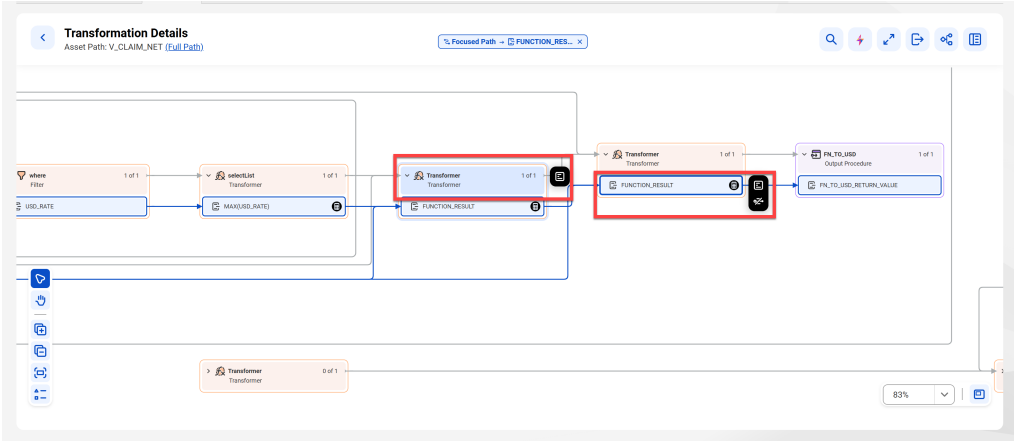

For more information about transformation details of an asset, see *Asset Discovery*.


Summarize transformation details

View an AI-generated explanation of the detailed lineage based on the catalog source metadata. Click **Generate Summary** when you view the detailed lineage of an asset to generate the explanation.

Manage additional configurations for a lineage view

Adjust the depth and direction of a lineage, and define the assets you want to see from an asset hierarchy. You can set the scope of the lineage view to a number of hops, and you can choose the lineage direction from the seed asset. You can also show or hide schemas in a lineage based on the data set parent name.

The following image shows **Scope** in **Manage Configuration** and the scope overlay on the toolbar:

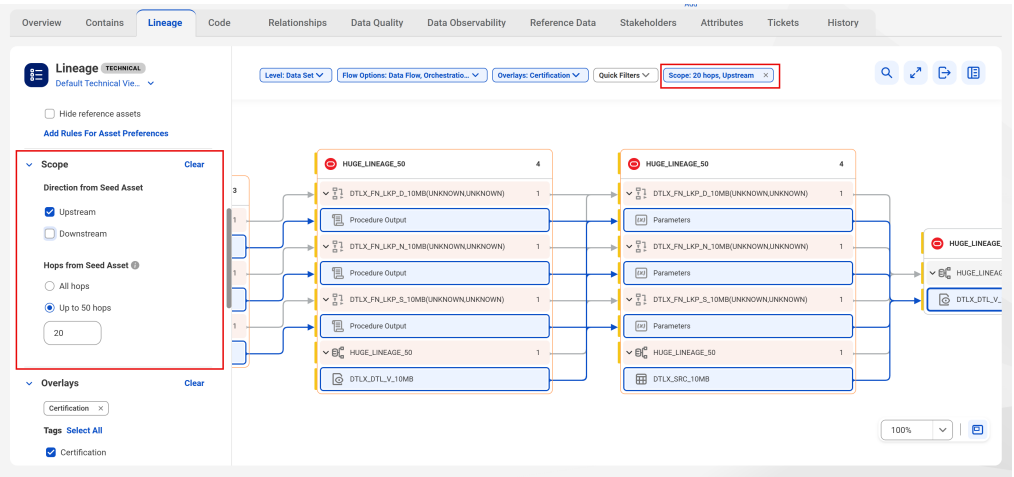

Assign lineage views

As an administrator in Data Governance and Catalog, you can assign lineage views to user roles in your organization. You can also set a lineage view as the default view that a user sees when they land on the **Lineage** tab of an asset page.

Performance enhancement

For organizations that run Data Governance and Catalog on Neo4j, you can load additional hops when you expand the depth of the lineage for upstream and downstream assets.

Lineage across spaces for SAP Datasphere

You can now extract and view lineage across multiple spaces within the SAP Datasphere source systems.

The SAP Datasphere catalog source extracts lineage across spaces for the following object types:

- AnalyticModel
- BusinessEntity
- DataFlow
- SAPDatasphereView
- TransformationFlow

For more information, see the *SAP Datasphere* catalog source help.

Enhancements to data profiling

This release includes the following enhancements to data profiling:

Adding passive mapplets as rules

You can add passive mapplets as rules to a profiling task to calculate advanced column statistics on the output ports of the mapplets.

The mapplets can contain the following passive transformations:

- Data Masking
- Expression

Profiling business data sets with source mapplets

You can link a business data set with a source mapplet and then create a data profile for the business data set. This allows you to run a profiling task and view advanced statistics for columns from multiple data sets.

For more information about Data Profiling, see *Data Profiling for Assets*.


Customize the Create Asset page for business assets

In Metadata Command Center, you can customize what a user sees on the **Create** page for business assets. You can customize an asset's create page by selecting the attributes that users fill when creating the asset. It also determines what a user views on an asset's **Overview** tab.

You can perform the following tasks to customize the create page for an asset:

- Design multiple versions of the **Create** page and assign them to different users, user groups, and user roles.
- Organize attribute panel and even remove optional attributes from the page.
- After you publish a custom create page, you can hide the visibility of default asset creation and preview pages.

The following image shows the **New Asset** page for an AI Model asset in Data Governance and Catalog:

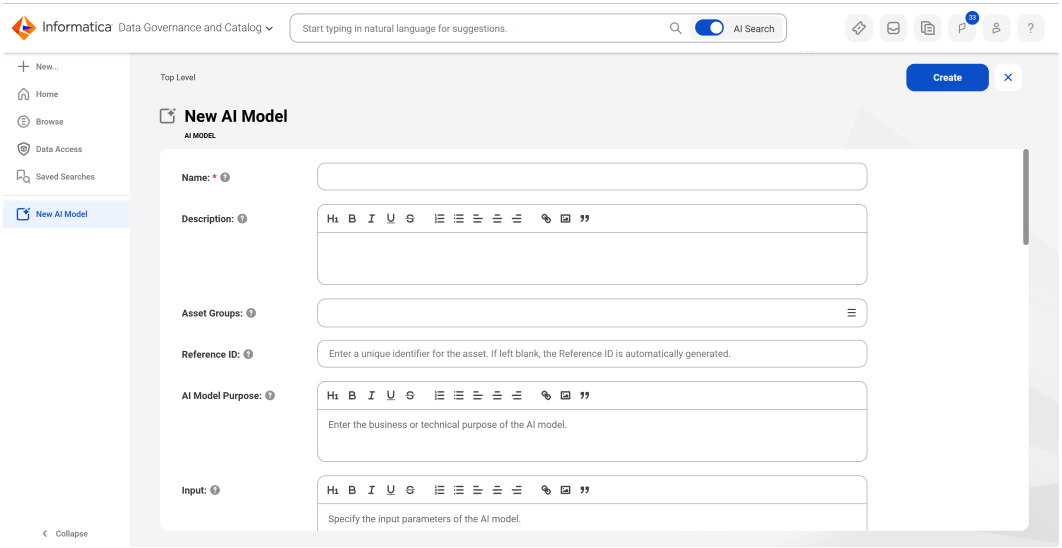

For more information about asset customization, see *Asset Management*. For information about custom layouts, see *Administration* in the Metadata Command Center help.

Enhancements to bulk import

This release includes the following enhancements to bulk import:

Asset Group management through bulk import

You can assign and update asset groups for multiple business and technical assets in a single operation using import files. In import and export template files, use the **Asset Group** column to associate asset groups with assets.

For more information about managing asset groups in bulk, see *Bulk Import Assets*.

Manage recommendations for Glossaries and Data Classifications

You can remove glossary and data classification associations from multiple assets using import files. You can remove an association regardless of its current state. Enter the glossary or classification name or reference ID in the **Glossaries: Remove** and **Data Classifications: Remove column**.

For more information about curating assets in bulk, see *Bulk Import Assets*.

Manage Policy to Data Classification relationships

The export and import files for Policy assets include the **Classifications** column. When you import assets,you can use the column to create associations between a Policy and Data Element or Entity classifications. When you export assets, existing associations between a Policy and Data Classifications appear in the sheets for Policy.

Export the technical data elements of a business data set

When you export a business data set that includes child assets, the exported file includes technical data elements. In the export file, the assets appear in a separate sheet that includes the data elements contained within each business data set. The sheet also contains an **Operation** column so that you can add or remove those relationships when you re-import the file.

Enhancements to stakeholder propagation for assets

This release includes the following enhancements to stakeholder propagation for assets:


Control propagation on assets

You can control the propagation of an asset's stakeholders to child assets in the hierarchy. With the **Propagate Stakeholders** and **Append Stakeholders** options, you can set how you want the stakeholders of a parent asset to propagate to its child assets. You can also configure these options to remove inherited stakeholders from child assets.

For technical assets, propagation options appear when an administrator enables **Assign Stakeholders** for a catalog source in Metadata Command Center. In Data Governance and Catalog, the options appear at the top most asset in a technical hierarchy. For business assets, you can set stakeholder propagation from asset pages in Data Governance and Catalog and during asset creation.

In Data Governance and Catalog, the **Stakeholder** tab of an asset pages shows different propagation details. The header of the **Stakeholder** tab shows if the propagation and append status is enabled or disabled. In the **Stakeholder** grid, the **Stakeholder Source** column shows **Inherited** if a stakeholder is inherited from a parent asset and **Assigned** indicates if the stakeholder is assigned to the asset. You can also view if a parent asset is propagating and appending on the asset in the **Edit Stakeholders** dialog box.

The following image shows the **Modify Stakeholders** dialog box with details of a parent asset's propagation on the asset and the **Stakeholder Source** column for the asset:

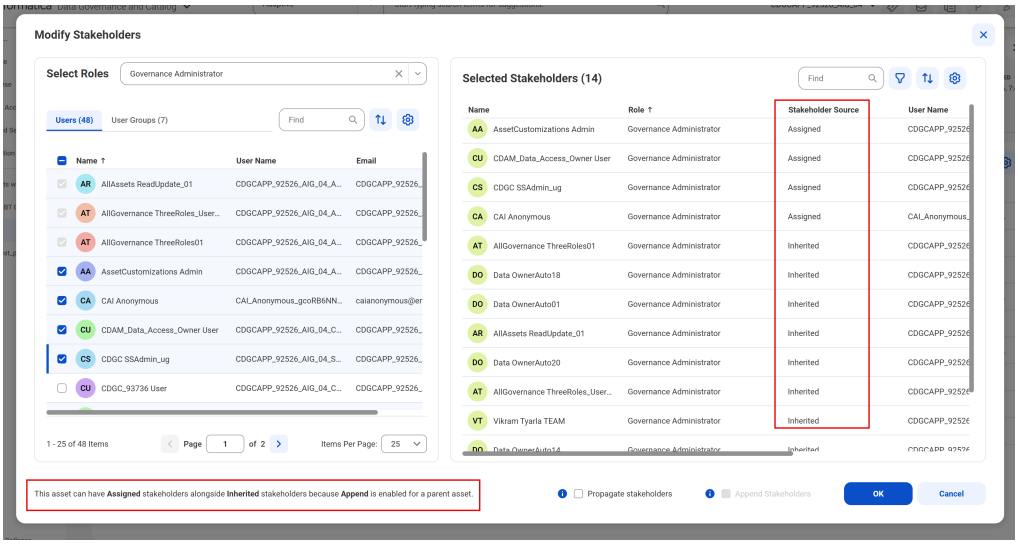

Propagate stakeholders through bulk import

When you export assets and re-import them, you can set the Propagate and Append options for an asset's stakeholders. In the **Propagate Stakeholders** and **Append Stakeholders** columns, select `Disabled` or `Enabled` to configure stakeholder propagation for an asset.

For more information about propagating stakeholders to asset hierarchies, see *Asset Management*.

Enhancements to governing unstructured data

This release includes the following enhancements to governing unstructured data:

Glossary association

You can associate glossary terms with unstructured files to relate them to your business vocabulary. Associate a metric or a business term manually, or use the bulk import and export templates to manage associations.

Data element classification

Data Governance and Catalog uses the name and description of a data element classification to classify unstructured files with greater accuracy. You can use custom data element classifications to classify unstructured files.

Sensitivity

Data Governance and Catalog automatically applies sensitivity level to unstructured files, based on the rules defined in data classifications in Metadata Command Center.

Preview valid rows of a data quality rule occurrence

You can preview the valid rows for a data quality rule occurrence from the **Data Preview** options in the **Score** tab of a rule occurrence or the **Ruel Occurrences** tab of a rule template. The preview grid displays up to 1,000 valid rows.

Valid row preview and download are available for rule occurrences that you create in Data Governance and Catalog and for rule occurrences that you migrated from Data Profiling.

Data quality score upload using a JSON payload

You can use a public REST API to update the data quality score of a data quality rule occurrence by passing the score as a JSON payload in the request body. The API accepts one or more data quality scores in a single request and returns a success response with the job URI and job ID or a failure response with the appropriate response code.

Define column-level data quality checks through mapplets

You can use mapplets to define column-level data quality checks in Data Governance and Catalog. Mapplets let you encapsulate complex, reusable data quality logic and apply it consistently across rule occurrences, rule templates, and deep profiling workflows. Use mapplets when you want to reuse logic across multiple rules.

You can associate a mapplet with the following assets:

- A data quality rule template
- A manually created data quality rule occurrence
- A rule occurrence generated by CLAIRE

Additional asset search options

On the search page and within the search widgets, you can search for, filter, and group data elements by the following attributes:

- Associated data classifications
- Associated glossaries
- Classification categories
- Critical data element
- Sensitivity level

Additionally, on the data element page, Data Governance and Catalog displays a Critical Data Element (CDE) icon to indicate that the data element is a CDE on an associated glossary.

Data access management enhancements

You can use the following new and enhanced features for data access management:

- You can view pushdown enforcement information on the new Enforcement tab. You can view which assets a data access policy protects and which data access rules a data access policy applies to an asset. The status of the data access policy also appears. You can also view which technical assets have data access policies applied.
- You can push down data de-identification policies to the Databricks and Snowflake source systems.
- You can push down data access policies to external tables in the Databricks and Snowflake source systems.

Enhancements to widgets

This release includes the following enhancements:

Search-based widgets

The following enhancements apply to search-based widgets:

- **Alphabetical ordering**. The list of assets in the **Group By** options and the **Select Display Columns** list appear in alphabetical order.

- **Additional Group By options and columns**. You can group by and display additional columns based on the following asset types:
  - **AI System**. AI System Type, Development Stage, Hierarchy, Asset Groups
  - **Business assets**. Hierarchy, Asset Groups
  - **Technical assets**. Hierarchy, Asset Groups, Glossaries, Classifications
- **Improved stakeholder display**. In the list view, stakeholders are shown by role, with a separate column for each role that lists the users assigned to it. Stakeholders display with their avatars.
- **Classifications for unstructured assets**.
  When a grid contains unstructured assets, each supported classification type appears as its own column in the following way:
  - Document classification
  - Data entity classification
  - Data element classification

  Each classification type is a separate column that you can show or hide in grid customization. You can view the classification type in the grid.
- **Grid customization in the widget drilldown**. Similar to the Data Quality widget, you can customize the columns displayed in the widget drilldown grid. You can also set a sorting preference by **Name** or **Last Updated**.
- **Change of assets in a widget**. If the asset types in a widget change because the query results change, the system keeps your saved grid customization in the following ways:
  - **Available Columns:** A column that applies to only some of the asset types remains in the list of available columns.
  - **Grid Display:** When a selected column does not apply to an asset type, the column stays in the grid, and cells for that asset type remain blank.
  - **Saved Preferences:** Every column you selected are saved in the saved preferences when the widget content changes.
- **Additional filters**. The widget drilldown includes additional filters, some of which apply only to specific asset types. In addition to the **Group By** attribute, you can filter by the following attributes:
  - AI System Type
  - Asset Groups
  - Catalog Source Name
  - Catalog Source Type
  - Certified
  - Critical Data Element
  - Data range
  - Environment
  - Last Updated
  - Policy Type
  - Ratings
  - Stakeholders
  - System Type

- **Filter components**.
  The drilldown grid uses the following filter components.
  - **Single Select with Find**. It is used when you can select one value, for example, Critical Data Element, Certified, Last Updated, custom attributes.
  - **Multi-select with Find**. It is used when you can select more than one value. Every other grid filter uses this component.
  - **Critical Data Element and Certified filters**. Only **True** and **False** value options are displayed. The **No** value option is not displayed.
- **Grid header**.
  The drilldown grid header is **Assets** for list, count, bar, and donut charts. The header stays Assets when you apply a filter.
- **Percentage with counts**. When you select a donut chart or a bar chart in a search-based widget, you can enable the option to show the percentage along with the counts.
- **Result count**. Search-based widgets show the result count against the total count.

Dashboard widgets

You can resize dashboard widgets to smaller dimensions. For the Donut, Count, and Bar Chart widgets, the chart adjusts as you resize the widget, displaying more or less detail based on the available space.

Use REST APIs to create and manage data profiles

You can use the following REST APIs to create and manage data profiles:

- Retrieve data profile summary. Use the API to retrieve the details of a data profile.
- Update data profile. Use the API to edit a data profile.
- Delete data profile. Use the API to delete a data profile.
- Retrieve data profiles configured for a data set. Use the API to retrieve a list of data profiles associated with the specified data set.
- Create a data profile for a data set. Use the API to create a data profile for the specified data set.
- Retrieve profile run details. Use the API to retrieve the details of a data profiling job instance.
- Export profiling results. Use the API to export the profiling results of a data profiling job instance to a CSV or Microsoft Excel file and download the file.
- Retrieve data profile runs. Use the API to retrieve a list of job instances from the last ten occasions on which the data profiling job ran.
- Run a data profile. Use the API to run a data profiling task.

For information about the data profiling APIs, see the Informatica Developer Portal.

Enhancements to notifications

Notifications for enrichment recommendations

Receive in-app and email notifications that summarize the number of assets with pending and automatically accepted recommendations in a catalog source. To review the recommendations in the **Curation Center**, click **Review All Recommendations** in the in-app notification or use the link in the email notification.

Notifications for business asset changes

Stakeholders of a business asset receive in-app and email notifications when users change the system and custom attribute values of the asset. Data Governance and Catalog groups the changes made within an hour into each notification.

Note: Data Governance and Catalog doesn't send notifications for changes to AI Agent business assets.

New catalog sources

This release includes the following new catalog sources:

- Amazon Bedrock
- Amazon SageMaker AI
- API Design
- dbt Cloud
- MuleSoft
- OpenLineage
- MCP Server
- Microsoft Fabric
- SAP Ariba
- SAP Cloud for Customer
- Trino

For more information about catalog sources, see the corresponding catalog source help.

Enhanced catalog sources

This release includes the following enhancements to catalog sources:

Amazon S3

You can use the IAM Roles Anywhere authentication type to connect to Amazon S3 source systems.

For more information, see the *Amazon S3* catalog source help.

Databricks

This release includes the following enhancements:

- From Databricks Unity Catalog, you can extract metadata of foreign catalogs that connect to the following source systems:
  - Amazon Redshift
  - Databricks
  - Google BigQuery
  - Microsoft Azure Synapse Data Warehouse
  - Microsoft SQL Server
  - Salesforce
  - Snowflake
- You can extract metadata of the following objects:
  - AI Search Indexes
  - AI Search Index Columns

- Genie Spaces
- Knowledge Assistants
- MCP Servers
- MCP Server Tools
- Metric Views
- Serving Endpoints
- Stored Procedures
- Supervisor Agents
- Supervisor Agent Tools

- You can add metadata extraction filters based on the following objects:
  - AI Search Indexes
  - Genie Spaces
  - Knowledge Assistants
  - MCP Servers
  - Metric Views
  - Stored Procedures
  - Supervisor Agents

For more information, see the *Databricks* catalog source help.

dbt

This release includes the following enhancements:

- You can extract metadata and generate lineage from manifest files created with dbt version 1.11.
- You can extract metadata and generate lineage from dbt snapshots.

For more information, see the *dbt* catalog source help.

Denodo

After you run a catalog source job, you can view lineage for views that use full outer joins.

For more information, see the *Denodo* catalog source help.

Google Gemini Enterprise Agent Platform

This release includes the following enhancements:

- The Google Vertex AI catalog source is renamed to Google Gemini Enterprise Agent Platform.
- You can extract metadata from AI Agents and related assets.

For more information, see the *Google Gemini Enterprise Agent Platform* catalog source help.

Informatica Intelligent Cloud Services

This release includes the following enhancements:

- You can extract metadata from Informatica Application Integration source systems.
- You can perform connection assignment to view lineage between an SAP ERP source system and an Informatica Intelligent Cloud Services source system.
- You can perform connection assignment to view lineage between an SAP Business Warehouse source system and an Informatica Intelligent Cloud Services source system source system.

- You can now configure how the catalog source reads Cloud Data Integration mapping task XML files when you extract metadata. Choose one of the following input fetch modes:
  - API. Default. Fetches tasks through the Informatica Intelligent Cloud Services API.
  - Files. Reads only the files in the input files folder.
  - Both. Combines both modes, matching objects in the files and through the API.

For more information, see the *Informatica Intelligent Cloud Services* catalog source help.

JDBC

This release includes the following enhancements:

- You can use the Amazon DocumentDB JDBC driver to connect to and extract metadata from Amazon DocumentDB source systems.
- You can extract metadata from Dremio sources.
- You can run data profiling and data quality jobs on metadata extracted from Trino source systems.

For more information, see the *JDBC* catalog source help.

Kafka

You can now extract metadata from JSON Schema and Protocol Buffers messages when Schema Registry is enabled.

For more information, see the *Kafka* catalog source help.

Microsoft Fabric Data Lakehouse

You can generate accurate reference assets from Microsoft Fabric Data Lakehouse source systems to files in Microsoft Fabric OneLake source systems.

For more information, see the *Microsoft Fabric Data Lakehouse* catalog source help.

Microsoft Power BI

Metadata extraction jobs now extract descriptions of data set tables as technical descriptions in Data Governance and Catalog.

For more information, see the *Microsoft PowerBI* catalog source help.

Qlik Sense Cloud

You can now extract metadata from Variable and Variables object types.

For more information, see the *Qlik Sense Cloud* catalog source help.

Salesforce

This release includes the following enhancements:

- You can extract metadata from Agentforce agents.
- You can add metadata extraction filters based on Agentforce agents.
- You can now extract metadata and add metadata extraction filters for the following Salesforce Data 360 objects:
  - Activation
  - Data Action
  - Data Graph

- Segment
- Semantic Model

- You can now extract metadata of filtered data lake objects located in Salesforce Data 360 data spaces.

For more information, see the *Salesforce* catalog source help.

Salesforce Marketing Cloud

This release includes the following enhancements:

- You can now extract metadata from the following activities in Automation Studio:
  - Data Copy or Import
  - Data Extract with no wildcard characters
  - File Transfer
  - Filter
  - SQL Query with data extension and data view sources
- You can add metadata extraction filters based on the automation object type.
- You can now extract metadata and add metadata extraction filters for the following Salesforce Data 360 and Salesforce CRM objects:
  - Activation
  - Segmentation
- You can perform connection assignment to view lineage between a Salesforce Marketing Cloud source system and the Salesforce Data 360 and Salesforce CRM applications.

For more information, see the *Salesforce Marketing Cloud* catalog source help.

SAP Business Warehouse (BW)

This release includes the following enhancements:

- You can now add metadata extraction filters based on the Open ODS View object type.
- You can extract metadata from planning sequences and planning services.

For more information, see the *SAP BW* catalog source help.

SAP Datasphere

This release includes the following enhancements:

- You can now perform connection assignment to view lineage between a Microsoft Power BI source system and an SAP Datasphere source system.
- You can now perform connection assignment to view lineage between an SAP Datasphere source system and an SAP Sales & Service Cloud source system.

For more information, see the *SAP Datasphere* catalog source help.

SAP BW/4HANA

You can run data profiling and data quality jobs on the following objects extracted from the SAP BW/4HANA source system:

- Advanced DataStore Object (ADSO)
- CompositeProvider

For more information, see the *SAP BW/4HANA* catalog source help.

SAP HANA Database

This release includes the following enhancements:

- You can perform connection assignment to view lineage between SAP HANA DB virtual tables and SAP Business Warehouse composite provider assets.
- You can extract metadata from column views.
- You can extract metadata from SQL Script calculation views.

For more information, see the *SAP HANA Database* catalog source help.

SAP S/4HANA Cloud

You can now extract metadata from an SAP S/4HANA Cloud source system that uses a proxy server-based connection.

For more information, see the *SAP S/4HANA Cloud* catalog source help.

SAP Sales & Service Cloud

You can now extract metadata from an SAP Sales & Service Cloud source system that uses a proxy server-based connection.

For more information, see the *SAP Sales & Service Cloud* catalog source help.

Snowflake

This release includes the following enhancements:

- You can extract metadata of semantic views.
- You can add metadata extraction filters based on semantic views.

For more information, see the *Snowflake* catalog source help.

Tableau

This release includes the following enhancements:

- You can perform connection assignment to view lineage between a Cloudera Hadoop source system and a Tableau source system.
- You can extract metadata from published data sources and Salesforce sources such as CRM, Data360, and Semantic Layer through Tableau. You can also view the real project hierarchy along with more detailed assets information and lineage in Data Governance and Catalog.

For more information, see the *Tableau* catalog source help.

Configure additional data capabilities

You can configure Data observability on the IBM DB2 LUW catalog sources.

For more information about catalog sources, see the corresponding catalog source help.

Profiling enhancements

This release includes the following profiling enhancements:

Amazon Redshift

You can enter a custom SQL query to select sample rows to run data profiling and data quality jobs using the Custom Query sampling type.

For more information, see the *Amazon Redshift* catalog source help.

SAP HANA Database

You can run data profiling and data quality jobs on SQL Script calculation views.

For more information, see the *SAP HANA Database* catalog source help.

Rule-based sensitivity for Document assets

You can now define rules that assign a sensitivity level to Document assets. A Document asset represents an unstructured file, such as a PDF or Microsoft Word document, in the catalog. You can apply sensitivity levels to these assets based on the classification policies that you define.

For more information, see Data Classification in *Administration*.

Enrichment propagation based on lineage

You can configure catalog sources to propagate enrichments to related assets based on lineage.

Enable autonomous enrichment to propagate curation values such as classifications, descriptions, business names, and glossary associations across catalog source assets. Enable autonomous enrichment globally, and then configure each catalog source to control how it receives enrichments.

Propagation settings determine which enrichment types propagate, from how many lineage levels they propagate, and whether values are automatically accepted or recommended.

For information about autonomous enrichment, see Autonomous Enrichment in *Administration* and the corresponding catalog source help.

Global settings for generated descriptions

You can now configure global settings that shape the descriptions Data Governance and Catalog generates for your assets. Set the industry and text length that apply to all generated descriptions. You can override these settings in Data Governance and Catalog.

For information about configuring generated descriptions, see Autonomous Enrichment in *Administration*.

Incremental metadata extraction

You can now run incremental metadata extraction jobs on the following catalog sources:

- Microsoft Fabric OneLake
- Microsoft OneDrive

A full metadata extraction extracts all objects from the source to the catalog. An incremental metadata extraction considers only the changed and new objects since the last successful catalog source job run. Incremental metadata extraction doesn't remove deleted objects from the catalog and doesn't extract metadata of code-based objects.

For more information about catalog sources, see the corresponding catalog source help.

LIKE operators in data classification rules and lookup tables

When you build data classification rules in Cloud Data Governance and Catalog, you can use the LIKE ALL, LIKE SOME, and LIKE ANY operators to match a value against multiple patterns in a single condition. You can also reference a lookup table column as the pattern source. Use LIKE (lkp.<table>.<column>), LIKE SOME (lkp.<table>.<column>), or LIKE ANY (lkp.<table>.<column>) to match against the values in a lookup column.

For more information, see *Data classification* and *Lookup tables* in the *Administration* help.

Metadata extraction from additional file types

You can now extract metadata from additional file formats across multiple catalog sources.

Newly Supported File Types:

- EML
- EMLX

- MSG
- RTF
- PPT
- PPTX
- JSONL

Supported Catalog Sources:

- Amazon S3
- File System
- Google Cloud Storage
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Classify Microsoft Word documents

You can now use **Document Classification** in Metadata Command Center to classify Microsoft Word documents with the DOC and DOCX extensions. You can classify Microsoft Word documents for the following catalog sources:

- Amazon S3
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Deleting lookup tables

You can delete a lookup table that is not used in any data classification rule.

For more information, see *Lookup tables* in the *Administration* help.

Workflow enhancements

This release includes the following workflow enhancements:

Periodic review of assets (Preview)

You can set up a periodic review of assets while configuring workflow events in Metadata Command Center to certify business and data access assets on a schedule. Periodic review helps you keep assets

accurate, up to date, and audit ready. You can configure a workflow event that reviews the assets that meet a condition, such as glossaries in a specific domain. When the schedule runs, the event automatically creates a review ticket for each qualifying business asset and data access asset.

Data Governance and Catalog creates review tickets automatically for the qualifying assets based on the schedule. The stakeholders defined in the workflow can review the asset, set its lifecycle to complete the review, and close the ticket. Each asset shows the last review date and the next review date. You can also search and browse assets by the last review date and the next review date.

Inclusive gateway

You can add an inclusive gateway to a workflow to route the flow along one or more outgoing paths based on conditions. The inclusive gateway evaluates the condition on each outgoing path independently, and the workflow follows every path whose condition is true. If no condition is true, the workflow follows a default path. An inclusive gateway activates one or more paths based on conditions.

Approval workflows for asset lifecycle changes

You can configure a workflow that runs when the lifecycle of an asset changes. Under the asset management event category, a new event type, **Approval Request for Lifecycle Change**, triggers a workflow when an asset's lifecycle state changes. The workflow runs when an asset moves from the Published state to the Obsolete state, or from the Obsolete state to the Published state. When you configure a workflow for this event type, you can select only the Obsolete or Published state.

Service task to retrieve asset details in a workflow

You can add a service task to route a workflow dynamically, based on asset groups and the custom attribute values of the asset the workflow runs on. You can use these values in expressions that define the gateway conditions.

Using the asset details available in the gateway conditions, you can configure an inclusive gateway that directs the workflow based on the asset metadata. For example, you can route the workflow along a different path for an asset that belongs to a specific asset group.

For more information, see *Workflows* in the *Administration* help.

REST API enhancements

You can use REST APIs to perform the following tasks on catalog source jobs:

- Cancel jobs. Use the API to cancel a job based on the job ID.
- List jobs. Use the API to list jobs based on the specified filters.
- Download logs. Use the API to download log files for a job based on the job ID.

For information about the job management APIs, see the Informatica Developer Portal.

Monitor Informatica Processing Unit (IPU) usage for catalog source jobs in Administrator

You can now monitor the catalog source job IPU usage in Administrator. IPU consumption details are available under Project **CDGC** and Folder **Scanner**.

For more information, see *IPU Meters* in the Organization Administration guide.

SAP transports

New SAP transports are available for SAP BW and SAP BW/4HANA catalog sources.

For more information about SAP transports, see
HOW TO: Import the latest transports for SAP catalog sources in Metadata Command Center.

Access control based on data classification sensitivity

When you create or modify an access policy in Metadata Command Center, you can add a sensitivity level as a predicate to a condition. The new predicate allows you to control access to assets based on the sensitivity level of their data classifications.

For more information, see *Metadata access control* in the *Administration* help.

Changed behavior

The October 2026 release of Data Governance and Catalog includes the following changed behavior.

Changes to stakeholder management

Options for the Stakeholder Status column

In a search export file, the **Stakeholder Status** column includes the `Both` option. This status indicates that the asset can include stakeholders who are assigned by you or inherited through its hierarchy.

Previously, the available status options for stakeholders on an asset were either `Inherited` or `Assigned`.

Prevent stakeholder re-inheritance

You can prevent the re-inheritance of a parent asset's stakeholders after you remove them from a child asset.

Previously, when you removed all stakeholders from an asset, the stakeholders of the parent asset were immediately re-inherited.

Changes to data quality rule occurrences

Delete data quality rule occurrences that have scores

You can delete a data quality rule occurrence after it generates data quality scores.

Previously, you couldn't delete a rule occurrence that had data quality scores because Data Governance and Catalog treated the scores as child assets.

Select data elements from different tables for data quality rule occurrences

When the measuring method of a data quality rule occurrence is any value other than **Informatica Cloud Data Quality**, you can select primary and secondary data elements that belong to different sources and tables for the rule occurrence. This change also applies when you create a rule occurrence with a bulk import template.

Previously, the secondary data element had to belong to the same table as the primary data element regardless of the measuring method.

Higher row counts for rule occurrences

Data quality rule occurrences can report larger values for total rows and failed rows. The **Total Rows** and **Failed Rows** attributes use the long data type.

Previously, the attributes used the integer data type.

Higher row counts for failed row previews

When you preview failed rows for a data quality rule occurrence, the preview grid displays up to 1,000 failed rows.

Previously, the preview grid displayed up to 100 failed rows.

Changes to total rows and failed rows of rule occurrences

The attributes for total rows and failed rows of a data quality rule occurrence depend on when the rule occurrence was created. This behavior applies to the following areas:

- REST API responses. If the rule occurrence was created before the October 2026 release, the response of a search API or the audit history API contains `totalRecords` and `failedRecords` in addition to the `totalCount` and `exception` attributes. When you modify the score of the rule occurrence, Data Governance and Catalog updates only the `totalRecords` and `failedRecords` attribute values. If the rule occurrence was created after the October 2026 release, the response contains only `totalRecords` and `failedRecords`.
- History tab. For changes made before the October 2026 release, the **History** tab shows **Total Records** and **Failed Records**. For later changes, the **History** tab shows **Total Rows** and **Failed Rows**.
- Audit history exports. When you export the audit history of a rule occurrence, the export follows the same logic as the **History** tab.

Previously, API responses contained `totalCount` and `exception` for all rule occurrences. The **History** tab showed **Total Rows** and **Failed Rows** for all changes.

Changes to the CLAIRE Activity widget

When you click the CLAIRE Activity widget on the dashboard, the **Curation Center** page opens, where you can review and curate recommendations for assets. While the CLAIRE Activity widget shows the total number of recommendations for all assets in your catalog, the **Curation Center** shows the total number of assets that have recommendations. In the **Curation Center**, you can view and act only on assets for which you're responsible.

You can click the different types of recommendations on the CLAIRE Activity widget to open the filtered assets in the **Curation Center.** The generated classification recommendation type is disabled on the CLAIRE Activity widget because you cannot curate generated classifications in the **Curation Center**.

Previously, the CLAIRE Activity widget opened its own drilldown page where you could only view assets with different types of recommendations and their statuses.

Change in export behavior for rich text fields

When you export assets that contain rich text fields, such as Description, Business Logic, rich-text custom attributes, you can preserve the HTML formatting or export the fields as plain text without HTML tags. If you preserve the formatting of the rich text fields, the field remains editable. Your edits take effect when you re-import the file. If you export the fields without HTML tags, you cannot edit the fields for re-import.

If the rich text fields contain non-HTML strings in angle brackets, the export preserves the formatting regardless of your choice during the export. For example, the fields might contain `<Enterprise>` and `<CustomerName>`.

Previously, rich text fields were always exported with HTML tags.

Changes to lifecycle status updates for business assets

You can configure an approval worflow when a business asset changes its lifecycle status from Published to Obsolete. Data Governance and Catalog creates a ticket and starts the configured approval workflow. The asset remains visible to other users with its Published status, and edits are blocked for all users, including stakeholders, until the ticket is closed. When the ticket is approved and closed, the lifecycle status changes to Obsolete. The ticket captures the lifecycle change.

Similarly, when you change the lifecycle status from Obsolete to Published, Data Governance and Catalog creates a ticket for approval. The ticket captures the lifecycle change along with any description updates since the asset was last published.

Previously, if you had edit permission, you could change an asset's lifecycle status from the asset page without triggering a workflow or creating a ticket.

Obsolete asset modifications

You can remove a reference dataset association from an obsolete asset. To keep obsolete assets consistent with their lifecycle state, you can no longer associate a reference dataset with obsolete assets.

Previously, you could add or change the reference dataset associated with an obsolete asset.

Include technical data elements in export

When you export a business data set with the **Include Child Assets** option, the export includes technical data elements that are children of the business data set. You export the assets in a separate sheet along with the business data set's manual data elements.
Previously, a Business Data Set export with child assets included only manually created Data Elements.

Changes to propagation jobs

Data Governance and Catalog runs batch jobs for propagating data set relationships, stakeholders, and asset groups. For these updates, a placeholder job queues the changes you make. After which, Data Governance and Catalog runs a dedicated job for each propagation. The batch job propagates the changes in the order you make them and changes appear on assets after the job completes.

Relationship Batch Propagation is the batch job for data set relationships, and **Asset Group & Stakeholder Batch Propagation** is the batch job for propagations in asset stakeholders and groups.

Previously, propagation jobs for data set relationships, stakeholders and asset groups ran concurrently.

Changes to freshness anomaly generation

Data observability generates a freshness anomaly event only when the freshness of data of a data set doesn’t change within its usual update interval. If a data update arrives after the update interval, data observability doesn’t generate an anomaly event.

Previously, data observability generated a freshness anomaly event when the freshness of data of a data set changed after the update interval.

For more information about anomaly events, see *View anomaly events* in the *Data Quality for Assets* help.

Change in data element selection limit for data profiling

You can include up to 200 data elements in a profiling task.

Previously, you included up to 50 data elements in a profiling task.

Catalog source configuration options based on the selected model

When a catalog source type supports more than one model, you now view only the configuration options that apply to the model you select. Previously, you viewed all the configuration options for the catalog source type regardless of the selected model.

Microsoft Power BI connector name change

The Microsoft Power BI connector in Administrator is renamed to Microsoft Fabric. Both the Microsoft Power BI catalog source and the new Microsoft Fabric catalog source use this connector. The Microsoft Fabric connector also includes additional connection properties.

For more information, see the *Microsoft Power BI* catalog source help.

Decision gateway path conditions based on expressions

You can configure the outgoing paths from a decision gateway with an expression or with a previous user task outcome. When you use an expression, a path can use the outcome of a service task that runs earlier in the workflow.

Previously, you could configure the outgoing paths from a decision gateway only with a user task outcome.

For more information, see *Configuring a workflow* in the *Administration* help.

Changes to permissions to manage connections of a catalog source

In Metadata Command Center, you can assign, modify, and unassign the connections to a catalog source for which you aren't a stakeholder. To manage the connections of a catalog source, the organization administrator must grant you the Manage Lineage Settings and Super Admin privileges for the Metadata Command Center service in Administrator. With these privileges, you can manage connections without edit permissions on catalog source assets.

Previously, you had to be a stakeholder of the catalog source to manage its connections.

For more information, see *Connections* in the *Administration* help.

CHAPTER 9

Data Ingestion and Replication

The October 2026 release of Data Ingestion and Replication includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 16, 2026	Added	"SAP HANA log-based CDC archive log discovery" on page 104
October 16, 2026	Modified	"Apache NiFi 2.5.0 runtime engine for Streaming Ingestion and Replication" on page 97
October 16, 2026	Added	"Table-level error isolation in incremental load tasks" on page 101
October 16, 2026	Modified	"Microsoft Fabric Lakehouse target" on page 98
October 16, 2026	Added	"Path validation for local directories in Google Cloud Storage V2 tasks" on page 104
October 16, 2026	Modified	"Audit metadata columns for Microsoft Fabric OneLake targets" on page 98
October 16, 2026	Added	"Billing project override for Google BigQuery targets" on page 100
October 16, 2026	Modified	"Multiple object distributors for Cloud Data Lake targets" on page 100
October 16, 2026	Added	"Auto-tuning enhancements" on page 101
October 16, 2026	Modified	"Number of Rows in Output File field location" on page 104

Publication Date	Type of Change	Section Title
September 24, 2026	Modified	"Granular privileges for deploy, redeploy, and undeploy actions " on page 102
September 24, 2026	Added	"Java Runtime Environment 17 requirement for Data Ingestion and Replication Command-Line Interface" on page 98
September 24, 2026	Added	"Job management from the task configuration page" on page 100
September 24, 2026	Added	"Serverless runtime environments extended to Cloud Data Lake targets" on page 100
September 24, 2026	Added	"Automatic agent switchover extended to Cloud Data Lake targets" on page 100
September 24, 2026	Added	"Improved security for Mass Ingestion service ports" on page 103
September 24, 2026	Modified	"Enhanced Query-based CDC logic to release task units faster and reduce queuing time" on page 103
September 24, 2026	Added	"Additional targets for Application Ingestion and Replication" on page 101
September 24, 2026	Added	"New Data Ingestion and Replication CLI options to override connection and runtime environment IDs" on page 99
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release includes the following important notices and upcoming changes.

Preview lifted

Effective in the October 2026 release, the following functionalities are generally available and production-ready. Previously, these functionalities were only available in preview.

Auto-tuning for database ingestion and replication tasks

You can enable auto-tuning on database ingestion and replication initial load tasks and the initial load phase of combined load tasks. Auto-tuning automatically sets optimal values for pipeline parameters, including source partition count, helper thread counts, distributor counts, and the number of rows per output file. To enable auto-tuning for a task, select the **Auto-Tune** option on the last page of the task configuration wizard.

SAP HANA Log-based CDC processing of encrypted logs

Database ingestion and replication jobs that use Log-based CDC can now capture changes from encrypted SAP HANA online redo logs and archive logs. When you configure the SAP HANA Database Ingestion connection, provide the Key Backup Password and Key Backup Data Path to allow the connector to decrypt AES-256 CBC encrypted online redo and archive log files. The connector checks each log file to detect whether encryption is active. This action ensures jobs continue uninterrupted even if you turn encryption on or off on the source database while a job is running.

Apache NiFi 2.5.0 runtime engine for Streaming Ingestion and Replication

Streaming Ingestion and Replication uses the Apache NiFi version 2.5.0 runtime engine. No user action is required. The upgrade includes key updates to custom processors and AMQP NAR components. Streaming Ingestion and Replication is now enhanced to ensure compatibility with JDK 21, as Apache NiFi 2.5 requires a minimum of JDK 21 version to run effectively.

Reinstated support

Effective in the October 2026 release, historical statistics for job monitoring in Streaming Ingestion and Replication is reinstated and is available.

You can view the historical performance statistics for jobs on the **Performance** tab in My Jobs and Operational Insights. The performance charts track data movement trends, such as the total number of messages and the data volume transferred between the source and the target. You can use the charts to compare a job's current performance against its history, spot unusual changes, and troubleshoot issues.

Deprecated support

Effective in the October 2026 release, OAuth 2.0 Username-Password Flow authentication in Salesforce Mass Ingestion Connector is deprecated because Salesforce is retiring the SOAP API login() call in API versions 31.0 through 64.0 to align with enhanced cybersecurity standards. For more information, see Platform SOAP API login() Retirement.

Deprecation Notice: Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica intends to drop support for OAuth 2.0 Username-Password Flow on May 1, 2027. In the interim, transition to OAuth 2.0 JWT Bearer Flow authentication.

Additionally, you can no longer create new connected apps in Salesforce. Existing connected apps continue to work, but you cannot create new ones. To create a new Salesforce Mass Ingestion connection, configure an External Client App in Salesforce. For more information, see Create an External Client App. To migrate an existing connected app for your Salesforce Mass Ingestion connection to an external client app, see Connected App to External Client App Migration.

New features and enhancements

The October 2026 release of Data Ingestion and Replication includes the following new features and enhancements.

Common

The October 2026 release of Data Ingestion and Replication includes the following new features that are common to multiple types of ingestion and replication tasks.

Java Runtime Environment 17 requirement for Data Ingestion and Replication Command-Line Interface

The Data Ingestion and Replication Command-Line Interface (CLI) requires Java Runtime Environment (JRE) 17 or later version. If you run the CLI on an earlier JRE version, the CLI stops with a message indicating that JRE 17 or later is required.

REST API enhancements for creating tasks

The REST API request `POST /dbmi/public/api/v2/task/create` that creates an application ingestion and replication or database ingestion and replication task includes additional configuration options. The REST APIs now handle errors better and return clearer messages when a request fails.

The following list shows some of the new options you can configure through this API:

- Source properties such as change data capture method, query-based CDC columns and intervals, large object replication, source partitioning for parallel initial loads, and reader performance tuning.
- Endpoint-specific source properties for connectors such as Workday, Oracle Fusion Cloud, and Salesforce Bulk API 2.0.
- Target properties such as apply mode, Databricks unmanaged tables, Snowflake ingestion options including Superpipe, writer performance tuning, JSON output format, and audit columns.

You can also enable automatic performance tuning in your request. The task automatically tunes initial load jobs and the initial phase of combined load jobs, so you don't need to adjust performance settings manually.

For special processing needs, you can set custom properties at the direction of Informatica Global Customer Support or a technical staff member.

For the full list of attributes that you can specify in your request, see *Database Ingestion and Replication REST API Reference*.

Microsoft Fabric Lakehouse target

You can now use Microsoft Fabric Lakehouse as a target for application ingestion and replication tasks and database ingestion and replication tasks of all load types.

To connect to a Microsoft Fabric Lakehouse target, use the Microsoft Fabric Lakehouse connector.

Confirmation prompt when undeploying tasks

A confirmation dialog appears before you undeploy an application ingestion and replication, database ingestion and replication, or streaming ingestion and replication task.

You must confirm the action before the task is undeployed. This prompt prevents you from accidentally undeploying a running task when you click **Undeploy**.

Audit metadata columns for Microsoft Fabric OneLake targets

You can now configure audit metadata columns for application ingestion and replication tasks and database ingestion and replication tasks that have a Microsoft Fabric OneLake target.

In **Advanced Options** under **Advanced Target Properties**, you can enable columns that track change-data metadata, such as operation type, operation sequence, and last replicated timestamp. To identify the source table or source schema for each replicated row, you can also enable the source table name and source schema name columns using target custom properties.

Schema drift options enabled for Microsoft Fabric OneLake targets

Automatic schema drift detection and handling is now available for Microsoft Fabric OneLake targets in incremental load and combined initial and incremental load application ingestion and replication jobs and database ingestion and replication jobs.

Schema drift occurs when you add, modify, drop, or rename columns in a source table.When defining a task, you can configure the types of source schema changes to propagate and how to handle them on the target. For example, you can configure schema drift options to ignore the changes, replicate the changes, or stop the job or a subtask when a schema change occurs. If you choose to stop the job, you can use the **Resume With Options** command to resume the job with an override schema drift option.

IAM Role ARN property available for Amazon S3 targets

You can now use the **IAM Role ARN** property in the Amazon S3 V2 target connection properties for application ingestion and replication tasks and database ingestion and replication tasks. Previously, this property did not apply to Data Ingestion and Replication tasks.

The **IAM Role ARN** property is used in the AssumeRole with EC2 role and AssumeRole with IAM user authentication types. In both types, the Secure Agent assumes the specified role through AWS Security Token Service and obtains temporary credentials automatically, so you don't need to store a long-lived access key or secret key in the connection. Cross-account Amazon S3 access is now possible without modifying the Secure Agent's own instance role.

Amazon Redshift JDBC driver upgrade

The Amazon Redshift JDBC driver has been upgraded from version 2.1.0.30 to 2.2.7 to address a security vulnerability that could allow unauthorized code execution under certain conditions. No configuration changes are required. Existing Amazon Redshift connections continue to work as before the upgrade.

Microsoft SQL Server JDBC driver upgrade

Data Ingestion and Replication now includes Microsoft SQL Server JDBC driver version 13.2.1 when you connect to Microsoft SQL Server sources and targets. This version replaces driver version 12.10.2, which reached end of life.

Secure Agent on Red Hat Enterprise Linux (RHEL) 10

You can now install the Secure Agent on RHEL 10 to handle your Data Ingestion and Replication tasks.

New Data Ingestion and Replication CLI options to override connection and runtime environment IDs

In the Data Ingestion and Replication Command-Line Interface (CLI) `task create` and `task replace` commands, you can now specify the source connection ID, target connection ID, and runtime environment ID as command-line arguments to override the values in the configuration file. This lets you reuse the same configuration file across organizations, such as when you promote a task configuration from a development environment to production. In the `task replace` command, you can also specify an argument to retain the connection and runtime environment IDs already stored in the repository.

The syntax for `task create` is:

```
task create --pathToConfig path_to_configuration_file [--taskName task_name][--
taskLocation task_location][--taskType task_type][--deploy][--sourceConnectionId
source_connection_id][--targetConnectionId target_connection_id][--runtimeEnvId
runtime_environment_id]
```

The syntax for `task replace` is:

```
task replace --pathToConfig path_to_configuration_file [--taskName task_name][--
taskLocation task_location][--deploy][--noprompt][--sourceConnectionId
source_connection_id][--targetConnectionId target_connection_id][--runtimeEnvId
runtime_environment_id][--retainExistingIds]
```

Job management from the task configuration page

You can now run, stop, abort, resume, redeploy, and undeploy application ingestion and replication jobs and database ingestion and replication jobs directly from the task configuration page. The Actions menu in the upper-right corner of the page displays options based on the current job status. You no longer need to navigate to the **My Jobs** page, Monitor, or Operational Insights to manage your jobs.

Serverless runtime environments extended to Cloud Data Lake targets

You can run application ingestion and replication and database ingestion and replication jobs on a serverless runtime environment hosted on Microsoft Azure with Cloud Data Lake targets such as Amazon S3, Google Cloud Storage, Microsoft Azure Data Lake Storage, Microsoft Fabric OneLake, and Oracle Cloud Object Storage targets.

Database Ingestion and Replication can now run incremental load and combined initial and incremental load jobs that use the Query-based CDC method to capture changes from an Oracle or SQL Server source and load to Cloud Data Lake targets using a serverless runtime environment.

Automatic agent switchover extended to Cloud Data Lake targets

Automatic switchover to another Secure Agent in a Secure Agent group is enabled by default for new application ingestion and replication jobs and database ingestion and replication jobs with Cloud Data Lake targets, such as Amazon S3, Google Cloud Storage, Microsoft Azure Data Lake Storage, Microsoft Fabric OneLake, and Oracle Cloud Object Storage.

Automatic agent switchover now also applies to database ingestion and replication jobs that use the Query-based CDC method to capture changes from a Db2 for LUW, Oracle, or SQL Server source to a Cloud Data Lake target.

Multiple object distributors for Cloud Data Lake targets

You can configure multiple writer object distributors to run in parallel during initial load jobs for Cloud Data Lake targets, including Amazon S3, Google Cloud Storage, Microsoft Azure Data Lake Storage Gen2, Microsoft Fabric OneLake, and Oracle Cloud Object Storage. Multiple distributors can reduce the initial load job run time on high-volume datasets. This feature is available for application ingestion and replication tasks and database ingestion and replication tasks. For combined initial and incremental load tasks, multiple object distributors apply to the initial load phase in synchronous mode only.

To enable the feature and enter the number of parallel distributors, use the **Writer Unload Multiple Distributors** and **Writer Distributor Count** target custom properties to run multiple writer instances simultaneously to help the writer throughput keep pace with parallel source reads. Alternatively, for database ingestion and replication tasks, enable the **Auto-Tune** option to calculate the optimal values automatically.

Billing project override for Google BigQuery targets

For application ingestion and replication tasks and database ingestion and replication tasks that use Google BigQuery targets, you can specify a separate billing project for query execution costs. To use this feature, configure the writerGbqBillingProjectId custom property with the billing project ID under **Advanced Target Properties** on the **Target Details** page of the task wizard. Google Cloud then bills query costs to that project while you continue to access data from the dataset in the storage project defined in the connection.

Application Ingestion and Replication

The October 2026 release of Application Ingestion and Replication includes the following new features and enhancements.

Additional targets for Application Ingestion and Replication

You can now use Microsoft Fabric Data Warehouse and Salesforce Data 360 targets with Oracle Fusion Cloud, Salesforce, SAP OData, and SAP ABAP sources, including SAP ECC and SAP S4/HANA with SAP Mass Ingestion Connector, for all load types in application ingestion and replication tasks.

All load types added for Cloud Data Lake targets with SAP OData

You can configure an application ingestion and replication incremental or combined load task from SAP OData to cloud data lake targets such as Amazon S3, Google Cloud Storage, Microsoft Azure Data Lake Storage Gen2, Microsoft Azure Synapse Analytics, Microsoft Fabric OneLake, and Oracle Cloud Infrastructure Object Storage. Previously, you could use these targets with SAP OData source for initial loads only.

Readable display values from Microsoft Dynamics 365 sources

When you create a task that uses Microsoft Dynamics 365 as the source, the task now writes the readable value for reference and coded fields to the target, next to the original column.

For OWNERTYPE and Lookup fields, the task adds a column named `<ColumnName>_display_name` that holds the display value, and the original column retains the GUID. For Choice, Yes-No, State, and Status fields, the task writes the label column `<field>name`, such as statuscodename, as a string column next to the numeric code. The target now holds both the reference and its resolved value. Existing tasks keep their current target columns. To add the display value columns, you need to redeploy your tasks.

Database Ingestion and Replication

The October 2026 release of Database Ingestion and Replication includes the following new features and enhancements.

Auto-tuning enhancements

Auto-tuning is now available for the following cloud data lake targets: Amazon S3, Google Cloud Storage, Microsoft Azure Data Lake Storage Gen2, Microsoft Fabric OneLake, and Oracle Cloud Object Storage. This release also introduces the following performance and resource optimization enhancements:

- Adaptive ring buffer sizing. Auto-tuning now sizes each table's internal pipeline ring buffer by selecting a slot count sized to each table's profile, reducing the risk of failures on wide tables and avoiding unnecessary memory use on narrow ones. The unloadEventBatchSize value is automatically tuned together with ringBufferSize so that peak in-flight payload stays near the configured size target.
- Dynamic writer flush size. Auto-tuning now adjusts the maximum number of rows that the writer batches before flushing to the target based on observed target latency to improve throughput.
- Evaluate-and-stop mode. You can run auto-tuning in evaluate-and-stop mode, to preview the auto-tuning recommendations without moving any data. In this mode, auto-tuning collects metrics and runs a full tuning evaluation, logs the recommended values for all components, and then stops the task gracefully before the unload and load execution begins. The task exits with a SUCCESS status. Use this mode to validate the auto-tuning decisions against a real task's metrics, compare recommended values across different source and target configurations, and identify regressions in the tuning algorithm without incurring the cost of a full data-movement run. This mode applies to initial load jobs only.

Table-level error isolation in incremental load tasks

You can enable table-level error isolation for database ingestion and replication tasks that replicate data from Oracle to Snowflake and use the log-based CDC method. When you enable error isolation and a table encounters an irrecoverable error, that table stops while all other tables in the task continue replicating. The task transitions to a Running with Warning state and raises an alert that identifies the stopped table and the reason for the error.

To enable this feature, contact Informatica Global Customer Support.

Granular privileges for deploy, redeploy, and undeploy actions

As an administrator, you now have granular control over the deploy, redeploy, and undeploy actions on database ingestion and replication tasks through three separate feature privileges. You can restrict any of these actions for a role.

To let a user perform these actions, assign the Deploy Ingestion Task, Redeploy Ingestion Task, and Undeploy Ingestion Task feature privileges to the role.

For example, you can let a user run ingestion tasks but withhold the undeploy privilege. Previously, a Run permission combined the deploy, redeploy, start, stop, abort, and undeploy actions.

Note: Effective in the October 2026 release, an organization-level flag controls these feature privileges. To enable this functionality for your organization, create a request with Informatica Global Customer Support. If you select and save these feature privileges, they won't take effect until Informatica Global Customer Support activates the functionality for your organization.

When enabled, the Admin, Deployer, and Designer system-defined roles include all three feature privileges by default, but custom roles don't. When a user in a custom role lacks these privileges, the Deploy, Redploy, and Undeploy options appear disabled in the ingestion and replication task setup flows, and don't appear in the Monitor and My Jobs menus or in Operational Insights. To grant these actions, an administrator must add the feature privileges to the custom role.

Oracle Autonomous Database target

You can now use Oracle Autonomous Database as a target in database ingestion and replication initial load tasks. To connect to a Oracle Autonomous Database target on Oracle Cloud Infrastructure, use the Oracle Autonomous Database connector.

Access Management for Oracle sources

You can now apply Cloud Data Access Management (CDAM) governance rules to Oracle source tables in database ingestion and replication jobs. In the **Transform** page of the task configuration, select one or more tables and add the Access Management transformation to assign de-identification and filtering policies defined in Cloud Data Governance and Catalog.

Connections available for Access Management in database ingestion and replication tasks

When you add access management to a database ingestion and replication task, the connection list on the Access Management page includes all the connections that match the source vendor type, including connections that are not Database Ingestion connections. Previously, the Access Management page listed only Database Ingestion connections, which meant that source vendors that required a non-ingestion connection, such as Oracle, had no available connection for access management configuration.

Truncate event handling for Oracle sources with Snowflake targets

Database ingestion and replication jobs that have an Oracle source can now detect TRUNCATE TABLE operations on an Oracle source table during log-based CDC replications to a Snowflake target. The incremental load task truncates the target table in standard apply mode or inserts a truncate record with an operation type of "T" in audit apply mode. You can configure this behavior with custom properties in the task configuration. You can also enable an alert that notifies you when the task detects a truncate event at the source.

Encrypted Oracle source connection passwords

Data Ingestion and Replication extends the CLI password encryption to support Oracle-specific connection credentials. You can now provide encrypted values for the following fields:

- Oracle database password

- Reader ASM Password
- TDE Wallet Password

The encryptText command introduces a new --method parameter with a selfcontained option. Unlike the existing keystore method, selfcontained embeds the encryption key directly in the encrypted output, and does no require a key-store.txt file on the machine that runs the CLI commands.

Soft Deletes for Microsoft Fabric Data Warehouse and Open Table targets

Database ingestion and replication incremental load jobs and combined initial and incremental load jobs can now process hard delete operations on the source as soft deletes on Microsoft Fabric Data Warehouse and Open Table targets. Database Ingestion and Replication marks the soft-deleted records with a "D" in the INFA_OPERATION_TYPE column on the target without actually deleting the records.

Schema drift options enabled for Microsoft Fabric Data Warehouse, Open Table, and Salesforce Data 360 targets

When you configure database ingestion and replication tasks that have Microsoft Fabric Data Warehouse, Open Table, or Salesforce Data 360 targets, you can now set schema drift options in the task configuration. Select REPLICATE, IGNORE, STOP TABLE, or STOP JOB options to control how the task responds to source column additions and modifications. The task does not replicate dropped or renamed columns to the target. For schema drift events that involve dropped or renamed columns, you can select IGNORE, STOP TABLE, or STOP JOB options.

File Ingestion and Replication

The October 2026 release of File Ingestion and Replication includes the following new features.

GCM cipher and RSA SHA-2 support for the Advanced SFTP V2 connector

You can use the Advanced SFTP V2 connector to connect to SFTP servers that require the aes128-gcm@openssh.com and aes256-gcm@openssh.com GCM ciphers. You can also use the connector to authenticate to SFTP servers that require the RSA SHA-2 host key algorithms `rsa-sha2-512` or `rsa-sha2-256`. The connector also works with servers that still accept the older ssh-rsa algorithm, with no change to your connection configuration.

Improved security for Mass Ingestion service ports

The Mass Ingestion service uses internal service ports. These ports now bind to the local host (127.0.0.1), so processes running on the same machine as the Secure Agent can connect to them.

Changed behavior

The October 2026 release of Data Ingestion and Replication includes the following changed behavior.

Enhanced Query-based CDC logic to release task units faster and reduce queuing time

For database ingestion and replication combined initial and incremental load tasks that have a Db2 for LUW, Oracle, or SQL Server source and use the query-based CDC method, a new dynamic algorithm triggers a CDC cycle as soon as one or more tables complete their initial load and releases the task unit for those tables sooner. During this initial period, CDC cycles might run at shorter, dynamic intervals. After all tables reach a normal state, the task returns to the CDC interval that you configured.

Previously, the task didn't release the task unit for a table until a full CDC cycle completed. This behavior caused tables that had finished unloading to remain in backlog status for hours if you configured a long CDC interval with a low Max Task Units value.

New parameter for encryptText command in Data Ingestion and Replication Command-Line Interface

When you encrypt a text value with the `encryptText` command in the Data Ingestion and Replication Command-Line Interface, you must now specify an encryption method with the `--method` parameter: Available options are:

- `keystore`. Legacy value. The encryption key is stored in a key-store.txt file
- `selfcontained`. New value. The encryption key is embedded in the encrypted output, making the encrypted value portable without requiring a separate key file.

Previously, the `keystore` encryption method was the only available option and the `encryptText` command did not include a method parameter.

Number of Rows in Output File field location

For application ingestion and replication tasks and database ingestion and replication tasks, the **Number of Rows in Output File** field has moved from the **Advanced Options** section to the **Custom Properties** section on the **Let's Go!** page of the task configuration wizard. If you don't select a value, a default of 100000 rows is applied. For tasks that are already deployed, the field appears in the **Custom Properties** section and is pre-populated with the value saved at deploy time.

SAP HANA log-based CDC archive log discovery

For SAP HANA log-based CDC, Database Ingestion and Replication now reads the list of archive log files from the SAP HANA backup catalog instead of scanning the mount point directory. Because only catalog-registered files are processed, duplicate archive log files on disk are excluded, preventing incremental and combined load jobs from getting stuck in the BACKLOG stage.

The database user configured for the SAP HANA source connection must have read access to the M_CATALOG_BACKUP and M_CATALOG_BACKUP_FILES monitoring views.

Previously, archive log discovery scanned the mount point directory directly, which caused CDC jobs to stall when duplicate redo-log files were generated during a BACKINT backup server outage.

Updated names for Google Cloud Storage V2 connection properties

The Google Cloud Storage V2 connection properties now use the names Service Account Private Key ID and Service Account Client ID. Previously, these connection properties had the names Private Key ID and Client ID. The name change doesn't affect existing connections or upgrades.

Path validation for local directories in Google Cloud Storage V2 tasks

File ingestion and replication tasks that move files between a local directory and Google Cloud Storage now validate the local directory. A directory that contains relative or shortcut segments such as /.. or ~, for example /root/FMI/f1/../f2/, fail with the following error message:

```
[GoogleStorageV2_AFTER_FILE_PICKUP_ACTION_DIR_NOT_VALID_7013]
The specified local directory is not valid.
```

Previously, tasks resolved these directories. Existing tasks that use such directories fail after the upgrade. To fix a task, replace the directory with an absolute directory that has no relative or shortcut segments.

CHAPTER 10

Data Integration

The October 2026 release of Data Integration includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 22, 2026	Added	"RunAJob utility" on page 108
October 8, 2026	Modified	"CLAIRE Copilot" on page 106
October 1, 2026	Modified	"Git repository verification" on page 110
October 1, 2026	Added	"Duplicate expression fields" on page 107
October 1, 2026	Added	"New fields" on page 108
September 24, 2026	Added	"Git repository verification" on page 110
September 24, 2026	Added	"Partitioned sources" on page 108
September 17, 2026	Modified	"CLAIRE Copilot" on page 106
September 17, 2026	Added	"Find transformations" on page 107
September 17, 2026	Added	"Target transformation" on page 109
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Data Integration includes the following important notices and upcoming changes.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Note: Don't enable JWT authentication if you use REST V2 Connector to call IDMC APIs.

Preview initiated

Effective in the October 2026 release, the following functionality is available for preview:

You can now select the Docling engine when you create an intelligent structure model. The Docling engine is an AI-powered document parser that is optimized for documents with complex layouts and tables. It supports text-based PDFs and preserves the hierarchical structure and metadata of the source document.

For more information, see "Intelligent structure models" in *Components*.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming change

We want to let you know that starting in the October 2026 release or later, JWT authentication token values will be limited to a maximum of 2000 characters.

New features and enhancements

The October 2026 release of Data Integration includes the following new features and enhancements.

Watch the What's New video to learn about new features and enhancements in the October 2026 release.

CLAIRE Copilot

When you create a mapping in SQL ELT mode that runs in the Snowflake ecosystem, you can prompt CLAIRE Copilot to add configured transformations to the data flow.

Connection parameters for mappings and mapplets

When you import a mapplet into a mapping, you can either reuse an existing mapping-level connection parameter or create a new one for the mapplet's connection parameters. You can manually select the connection parameter or accept Data Integration's suggestion based on connection type.


Duplicate expression fields

You can duplicate expression fields in Expression and Aggregator transformations. When you duplicate a field, Data Integration copies the configured expression and field metadata to the new field.

Find transformations

You can search for transformations by name or type on the Mapping Designer and Mapplet Designer. To find a transformation, enter a full or partial string in the Find transformation box.

The following image shows the Find transformation box on the Mapping Designer:

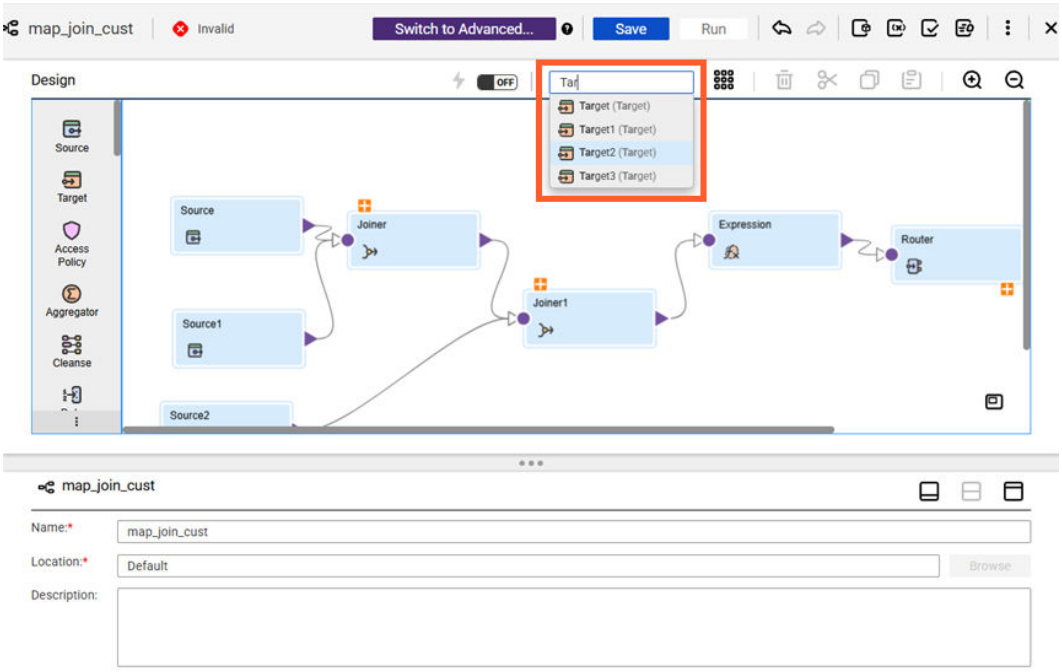

Fixed-width file formats

This release includes the following new features for fixed-width file formats:

- The Fixed-Width File Format page is updated with a new look and feel for increased usability.
- You can create a new flat file or FTP/SFTP connection directly from the Fixed-Width File Format page.
- You can add, delete, reorder, and search for fields in the Fields section.
- You can preview your sample data before and after you configure field widths and metadata.

Hierarchy Builder transformation

You can download the source file from which a hierarchical schema asset is created, so that you can review, reuse, or share the file. This applies to assets that are associated with the Hierarchy Builder transformation and that were created from an XML file or an XML Schema Definition (XSD) file.

For more information, see "Hierarchy Builder transformation" in *Transformations*.

Hierarchy Parser transformation

You can download the source file from which a hierarchical schema asset is created, so that you can review, reuse, or share the file. This applies to assets that are associated with the Hierarchy Parser transformation and that were created from an XML file or an XML Schema Definition (XSD) file.

For more information, see "Hierarchy Parser transformation" in *Transformations*.

Intelligent structure models

This release includes the following enhancements for intelligent structure models:

- When you create an intelligent structure model from an Excel file using Claire engine, you can read hidden sheets in the workbook at design time and run time.
- When you create an intelligent structure model using Claire engine, you can discover the structure of additional file formats, including email, Markdown, YAML, HTML, and PowerPoint, and to extract data from charts and graphs in your documents.

For more information, see "Intelligent structure models" in *Components*.

New fields

When you add a new field to the following transformations, the properties panel automatically scrolls to the new field:

- Aggregator
- Expression
- Lookup
- Normalizer
- Source
- SQL
- Target

Partitioned sources

When you use a partitioned source with a flat file target, you can write output data to a specified output file and directory. To write target data to the output file and directory that you specify, enable the **Use output file path for partitioned sources** advanced property in the Target transformation.

Preview error row files

You can preview error row files directly in Data Integration, even when you customize the error log directory. This enhancement enables you to view error logs regardless of directory configuration.

RunAJob utility

When you use the RunAJob utility to restart a mapping task that performs change data capture, you can restart the job from the beginning of the task.

Session logs

Mapping session logs now include both the connection ID and connection name, making it easier for you to identify connections while diagnosing failures. For the following connections and scenarios, the session log lists only the connection ID:

- Flat file
- FTP/SFTP
- Parameterized connection names that are passed through in-out or input parameters

Structure Parser transformation

You can configure the Structure Parser transformation to generate a single, complete JSON or XML output row instead of splitting the structured document across multiple rows.

For more information about generating a single output, see How to generate a single, complete JSON or XML output using Structure Parser transformation Knowledge article.

Target transformation

When you configure a Target transformation with an FTP connection, you can specify the Remote File Name advanced property. You can also parameterize the file name and override it at run time with a value that you specify in a parameter file.

Tasks

This release includes the following enhancements for tasks:

- When you configure a custom query source in a mapping task or dynamic mapping task, you can view and edit the field metadata.
- When you view details for a mapping task, the Task Details section displays the execution mode.

Changed behavior

The October 2026 release of Data Integration includes the following changed behaviors.

Fixed-width file formats

This release includes the following behavior changes for fixed-width file formats:

- When you configure column widths, you enter the width for each field that you add.
  Previously, you specified the column boundaries as a comma separated list or marked column boundaries on a ruler.
- You configure the default date format in the Date Format dialog box where you select the field width type, enter the width, and enter the datetime format.
  Previously, you entered the default date format as a single text string.
- You configure field metadata in the Fields section on the Fixed-Width File Format page.
  Previously you configured field metadata in the Edit Columns dialog box.
- You configure additional attributes for the fixed-width file format in the Advanced Properties section on the Fixed-Width File Format page.
  Previously you configured additional attributes in the Additional Attributes dialog box.
- Several advanced properties have been renamed:
  - Line Sequential is now Process File Line-by-Line.
  - Number of Rows to Skip is now Rows to Skip at Start
  - Number of Bytes to Skip After Column Ending is now Bytes to Skip After Field
  - Null Character Type is now Null Value Type
  - Null Character is now Null Value Character
  - Repeat Null Character is now Use Repeated Null Character

- Strip Trailing Blanks is now Remove Trailing Spaces

Functions in advanced mode

This release includes the following behavior changes for functions in advanced mode:

MAKE_DATE_TIME

If you pass a null value to the MAKE_DATE_TIME function in advanced mode, the function returns NULL.

Previously, the function failed.

TO_DATE

If you pass an invalid date to the TO_DATE function in advanced mode, the function returns NULL.

Previously, the function returned the next valid date.

Git repository verification

When you use an on-premise Git repository for source control, IDMC saves a local copy of the repository. To ensure that the correct repository is used, IDMC now verifies that the saved copy matches the repository that you request during a source control operation.

Previously, IDMC didn't perform verification, so IDMC could use a cached repository that didn't match your repository.

After the October 2026 upgrade, the first time you connect to a repository that was saved before the upgrade, IDMC creates a fresh copy instead of reusing the cached repository. This process can take extra time depending on the size of the repository and your network speed. Subsequent connections use the new copy as usual. IDMC doesn't delete the old saved copies automatically. Administrators can clear the old copies from the cache to free up disk space.

Intelligent Structure Models

When you create an intelligent structure model, Intelligent Structure Discovery generates normalized hierarchy relationships by default. This method generates output groups for each repeating element and provides faster performance and lower memory consumption. However, you can select a different option to generate output groups based on your requirement.

Previously, Intelligent Structure Discovery used the Default output groups option, which generated normalized or denormalized output groups.

For more information, see "Intelligent structure models" in *Components*.

Taskflows

You can view the taskflow execution details on the Monitor page with read permission. You can view the history, run status, timestamps, duration, step-level breakdowns, error messages, logs, and statistics.

This change allows administrators to grant the permissions to operations teams, data governance officers, and auditors who need to monitor taskflows without the authority to trigger or modify them.

Previously, you needed the execute permission to view the taskflow execution details.

For more information, *Monitor*.

Upgrade

The following topics provide information about tasks that you might need to perform before or after an upgrade of Data Integration.

For information on the upgrade tasks in Data Integration Connectors, see the *Data Integration Connector What's New*.

Preparing for the upgrade

Perform the following tasks to prepare for upgrade to the latest release.

Disk space requirements and file preparation

The Secure Agent upgrades the first time that you access the system after the upgrade.

Files that you added to the following directory are preserved after the upgrade:

```
<Secure Agent installation directory>/apps/Data_Integration_Server/ext/deploy_to_main/bin/rdtm-extra
```

Note: After a major release upgrade, the old and new versions of the services might continue to run concurrently for up to 24 hours. Ensure that the Secure Agent machine has sufficient free memory to avoid memory depletion during this period.

Perform the following steps to ensure that the Secure Agent is ready for the upgrade:

1. Ensure that each Secure Agent machine has sufficient disk space and memory available for upgrade.

   The machine must have sufficient available memory to run two Secure Agents simulatenously.

   The machine must have at least 5 GB free space or the amount of disk space calculated using the following formula, whichever is greater:

   ```
   Minimum required free space = 3 * (size of current Secure Agent installation directory - space used for logs directory)
   ```

2. Close all applications and open files to avoid file lock issues, for example:
   - Windows Explorer
   - Notepad
   - Windows Command Processor (`cmd.exe`)

Dynamic files in preprocessing commands

Data Integration refreshes mapping and task metadata during an upgrade. If you have a task that uses preprocessing commands to create a dynamic file, ensure that a file with the referenced file name is present at the specified file path before the first task run after the upgrade.

If a file isn't present, Data Integration can't map the metadata between the preprocessing command and the referenced file, and the task fails. After the first task run, Data Integration retains the file path.

CHAPTER 11

Data Integration Connectors

The October 2026 release of Data Integration includes the following updates for Data Integration Connectors.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 29, 2026	Added	"Important notices and upcoming changes" on page 114
October 29, 2026	Added	"Important notices and upcoming changes" on page 114
October 16, 2026	Deleted	"Changed behavior" on page 119
October 16, 2026	Deleted	"Changed behavior" on page 119
September 24, 2026	Deleted	"New and updated connector packages" on page 112
September 24, 2026	Added	"SAP OData V4 Connector" on page 120
September 24, 2026	Deleted	"SAP OData V4 Connector" on page 119
September 10, 2026	Initial publication	

New and updated connector packages

Read about new and updated connector packages in the October 2026 release of Data Integration Connectors.

The updated packages might include feature enhancements or might address bugs and internal fixes implemented for the release.

The following table lists the new and updated connector packages:

Amazon Athena Connector	Microsoft Fabric Data Warehouse Connector
Amazon DynamoDB V2 Connector	Microsoft Fabric Lakehouse Connector
Amazon Redshift V2 Connector	Microsoft Fabric OneLake Connector
Amazon S3 V2 Connector	MongoDB V2 Connector
Amazon Sagemaker Lakehouse Connector	Mixpanel Connector
Amplitude Connector	Netezza Connector
Ariba V2 Connector	NetSuite Connector
Box Connector	NetSuite RESTlet V2 Connector
Cassandra V2 Connector	OData Consumer Connector
Concur V2 Connector	OData V2 Applications Connector
Coupa V2 Connector	Oracle Autonomous Database Connector
Databricks Connector	Oracle Cloud Object Storage Connector
Db2 for i Connector	Open Table Connector
Db2 for zOS Connector	PostgreSQL Connector
Elasticsearch Connector	Salesforce Connector
Eloqua Bulk API Connector	Salesforce Analytics Connector
File Processor Connector	Salesforce Data 360 Connector
FileIo Connector	Salesforce Marketing Cloud Connector
Google Analytics Connector	SAP ADSO Writer Connector
Google BigQuery V2 Connector	SAP BW Connector
Google Cloud Storage V2 Connector	SAP HANA Connector
Greenplum Connector	SAP IDoc Reader Connector
Hadoop Files V2 Connector	SAP IDoc Writer Connector
IBM MQ Connector	SAP OData V2 Connector
JIRA Connector	SAP OData V4 Connector
JMS Connector	SAP ODP Extractor Connector
Kafka Connector	SAP Table Connector
Klaviyo Connector	ServiceNow Connector
Mailchimp Connector	Snowflake Data Cloud Connector
Marketo V3 Connector	SurveyMonkey Connector
Microsoft Azure Blob Storage V3 Connector	Teradata Connector
Microsoft Azure Cosmos DB SQL API Connector	Web Service Consumer Connector
Microsoft Azure Data Lake Storage Gen2 Connector	Xero Connector
Microsoft Azure Synapse SQL Connector	Zendesk V2 Connector
Microsoft Excel Connector	

Important notices and upcoming changes

The October 2026 release of Data Integration Connectors includes the following important notices and upcoming changes.

Dropped support

Effective in the October 2026 release, Informatica drops support for Microsoft CDM Folders V2 Connector.

Deprecated support

User name and password-based authentication in Snowflake Connector

Informatica intends to drop support for the user name and password-based authentication to connect to Snowflake by October 31, 2026 following Snowflake's scheduled deprecation.

For more information about the announcement from Snowflake, see Deprecation of single-factor password sign-ins.

This change applies to the following connectors, wherever you use a user name and password to connect to Snowflake:

- Snowflake Data Cloud Connector
- Snowflake Cloud Data Warehouse Connector
- ODBC Connector with the Snowflake subtype

To avoid service disruption, switch to a multi-factor authentication method as soon as possible.

For more information, contact Informatica Global Customer Support.

JD Edwards EnterpriseOne Connector

Effective in the October 2026 release, JD Edwards EnterpriseOne Connector is deprecated and has been moved to maintenance mode. Informatica intends to drop support for JD Edwards EnterpriseOne Connector in a future release.

Upcoming change

We want to let you know that by February 2027 or later, Snowflake Data Cloud Connector will use the JDBC driver version 4.3.2, by default, to connect to Snowflake and run your Snowflake Data Cloud mappings and tasks.

The JDBC driver version 4.3.2 is available in the Secure Agent installation directory.

To prepare for the change, ensure that you test the JDBC driver version 4.3.2 in a lower or non-production environment before the February 2027 release.

If you encounter any issues, contact Informatica Global Customer Support.

For more information about configuring the latest driver in a lower or non-production environment, see the Configure the JDBC driver for Snowflake Data Cloud Connector Knowledge article.

Informatica intends to include this functionality in February 2027 or later but might choose not to in accordance with changing market or technical circumstances.

Enhanced connectors

The October 2026 release of Data Integration Connectors includes the following new features and enhancements.

Common

This release includes the following enhancement across multiple connectors:

When you create a Source transformation, you can select from multiple supported operations. You can use the request message editor to configure the input parameters for the operation that you want to perform.

This enhancement applies to the connectors listed in the following table:

Amplitude Connector Klaviyo Connector Mixpanel Connector	SurveyMonkey Connector Xero Connector

Amazon Redshift V2 Connector

Amazon Redshift V2 Connector uses JDBC driver version 2.2.5.

Amazon S3 V2 Connector

You can use the MS 932 code page when you read from and write to a flat file.

For more information, see *Amazon S3 V2 Connector* documentation.

Amplitude Connector

When you configure an Amplitude connection, you can select the US or EU data residency region for the endpoints.

For more information, see *Amplitude Connector* documentation.

Databricks Connector

This release includes the following enhancements for Databricks Connector:

- You can use OAuth Machine-to-Machine authentication for service principals to read from and write to Databricks objects in a mapping in advanced mode. OAuth Machine-to-Machine authentication uses the OAuth 2.0 protocol to authenticate access to Databricks objects.
- You can use IAM AssumeRole authentication for secure and controlled access to the Amazon S3 staging bucket when you run a mapping in advanced mode.
- To optimize reader performance, you can configure the Secure Agent to stage the data as flat files in a local temporary folder after it reads from Databricks. You can also use Gzip compression for the flat files.
- You can specify the number of rows to fetch from the database per batch in a mapping that reads from Databricks.

For more information, see *Databricks Connector* documentation.

Google BigQuery V2 Connector

You can use Workload Identity Federation with the client credentials grant to authenticate the Google BigQuery V2 connection. As a result, you can connect through your existing identity provider and access datasets across Google Cloud projects.

For more information, see *Google BigQuery V2 Connector* documentation.

Google Cloud Storage V2 Connector

This release includes the following enhancements for Google Cloud Storage V2 Connector:

- You can use Workload Identity Federation with the client credentials grant to authenticate the Google Cloud Storage V2 connection. As a result, you can authenticate through your existing identity provider and access data across Google Cloud projects.
- You can configure a flat file source to read field values that contain line breaks as part of a single record. As a result, you can read source data with multi-line values correctly and avoid splitting a record into multiple records.

For more information, see *Google Cloud Storage V2 Connector* documentation.

Kafka Connector

You can run mappings that connect to Confluent Kafka with Schema Registry when the Schema Registry response contains the metadata field. As a result, you can maintain reliable, real-time data integration with Confluent Kafka environments that return additional schema metadata.

For more information, see *Kafka Connector* documentation.

Klaviyo Connector

You can configure OAuth 2.0 Authorization Code authentication to connect to Klaviyo when you read data in a mapping.

For more information, see *Klaviyo Connector* documentation.

Microsoft Azure Blob Storage V3 Connector

Microsoft Azure Blob Storage V3 Connector uses the Azure Blob File System (ABFS) driver, replacing the Windows Azure Storage Blob (WASB) driver, for complex file formats. The connector also uses Microsoft Azure Storage SDK V2, replacing the earlier SDK version that is reaching end-of-life.

Microsoft Azure Synapse SQL Connector

You can configure the Microsoft recommended JDBC driver version 13.4.0.jre8 available in the BASE folder to run all your mappings and tasks.

For more information about configuring this driver, see
How to configure the JDBC driver for Microsoft Azure Synapse SQL Connector Knowledge article.

Microsoft Fabric Data Warehouse Connector

This release includes the following enhancements for Microsoft Fabric Data Warehouse Connector:

- You can use the Copy command to stage data as Parquet files in Microsoft Fabric OneLake and load the data into Microsoft Fabric Data Warehouse tables.
- You can read data from Microsoft Fabric Data Warehouse tables that contain an IDENTITY column.
- You can push the IIF logical function to Microsoft Fabric Data Warehouse.
  For a list of functions that you can push down to Microsoft Fabric Data Warehouse, see the Microsoft Fabric Data Warehouse Connector documentation.
- You can configure the Microsoft recommended JDBC driver version 13.4.0.jre8 available in the BASE folder to run all your mappings and tasks.
  For more information about configuring this driver, see
  How to configure the JDBC driver for Microsoft Fabric Data Warehouse Connector Knowledge article.

For more information, see *Microsoft Fabric Data Warehouse Connector* documentation.

Microsoft Fabric Lakehouse Connector

You can configure the Microsoft recommended JDBC driver version 13.4.0.jre8 available in the BASE folder to run all your mappings and tasks.

For more information about configuring this driver, see
How to configure the JDBC driver for Microsoft Fabric Lakehouse Connector Knowledge article.

Microsoft SQL Server Connector

This release includes the following enhancements for Microsoft SQL Server Connector:

- You can run a mapping with the following upgraded JDBC and ODBC driver versions:
  - JDBC Base driver: 6.0.0.001957
  - JDBC Latest driver: 6.0.0.002120
  - ODBC Base driver: 08.02.2200

  The connector uses the JDBC and ODBC Base drivers by default.

  To use the Latest driver, update the Secure Agent configuration. For more information about configuring the Latest driver, see the How to configure the JDBC or ODBC driver for Microsoft SQL Server Connector Knowledge article.
- The ODBC driver available in the `Latest` folder uses OpenSSL 3.5.

Mixpanel Connector

When you configure a Mixpanel connection, you can select the US, EU, or India data residency region for the endpoints.

For more information, see *Mixpanel Connector* documentation.

MongoDB V2 Connector

When you write data to a MongoDB V2 target in a mapping task configured with an error threshold, you can capture the rejected rows in an error file. This enhancement doesn't apply to mapping tasks that are based on mappings in advanced mode.

For more information, see *MongoDB V2 Connector* documentation.

Open Table Connector

This release includes the following enhancements for Open Table Connector:

- You can read from and write to Apache Iceberg tables that are managed by the Nessie catalog and stored in MinIO.
- You can commit all the rows at once or periodically based on the commit interval in a mapping that writes to Apache Iceberg tables.
- You can use a custom query as a source object in a mapping.
  You can create a custom query to perform a complicated join of multiple tables or to reduce the number of fields that enter the data flow in a very large source.
- You can read from and write to Apache Iceberg tables that are managed by the REST Catalog and stored in Amazon S3 in a mapping.
- You can read from and write to Apache Iceberg tables that are managed by the REST Catalog and stored in Microsoft Azure Data Lake Storage Gen2 in a mapping in advanced mode.
- When you query data using a specific snapshot or timestamp, you can use absolute values or relative references, such as latest or latest-n.

For more information, see *Open Table Connector* documentation.

Oracle Connector

This release includes the following enhancements for Oracle Connector:

- You can read from and write to Oracle Database 26ai.
- You can run a mapping with the following upgraded JDBC and ODBC driver versions:

  - JDBC Base driver: 6.0.0.001794
  - JDBC Latest driver: 6.0.0.001877
  - ODBC Base driver: 08.02.3863

  The connector uses the JDBC and ODBC Base drivers by default.

  To use the Latest driver, update the Secure Agent configuration. For more information about configuring the Latest driver, see the How to configure the JDBC or ODBC driver for Oracle Connector Knowledge article.
- The ODBC driver available in the `Latest` folder uses OpenSSL 3.5.

Oracle Autonomous Database Connector

You can read from and write to Oracle Autonomous Database tables that contain TIMESTAMP WITH TIME ZONE and TIMESTAMP WITH LOCAL TIME ZONE columns. As a result, you can process time-zone-sensitive data in your integrations and maintain time zone accuracy.

For more information, see *Oracle Autonomous Database Connector* documentation.

Oracle Cloud Object Storage Connector

You can configure host patterns to bypass the configured forward proxy and connect directly to Oracle Cloud Object Storage. As a result, you can route traffic according to your network policies instead of sending every connection through the proxy.

For more information, see *Oracle Cloud Object Storage Connector* documentation.

PostgreSQL Connector

This release includes the following enhancements for PostgreSQL Connector:

- You can read from and write to PostgreSQL 17.x databases.
- You can run a mapping with the following upgraded JDBC driver versions:

  - Base driver: 6.0.0.001843
  - Latest driver: 6.0.0.001982

  The connector uses the JDBC Base driver by default.

  To use the Latest driver, update the Secure Agent configuration. For more information about configuring the Latest driver, see the How to configure the JDBC driver for PostgreSQL Connector Knowledge article.
- You can connect to PostgreSQL databases through an HTTP proxy server configured on the Secure Agent. As a result, you can integrate PostgreSQL data in secured networks that route outbound traffic through a proxy.

For more information, see *PostgreSQL Connector* documentation.

Salesforce Connector

This release includes the following enhancements for Salesforce Connector:

- Salesforce Connector uses the Salesforce API version 67.0.
- You can use the JWT bearer token as an authentication type to connect to Salesforce.

For more information, see *Salesforce Connector* documentation.

SAP OData V4 Connector

You can read data from analytical models in SAP Datasphere applications.

For more information, see *SAP OData V4 Connector* documentation.

Xero Connector

You can configure OAuth 2.0 Client Credentials authentication to connect to Xero when you read data in a mapping.

For more information, see *Xero Connector* documentation.

Changed behavior

The October 2026 release includes changes in behavior for the following connectors.

Kafka Connector

A mapping that writes to a Schema Registry topic completes successfully with a Warning status if the registry rejects records with an incorrect schema. This Warning status applies even when the registry rejects all of the records in the mapping.

Previously, the mapping failed with an Error status.

Microsoft Fabric Lakehouse Connector


When Lakehouse schema is enabled and you specify a schema in the connection that differs from the schema in the target path, the schema specified in the connection takes precedence. When you create a new target or run existing mappings, if the schema in the target path does not match the schema in the connection, Microsoft Fabric Lakehouse Connector creates or writes to the target table in the schema specified in the connection.

Previously, the schema specified in the target path took precedence over the schema specified in the connection.

Open Table Connector

This release includes the following changes in behavior for Open Table Connector:

- When you configure an Open Table connection with a REST catalog, you can enable credential vending from the list of storage authentication types.

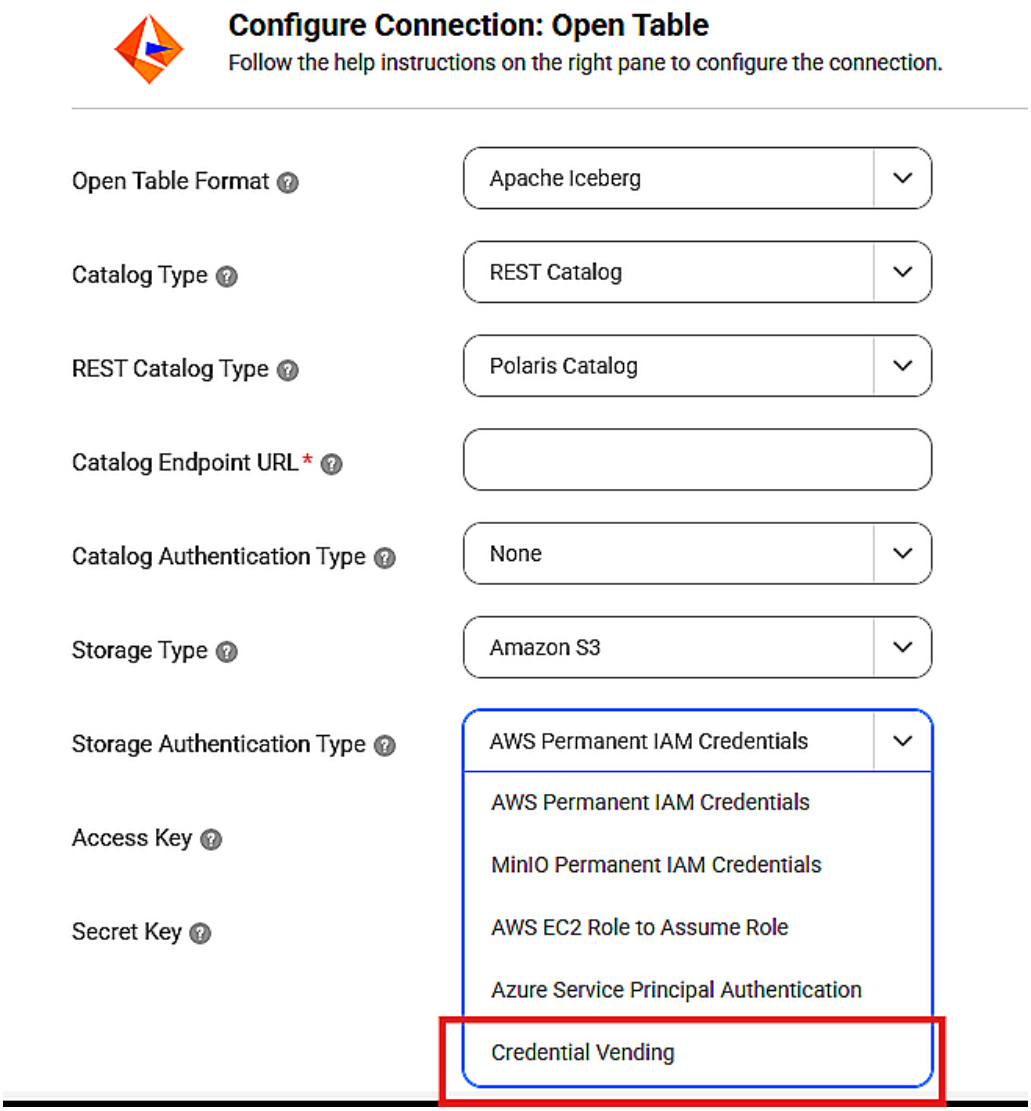

  Previously, credential vending was a separate connection property on the UI.

- The advanced property **Iceberg Spark Properties** for Source and Lookup transformations is renamed to **Iceberg Advanced Properties**. However, there is no impact on its functionality.

For more information, see *Open Table Connector* documentation.

SAP OData V4 Connector

When you configure the `InfaAgent.NonProxyHost` property in the proxy.ini file, you can bypass the proxy server and connect directly to the listed hosts using SAP OData V4 Connector.

If your existing SAP OData V4 connection uses a proxy.ini file configured with the `InfaAgent.NonProxyHost` property, the connection honors the property and bypasses the proxy server.

Previously, SAP OData V4 Connector didn't honor the `InfaAgent.NonProxyHost` property.

For more information, see *SAP OData V4 Connector* documentation.

Upgrade

The following topics provide information about tasks that you might need to perform before or after an upgrade of Data Integration Connectors. Post-upgrade tasks for previous monthly releases are also included in case you haven't performed these tasks after the previous upgrade.

Post-upgrade tasks for the October 2026 release

Perform the following task after your organization is upgraded to the October 2026 release.

Open Table Connector

Open Table Connector includes the following upgrade impacts:

- After the upgrade, if you run existing mappings, the commit interval is not considered and all the rows are committed at the end of the job.
  This issue occurs because the **Enable Transactional Commit** option in the advanced target properties is disabled by default.

  To resolve this issue, select the **Enable Transactional Commit** option to commit the rows periodically during the job based on the commit interval.
- After the upgrade, you can't disable credential vending for existing Open Table connections if the property was enabled before the upgrade.
  This issue occurs because the **Credential Vending** property is removed and now appears as an option under **Storage Authentication Type**. For existing connections with credential vending enabled, the option to disable is no longer available on the UI.

  To connect to a REST catalog without credential vending, create a new connection.

For more information, see *Open Table Connector* documentation.

CHAPTER 12

Data Marketplace

The October 2026 release of Data Marketplace includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 1, 2026	Added	"Enhancements to the Data Quality tab" on page 122
October 1, 2026	Added	"Manually refresh for search results" on page 124
October 1, 2026	Modified	"Changes to Data Quality fields" on page 123
October 1, 2026	Modified	"Additional metadata for Consumer Access Details" on page 123
September 17, 2026	Initial publication	

New features and enhancements

The October 2026 release of Data Marketplace includes the following new features and enhancements.

Enhancements to the Data Quality tab

The October release includes the following enhancements o the **Data Quality** tab of the data collection and data asset pages:

View business names

In the **Data Assets** and **Data Quality Rules** grids, you can view the business name for each data element or data quality rule in the **Business Name** column.

Sort and filter for Data Quality rules

On the **Data Quality** tab for data collection and data asset pages, you can sort the values of the following columns :

- **Rule Name**
- **Dimension**
- **Latest Score**
- **Score Data**

On the **Data Quality** tab for data collection and data asset pages,, you can use the following columns to filter the data quality rules:

- **Rule Name**
- **Primary Data Element**
- **Business Name**
- **Dimension**
- **Latest Score**

For more information about the Data Quality tab for data collections and data assets, see *Data Collections* and *Data Assets* in *Introduction and Getting Started*.

Review data collections in the Usage Guide

On the **Usage Guide** stage of a cart checkout, you can view the data collections that applies to each of the terms of use.
For more information about ordering data collections, see *Order data collections* in the *Working with Data Collections* help.

Find data assets in a data collection

On the **Data Asset** tab of a data collection page, you can use the find bar to search for data assets within the data collection. Enter the names, descriptions, or business names of the assets you want to find.

For more information about data assets, see *Data Assets tab* in the *Introduction and Getting Started* help.

Additional metadata for Consumer Access Details

When you create a custom layout for the **Consumer Access Details** grid, you can add columns for **Delivery Target** and **Business Justification**. The columns in the grid provide additional context about each consumer access.
For more information about designing page layouts, see *Design a page layout* in the *Set Up Data Marketplace* help.

Changed behavior

The October 2026 release of Data Marketplace includes the following changed behavior.

Changes to Data Quality fields

The **Data Quality** and **Data Quality Per Data Set** fields are renamed to **Average Data Quality** and **Average Data Quality Per Data Set**. The fields also show Data Quality scores as percentages. The scores don't change but the new format more accurately reflect what the scores represent. A data asset's data quality score is an average of the data quality scores of its data elements.

For more information about the data quality score of a data asset, see *Data Assets tab* in the *Introduction and Getting Started* help.

Manually refresh for search results

When you return to the **Search** page, Data Marketplace retains the results of your latest search instead of refreshing them. To refresh your results, click **Search**.

Previously, Data Marketplace refreshed the results of the **Search** page automatically.

For more information about searching for and viewing data collections, see "Search and view data collections" in *Working with Data Collections*.

CHAPTER 13

Data Validation

The October 2026 release of Data Validation includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
September 10, 2026	Initial publication	

New features and enhancements

The October 2026 release of Data Validation includes the following new feature and enhancement.

Support for PowerExchange VSAM and Sequential connections

You can now use PowerExchange Virtual Storage Access Method (VSAM) and Sequential connections in Data Validation to validate data. Use these connections to run a heterogeneous validation between a single PowerExchange source table and Teradata, and confirm that the data matches between both systems.

For more information, see *Introducing Data Validation*.

For more information, see *Test Cases*.

CHAPTER 14

MDM - Customer 360 SaaS

The October 2026 release of MDM - Customer 360 SaaS includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 21, 2026	Deleted	Default values in "New features and enhancements" on page 130
October 21, 2026	Deleted	Search filters in "Changed Behavior" on page 132
October 21, 2026	Modified	"Preview initiated" on page 127
October 21, 2026	Deleted	Tasks and tickets in "New features and enhancements" on page 130
October 21, 2026	Modified	"Preview lifted" on page 129
October 8, 2026	Added	Draft recordson page 0
October 8, 2026	Added	Edit in a tableon page 0
October 8, 2026	Deleted	Draft recordsThe October 2026 release includes the following new features and enhancements.
October 8, 2026	Deleted	Edit in a tableThe October 2026 release includes the following new features and enhancements.
October 8, 2026	Added	"Preview initiated" on page 127
October 8, 2026	Deleted	"New features and enhancements" on page 130

Publication Date	Type of Change	Section Title
October 8, 2026	Added	"Match Analysis and Explainability dashboard" on page 132
October 8, 2026	Modified	"Preview initiated" on page 127
October 2, 2026	Modified	Multilingual picklist values in "Important notices and upcoming changes" on page 127
September 24, 2026	Added	#unique_125/unique_125_Connect_42_GUID-4FF6EF8C-2AB5-4329-BC57-9221DE382707
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release includes the following important notices:

Dropped support

Effective in the October 2026 release, Informatica drops support for the classic experience of the Source Records page and merge and unmerge tasks in the workflow inbox.

Previously, you could toggle between the classic and the new experiences. The new experience is now the only option for the Source Records page and the workflow inbox.

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Search within field group entries

When you search for records using multiple filters on fields in the same field group or nested field group, the search evaluates the conditions within each entry, and returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has city New York and street Main Street. The office address has city Chicago and street Oak Avenue.

A filtered search with city Chicago and street Main Street returns no record because no single address entry matches both conditions.

Previously, the search returned the record if the conditions matched across different entries.

Multilingual picklist values

When you access business applications in a localized language through your browser locale, picklist field values appear in the same language. You can now search for records with picklist values in any enabled language, regardless of your browser locale. When you use a filtered search, the filters display picklist values based on your browser locale. When you sort records or use auto-suggest, MDM SaaS continues to use the default language configured for the field values.

For more information, see *Manage localized assets* in Reference 360 Help.

Edit in a table

From the Edit in Table page, you can resolve conflicts and clone records.

- When other users update the same fields of a record before you submit your drafts, you can resolve the conflicts by keeping your updates or updates of other users.
- You can clone records to start with draft copies instead of creating new records from scratch. You can clone up to 10 records at a time. The draft copy contains the values of root fields and field groups from the original record.

Draft records

When you create or edit a record, the changes are now automatically saved as a draft before you submit or send the record for approval. If another user updates the same record, you can synchronize your draft with their updates or resolve conflicts. You can manage all your drafts on the My Drafts page, where you can search for specific drafts, open them for editing, or discard them.

Task inbox and ticket manager

You can view, act on, assign, and comment on the tasks assigned to you in the task inbox of business applications. You can assign, act on, or comment on tasks individually or on multiple tasks at once. You can also track the status of your updates in the ticket manager. A ticket is created automatically when a workflow is triggered, and shows workflow milestones, statuses of all the tasks in a workflow, and the comments as reviewers complete their tasks.

For example, a ticket for a product onboarding workflow lists all the tasks, such as validation of product name, brand name, and description, and approval or rejection of the product. The ticket is closed after the product is approved or rejected.


CLAIRE Copilot

You can use the product experience agent in CLAIRE Copilot to enrich records with PDF that contains product data. The agent can also enrich and classify records that contain product data by running data quality objectives. The product experience agent applies the enrichment and classification results to a draft of the current record. You can also view a data completion report that shows the number of enriched fields and objectives applied.

CLAIRE recommendations

When you claim an approval task, you can now view the CLAIRE recommendations for data enrichment in the Insights panel. You can accept or reject those recommendations. MDM SaaS saves the accepted values to the record after your final approval.

The following image shows the Insights tab of the CLAIRE Copilot panel in the workflow inbox:

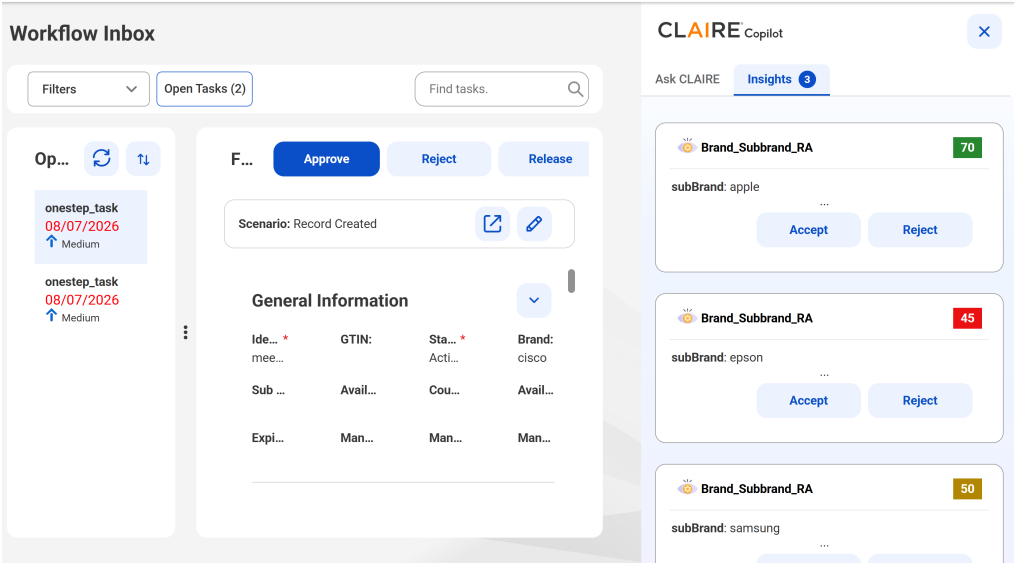

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Preview lifted

Effective in the October 2026 release, the following functionality is production ready:


Import data

When you import records, you can now update only the fields that contain values without overwriting the other fields that have null values.

Match Analysis and Explainability dashboard

You can now use the Match Analysis and Explainability dashboard to analyze and identify large clusters of records that are formed during the match process. You can then fine-tune the match model configuration to prevent the formation of large clusters to avoid overmatching.

The following image shows the Large Clusters tab in the Match Analysis and Explainability dashboard:

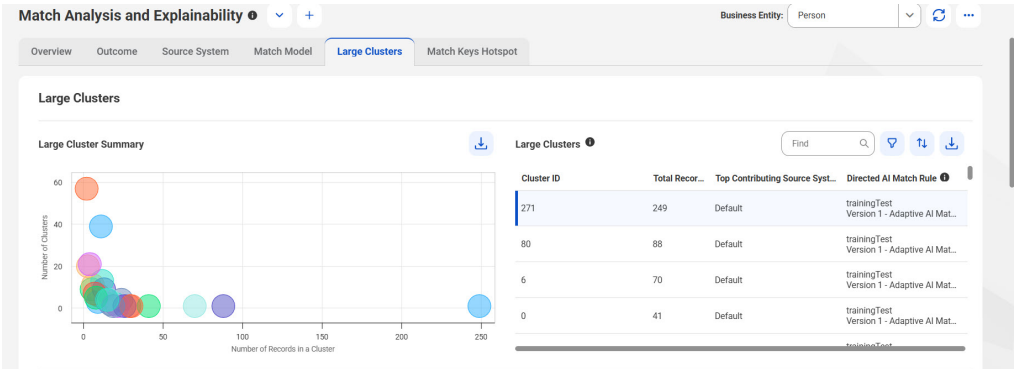


New features and enhancements

The October 2026 release includes the following new features and enhancements.

Filter related records with business entity record fields

When you manage related records that are based on business entity record fields in the related records table, you can filter the table to focus on the records that you want to view and edit.


The following image shows a related records table that filters for related records with Home Insurance Platinum as the value for the Product field:

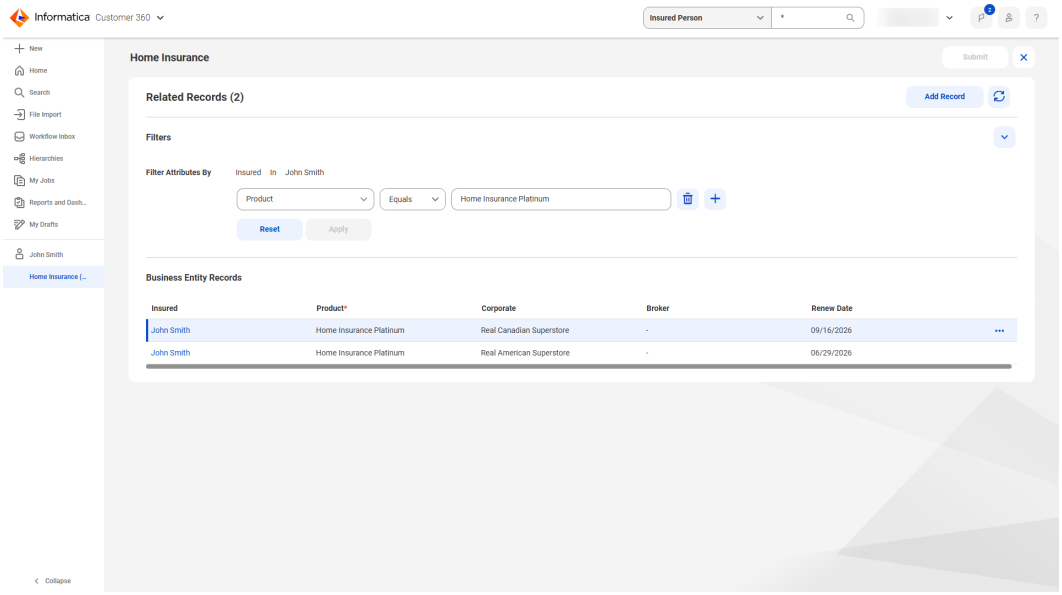

Source records and workflow inbox management experience

The Source Records page and the workflow inbox include the following capabilities for filtering records and overriding survivorship:

- When you merge records, you can override field values in both manual merge previews and workflow inbox tasks, and preview the surviving field values of the merged record before you submit or approve the merge.
  The following image shows the Override Surviving Value option in the manual merge preview:

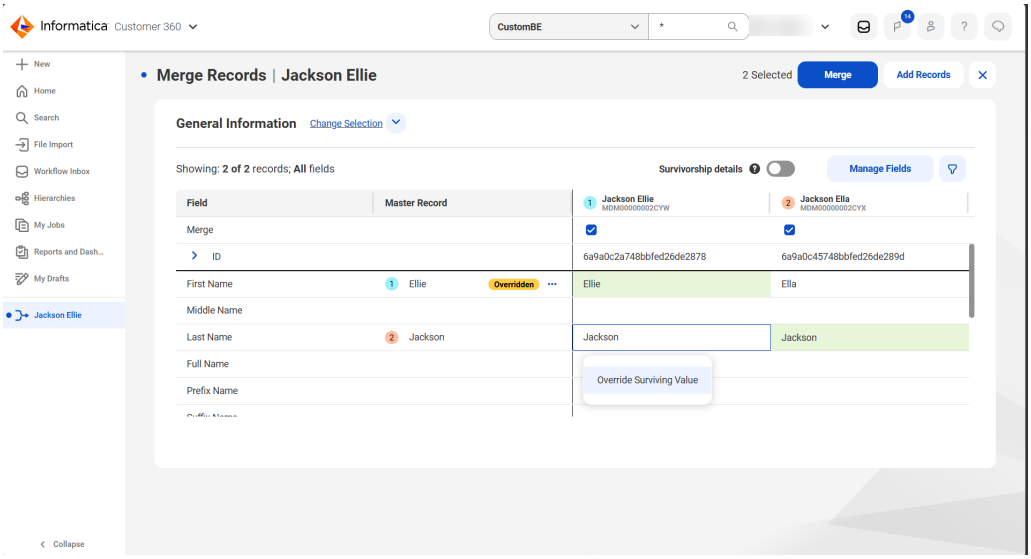

- On the Source Records page, you can filter source records that have an overriding field value and those that match a specified field value.

Data Import

When you import records, you can update individual fields in a target record instead of replacing the entire record. The update applies only to the fields in the import file that are mapped to the target fields. Other fields remain unchanged. You can also control how the update handles empty values in mapped fields. When a mapped field is empty in the import file, you can overwrite the target value with null or leave it unchanged.

Note: This functionality is available only after you migrate your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release.

For more information about updating fields containing data, see *Import all data*.

Dynamic field definitions

When you add dynamic field definitions to a record, you can select folders to add all the fields, field groups, and subfolders they contain at once.

For more information about dynamic field definitions, see *Manage records*.


Search

To enhance search accuracy, MDM SaaS now returns more relevant results. When you search for records, you might notice changes in your search results. For example, a search for a record with the first name Benjamin also returns records with the first names Ben and Benny.

Match Analysis and Explainability dashboard

You can now use the Match Analysis and Explainability dashboard to analyze and identify large clusters of records that are formed during the match process. You can then fine-tune the match model configuration to prevent the formation of large clusters to avoid overmatching.

The following image shows the Large Clusters tab in the Match Analysis and Explainability dashboard:

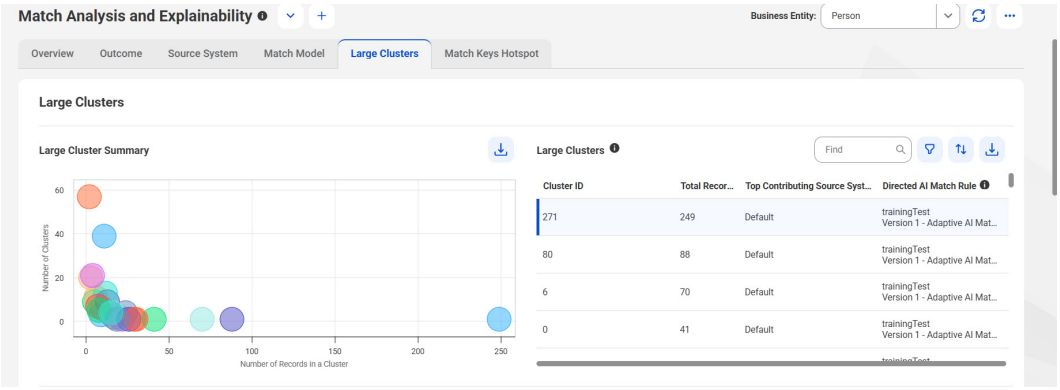

For more information about the Large Clusters tab in the Match Analysis and Explainability dashboard, see *Large Clusters tab.*

Changed Behavior


The October 2026 release includes the following changed behaviors:

Business entity record fields

When you use the related records table to create a new related record with a business entity record field, you fill in the business entity record field. automatically fills in that field with the record that the new related record belongs to. You can edit the field if needed.

For example, you have an Insured Person record named John Smith, and you want to add an insurance product for John Smith. The record John Smith has a related records table called Home Insurance Products, from which you can add new home insurance product records. In the table, you create a new Insurance Product record. The new Insurance Product record has an Insured field that accepts an Insured Person record. automatically fills in the Insured field with the record John Smith.

The following image shows the Insured field automatically filled in with John Smith on the new Home Insurance record:

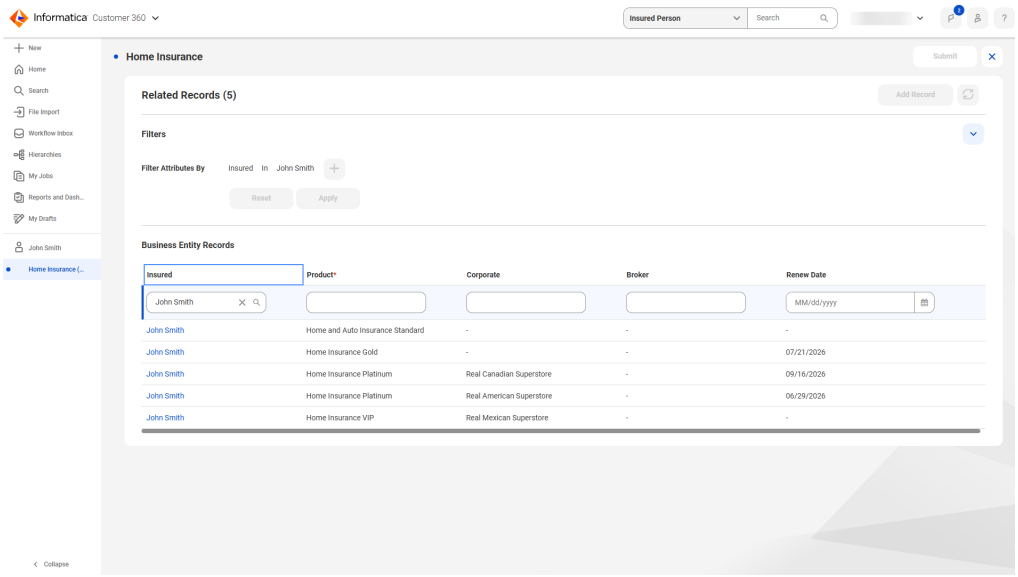

Previously, you had to manually fill in the record for each business entity record field.

CLAIRE Copilot access

To help your organization manage access to CLAIRE Copilot, you now need the CLAIRE GPT User role. If you don't have this role, contact Informatica Global Customer Support.

Previously, you could access CLAIRE Copilot without this role.

CHAPTER 15

MDM - Product 360 SaaS

The October 2026 release of MDM - Product 360 SaaS includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 21, 2026	Deleted	Default values in "New features and enhancements" on page 137
October 21, 2026	Deleted	Search filters in "Changed Behavior" on page 140
October 21, 2026	Modified	"Preview initiated" on page 135
October 21, 2026	Deleted	Tasks and tickets in "New features and enhancements" on page 137
October 21, 2026	Deleted	Preview lifted in "Important notices and upcoming changes" on page 135
October 8, 2026	Added	Draft recordson page 0
October 8, 2026	Added	"Preview initiated" on page 135
October 8, 2026	Deleted	"New features and enhancements" on page 137
October 8, 2026	Added	Edit in a tableon page 0
October 8, 2026	Deleted	Draft recordsThe October 2026 release includes the following new features and enhancements.
October 8, 2026	Deleted	Edit in a tableThe October 2026 release includes the following new features and enhancements.

Publication Date	Type of Change	Section Title
October 8, 2026	Added	"Match Analysis and Explainability dashboard" on page 139
October 8, 2026	Modified	"Preview initiated" on page 135
October 2, 2026	Modified	Multilingual picklist values in "Important notices and upcoming changes" on page 135
September 24, 2026	Added	#unique_131/unique_131_Connect_42_GUID-4FF6EF8C-2AB5-4329-BC57-9221DE382707
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release includes the following important notices:

Dropped support

Effective in the October 2026 release, Informatica drops support for the classic experience of the Source Records page and merge and unmerge tasks in the workflow inbox.

Previously, you could toggle between the classic and the new experiences. The new experience is now the only option for the Source Records page and the workflow inbox.

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Search within field group entries

When you search for records using multiple filters on fields in the same field group or nested field group, the search evaluates the conditions within each entry, and returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has city New York and street Main Street. The office address has city Chicago and street Oak Avenue.

A filtered search with city Chicago and street Main Street returns no record because no single address entry matches both conditions.

Previously, the search returned the record if the conditions matched across different entries.

Multilingual picklist values

When you access business applications in a localized language through your browser locale, picklist field values appear in the same language. You can now search for records with picklist values in any enabled language, regardless of your browser locale. When you use a filtered search, the filters display picklist values based on your browser locale. When you sort records or use auto-suggest, MDM SaaS continues to use the default language configured for the field values.

For more information, see *Manage localized assets* in Reference 360 Help.

Edit in a table

From the Edit in Table page, you can resolve conflicts and clone records.

- When other users update the same fields of a record before you submit your drafts, you can resolve the conflicts by keeping your updates or updates of other users.
- You can clone records to start with draft copies instead of creating new records from scratch. You can clone up to 10 records at a time. The draft copy contains the values of root fields and field groups from the original record.

Draft records

When you create or edit a record, the changes are now automatically saved as a draft before you submit or send the record for approval. If another user updates the same record, you can synchronize your draft with their updates or resolve conflicts. You can manage all your drafts on the My Drafts page, where you can search for specific drafts, open them for editing, or discard them.

Task inbox and ticket manager

You can view, act on, assign, and comment on the tasks assigned to you in the task inbox of business applications. You can assign, act on, or comment on tasks individually or on multiple tasks at once. You can also track the status of your updates in the ticket manager. A ticket is created automatically when a workflow is triggered, and shows workflow milestones, statuses of all the tasks in a workflow, and the comments as reviewers complete their tasks.

For example, a ticket for a product onboarding workflow lists all the tasks, such as validation of product name, brand name, and description, and approval or rejection of the product. The ticket is closed after the product is approved or rejected.


CLAIRE Copilot

You can use the product experience agent in CLAIRE Copilot to enrich records with PDF that contains product data. The agent can also enrich and classify records that contain product data by running data quality objectives. The product experience agent applies the enrichment and classification results to a draft of the current record. You can also view a data completion report that shows the number of enriched fields and objectives applied.

CLAIRE recommendations

When you claim an approval task, you can now view the CLAIRE recommendations for data enrichment in the Insights panel. You can accept or reject those recommendations. MDM SaaS saves the accepted values to the record after your final approval.

The following image shows the Insights tab of the CLAIRE Copilot panel in the workflow inbox:

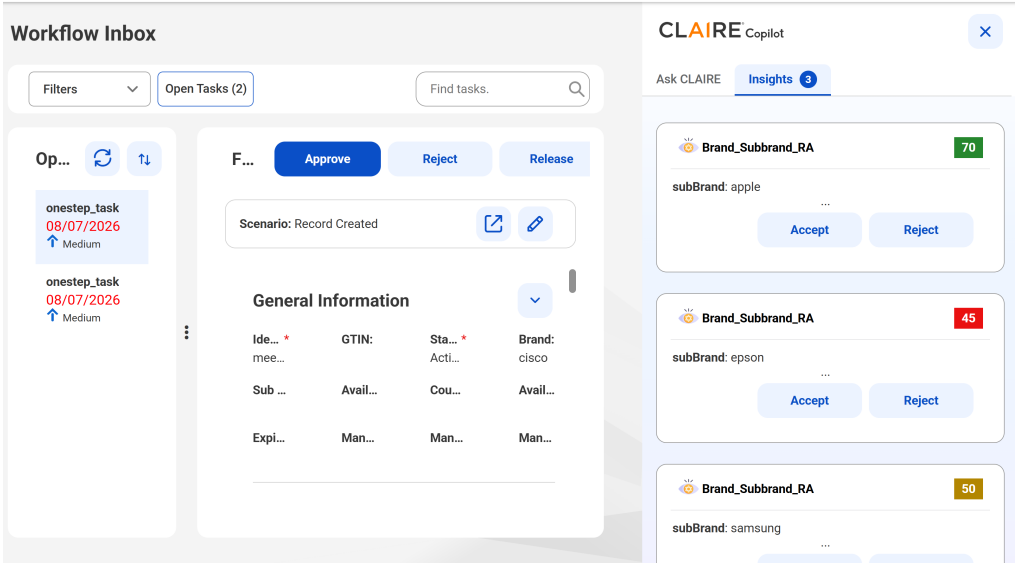

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.


New features and enhancements

The October 2026 release includes the following new features and enhancements.

Filter related records with business entity record fields

When you manage related records that are based on business entity record fields in the related records table, you can filter the table to focus on the records that you want to view and edit.


The following image shows a related records table that filters for related records with Home Insurance Platinum as the value for the Product field:

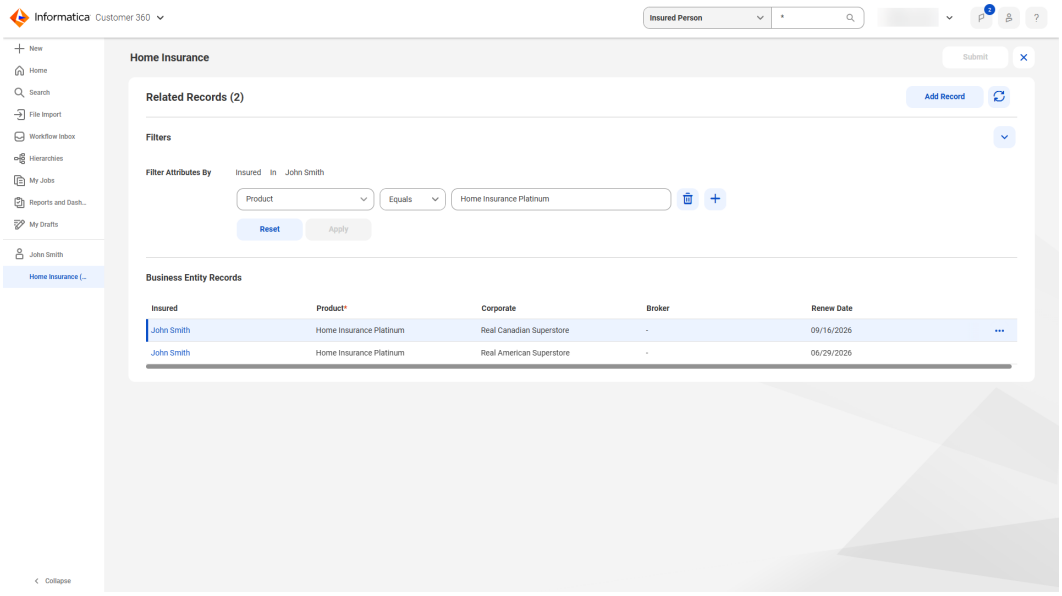

Source records and workflow inbox management experience

The Source Records page and the workflow inbox include the following capabilities for filtering records and overriding survivorship:

- When you merge records, you can override field values in both manual merge previews and workflow inbox tasks, and preview the surviving field values of the merged record before you submit or approve the merge.
  The following image shows the Override Surviving Value option in the manual merge preview:

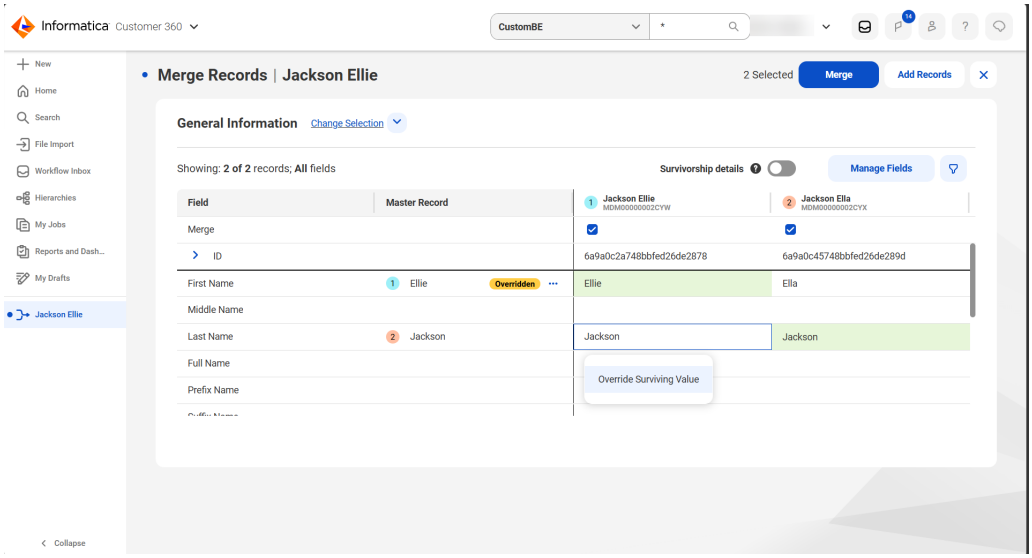

- On the Source Records page, you can filter source records that have an overriding field value and those that match a specified field value.

Data import

When you import records, you can update individual fields in a target record instead of replacing the entire record. The update applies only to the fields in the import file that are mapped to the target fields. Other fields remain unchanged. You can also control how the update handles empty values in mapped fields. When a mapped field is empty in the import file, you can overwrite the target value with null or leave it unchanged.


Note: This functionality is available only after you migrate your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release.

For more information about updating fields containing data, see *Import all data*.

Dynamic field definitions

When you add dynamic field definitions to a record, you can select folders to add all the fields, field groups, and subfolders they contain at once.

The following image shows a selected folder being added to the dynamic field definitions for a record:

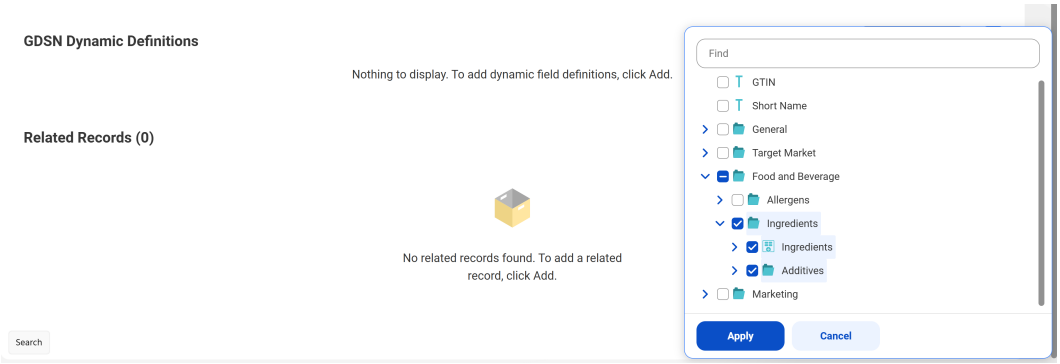

For more information about dynamic fields, see *Manage records*.


Search

To enhance search accuracy, MDM SaaS now returns more relevant results. When you search for records, you might notice changes in your search results. For example, a search for a record with the first name Benjamin also returns records with the first names Ben and Benny.

Match Analysis and Explainability dashboard

You can now use the Match Analysis and Explainability dashboard to analyze and identify large clusters of records that are formed during the match process. You can then fine-tune the match model configuration to prevent the formation of large clusters to avoid overmatching.

The following image shows the Large Clusters tab in the Match Analysis and Explainability dashboard:

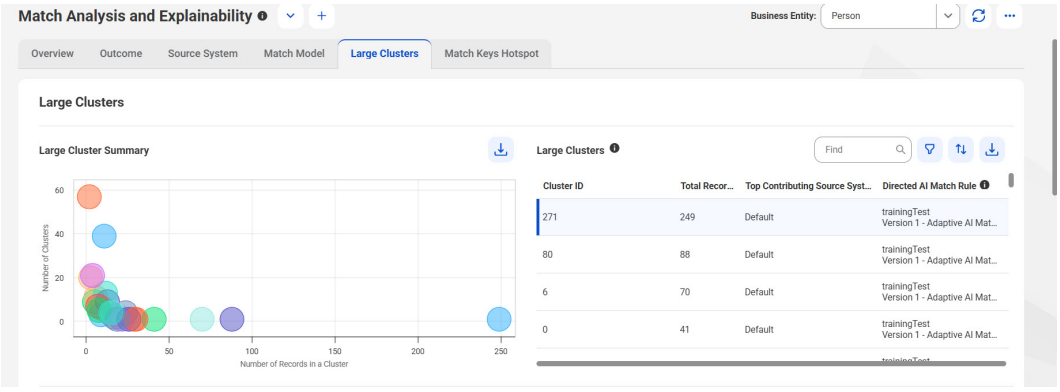

For more information about the Large Clusters tab in the Match Analysis and Explainability dashboard, see *Large Clusters tab*.

Changed Behavior


The October 2026 release includes the following changed behaviors:

Business entity record fields

When you use the related records table to create a new related record with a business entity record field, you fill in the business entity record field. automatically fills in that field with the record that the new related record belongs to. You can edit the field if needed.

For example, you have an Insured Person record named John Smith, and you want to add an insurance product for John Smith. The record John Smith has a related records table called Home Insurance Products, from which you can add new home insurance product records. In the table, you create a new Insurance Product record. The new Insurance Product record has an Insured field that accepts an Insured Person record. automatically fills in the Insured field with the record John Smith.

The following image shows the Insured field automatically filled in with John Smith on the new Home Insurance record:

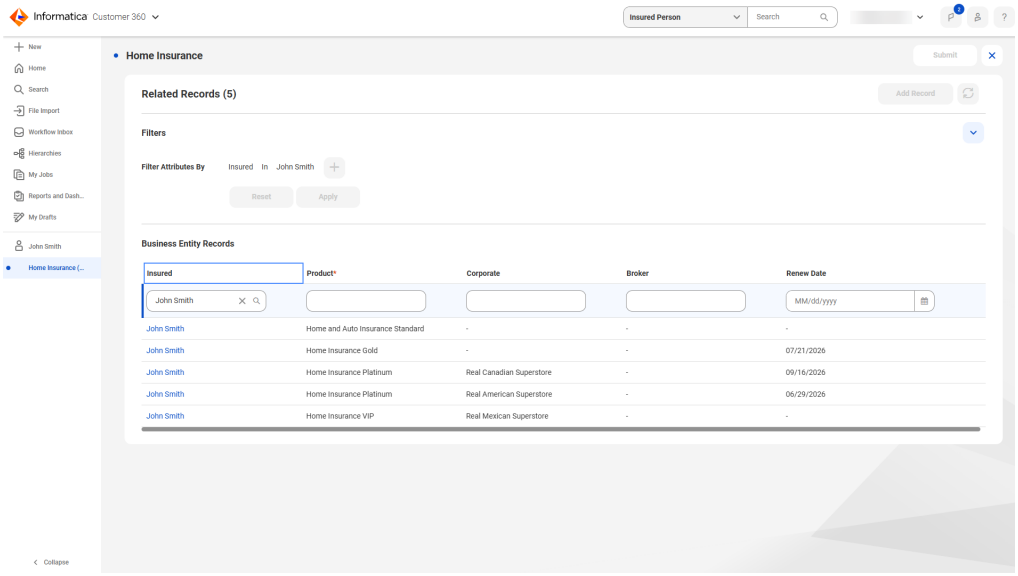

Previously, you had to manually fill in the record for each business entity record field.

CHAPTER 16

MDM - Reference 360

The October 2026 release of MDM - Reference 360 includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
September 25, 2026	Modified	"Important notices and upcoming changes" on page 141
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release includes the following important notices:

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Configure privileges for custom user roles to access Reference 360 assets

In Business 360 Console, you can configure privileges for custom user roles to control access to reference data assets, attributes, code values, and workflows.

For more information about configuring privileges for custom user roles, see *Getting started with Reference 360*.

Multilingual reference data assets

You can now manage reference data set and code list in multiple languages in Reference 360. Use the Localization Languages code list to define the languages for your organization and set a default language. You can configure the string attributes of a reference data set or code list to be multilingual and then enter attribute values in each configured language. You can view the multilingual values in each preferred language and use them as lookup values in business applications. If a code list already has

code values, export the code values before you configure its attributes as multilingual. After you configure the attribute as multilingual, you can import the code values back in.

Export and import model version 3 REST APIs

The export file version in the export and import model version 3 REST APIs is updated to `4.1` to reflect the addition of multilingual reference data.

For more information about the export and import model version 3 REST APIs, see *Reference 360 REST API*.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

CHAPTER 17

MDM - Supplier 360 SaaS

The October 2026 release of MDM - Supplier 360 SaaS includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 21, 2026	Deleted	Default values in "New features and enhancements" on page 146
October 21, 2026	Deleted	Search filters in "Changed Behavior" on page 148
October 21, 2026	Modified	"Preview initiated" on page 144
October 21, 2026	Deleted	Tasks and tickets in "New features and enhancements" on page 146
October 21, 2026	Deleted	Preview lifted in "Important notices and upcoming changes" on page 144
October 8, 2026	Added	Draft recordson page 0
October 8, 2026	Added	"Preview initiated" on page 144
October 8, 2026	Deleted	"New features and enhancements" on page 146
October 8, 2026	Added	Edit in a tableon page 0
October 8, 2026	Deleted	Draft recordsThe October 2026 release includes the following new features and enhancements.
October 8, 2026	Deleted	Edit in a tableThe October 2026 release includes the following new features and enhancements.

Publication Date	Type of Change	Section Title
October 8, 2026	Added	"Match Analysis and Explainability dashboard" on page 148
October 8, 2026	Modified	"Preview initiated" on page 144
October 2, 2026	Modified	Multilingual picklist values in "Important notices and upcoming changes" on page 144
September 24, 2026	Added	#unique_139/unique_139_Connect_42_GUID-4FF6EF8C-2AB5-4329-BC57-9221DE382707
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release includes the following important notices:

Dropped support

Effective in the October 2026 release, Informatica drops support for the classic experience of the Source Records page and merge and unmerge tasks in the workflow inbox.

Previously, you could toggle between the classic and the new experiences. The new experience is now the only option for the Source Records page and the workflow inbox.

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Search within field group entries

When you search for records using multiple filters on fields in the same field group or nested field group, the search evaluates the conditions within each entry, and returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has city New York and street Main Street. The office address has city Chicago and street Oak Avenue.

A filtered search with city Chicago and street Main Street returns no record because no single address entry matches both conditions.

Previously, the search returned the record if the conditions matched across different entries.

Multilingual picklist values

When you access business applications in a localized language through your browser locale, picklist field values appear in the same language. You can now search for records with picklist values in any enabled language, regardless of your browser locale. When you use a filtered search, the filters display picklist values based on your browser locale. When you sort records or use auto-suggest, MDM SaaS continues to use the default language configured for the field values.

For more information, see *Manage localized assets* in Reference 360 Help.

Edit in a table

From the Edit in Table page, you can resolve conflicts and clone records.

- When other users update the same fields of a record before you submit your drafts, you can resolve the conflicts by keeping your updates or updates of other users.
- You can clone records to start with draft copies instead of creating new records from scratch. You can clone up to 10 records at a time. The draft copy contains the values of root fields and field groups from the original record.

Draft records

When you create or edit a record, the changes are now automatically saved as a draft before you submit or send the record for approval. If another user updates the same record, you can synchronize your draft with their updates or resolve conflicts. You can manage all your drafts on the My Drafts page, where you can search for specific drafts, open them for editing, or discard them.

Task inbox and ticket manager

You can view, act on, assign, and comment on the tasks assigned to you in the task inbox of business applications. You can assign, act on, or comment on tasks individually or on multiple tasks at once. You can also track the status of your updates in the ticket manager. A ticket is created automatically when a workflow is triggered, and shows workflow milestones, statuses of all the tasks in a workflow, and the comments as reviewers complete their tasks.

For example, a ticket for a product onboarding workflow lists all the tasks, such as validation of product name, brand name, and description, and approval or rejection of the product. The ticket is closed after the product is approved or rejected.


CLAIRE Copilot

You can use the product experience agent in CLAIRE Copilot to enrich records with PDF that contains product data. The agent can also enrich and classify records that contain product data by running data quality objectives. The product experience agent applies the enrichment and classification results to a draft of the current record. You can also view a data completion report that shows the number of enriched fields and objectives applied.

CLAIRE recommendations

When you claim an approval task, you can now view the CLAIRE recommendations for data enrichment in the Insights panel. You can accept or reject those recommendations. MDM SaaS saves the accepted values to the record after your final approval.

The following image shows the Insights tab of the CLAIRE Copilot panel in the workflow inbox:

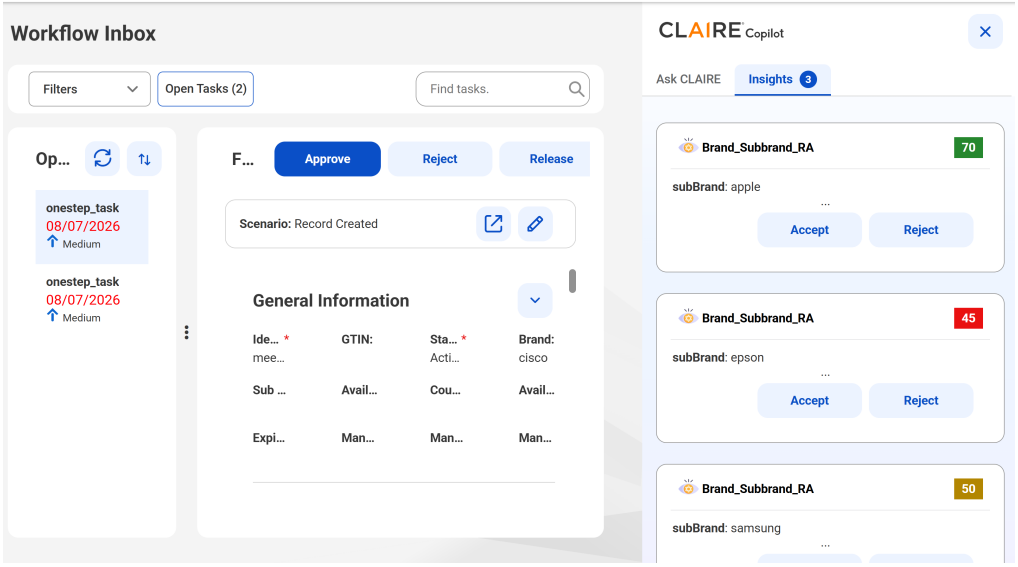

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.


New features and enhancements

The October 2026 release includes the following new features and enhancements.

Filter related records with business entity record fields

When you manage related records that are based on business entity record fields in the related records table, you can filter the table to focus on the records that you want to view and edit.


The following image shows a related records table that filters for related records with Home Insurance Platinum as the value for the Product field:

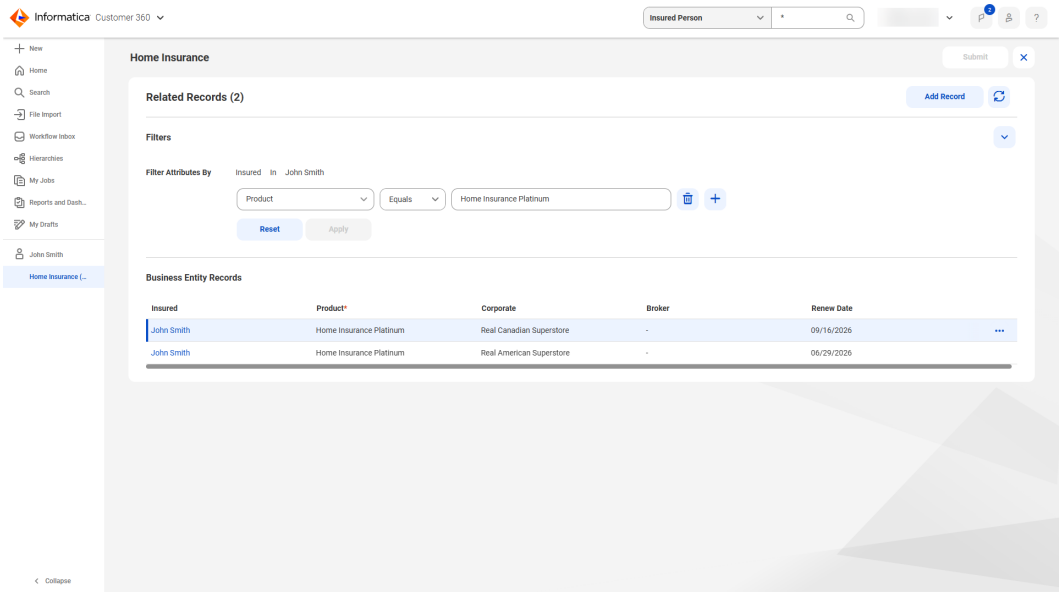

Source records and workflow inbox management experience

The Source Records page and the workflow inbox include the following capabilities for filtering records and overriding survivorship:

- When you merge records, you can override field values in both manual merge previews and workflow inbox tasks, and preview the surviving field values of the merged record before you submit or approve the merge.
  The following image shows the Override Surviving Value option in the manual merge preview:

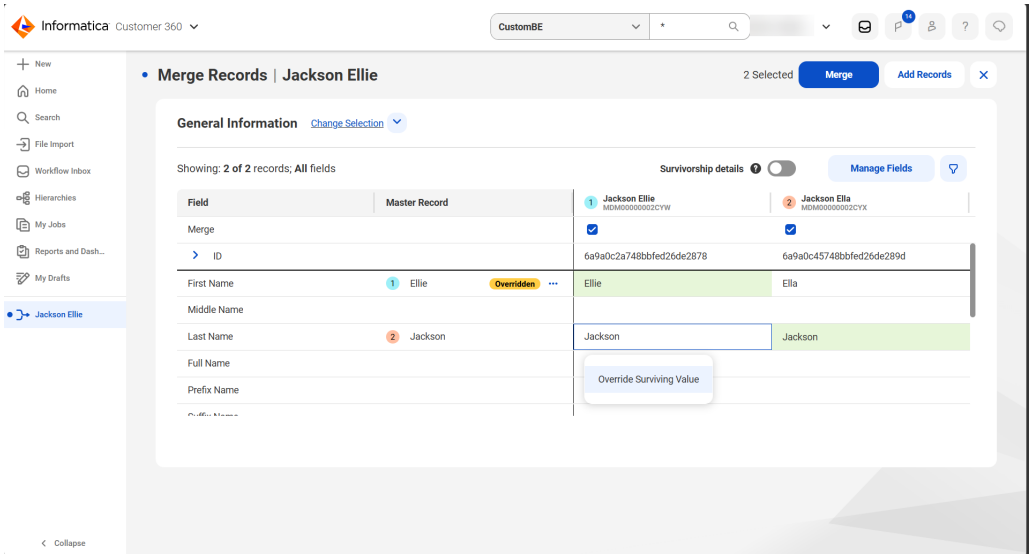

- On the Source Records page, you can filter source records that have an overriding field value and those that match a specified field value.

Data import

When you import records, you can update individual fields in a target record instead of replacing the entire record. The update applies only to the fields in the import file that are mapped to the target fields. Other fields remain unchanged. You can also control how the update handles empty values in mapped fields. When a mapped field is empty in the import file, you can overwrite the target value with null or leave it unchanged.

Note: This functionality is available only after you migrate your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release.

For more information about updating fields containing data, see *Import all data*.

Dynamic field definitions


When you add dynamic field definitions to a record, you can select folders to add all the fields, field groups, and subfolders they contain at once.

For more information about dynamic field definitions, see *Manage records*.

Search

To enhance search accuracy, MDM SaaS now returns more relevant results. When you search for records, you might notice changes in your search results. For example, a search for a record with the first name Benjamin also returns records with the first names Ben and Benny.

Match Analysis and Explainability dashboard

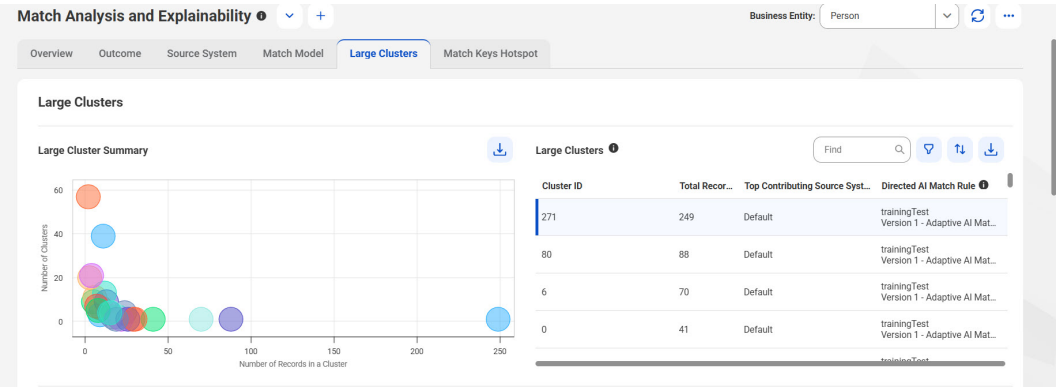

For more information about the Large Clusters tab in the Match Analysis and Explainability dashboard, see *Large Clusters tab*.

Changed Behavior

The October 2026 release includes the following changed behaviors:


Business entity record fields

When you use the related records table to create a new related record with a business entity record field, you fill in the business entity record field. automatically fills in that field with the record that the new related record belongs to. You can edit the field if needed.

For example, you have an Insured Person record named John Smith, and you want to add an insurance product for John Smith. The record John Smith has a related records table called Home Insurance Products, from which you can add new home insurance product records. In the table, you create a new

Insurance Product record. The new Insurance Product record has an Insured field that accepts an Insured Person record. automatically fills in the Insured field with the record John Smith.

The following image shows the Insured field automatically filled in with John Smith on the new Home Insurance record:

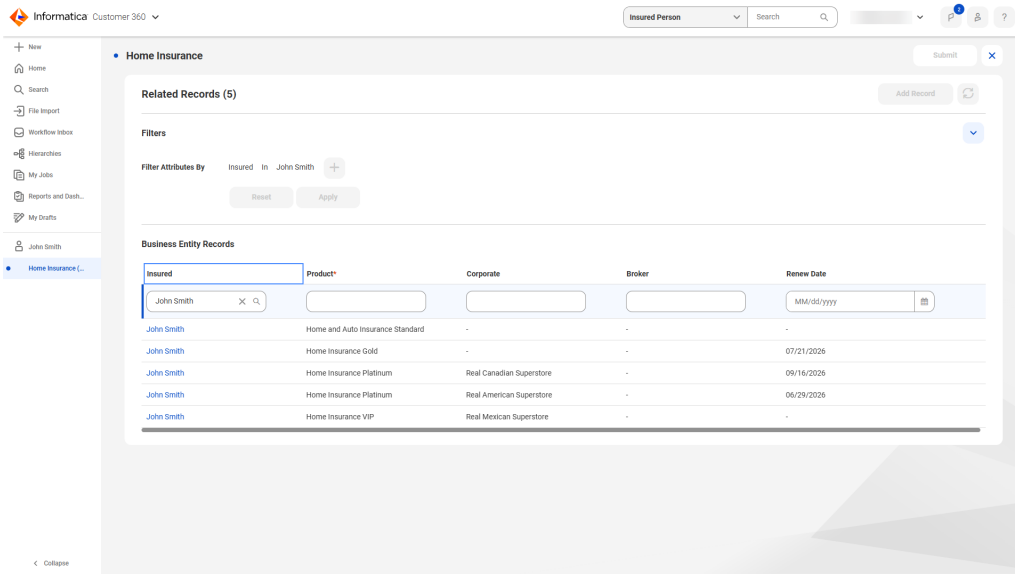

Previously, you had to manually fill in the record for each business entity record field.

CHAPTER 18

Monitor

The October 2026 release of Monitor includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
September 10, 2026	Initial publication	

Changed behavior

The October 2026 release of Monitor contains the following changes.

Error messages

When Monitor reports error messages for individual sources in a mapping task, it reports error messages only for the source where the error occurred.

This feature was introduced in the April 2026 release for certain connectors. The October 2026 release extends support to all connector types.

Previously, Monitor reported error messages for all sources regardless of where the error occurred.

CHAPTER 19

Multidomain MDM SaaS

The October 2026 release of Multidomain MDM SaaS includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 21, 2026	Deleted	Default values in "New features and enhancements" on page 154
October 21, 2026	Deleted	Search filters in "Changed Behavior" on page 156
October 21, 2026	Modified	"Preview initiated" on page 152
October 21, 2026	Deleted	Tasks and tickets in "New features and enhancements" on page 154
October 21, 2026	Deleted	Preview lifted in "Important notices and upcoming changes" on page 152
October 8, 2026	Added	"Preview initiated" on page 152
October 8, 2026	Deleted	"New features and enhancements" on page 154
October 8, 2026	Added	"Match Analysis and Explainability dashboard" on page 156
October 8, 2026	Modified	"Preview initiated" on page 152
October 2, 2026	Modified	Multilingual picklist values in "Important notices and upcoming changes" on page 152

Publication Date	Type of Change	Section Title
September 24, 2026	Added	#unique_147/unique_147_Connect_42_GUID-4FF6EF8C-2AB5-4329-BC57-9221DE382707
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release includes the following important notices:

Dropped support

Effective in the October 2026 release, Informatica drops support for the classic experience of the Source Records page and merge and unmerge tasks in the workflow inbox.

Previously, you could toggle between the classic and the new experiences. The new experience is now the only option for the Source Records page and the workflow inbox.

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Search within field group entries

When you search for records using multiple filters on fields in the same field group or nested field group, the search evaluates the conditions within each entry, and returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has city New York and street Main Street. The office address has city Chicago and street Oak Avenue.

A filtered search with city Chicago and street Main Street returns no record because no single address entry matches both conditions.

Previously, the search returned the record if the conditions matched across different entries.

Multilingual picklist values

When you access business applications in a localized language through your browser locale, picklist field values appear in the same language. You can now search for records with picklist values in any enabled language, regardless of your browser locale. When you use a filtered search, the filters display picklist values based on your browser locale. When you sort records or use auto-suggest, MDM SaaS continues to use the default language configured for the field values.

For more information, see *Manage localized assets* in Reference 360 Help.

Edit in a table

From the Edit in Table page, you can resolve conflicts and clone records.

- When other users update the same fields of a record before you submit your drafts, you can resolve the conflicts by keeping your updates or updates of other users.

- You can clone records to start with draft copies instead of creating new records from scratch. You can clone up to 10 records at a time. The draft copy contains the values of root fields and field groups from the original record.

Draft records

When you create or edit a record, the changes are now automatically saved as a draft before you submit or send the record for approval. If another user updates the same record, you can synchronize your draft with their updates or resolve conflicts. You can manage all your drafts on the My Drafts page, where you can search for specific drafts, open them for editing, or discard them.

Task inbox and ticket manager

You can view, act on, assign, and comment on the tasks assigned to you in the task inbox of business applications. You can assign, act on, or comment on tasks individually or on multiple tasks at once. You can also track the status of your updates in the ticket manager. A ticket is created automatically when a workflow is triggered, and shows workflow milestones, statuses of all the tasks in a workflow, and the comments as reviewers complete their tasks.

For example, a ticket for a product onboarding workflow lists all the tasks, such as validation of product name, brand name, and description, and approval or rejection of the product. The ticket is closed after the product is approved or rejected.


CLAIRE Copilot

You can use the product experience agent in CLAIRE Copilot to enrich records with PDF that contains product data. The agent can also enrich and classify records that contain product data by running data quality objectives. The product experience agent applies the enrichment and classification results to a draft of the current record. You can also view a data completion report that shows the number of enriched fields and objectives applied.

CLAIRE recommendations

When you claim an approval task, you can now view the CLAIRE recommendations for data enrichment in the Insights panel. You can accept or reject those recommendations. MDM SaaS saves the accepted values to the record after your final approval.

The following image shows the Insights tab of the CLAIRE Copilot panel in the workflow inbox:

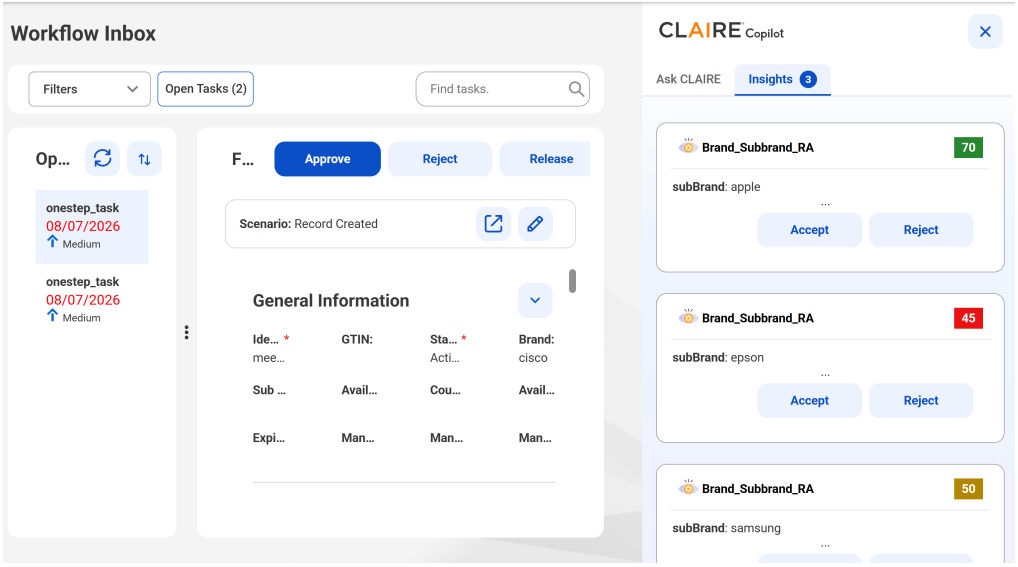

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in

accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.


New features and enhancements

The October 2026 release includes the following new features and enhancements.

Filter related records with business entity record fields

When you manage related records that are based on business entity record fields in the related records table, you can filter the table to focus on the records that you want to view and edit.


The following image shows a related records table that filters for related records with Home Insurance Platinum as the value for the Product field:

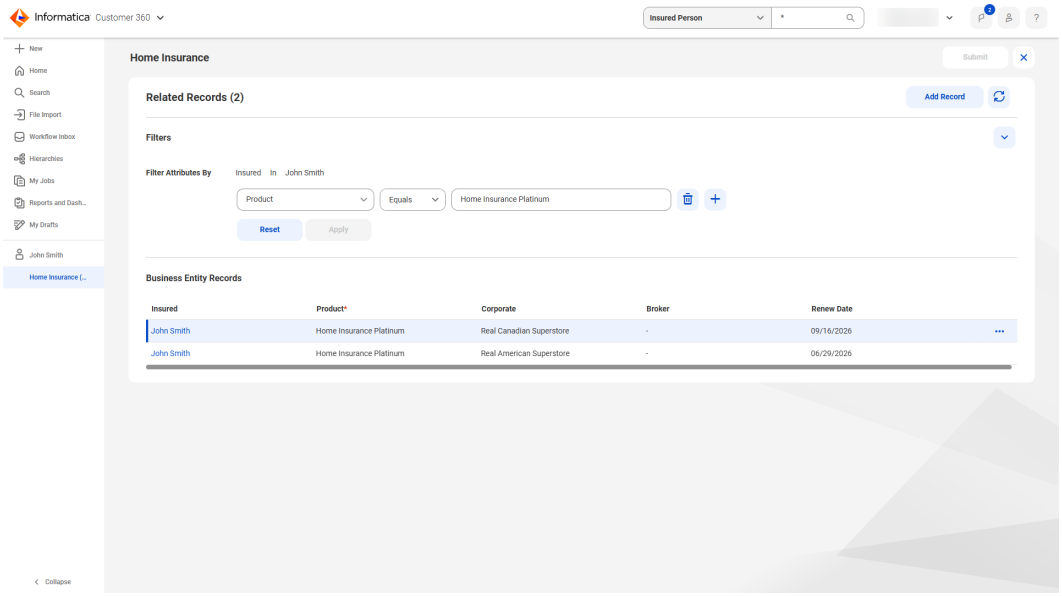

Source records and workflow inbox management experience

The Source Records page and the workflow inbox include the following capabilities for filtering records and overriding survivorship:

- When you merge records, you can override field values in both manual merge previews and workflow inbox tasks, and preview the surviving field values of the merged record before you submit or approve the merge.
  The following image shows the Override Surviving Value option in the manual merge preview:

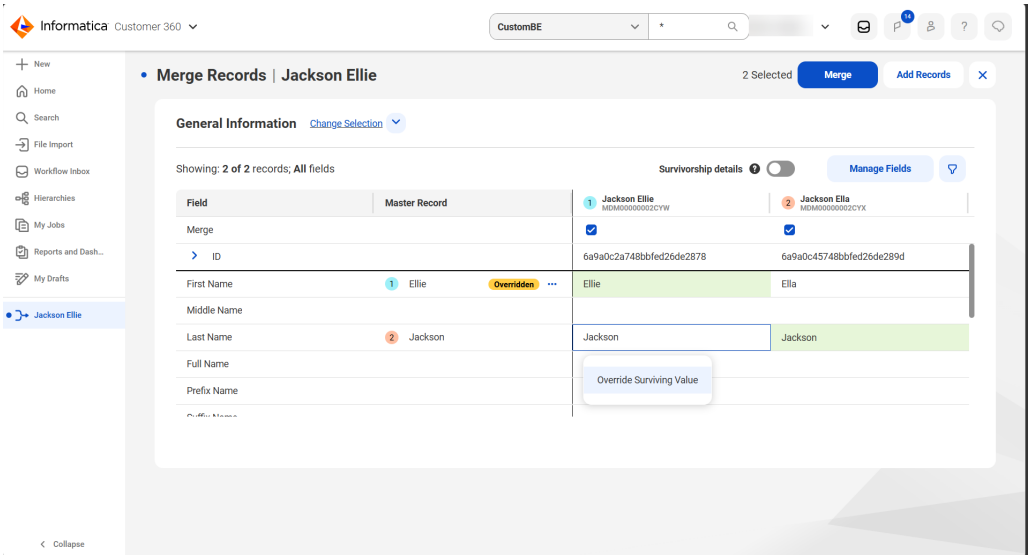

- On the Source Records page, you can filter source records that have an overriding field value and those that match a specified field value.

Data import

When you import records, you can update individual fields in a target record instead of replacing the entire record. The update applies only to the fields in the import file that are mapped to the target fields. Other fields remain unchanged. You can also control how the update handles empty values in mapped fields. When a mapped field is empty in the import file, you can overwrite the target value with null or leave it unchanged.

Note: This functionality is available only after you migrate your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release.

For more information about updating fields containing data, see *Import all data*.

Dynamic field definitions

When you add dynamic field definitions to a record, you can select folders to add all the fields, field groups, and subfolders they contain at once.


For more information about dynamic field definitions, see *Manage records*.

Search

To enhance search accuracy, MDM SaaS now returns more relevant results. When you search for records, you might notice changes in your search results. For example, a search for a record with the first name Benjamin also returns records with the first names Ben and Benny.

Match Analysis and Explainability dashboard

The following image shows the Large Clusters tab in the Match Analysis and Explainability dashboard:

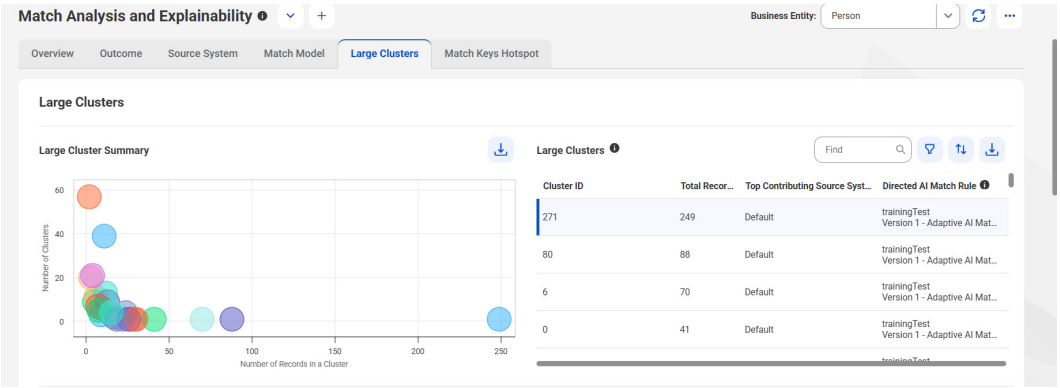

For more information about the Large Clusters tab in the Match Analysis and Explainability dashboard, see *Large Clusters tab*.

Changed Behavior


The October 2026 release includes the following changed behaviors:

Business entity record fields

When you use the related records table to create a new related record with a business entity record field, you fill in the business entity record field. automatically fills in that field with the record that the new related record belongs to. You can edit the field if needed.

For example, you have an Insured Person record named John Smith, and you want to add an insurance product for John Smith. The record John Smith has a related records table called Home Insurance Products, from which you can add new home insurance product records. In the table, you create a new Insurance Product record. The new Insurance Product record has an Insured field that accepts an Insured Person record. automatically fills in the Insured field with the record John Smith.

The following image shows the Insured field automatically filled in with John Smith on the new Home Insurance record:

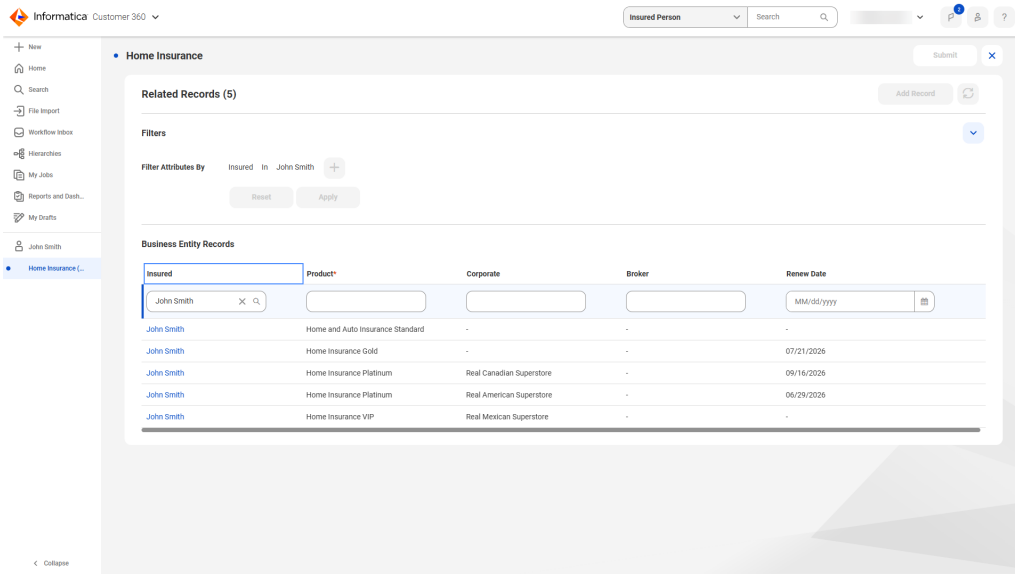

Previously, you had to manually fill in the record for each business entity record field.

CHAPTER 20

Operational Insights

The October 2026 release of Operational Insights includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
September 10, 2026	Initial publication	

Important notice and upcoming change

The October 2026 release of Operational Insights includes the following important notice and upcoming change.

Dropped support

Effective in the October 2026 release, Informatica drops support for Operational Insights data collection from PowerCenter 10.4.0 domains. Operational Insights no longer collects Domain Stats, Customer Service Management (CSM), and PowerCenter Jobs data from PowerCenter 10.4.0 domains. PowerCenter 10.4.0 reached end of support on March 31, 2024.

Changed behavior

The October 2026 release of Operational Insights includes the following changed behavior.

Time range limit for the Application Integration usage report

When you download the Application Integration usage report in Operational Insights, the time range between the start and end dates can't exceed 13 months. If you request a longer range, the request returns an error that explains the limit, so you know to shorten the range and download the report again.

Previously, a request for a range longer than 13 months returned a success response with no data, which made it unclear whether the limit or the data was the problem.

For more information, see *Operational Insights*.

For more information, see *Operational Insights*.

INDEX

B

behavior changes
  Data Ingestion and Replication October 2026 103

C

Cloud Application Integration community
  URL 7
Cloud Developer community
  URL 7

D

Data Ingestion and Replication
  changed behavior in October 2026 103
  new features in October 2026 97
Data Integration community
  URL 7

I

Informatica Global Customer Support
  contact information 8
Informatica Intelligent Data Management Cloud
  web site 7

M

maintenance outages 8

N

new features
  Data Ingestion and Replication October 2026 97

S

Secure Agents
  upgrade preparation 16, 111
status
  IDMC 8
system status 8

T

trust site
  description 8

U

upgrade notifications 8
upgrade preparation
  Secure Agent preparation 16, 111

W

web site 7