Informatica® Cloud Data Governance and Catalog

October 2026

Asset Reference

Informatica Cloud Data Governance and Catalog Asset Reference
October 2026

© Copyright Informatica LLC 2021, 2026

Publication Date: 2026-10-29

Table of Contents

Preface 4

Chapter 1: Business assets 5

AI Agent 5
AI Model 9
AI System 15
AI Use Case 19
Business Area 24
Capability 28
Data Quality Rule Template 32
Data Quality Rule Occurrence 36
Data Set 40
Geography 46
Glossary Domain 50
Glossary Subdomain 55
Glossary Business Term 60
Glossary Metric 65
Legal Entity 71
Manual Data Element 75
Mitigation Plan Template 79
Policy 82
Process 87
Project 94
Questionnaire template 98
Regulation 102
Risk Template 106
System 110

Chapter 2: Technical asset details 116

View technical assets 116
Data profiling statistics 128
Data quality scores 130
Data observability events 132
Reference data for data elements 132
Glossary association 133
Data classifications 133
    Types of data classifications 133
    Data sensitivity levels for assets 134
    Data classification categories for assets 136

Preface

Read *Understanding Business Assets* to familiarize yourself with the properties of business assets in Data Governance and Catalog.

CHAPTER 1

Business assets

Business assets help you describe why, where, and how you use your data to make business decisions. They provide context to your data using relationships with other business assets and through meaningful representations of technical data.

In Data Governance and Catalog, you can create business assets of various types such as AI model, business term, process, domain, or metric. A business asset can represent an actual asset in your organization or represent a business concept like finance or human resources.

When you create a business asset, you can populate several predefined attributes to define the asset. You can also add your own attributes to include additional details about an asset that are unique to your business requirement. You can rate or comment on business assets to collaborate with the users in your organization. When users collaborate on an asset, they might gain insight into the quality of the data and expose details of the asset's usage in your business. You can also define relationships between assets, assign stakeholders, keep an audit of changes performed on an asset, and view change request tickets created for the assets.

AI Agent

An AI Agent asset represents an AI-powered autonomous entity that uses a model and a set of tools to make decisions and take actions toward a specific goal.

For example, you use a representation for an AI agent that reviews supplier invoices. The AI Agent asset might contain the agent's Capability assets, such as an asset for extracting invoice totals and flagging duplicate payments. It might also show how the agent calls another AI agent to approve payments.

You can rate an AI Agent asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of an AI Agent asset including its system and custom attributes.

The following table describes the properties of an AI Agent asset that you can view on the **Overview** tab:

Field	Description
Description	Functional definition of the AI agent. The size of the field can't exceed 1 MB.
Capabilities	Specific functions that an AI agent can perform.

Field	Description
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Autonomy Level	The degree of independence with which the agent operates.
Instructions	The natural-language guidance that defines an AI agent's behavior, operating logic, and boundaries.
Orchestration Pattern	The approach the agent uses to plan and coordinate its actions.
Data	Displays the data sets that are associated with the AI agent.
Associated AI Agents	The other AI Agent assets that are associated with the AI Agent asset.
Associated Policies	Policy assets associated with the AI Agent asset. The Policy assets represent the safety rules and filters that block harmful, unsafe, or incorrect output from the AI agent.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Capabilities tab

View the Capability assets in the AI Agent asset. A capability is a specific function that an AI agent can perform.

For more information about a Capability asset, see "Capability" on page 28.

Lineage tab

View the data lineage of an AI agent. A lineage graphically displays the inflow of data from other assets into the AI agent and the outflow of data from the AI agent to other assets.

For more information about how to view data lineage on this tab, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the AI Agent asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the AI Agent asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the AI Agent asset to a related asset. An inbound relationship goes from a related asset to the AI Agent asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Attributes tab

View the system and custom attributes of the asset.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

For more information about how administrators customize the attributes of an asset, see *Administration* in the Metadata Command Center help.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.

Field	Description
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

AI Model

An AI model asset represents the essential parameters of an AI model. These parameters also include the environment where the model is run, the input parameters and the output data, and the business purpose and rules for the model. AI models provide insights for many activities so that you can make decisions faster and easier or provide prediction modeling.

For example, you can create a business representation for a regular expression that analyzes clickstream data. The AI Model asset might contain details for how the expression uses clickstream data to predict user navigation on your organization website.

You can rate AI Model asset to indicate your assessment of its quality, and add comments to share input on the data. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of an AI Model asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of an AI Model asset that you can view on the **Overview** tab:

Field	Description
Description	Functional definition of the AI model. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.

Field	Description
AI Model Purpose	Purpose of the AI model.
Input	Data elements that represent the input parameters the AI model.
Output	Data elements that represent the output after the AI model is run.
Environment	Indicates whether the AI model belongs to the training, validation or production environment.
Model Rules	Rules that govern the use of the AI model.
Architecture Type	The architecture and algorithms that are used in the AI model.
Libraries	The software libraries that are used by the AI model.
Model format	The format in which the AI model is maintained.
Source Model Repository	The repository in which the source of the AI model is maintained.
Contains	Displays all the AI models that have a direct relationship with the source AI model.
Is Part Of	Displays all the AI models that are part of the source AI model.
Data	Displays the data sets that are associated with the AI model.
Evaluation Metrics	Record additional data that pertain to an AI Model asset. You can use evaluation metrics to compare various models, identify potential biases, and monitor model behavior over time. An AI Model asset has the following predefined evaluation metrics: - **Drift Score**. Measure of degradation of the model. A higher value indicates greater degradation. Use the drift score to determine if the model can provide results within an acceptable range of accuracy. Drift score is measured in percentage. Enter a value between `0` and `100`. Ensure that the value you specify has a maximum precision of `5` digits and a scale of `2` decimal places. - **Bias Score**. Measure of bias in the model. A higher value indicates a greater difference between the predicted result and the actual result. Use the bias score to determine if the assumptions in the model are correct. Bias score is measured in percentage. Enter a value between `0` and `100`. Ensure that the value you specify has a maximum precision of `5` digits and a scale of `2` decimal places. In Metadata Command Center, your administrator can define additional metrics. For more information, see the *Administration* help in Metadata Command Center.
Associated AI Model Versions	Displays the AI Model Core Version technical asset that was used to create the AI Model asset.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.

Field	Description
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Model Lineage

View a visual representation of the data sets and other AI models that are associated with the AI model.

For more information about model lineage, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the AI Model asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the AI Model asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the AI Model asset to a related asset. An inbound relationship goes from a related asset to the AI Model asset.
- To search for a related asset, use the find bar.

- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

Data tab

View data sets used in the AI model. You can search for a specific data set and use filters to narrow the list of data sets.

On the **Data** tab of an AI Model asset, a stakeholder can use the **Add** icon to add a Data Set asset to the AI Model asset. To remove a data set, the stakeholder can select the data set and click the **Delete** option from the Action menu. Stakeholders can also update the association value for a data set. To update the association, a stakeholder selects the data set and selects the applicable association value in the **Action** > **Update Association** menu.

The following table describes the properties of the **Data** tab:

Field	Description
Name	Name of the data set.
Type	Type of the data set.
Association	The type of association between the AI model and the data set. This field can have one of the following values: - **Unknown**. The nature of association between the AI model and the data set has not been determined. - **used to Train model**. The data set is used to train the model. - **used to Validate model**. The data set is used to validate the model. - **used to Train and Validate model**. The data set is used to train and validate the model.
Glossaries	Glossary assets that are associated with the data set.
Classifications	Data classifications associated with the data set. For information about configuring data classification, see *Administration* in the Metadata Command Center help. **Note:** To see this information, the organization administrator must grant the **View Data Classifications** feature privilege to your user role in Intelligent Data Management Cloud™ (IDMC) Administrator. For more information about roles and users, see the *Asset Management* help.
Sensitivity	Data sensitivity levels for the data elements that belong to the data set.
Hierarchy	Hierarchy of the data set.
Description	Description of the data set.
Reference ID	Unique identifier for the data set.

Field	Description
Asset Groups	One or more asset groups assigned to the Data Set asset. Asset groups allow users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Business Name	Business name of the data set.
Inferred Data Type	Inferred data type of the data set.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.

Field	Description
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

AI System

The AI System asset is a machine learning-based system that uses multiple AI models to perform tasks such as generating predictions, content, recommendations, decisions, and actions. The asset records information about the technologies, AI models, and data that is used to perform these tasks.

For example, an e-commerce website analyzes user data such as browsing history, purchase patterns, and demographics to suggest relevant products to its users. In Data Governance and Catalog, you can create an AI system asset to represent the AI system that your organization uses to personalize the shopping experience for its users.

You can rate an AI System asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of an AI System asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of an AI System asset that you can view on the **Overview** tab:

Field	Description
Description	Functional definition of the AI system. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
AI System Type	Type of the AI system that you can choose from a predefined list.
Development Stage	The phase in the AI system lifecycle that you can choose from a predefined list. During this stage, data preparation, model design, training and validation might be carried out to build and improve the AI system's performance.
AI Models	AI models that are associated with the AI system.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.

Field	Description
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Lineage tab

View the data lineage of an AI system. A lineage graphically displays the inflow of data from other assets into the AI System asset and the outflow of data from the AI System asset to other assets.

For more information about how to view data lineage on this tab, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the AI System asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the AI System asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the AI System asset to a related asset. An inbound relationship goes from a related asset to the AI System asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

AI Use Case

An AI Use Case asset represents an initiative that uses AI to solve a specific problem or produce measurable outcomes.

For example, you can create a business representation for an initiative that uses AI to predict supplier delays. The AI Use Case asset might contain the target reduction in late deliveries, the AI models used for the predictions, and the related risks.

You can rate an AI Use Case asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of an AI Use Case asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of an AI Use Case asset that you can view on the **Overview** tab:

Field	Description
Description	Functional definition of the AI use case. The size of the field can't exceed 1 MB.
Capabilities	Specific functions that an AI agent can perform.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Autonomy Level	The degree of independence with which the agent operates.
Instructions	The natural-language guidance that defines an AI agent's behavior, operating logic, and boundaries.

Field	Description
Orchestration Pattern	The approach the agent uses to plan and coordinate its actions.
Data	Displays the data sets that are associated with the AI agent.
Associated AI Agents	The other AI Agent assets that are associated with the AI Agent asset.
Associated Policies	Policy assets associated with the AI Agent asset. The Policy assets represent the safety rules and filters that block harmful, unsafe, or incorrect output from the AI agent.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Risks and Mitigations

View the risks associated with the asset and the mitigation plans that address those risks. Stakeholders of the asset associate risks and mitigation plans with the asset. When a stakeholder associates a risk template or mitigation plan template with the asset, Data Governance and Catalog creates a risk instance or mitigation plan instance.

Subsequent changes to the risk and mitigation plan templates don't apply to the risk and mitigation plan instances. To use the latest version of a template asset, a stakeholder must remove the instance and associate the template asset again.

The following table describes the properties of the **Overview** section on the **Risks and Mitigations** tab:

Field	Description
Overall risk score	Average of the risk scores of all the risks associated with the asset.
Total Risks	Number of risks associated with the asset.
Total Mitigation Plans	Number of mitigation plans associated with the asset.

The following table describes the properties of the **Risks** sub-tab on the **Risks and Mitigations** tab:

Field	Description
Name	Name of the Risk Template asset used to create the risk instance.
Due Date	Date for addressing the risk.

Field	Description
Risk Status	Current state of the risk.
Score	A value representing the overall severity of the risk, typically a combination of its likelihood and impact.

The following table describes the properties of the **Mitigation Plans** sub-tab on the **Risks and Mitigations** tab:

Field	Description
Name	Name of the Mitigation Plan Template asset used to create the mitigation plan instance.
Due Date	Date for completing the mitigation plan.
Associated Risks	The risks that the mitigation plan addresses.
Actions	The specific actions to complete as part of the mitigation plan.

For more information about how a stakeholder associates a risk template or a mitigation template with an asset, see the *Asset Management* help.

Questionnaire

View the questionnaire associated with the asset. Stakeholders of the asset associate questionnaire with the asset. When a stakeholder associates a questionnaire template, Data Governance and Catalog creates a questionnaire instance.

Subsequent changes to the questionnaire template don't apply to a questionnaire instance. To use the latest version of a questionnaire template, a stakeholder must remove the questionnaire instance and associate the questionnaire template again.

The following table describes the properties of the **Questionnaire** tab:

Field	Description
Name	Name of the Questionnaire Template asset used to create the questionnaire instance.
Due Date	Date for completing the questions in the questionnaire.
Completion Status	Status of the responses in a questionnaire or section, such as answered, partially answered, not answered, or needs revision.
Stakeholders	Stakeholders of the asset who answer the questions in the associated questionnaire.

For more information about how a stakeholder associates a questionnaire template with an asset, see the *Asset Management* help.

Relationships tab

View all the relationships that the AI Use Case asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the AI Use Case asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the AI Use Case asset to a related asset. An inbound relationship goes from a related asset to the AI Use Case asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Business Area

A Business Area asset represents a department or business function with certain assigned responsibilities in the wider organization.

For example, you can create the 'Marketing', 'HR' and 'Finance' assets to represent different areas of your business. The employees of different communities in an organization can use various systems. If you assign the system relationships to different business function areas under the Business Area asset, you can easily identify the systems that contain a specific kind of data.

You can rate a Business Area asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Business Area asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Business Area asset that you can view on the **Overview** tab:

Field	Description
Name	Unique name of the asset.
Parent	Another Business Area asset under which the open Business Area asset hierarchically fits.
Description	Definition of the asset. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Stakeholders	Users responsible for the asset or interested in the asset.

Field	Description
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the Business Area asset that is generated from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Business Area asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Business Area asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Business Area asset to a related asset. An inbound relationship goes from a related asset to the Business Area asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the business area.

The **Dimensions Latest Scores** section shows the data quality score of the business area for each data quality dimension. The **Rules Against Target** section shows the data quality score of the business area against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.

Field	Description
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.

Field	Description
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Capability

A Capability asset represents a specific function that an AI agent can perform.

On the **Lineage** tab of an AI Agent asset, a stakeholder can use the **Add** icon to create a Capability asset.

You can rate a Capability asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Capability asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Capability asset that you can view on the **Overview** tab:

Field	Description
Description	Functional definition of the capability. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.

Field	Description
Reference ID	Unique reference identifier for the asset.
Capability Scope	The range of actions and data that the AI agent can access through the capability.
Capability Type	The category of the AI agent's capability.
Stakeholders	Users responsible for the asset or interested in the asset.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Lineage tab

View the data lineage of a AI agent's capability. A lineage graphically displays the inflow of data from other assets into the capability and the outflow of data from the capability to other assets.

For more information about how to view data lineage on this tab, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the Capability asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Capability asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Capability asset to a related asset. An inbound relationship goes from a related asset to the Capability asset.
- To search for a related asset, use the find bar.

- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Attributes tab

View the system and custom attributes of the asset.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

For more information about how administrators customize the attributes of an asset, see *Administration* in the Metadata Command Center help.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.

Field	Description
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Data Quality Rule Template

A Data Quality Rule Template asset is the business representation of a data quality rule specification. You can use a data quality rule template to create a data quality rule. The actual data quality score of data elements are expressed as Data Quality Rule Occurrences in Data Governance and Catalog. As data quality rules set business expectations, they are often associated with glossary assets such as Business Terms and Metrics.

For example, if your organization processes automobile insurance claims, you would have some predetermined criteria to determine whether the insurance claim of a particular customer qualifies or not. In your data quality tool, the rule might be called 'ins_claim_check'. To represent this rule in Data Governance and Catalog, you can create a Data Quality Rule Template asset called 'Eligibility for Insurance Claim'.

When the data quality rule as defined in the rule template is run on data elements, data quality rule occurrences are created. For more information about automatically creating rule occurrences from a rule template, see "Data Quality Rule Occurrence" on page 36.

You can rate a Data Quality Rule Template asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it. For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Data Quality Rule Template asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Data Quality Rule Template asset that you can view on the **Overview** tab:

Field	Description
Description	Description of the rule template. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Dimension	The data quality dimension that applies to the data quality rule that is defined by this rule template. Default is `Accuracy`. **Note:** If the default value of the **Dimension** field that is specified here differs from what is displayed on the Data Governance and Catalog interface, the administrator might define a different list of dimensions. For more information about how your administrator can customize the data quality dimensions, see the *Administration* help in Metadata Command Center.
Measuring Method	Method by which the data quality rule for the rule template is evaluated. The default value is `Informatica Cloud Data Quality`. You can choose one of the following values: - `Business Extract`. The rule is measured on data that is exported for a particular business case. - `System Function`. The rule is measured by a data quality system. - `Technical Script`. The rule is measured by a script that is manually run by an analyst. - `Informatica Cloud Data Quality`. The rule is measured by Informatica Cloud Data Quality.

Field	Description
Primary Glossary	Glossary asset that represents the data element on which single port data quality rules in the rule template apply.
Secondary Glossary	Glossary asset that represents the data element on which multi-port data quality rules in the rule template might apply. **Note:** You can't add, update, or delete a secondary glossary that's mapped to multiple input ports in a rule template that you have not executed.
Technical Rule Reference	Rule specification in the data quality application that runs on the data elements represented by the Glossary asset in the **Primary Glossary** field.
Occurrences	Number of occurrences of data quality rules that are run on the data elements represented by the Glossary asset in the **Primary Glossary** field. For example, if the Glossary asset in the **Primary Glossary** field is linked to a technical asset that contains five data elements, the tab displays five rule occurrences. If you have enabled automation for the rule template, Data Governance and Catalog automatically runs the rule on the linked data elements and generates the corresponding rule occurrences.
Criticality	Criticality of the rule template. The value can be `High`, `Medium`, or `Low`. The default value is `Medium`.
Automation	Whether automation for the data quality rule is enabled. When enabled, this creates rule occurrences for the data elements that are associated with the primary glossary. After you save the rule template, you can't disable the automation option later.
Target	Minimum acceptable data quality value for the asset to be considered good. The default value is 90.
Threshold	Minimum acceptable data quality value for the asset to be considered acceptable. The default value is 70.

Frequency	Frequency of running the data quality rules in the rule template. The default value is Weekly. You can choose one of the following values:
	`- Daily`
	`- Weekly`
	`- Monthly`

Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the rule template that is generated from a data quality tool.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

For more information about running automated rules on assets, see the *Data Quality for Assets* help.

Rule Occurrences tab

View all instances of data quality rule runs for the rule template that have been run on data elements.

The **Dimensions Latest Scores** section shows the data quality score of the rule occurrences for each data quality dimension within the rule. The **Rules Against Target** section shows the data quality score of the rule occurrences against the defined target.

You can also search for a specific rule occurrence by using the **Find** bar.

The following table describes the fields in the **Rule Occurrences** table:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension that applies to the rule occurrence.
Latest Score	Data quality score from the latest rule run.
Date	Data of the rule occurrence.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Data Quality Rule Occurrence

A data quality rule occurrence is the business representation of a data quality rule that is run on data elements in a data set.

The rule occurrence provides a preview of valid and failed rows along with the overall quality score, based on the rule defined in the selected rule specification asset.

For example, you work in a retail organization, and you want to send promotional emails to your customers. The business rule in your organization might require that all customer email addresses follow a valid format. Each email ID requires the @ symbol and a domain name to ensure proper delivery and compliance with standard email formatting. When a rule occurrence is generated, you see the list of email IDs with @ and domain names, list of email IDs without @ and domain names, and the overall quality score of the data elements.

You can rate a Data Quality Rule Occurrence asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Association of data elements with rule occurrences

You can associate data elements with rule occurrences through the following ways:

- Data quality automation. Automatically associate rule occurrences with their corresponding data elements when data quality checks are run automatically according to the schedule defined by the administrator in Metadata Command Center.
- Bulk import. Manually associate rule occurrences with their corresponding data elements by uploading the data quality scores using a bulk upload template.
- Profiling. Manually associate rule occurrences with data elements when the rule occurrences in Data Governance and Catalog are generated from Data Quality scorecards.

Overview tab

View the properties of a Data Quality Rule Occurrence asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.

The following table describes the properties of a Data Quality Rule Occurrence asset that you can view on the **Overview** tab:

Field	Description
Rule Template	Data quality rule template that defines the parameters of the rule for which the rule occurrence is generated.
Sync with Rule Template	Synchronizes the rule occurrence attribute values with the values on the rule template that a stakeholder specifies. If the stakeholder selects the **Sync with Rule Template** field, subsequent changes to the rule occurrence attribute values with the values on the rule template automatically apply to the rule occurrence. If a rule occurrence already has scores, it keeps its current **Technical Rule Reference** value and doesn't inherit the value from the rule template. If the stakeholder clears the **Sync with Rule Template** field, subsequent changes to the rule occurrence attribute values don't automatically apply to the rule occurrence.
Description	Description of the rule occurrence. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Dimension	One of the six data quality dimension that applies to the data quality rule occurrence. Default value is `Accuracy`. **Note:** If the default value of the **Dimension** field that is specified here differs from what is displayed on the Data Governance and Catalog interface, the administrator might define different list of dimensions. For more information about how your administrator can customize the data quality dimensions, see the *Administration* help in Metadata Command Center.
Measuring Method	Method by which the data quality rules for the rule occurrence are evaluated. The default value is `Informatica Cloud Data Quality`. You can choose one of the following values: - `Business Extract`. The rule is measured on data that is exported for a particular business case. - `System Function`. The rule is measured by a data quality system. - `Technical Script`. The rule is measured by a script that is manually run by an analyst. - `Informatica Cloud Data Quality`. The rule is measured by Informatica Cloud Data Quality.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**. **Note:** You can't add, update, or delete a secondary data element that's mapped to multiple input ports in a rule occurrence that you have not executed.
Technical Rule Reference	Rule specification in the data quality application that runs on the data element.
Criticality	Criticality of the rule occurrence. The value can be `High`, `Medium`, or `Low`. The default value is `Medium`.

Field	Description
Target	Minimum acceptable data quality value for the asset to be considered good. The default value is `90`.
Threshold	Minimum acceptable data quality value for the asset to be considered acceptable. The default value is `70`.
Frequency	Frequency of running the data quality rule that is defined in the rule template. The default value is Weekly. You can choose one of the following values: - `Daily` - `Weekly` - `Monthly` **Note:** If the administrator has configured data quality automation in Metadata Command Center to run according to a schedule defined for the catalog source, you can't specify a frequency value for individual rule occurrences. In this case, the **Frequency** field is disabled.
Latest Data Quality Score	Data quality scores of the last rule run. The panel displays the composite score and score trend for the data element that is represented by the rule occurrence. The panel displays the score trend in color according to the target and threshold values that are defined for the rule occurrence. For example, if the threshold value is 40 and the target value is 80, the scores appear in the following color: - A score below 40 appears in red and is considered not acceptable. - A score between 40 and 79 appears in amber and is considered acceptable. - A score above 80 appears in green and is considered good.
Profile Reference	The data quality rule that runs on the data element. Click the reference link to access the rule in the integrated data quality application.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

For more information about running automated rules on assets, see the *Data Quality for Assets* help.

Score tab

View details of the data quality scores that comprise the rule occurrence.

The **Latest Data Quality Score** panel displays the composite score, the total rows and failed rows from the rule occurrence, and the score trend.

The **Total Runs** table shows all the data quality rules that have been run so that the composite score is calculated.

The following table describes the properties of the **Total Runs** table:

Field	Description
Date	Date on which the data quality rule is run.
Latest Score	Data quality score from the rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Data Set

A Data Set asset represents identifiable groupings of data for a particular purpose. Data Sets are business-friendly representations of technical assets such as tables, files, and more. A Data Set asset focuses less on the technical aspects of how the data is delivered and more on the information provided by the data set.

For example, if you have a table that contains the 'cust_name' and 'customer columns', you can associate both the columns to a single data set called 'Customer Name' to provide business context.

You can rate a Data Set asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Data Set asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Data Set asset that you can view on the **Overview** tab:

Field	Description
System	The parent system to which the data set belongs.
Description	Description of the data set. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Data Elements	List of data elements that are added to this data set.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Reference Data	Code values and attributes from Reference 360 linked to the data set. You can view the **Reference Data** tab only if you have the **View Reference Data** permission.
Associated Technical Data Sets	List of data elements, such as tables and columns, associated with this data set. You can associate data elements to a data set either while creating a data set or after you have created the data set. You can associate only those data elements that belong to the catalog source associated with the parent system that you have selected.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.

Field	Description
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Contains tab

View the data elements that constitute the data set.

The following table describes the properties of the **Contains** tab:

Field	Description
Name	Name of the constituent data element.
Business Name	Business name of the data element.
Type	Type of the constituent data element.
Glossaries	Glossary assets that are associated with the constituent data element.
Classifications	Data classifications associated with the constituent data elements and technical data sets. For information about configuring data classification, see *Administration* in the Metadata Command Center help. **Note:** To see this information, the organization administrator must grant the **View Data Classifications** feature privilege to your user role in IDMC Administrator. For more information about roles and users, see the *Asset Management* help.
Profiling statistics	Profiled statistics of the constituent data element. The table displays one of the following statistics: - Null percentage - Distinct percentage - Non-distinct percentage **Note:** To see this information, the organization administrator must grant the **View Profiled Stats** feature privilege to your user role in IDMC Administrator. For more information about roles and users, see the *Asset Management* help.
Source Data Type	Data type of the constituent data element.
Inferred Data Type	Inferred data type of the constituent data element.
Description	Description of the constituent data element as it appears in the source system.
Hierarchy	Hierarchy or the path of the data element.

On the **Contains** tab, you can search for a specific data element, add a new data element to the data set, or remove data elements from the data set. You can also apply filters to the list of data elements.

Lineage tab

View the data lineage of the data set. A lineage graphically displays the inflow of data from other systems into the asset and the outflow of data from the asset to other systems.

For more information about lineage, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the Data Set asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Data Set asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Data Set asset to a related asset. An inbound relationship goes from a related asset to the Data Set asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the data set.

The **Dimensions Latest Scores** section shows the data quality score of the data set for each data quality dimension. The **Rules Against Target** section shows the data quality score of the data set against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

You can also search for a specific rule occurrence by using the **Find** bar.

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Reference Data tab

You can view the data elements of the data set that are associated with the reference data from Reference 360 if you have the **View Reference Data** privilege for the Data Governance and Catalog service in Administrator. You can't associate new reference data with a data set, but you can view data elements that are already associated with the reference data.

Under the **Code Values** column on the **Details** table, you can view the first 50 code values of the code list retrieved from Reference 360.You can also navigate to Reference 360 to view the complete reference data.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Geography

A Geography asset captures areas, regions, or countries relevant to where your organization operates. You can use a geography asset to show how different business assets are relevant to different locations.

You can link different legal entities to a Geography asset to see where the entity operates, or to find out how many legal entities within a group operate within the same territory. If you link a legal entity to Systems and Data Sets, the entity can locate the Geography assets.

For example, you can create the 'Poland', 'Brazil', and 'India' Geography assets if your organization has offices in these countries.

You can rate a Geography asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Geography asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Geography asset that you can view on the **Overview** tab:

Field	Description
Name	Unique name of the asset.
Parent	Another Geography asset under which the open Geography asset hierarchically fits.
Description	Definition of the asset. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Geography asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Geography asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Geography asset to a related asset. An inbound relationship goes from a related asset to the Geography asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the Geography asset.

The **Dimensions Latest Scores** section shows the data quality score of the asset for each data quality dimension. The **Rules Against Target** section shows the data quality score of the asset against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Glossary Domain

A glossary asset of the Domain type refers to a collection of business concepts and activities that can be grouped together for a specific function or requirement. A domain is a subject matter area under which many terms can be organized. You can use a glossary domain to assign semantic and business context to an actual business concept.

For example, 'finance' is a domain containing the 'retail finance', 'corporate finance', and 'investment banking' assets in its hierarchy.

You can rate a Domain asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Domain asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Domain asset that you can view on the **Overview** tab:

Field	Description
Description	Description of the domain. The size of the field should not exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Alias Names	Alternative names for the domain that applies in your business context. Enter synonyms and alias names to help people find the domain easily or make the domain accessible for people from various departments.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Domain asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Domain asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Domain asset to a related asset. An inbound relationship goes from a related asset to the Domain asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the domain.

The **Dimensions Latest Scores** section shows the data quality score of the domain for each data quality dimension. The **Rules Against Target** section shows the data quality score of the domain against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Glossary Subdomain

A glossary asset of the Subdomain type refers to a concept or activity that constitutes a specific business function or requirement. A domain is divided into subdomains to help organize business terms and metrics. You can use a glossary subdomain to assign semantic and business context to an actual business concept.

For example, you can create subdomains such as 'retail finance', 'corporate finance', and 'investment banking' for the 'finance' domain asset.
You can rate a Subdomain asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Subdomain asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Subdomain asset that you can view on the **Overview** tab:

Field	Description
Description	Description of the subdomain. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Parent	The subdomain can have any one of the following assets as the parent asset: - Business Term - Subdomain - Domain - Metric

Field	Description
Alias Names	Alternative names for the subdomain that applies to your business context. Enter synonyms and alias names to help people find the subdomain easily or to make the subdomain accessible for people from various departments.
Examples	Examples of the subdomain.
Security Level	Security level of the asset with respect to the sensitivity of the information. This is manually specified while creating the subdomain and is suitable only as a governance record.
Business Logic	Business logic or calculation that applies if the subdomain is a number. The size of the field can't exceed 1 MB.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Subdomain asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Subdomain asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Subdomain asset to a related asset. An inbound relationship goes from a related asset to the Subdomain asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the subdomain.

The **Dimensions Latest Scores** section shows the data quality score of the subdomain for each data quality dimension. The **Rules Against Target** section shows the data quality score of the subdomain against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Glossary Business Term

A glossary asset of the Business Term type can be used to capture a business definition that is used in your organization. Most business terms tend to be realized as data elements and can be used to indicate that different data elements represent the same concept, whatever the name they have in each table.

For example, 'payroll' is a glossary asset of the Business Term type.

You can rate a Business Term asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Business Term asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Business Term asset that you can view on the **Overview** tab:

Field	Description
Parent	The business term can have any one of the following assets as the parent asset under which this business term hierarchically fits: - Business Term - Subdomain - Domain - Metric
Description	Description of the business term. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.

Field	Description
Alias Names	Alternative names for the business term that applies to your business context. Enter synonyms and alias names to help people find the business term easily or make the term accessible for people from various departments.
Reference Data	Code values and attributes from Reference 360 linked to the business term. You can view the **Reference Data** tab only if you have the **View Reference Data** permission.
Security Level	Security level of the asset with respect to the sensitivity of the information. This is manually specified while creating the business term and is suitable only as a governance record.
Business Logic	Business logic or calculation that applies if the term value is a number. The size of the field can't exceed 1 MB.
Examples	Examples of the business term.
Format Type	Format of the business term. You can select from one of the following formats: - Text - Number - Decimal - Percentage - Fraction - Date - Time - Date and time Default value is `Text`.
Format Description	Description of the format that you have selected.
Critical Data Element	Indicates whether the business term is critical to the success of the business.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.

Field	Description
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Business Term asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Business Term asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Business Term asset to a related asset. An inbound relationship goes from a related asset to the Business Term asset.

- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View aggregate and individual data quality scores for the data elements that comprise the business asset.

The **Dimensions Latest Scores** section shows the data quality score of the business term for each data quality dimension within the rule. The **Rules Against Target** section shows the data quality score of the business term against the defined target.

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Reference Data tab

You can view and associate reference data from Reference 360 with Business Term assets if you have the **View Reference Data** privilege for the Data Governance and Catalog service in Administrator. You can use the curated reference data from Reference 360 to enhance your business assets and improve data accuracy.

You can view the first 50 code values. To see the complete list of code values, navigate to Reference 360.

After you associated the reference data, you can view the code values and the attributes of the code values. To select a different reference data that is more suitable for the business term, click **Switch Reference Dataset**. To remove an already associated reference data, click the **Remove associated reference data** icon.

You can also view the general properties of the reference data, such as associated reference data set, code list, and version. For more information about associating a reference data with Business Term assets, see the *Asset Management* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Glossary Metric

A glossary asset of the Metric type refers to the definition of the measurement of a business result. The asset assigns semantic and business context to an actual business measurement. You can use a metric asset if you use a numerical indicator to measure business success.

For example, you can create a 'Net Profit' and an 'Average Revenue Per User (ARPU)' Metrc assets if your business has numerical indicators for them.

You can rate a Metric asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Metric asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Metric asset that you can view on the **Overview** tab:

Field	Description
Parent	The metric can have any one of the following assets as the parent asset under which this metric asset hierarchically fits: - Business Term - Subdomain - Domain - Metric
Description	Description of the metric. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Alias Names	Alternative names for the metric that applies to your business context. Enter synonyms and alias names to help people find the metric easily or to make the metric accessible for people from various departments.
Reference Data	Code values and attributes from Reference 360 linked to the metric. You can view the **Reference Data** tab only if you have the **View Reference Data** permission.
Security Level	Security level of the asset with respect to the sensitivity of the information. This is manually specified while creating the metric and is suitable only as a governance record.
Business Logic	Business logic or calculation of the metric. The size of the field can't exceed 1 MB.
Examples	Examples of the metric.
Format Type	Format of the metric. You can select from one of the following formats: - Text - Number - Decimal - Percentage - Fraction - Date - Time - Date and time Default value is `Text`.
Format Description	Description of the metric format that you have selected.
Critical Data Element	Indicates whether the metric is critical to the success of the business.
Stakeholders	Users responsible for the asset or interested in the asset.

Field	Description
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Metric asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Metric asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Metric asset to a related asset. An inbound relationship goes from a related asset to the Metric asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View aggregate and individual data quality scores for the data elements that comprise the metric.

The **Dimensions Latest Scores** section shows the data quality score of the metric for each data quality dimension. The **Rules Against Target** section shows the data quality score of the metric against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.

Field	Description
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Reference Data tab

You can view and associate reference data from Reference 360 with Metric assets if you have the **View Reference Data** privilege for the Data Governance and Catalog service in Administrator. You can use the curated reference data set from Reference 360 to enhance your business assets and improve data accuracy. You can view the first 50 code values. To see the complete list of code values navigate to Reference 360.

To select a different reference data that is more suitable for the metric, click **Switch Reference Dataset**. To remove an already associated reference data, click the **Remove associated reference data** icon.

You can also view the general properties of the reference data. For more information about associating a reference data with Metric assets, see the *Asset Management* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in

progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.

Field	Description
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Legal Entity

A Legal Entity asset captures corporate entities, whether these are part of the customer's own group of companies or trusted partners and vendors. You can use Legal Entity assets to make relationships to other business assets and to provide context.

For example, if your organization Acme Fitness has a subsidiary called Acme Digital for creating digital wellbeing products, you can create a Legal Entity asset called 'Acme Digital'.

You can rate a Legal Entity asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Legal Entity asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Legal Entity asset that you can view on the **Overview** tab:

Field	Description
Name	Unique name of the asset.
Parent	Another Legal Entity asset under which the open Legal Entity asset hierarchically fits.
Description	Definition of the asset. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Long Name	Long form name for the Legal Entity to make it easily identifiable.
Stakeholders	Users responsible for the asset or interested in the asset.

Field	Description
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Legal Entity asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Legal Entity asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Legal Entity asset to a related asset. An inbound relationship goes from a related asset to the Legal Entity asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the legal entity.

The **Dimensions Latest Scores** section shows the data quality score of the legal entity for each data quality dimension. The **Rules Against Target** section shows the data quality score of the legal entity against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.

Field	Description
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.

Field	Description
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Manual Data Element

A manual data element is the business representation of data that might not be available in the catalog but is essential to capture for governance purposes in your organization.

If you are a business user, you can manually create a data element within a data set. A data set can either have technical data elements or manual data elements or a combination of both. Although a manual data element is a type of business asset, it exists in a business data set and not as a standalone business asset. You can associate a manual data element with one business data set only.

Overview tab

View the properties of a manual data element.

The following table describes the properties of a manual data element that you can view on the **Overview** tab:

Field	Description
Name	Name of the manual data element.
Data Set	Parent data set to which the manual data element belongs.
Description	Description of the manual data element. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.

Field	Description
Reference ID	Unique reference identifier for the asset.
Glossaries	Glossary assets that are related to the manual data element.
Data Element Classifications	Data element classifications that you want to associate with the manual data element.
Stakeholders	Users responsible for the asset or interested in the asset.
Reference Data	Code values and attributes from Reference 360 linked to the manual data element. You can view the **Reference Data** tab only if you have the **View Reference Data** permission.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.

When you open the parent data set, you can search for a specific manual data element, click **Add** to add a new manual data element to the data set, or click the Delete icon to remove a specific manual data element from the data set. You can also use filters to narrow the list of manual data elements.

Lineage tab

View the data lineage of the manual data element. A lineage graphically displays the inflow of data from other systems into the manual data element and the outflow of data from the manual data element to other systems. The lineage tab displays data flow that is automatically generated and lineages that you have manually created.

For more information about lineage, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the manual data element has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the manual data element and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the manual data element to a related asset. An inbound relationship goes from a related asset to the manual data element.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Reference Data tab

You can view and associate reference data from Reference 360 with manual data element if you have the **View Reference Data** privilege for the Data Governance and Catalog service in Administrator. You can use the curated reference data from Reference 360 to enhance your business assets and improve data accuracy.

You can view a sample list of the first 50 code values. To see the complete list of code values, navigate to Reference 360.

Note: You can see the **Reference Data** tab and its values only if you have the **View Reference Data** privilege in Administrator.

To select a different reference data that is more suitable for the manual data element, click **Switch Reference Dataset**. To remove an already associated reference data, click the **Remove associated reference data** icon. Additionally, you can also view the general properties of the reference data.

For more information about associating a reference data with manual data elements, see the *Asset Management* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.

Field	Description
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Mitigation Plan Template

A Mitigation Plan Template asset helps you document the plan of action for addressing a risk and track the progress of the plan. A stakeholder associates the plan with a risk that they identify for an asset.

On the **Browse** page, mitigation plan templates appear on the **Risk and Evaluation** tab of an asset.

When you create a mitigation plan template, you enter strategy details for mitigating the risk and its impact. After you identify the risk for an asset, you associate one or more mitigation plans and set a due date for completing the plan.

Example

Your organization reviews a supply chain AI use case before you approve it for production. You identify the risk that supplier's personal information is exposed in the training data. You create a mitigation plan template to mask that personal information, and you set the strategy for the plan. You associate the plan with that risk, and the assigned stakeholder carries out the plan.

Overview tab

On the **Overview** tab, you can view basic information about the Mitigation Plan Template asset.

The following table describes the fields of the **Overview** tab:

Field	Description
Description	Functional definition of the mitigation plan template.
Reference ID	Unique identifier for the mitigation plan template.
Strategy	Approach for mitigating the risk and its impact. An administrator can customize the values in Metadata Command Center. For more information about how an administrator customizes the strategy values, see the *Asset Customization* topic in *Administrator* help for Metadata Command Center.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Stakeholders	Users who manage the mitigation plan template.

Field	Description
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Associations tab

On the **Associations** tab, you can view the assets with which this mitigation plan template is associated. The following table describes the fields of the **Associations** tab:

Field	Description
Name	Name of the associated asset.
Type	Type of the associated asset.
Association Date	Date when the mitigation plan was associated with the asset.
Association Path	Location of the associated asset. This value shows the hierarchy path when the asset has a parent, or the association path when it doesn't have a parent.

Relationships tab

On the **Relationships** tab, you can switch between grid view or graph view to view all the relationships that the mitigation plan template asset has with other assets. Create relationships with other assets that you use together to make business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

You can perform the following activities on the **Relationships** tab:

- Click the **Filters** icon at the top of the tab to apply filters to narrow the list of relationships. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset, or view by relationship label. The direction of the asset can be inbound or outbound. A relationship created from the mitigation plan template asset to the related asset is called an outbound relationship. A relationship created from the related asset to the mitigation plan template asset is called an inbound relationship.

- Search for a related asset using the search box.
- Click the **Add** icon to add a new related asset, or the **Delete** icon to delete an existing related asset. You can delete only outbound direct related assets.

For more information about asset relationships, see the Relationships topic in the Asset Discovery help.

Stakeholders tab

View the users who are stakeholders for the mitigation plan template. Stakeholders of the template manage the mitigation plan. These stakeholders are different from the stakeholders assigned to the plan on an AI Use Case asset. If your role has the required permissions, you can add or remove stakeholders on this tab. The following table describes the fields of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. This field doesn't appear for user groups.
User Name	Account name the user signs in with.
Stakeholder Source	How the user became a stakeholder of the asset. For example, **Assigned** means the user was added as a stakeholder of this asset.

You can also use filters to narrow your search for stakeholders.

Tickets tab

View change request tickets that users have created for the mitigation plan template asset.

The following table describes the fields of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filter options. For more information about tickets, see the *Workflows and tickets* topic in the *Asset Management* help.

History tab

View changes that users have made to the mitigation plan template. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the fields of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Policy

A Policy asset represents an internal collection of rules and guidance on how to conduct business and manage data. They might be inspired by company goals, external regulations, or commercials agreements.

For example, you can create a Policy asset called ;Document Security' to provide business context for a file that outlines policies for document security.

You can rate a Policy asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Policy asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Policy asset that you can view on the **Overview** tab:

Field	Description
Parent	Another policy under which the open policy hierarchically fits.
Description	Description of the policy. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Policy Type	The area that the policy governs. Select from one of the following types: - `Conduct Standards`. Guides conduct in various situations. - `Data Standards`. Applies to data management. - `Technical Standards`. Applies to technical management. - `Business Rule`. Defines rules for business functions. - `AI Guardrail`. Applies safety rules and filters that block harmful, unsafe, or incorrect AI output. Default value is `Business Rule`.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Policy asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Policy asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Policy asset to a related asset. An inbound relationship goes from a related asset to the Policy asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View aggregate and individual data quality scores for the data elements that are related to the policy.

The **Dimensions Latest Scores** section shows the data quality score of the policy for each data quality dimension. The **Rules Against Target** section shows the data quality score of the policy against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Process

You can use a Process asset to document important business activities so that the activity can be contextualized through relationships. These activities allow business users to record the key reasons on why they consume data. Processes might include the name of a parent process, with a series of child processes that explain the key stages involved in executing that activity. Each individual process object can have its own set of relationships to explain key metadata associations.

For example, you can create a Process asset called 'New Employee Orientation' to provide business context to a file that contains activities for employee orientations.

You can rate a Process asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Process asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Process asset that you can view on the **Overview** tab:

Field	Description
Parent	Another process under which the open process hierarchically fits.
Description	Description of the process. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Duration	Duration required for the process, expressed in date and time.

Field	Description
Process Type	Type of the process. You can choose from one of the following process types: - Process. An entire process. - Step. A particular step in a process. - Control. An intermediate option within a process that determines the direction of the subsequent steps.
Step Type	Choose whether you are creating the starting step of a process, the ending step of a process, or a common step across the process.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Process asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Process asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Process asset to a related asset. An inbound relationship goes from a related asset to the Process asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.


  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Process Map tab


View a visual representation of a process flow. The system generates a process map only if a process asset has a parent-child relationship with another process asset. The direction of the process flow is determined by the **is Predecessor to** relationship between the process assets.

The following image shows the process map for a process asset:

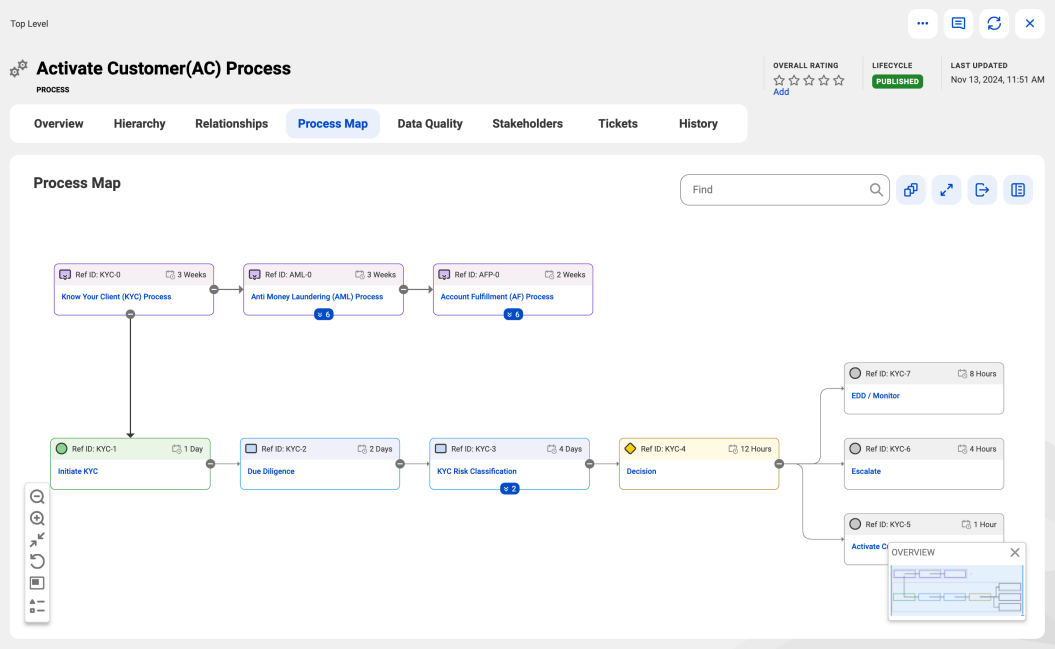

Process map navigation options

The following image shows the process map options available on the **Process Map** tab:



1. **Find**. Find assets within the process map by name or reference ID.
2. **Overlays**. Adds business context for the assets in the process map. The **Overlays** menu appears. By default, a process map displays only the related parent processes or the related child processes. To view the processes that have only an **is Predecessor to** relationship with the selected process but don't have a parent-child relationship with the process, you can select the **Adjacent Process** overlay from the **Overlays** menu.
3. **Full Screen**. Displays the process map in such a manner that it occupies your entire display screen.
4. **Export**. Exports the process map.
5. **Show Preview**. Displays a preview of the selected process asset.

The following image shows the navigation options available on the **Process Map** tab:



1. **Zoom Out**. Adjusts the process map to provide a wider view of the process flow.
2. **Zoom In**. Adjusts the process map to focus on a particular aspect of the process flow.
3. **Fit To Screen**. Resizes the process map according to the resolution of your browser window.
4. **Reset View**. Resets the process map to its default state.
5. **Overview**. Provides an overview of the process map.
6. **Legend**. Provides the different components of a process map including the direction of the process flow.

Data Quality tab

View aggregate and individual data quality scores for the data elements that are related to the process.

The **Dimensions Latest Scores** section shows the data quality score of the process for each data quality dimension. The **Rules Against Target** section shows the data quality score of the process against the defined target, which is the minimum acceptable data quality value for the asset to be considered good.

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.

Field	Description
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.

Field	Description
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Project

A Project asset represents a collection of activities that are planned and organized to achieve a particular set of objectives.

Use the Project asset for activities that are less regular and more specific.

For example, you can create a Project asset called 'Annual Sales Meet' to govern the activities of the annual meeting of the sales team in your organization.

You can rate a Project asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Project asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Project asset that you can view on the **Overview** tab:

Field	Description
Name	Unique name of the asset.
Parent	Another project under which the open project hierarchically fits.
Description	Definition of the asset. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
Start Date	Date on which the planned activities in a project commence.
End Date	Date on which the planned activities in a project are completed.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.

Field	Description
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Project asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Project asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.

Field	Description
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Project asset to a related asset. An inbound relationship goes from a related asset to the Project asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the Project asset.

The **Dimensions Latest Scores** section shows the data quality score of the asset for each data quality dimension. The **Rules Against Target** section shows the data quality score of the asset against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.

Field	Description
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Questionnaire template

A Questionnaire Template asset gathers structured input from stakeholders as part of a governance assessment, such as an impact, risk, or intake review. You associate the template with an asset that you want to assess, and stakeholders of the asset respond to the questionnaire.

A Questionnaire Template asset defines the sections, questions, and responses of a questionnaire. You can add, update, or remove sections and questions. After you associate the template with another asset such as an AI use case, Data Governance and Catalog creates a questionnaire instance on that AI use case. Stakeholders of the AI use case respond to the questionnaire.

If a stakeholder updates the questionnaire template after you associate it with an asset, your existing questionnaire instance doesn't update automatically. You will see an update that a newer version of the template is available. To use the updated questionnaire template, remove the questionnaire instance from the asset and associate the template again. This creates a new questionnaire instance from the updated template.

Example

Your organization deploys an AI agent that approves supplier payments. An AI Use Case tracks this initiative. You create a questionnaire template asset with sections for business justification, data and models, and regulatory compliance. Each section groups the relevant questions. After you associate the template with the AI use case, stakeholders of the AI use case answer the questions.

Sections and questions

A section groups related questions together, so stakeholders can answer a set of questions at a time. A questionnaire template must contain at least one section. A section can contain more than one question.

A question has question text and a response type. The response type can be single choice or multiple choice. For these response types, you define the responses that a stakeholder can choose. For a single choice question, select **Other Option** to let a stakeholder enter an answer that is not in the list.

Track questionnaire progress

As stakeholders respond, you can track the completion status of each section and of the questionnaire. The completion status can be **Answered**, **Partially Answered**, or **Not Answered**. The associated asset also shows a completion rate, so you can see progress without opening each questionnaire instance.

Overview tab

On the **Overview** tab, you can view basic information about the questionnaire template asset.

The following table describes the fields of the **Overview** tab:

Field	Description
Description	Functional definition of the questionnaire template. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the questionnaire template.
Type	Category of assessment for which you want to use the questionnaire. You can choose from a predefined list. An administrator can customize the values in Metadata Command Center. For more information about asset customization, see Administrator in the Metadata Command Center documentation.
Associations	Assets with which this questionnaire template is associated.
Stakeholders	Users who manage the questionnaire template. These stakeholders can add, update, or remove sections and questions.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Questions tab

On the **Questions** tab, you can view and manage the sections and questions in the questionnaire template. To add a question select **Add Question**.

The following table describes the fields in the **Add Question** dialog box:

Field	Description
Section	Section that contains the question. This field is required.
Question	Text of the question. This field is required.
Response Type	Format of the response. You can specify a single choice or multiple choice response. **Other** when the response type is single choice. Select **Other** as an answer type to let a stakeholder enter an answer that is not in the list.
Responses	Predefined responses for the question.

Associations tab

On the **Associations** tab, you can view the assets with which the questionnaire template is associated.

The following table describes the fields of the **Associations** tab:

Field	Description
Name	Name of the associated asset.
Type	Type of the associated asset.

Field	Description
Association Date	The date when the questionnaire was associated with the asset.
Association Path	Location of the associated asset. This value shows the hierarchy path when the asset has a parent, or the association path when it does not have a parent.

Relationships tab

On the **Relationships** tab, you can switch between grid view or graph view to view all the relationships that the questionnaire template asset has with other assets. You can relate a Questionnaire Template to assets such as a policy, regulation, geography, business area, legal entity, glossary, process, or project.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

You can perform the following activities on the **Relationships** tab:

- Click the **Filters** icon at the top of the tab to apply filters to narrow the list of relationships. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset, or view by relationship label. The direction of the asset can be inbound or outbound. A relationship created from the questionnaire template asset to the related asset is called an outbound relationship. A relationship created from the related asset to the questionnaire template asset is called an inbound relationship.
- Search for a related asset using the search box.
- Click the **Add** icon to add a new related asset, or the **Delete** icon to delete an existing related asset. You can delete only outbound direct related assets.

For more information about asset relationships, see the *Asset Discovery* help.

Stakeholders tab

View users that are designated as stakeholders for the Questionnaire Template asset. Stakeholders of the template are authorized users who manage the sections and questions, and can approve or reject change requests for the asset. These stakeholders are different from the stakeholders who respond to questions. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the fields of the Stakeholders tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.

You can also use filters to narrow your search for stakeholders.

Tickets tab

View change request tickets that users have created for the questionnaire template asset.

The following table describes the fields of the Tickets tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filter options.

For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.

Field	Description
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Regulation

You can use a Regulation asset type to document the important clauses of a major legislation. A regulation is a key driver of internal policies that direct how an organization conducts its business.

Use the Regulation asset to connect to the Policy and the Geography assets and explain the effects on the organization operations.

For example, if your organization is in the healthcare industry, you can create assets that represent the various healthcare regulations in the operating countries.

You can rate a Regulation asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a Regulation asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a Regulation asset that you can view on the **Overview** tab:

Field	Description
Name	Unique name of the asset.
Parent	Another regulation under which the open regulation hierarchically fits.
Description	Definition of the asset. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the regulation.
Long Name	Long form name for the regulation to make it easily identifiable.
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Relationships tab

View all the relationships that the Regulation asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the Regulation asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the Regulation asset to a related asset. An inbound relationship goes from a related asset to the Regulation asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.

Field	Description
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.

Field	Description
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Risk Template

A Risk Template asset documents a potential risk in an enterprise initiative. You can associate the risk with another asset, and associate one or more mitigation plans with the risk to address it.

Example

Your organization reviews a supply chain AI use case before you approve it for production. You create a Risk Template asset to document the risk that a supplier's personal information is exposed in the training data. You associate the risk with the AI use case asset, and you associate a mitigation plan to address that risk.

Overview tab

On the **Overview** tab, you can view basic information about the **Risk Template** asset.

The following table describes the fields of the **Overview** tab:

Field	Description
Description	Functional definition of the risk template.
Reference ID	Unique identifier for the risk template.

Field	Description
Risk Category	Category of the risk that you can group and find risks of the same kind. An administrator can customize the values in Metadata Command Center. For more information about how an administrator customizes the category types, see the *Asset Customization* topic in *Administrator* help for Metadata Command Center.
Risk Severity	The severity of the risk. The values are **Low**, **Medium**, **High**, and **Unacceptable**.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies inMetadata Command Center.
Stakeholders	Users who manage the risk template.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.

Associations tab

On the **Associations** tab, you can view the assets with which this Risk Template asset is associated. The following table describes the fields of the **Associations** tab

Field	Description
Name	Name of the associated asset.
Type	Type of the associated asset.
Association Date	Date when the risk template was associated with the asset.
Association Path	Location of the associated asset. This value shows the hierarchy path when the asset has a parent, or the association path when it does not have a parent.

Relationships tab

On the Relationships tab, you can switch between grid view or graph view to view all the relationships that the Risk Template asset has with other assets. Create relationships with other assets that you use together to make business or governance decisions.

The following table describes the fields that appear when you switch to the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.

Field	Description
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

You can perform the following activities on the **Relationships** tab:

- Click the **Filters** icon at the top of the tab to apply filters to narrow the list of relationships. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset, or view by relationship label. The direction of the asset can be inbound or outbound. A relationship created from the Risk Template asset to the related asset is called an outbound relationship. A relationship created from the related asset to the Risk Template asset is called an inbound relationship.
- Search for a related asset using the search box.
- Click the **Add** icon to add a new related asset, or the **Delete** icon to delete an existing related asset. You can delete only outbound direct related assets.

For more information about asset relationships, see the *Relationships* topic in the *Asset Discovery* help.

Stakeholders tab

View users that are designated as stakeholders for the Risk Template asset. Stakeholders of the template manage the risk. These stakeholders are different from the stakeholders assigned to the risk on an AI use case. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the fields of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. This field doesn't appear for user groups.
User Name	User name of the user.
Stakeholder Source	How the user became a stakeholder of the asset. For example, **Assigned** means the user was added as a stakeholder of this asset.

Tickets tab

View change request tickets that users have created for the Risk Template asset.

The following table describes the fields of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filter options. For more information about tickets, see the *Workflows and tickets* topic in the *Asset Management* help.

History tab

View changes that users have made to the risk template. The **History** tab provides an audit log that you can use for compliance requirements. The following table describes the fields of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.

Field	Description
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

System

A System asset represents a recognizable location or application that might contain multiple data sets. In a System asset, the system name is often more business-friendly than the technical names used for technical assets. Business users who create and manage the data can use the system name to identify the asset.

For example, you can create an 'HR' System asset in Data Governance and Catalog to provide business context to a database that stores data created by the human resource team in your organization.

You can rate a System asset to indicate your assessment of its quality, and you can comment on the asset. Ratings and comments help different users collaborate on the asset and make collective decisions about using it.

For more information about collaborating on an asset, see the *Asset Management* help.

Overview tab

View the properties of a System asset including its system and custom attributes.

System attributes are predefined properties of an asset. Custom attributes are properties that your administrator configures in Metadata Command Center. Stakeholders use custom attributes to store specific information about assets.

The following table describes the properties of a System asset that you can view on the **Overview** tab:

Field	Description
Parent	Another system under which the open system hierarchically fits.
Description	Description of the system. The size of the field can't exceed 1 MB.
Attributes	System and custom attributes of the asset.
Reference ID	Unique reference identifier for the asset.
System Type	Type of the system that you can choose from a predefined list.
System Purpose	Indicates the purpose of the system that best describes its function. Choose from a list of predefined values.
Long Name	Name of the system that makes it identifiable in a business context.
Asset ID	Reference ID of the asset.

Field	Description
Stakeholders	Users responsible for the asset or interested in the asset.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Data Quality	Data quality scores for the asset from a data quality tool.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.
Catalog Sources	The catalog sources that you associate with the open system.

Hierarchy tab

See all the assets in the hierarchy of the open asset. This includes the parent and child assets of the asset, along with the siblings of the child assets.

The open asset is highlighted. Click the expand icon to view the upstream and downstream assets of the open asset. Click an asset to open the asset on a new page.

The following table describes the properties of the assets on the **Hierarchy** tab:

Field	Description
Name	Name of the parent asset or the child asset.
Type	Type of the parent asset or the child asset
Description	Description of the parent asset or the child asset.

Lineage tab

View the data lineage of the system. A lineage graphically displays the inflow of data from other systems into the asset and the outflow of data from the asset to other systems.

For more information about how to view data lineage on this tab, see the *Asset Discovery* help.

Relationships tab

View all the relationships that the System asset has with other assets. You can switch between grid view or graph view. Stakeholders create relationships between the System asset and other assets when the assets support the same business or governance decisions.

The following table describes the fields that appear in the grid view on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

On the **Relationships** tab, you can perform the following activities:

- To apply filters to narrow the list of relationships, click the **Filters** icon. You can apply filters to view related assets of a particular type, origin, or lifecycle stage. You can also view assets that are directly or indirectly connected to the asset or view by relationship label.
  A relationship can be inbound or outbound. An outbound relationship goes from the System asset to a related asset. An inbound relationship goes from a related asset to the System asset.
- To search for a related asset, use the find bar.
- To create a relationship with another asset, click the **Add** icon. To delete a relationship, click the **Delete** icon.

  Note: You can delete only relationships that are direct and outbound.

For more information about asset relationships, see the *Asset Discovery* help.

Data Quality tab

View individual data quality scores of the technical assets that are linked to the system.

The **Dimensions Latest Scores** section shows the data quality score of the system for each data quality dimension. The **Rules Against Target** section shows the data quality score of the system against the defined target, which is the minimum acceptable data quality value for the asset to be considered "Good".

The **Rule Occurrences** panel lists all instances of data quality rules that are associated with the asset. The following table describes the properties of the **Rule Occurrences** panel:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.

Field	Description
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

Stakeholders tab

View users that have been designated as stakeholders for the asset. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. If your role has the required permissions, you can add or remove stakeholders on this tab.

The following table describes the properties of the **Stakeholders** tab:

Field	Description
Name	Name of the user or user group.
Role	Role of the user or user group in the organization.
Email	Email address of the user. **Note:** This field does not appear for user groups.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.

You can also use filters to narrow your search for stakeholders.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:

Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.

Field	Description
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

CHAPTER 2

Technical asset details

Technical assets are representations of data elements, technical data sets, and data containers that Metadata Command Center extracts from a source system. In Data Governance and Catalog, you can view details of technical assets, such as profiling statistics, glossary associations, data classifications, data quality scores and more.

The technical assets that you see in Data Governance and Catalog depend on the configurations that your organization administrator applies in Metadata Command Center. These configurations include the metadata extraction settings for the catalog sources, the capabilities that are enabled, the profiling filters that are applied, the job schedules that are defined, and other factors. For more information about catalog source configurations, see *Administration* in the Metadata Command Center help.

The following list explains the various categories of technical assets that appear in Data Governance and Catalog:

- Data elements. Data elements are the smallest unit of data in a source system. Columns, files, fields are examples of data elements.
- Technical data sets. Technical data sets are collections of data elements. For example, a table is a technical data set as it is a collection of columns.
- Catalog sources. Catalog sources are objects that represent the source system from which you extract metadata. You can create catalog sources in Metadata Command Center to extract metadata from source systems like Amazon S3 and Oracle.

View technical assets

In Data Governance and Catalog, you can view technical asset pages for data elements, technical data sets and catalog sources.


The assets that you can view in Data Governance and Catalog depend on the permissions that your organization administrator assigns to you through access policies in Metadata Command Center. For information about how administrators manage access to assets, see the *Asset Management* help.

Note: When your organization administrator deletes or purges a catalog source in Metadata Command Center or deletes the data from the source system, the following conditions apply:

- If an existing catalog source is deleted in Metadata Command Center, the technical assets for the catalog source are removed completely from Data Governance and Catalog. If an existing catalog source is purged in Metadata Command Center, the catalog source appears in the browse and search results in Data Governance and Catalog, but any enrichment made to the assets is lost.

- In Metadata Command Center, you can choose whether you want to retain or delete assets in Data Governance and Catalog when the corresponding objects are deleted from the source. If your administrator has chosen to delete objects that are deleted from the source, then the metadata along with the enrichments and relationships to the deleted objects are permanently deleted from the catalog. If your administrator has chosen to retain the objects that are deleted from the source, then Data Governance and Catalog retains the objects that were previously extracted. All enrichments and relationships to the objects are also retained. The objects that are retained in the catalog but deleted from the source appear as unresolved objects inData Governance and Catalog. For more information about configuring the metadata change option while configuring the catalog source, see the corresponding catalog source help in Metadata Command Center.

The following image shows the technical asset page for a sample table in an Oracle catalog source:

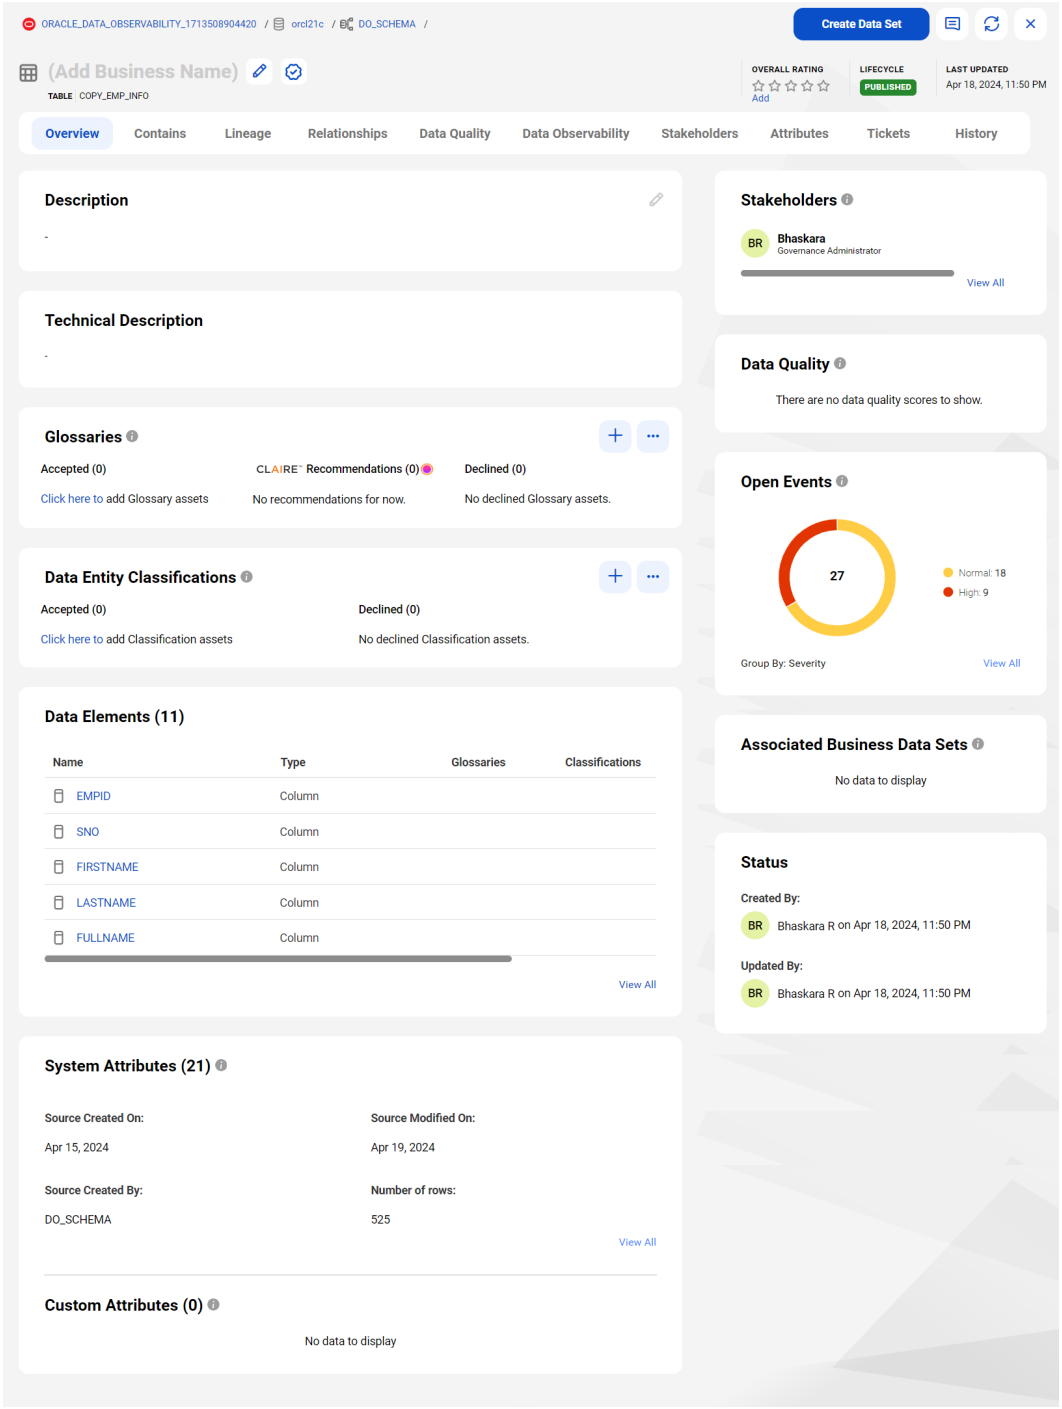

The following table describes the header properties of the technical asset page:

Field	Description
Hierarchy	The top of the page displays the hierarchical path of the technical asset.
Name	Name of the technical asset. The name can be one of the following types: - Technical name of the asset that Metadata Command Center extracts from the source system. For more information about configuring a catalog source to extract metadata from source systems, see the *Catalog Source Configuration* help in Metadata Command Center. - Readable business name that a user has manually associated with the technical asset or is automatically assigned to the technical asset. For more information about glossaries for technical assets, see "Glossary association" on page 133.
Overall Rating	Rate a technical asset to indicate your assessment of the quality of the asset. As a stakeholder, you can endorse a technical asset as trusted and reliable by certifying the asset and also decertify the technical asset if it is no longer trusted and valid. You can add your comments to the asset and collaborate with other users to make collective decisions on using the data. For more information about collaborating on an asset, see the *Asset Management* help.
Lifecycle	Stage of the asset in the production lifecycle. If the administrator has configured a workflow for creating or updating assets, the **Lifecycle** value displays the current stage of the asset in the workflow.
Last Updated	Date on which the asset was last updated.

Overview tab

View the basic information about the technical asset. Depending on the type of technical asset that you are viewing, the following table describes the fields that appear on the **Overview** tab:

Field	Description
Description	This field appears only for technical data sets and data elements. Description of the technical asset. The size of the field should not exceed 1 MB. The description can be one of the following types: - Description that is assigned to a technical asset either by its association with an existing glossary business term or by entering a new description. For more information about assigning a business name and description to a technical asset, see the *Asset Management* help. - Description of an associated Glossary asset that is automatically assigned. For more information about configuring automatic association of technical assets with Glossary assets, see the *Asset Management* help.
Technical Description	Technical description of the asset that Metadata Command Center extracts from the source system. This field appears only for technical data sets and data elements.

Field	Description
Glossaries	View glossaries for the technical assets. Accept or decline glossaries that the CLAIRE engine recommends, or associate a glossary asset manually. You can hover over a glossary to view the confidence score based on which the glossary asset was recommended, accepted or rejected. **Note:** If a glossary asset was manually associated with the technical asset, the system doesn't display a confidence score when you hover over the glossary. This field appears only for technical data sets and data elements. For more information, see "Glossary association" on page 133.
Data Element Classifications	View data element classifications for the technical assets. Accept or decline data element classifications that the data classification rule detects, or associate a data element classification manually. For more information about data classifications, see "Data classifications" on page 133. This field appears only for technical data elements *only* if the Data Classification capability is enabled and configured in Metadata Command Center for the catalog source.
Data Entity Classifications	View data entity classifications for the technical assets. Accept or decline data entity classifications that the data entity rule detects, or associate a data entity classification manually. For more information about data classifications, see "Data classifications" on page 133. . This field appears only for technical data sets *only* if the Data Classification capability is enabled and configured in Metadata Command Center for the catalog source.
Document Classifications	View document classifications for the technical assets. Accept or decline document classifications that the document classification capability detects, or manually associate a document classification with the asset. For more information about curating document classifications for technical assets, see the *Asset Management* help. This field appears only for unstructured data assets such as PDFs, text files, and Microsoft Word files.
System Attributes	The system properties of the technical asset.
Custom Attributes	The user configured custom attributes of the technical asset. To view all the existing custom attributes, click **View All** to open the **Custom Attributes** sub-tab on the **Attributes** tab. You can also modify values of the custom attributes on the **Overview** tab or the **Attributes** tab.
Profiling statistics	To know more about the types of profiling statistics that you can view, see "Data profiling statistics" on page 128. This field appears for technical data elements *only* if the Data Profiling capability is enabled and configured in Metadata Command Center for the catalog source.
Data Elements	The child assets of a data set. This section displays the data elements, such as columns, that constitute the data set. You can click a data element to see the details on a new technical asset page. This field appears only for technical data sets.

Field	Description
Data Quality Score	Aggregated data quality scores for the technical asset. This field appears only for technical data sets and data elements. The percentage value displays the overall score for the data elements that comprise the asset. The **Rules Against Target** section display the aggregate quality measurement of the data sets and data elements against the defined threshold and target values. Click **View rules against target breakdown** to see the data quality rules that specify the threshold and target values. For more information about data quality scores for technical assets, see "Data quality scores" on page 130.
Data Marketplace	Details of an asset's presence in Data Marketplace. If an asset is added to a data collection in Data Marketplace, you can view the details of the data collection. You can click **Create Data Collection** to create a data collection with the asset in Data Marketplace. For more information, see the following topics: - To connect Data Governance and Catalog to Data Marketplace, see the *Set Up Data Marketplace* help in Data Marketplace. - To add an asset to a data collection, see the *Working With Data Collections* help in Data Marketplace.
Open Events	Open events for the data observability anomalies identified for the technical asset. For more information about data observability events for technical assets, see "Data observability events" on page 132.
Stakeholders	Users responsible for the asset or interested in the asset.
Assets with Recommendations	Pending and auto-accepted enrichment recommendations for assets in a catalog source. This field appears only for catalog sources. You can view the recommendations for the assets in the catalog source only if you have the **Read** and **Edit** permissions on the catalog source through access policies in Metadata Command Center. To navigate to the **Curation Center** page and act on all your pending recommendations, click **Review Pending**.
Asset Groups	One or more asset groups assigned to this asset. Use asset groups to give users access to a set of assets in the organization. You can assign asset groups to an asset if you are the stakeholder of the asset or if your organization administrator has granted you the **Manage Access** permission on the asset through access policies in Metadata Command Center.
Associated Business Data Sets	The business data sets that are associated with the technical data set. This field appears only for technical data sets and data elements. For information about creating data sets from technical assets, see the *Asset Management* help.
Reference Data	Code values and attributes from Reference 360 linked to the data element. This field appears only for data elements, and you can view the **Reference Data** tab only if you have the **View Reference Data** permission. For more information about view or associating reference data with data elements, see "Reference data for data elements" on page 132.

Field	Description
Created By	User that created the asset and the date on which it was created.
Updated By	User that last updated the asset and the date on which it was updated.
Linked Lineage	The links that are generated for this catalog source as a result of linking it with another catalog source in Metadata Command Center. For more information about linking catalog sources to generate lineage, see the *Administration* help in Metadata Command Center. You can view the links for a catalog source only if you are a stakeholder for the catalog source. Click this link to view all the links generated for this catalog source and to curate those links to view complete lineage. For more information about curating the catalog source links, see the *Asset Management* help. This panel appears only for catalog sources.

Note: The **Overview** tab for the IDERA ER/Studio Data Architect catalog source displays Primary key (PK) and Foreign key (FK) columns.

Lineage tab

View the data lineage of the technical asset. A lineage graphically displays the inflow of data from other systems into the asset and the outflow of data from the asset to other systems.

For more information about how to view data lineage on this page, see the *Asset Discovery* help.

Contains tab

This tab is displayed for technical data sets. On this tab, the **Data Elements** grid lists the data elements that constitute the data set and the data element properties. You can expand the assets on the grid to view the complete hierarchy of all child assets. You can search for top-level assets by their name, description, technical description, and business name. You can also filter the grid by asset type and sort assets based on name, business name, or position.

Click **Add** to add data elements to the data set or create a manual data element within the data set. You can add up to 500 data elements to a data set, for which Data Governance and Catalog triggers a job to track its progress. When you add up to 50 data elements, you add data elements through a faster job. You can track the progress of the jobs on the **Job Monitoring** page. If you want to remove a data element from the data set, hover over it and click **Delete**. For more information about the monitoring jobs, see *Monitor jobs* in the *Asset Discovery* help.

Note: If a job to modify the data elements in the data set is in progress, wait for the job to complete before you add or delete data elements.

The following table describes the properties of data elements that you can view on the **Contains** tab:

Field	Description
Name	Name of the constituent data element. Shows if the constituent data element is part of a Primary or Secondary key.
Business Name	Business name of the data element.
Type	Type of the constituent data element.

Field	Description
Glossaries	Glossary assets that are associated with the constituent data elements. You can use the **Curate** option to associate a data element with glossary assets. You can hover over a glossary to view the confidence score based on which the glossary asset was recommended, accepted or rejected. **Note:** If a glossary asset was manually associated with the technical asset, the system doesn't display a confidence score when you hover over the glossary. For more information, see "Glossary association" on page 133.
Classifications	Data classifications associated with the constituent data elements. You can use the **Curate** option to associate a data element with data classifications. For more information about curating data classifications, see the *Asset Management* help.
CLAIRE Recommendations	Automatically recommended glossary assets for the data element.
Profiling statistics	Null, distinct, and non-distinct values for the data element. For more information, see "Data profiling statistics" on page 128.
Source Data Type	Source data type of the data element.
Inferred Data Type	The data type that was inferred for the data element.
Description	Description of the constituent data element as it appears in the source system.
Technical Description	Technical description of the constituent data element as it appears in the source system.
Sensitivity	Sensitivity level of the constituent data element.
Hierarchy	Hierarchy of the constituent data element.
Custom Attributes	Custom attributes of the constituent data element.

Relationships tab

On this tab, you can switch between grid view or graph view to view all the relationships that the technical asset has with other assets. Create relationships with other assets if they can be used together to make business or governance decisions. For more information about creating relationships between assets, see the *Asset Discovery* help.

The following table describes the fields that appear on the **Relationships** tab:

Field	Description
Name	Name of the related asset.
Type	Type of the related asset.

Field	Description
How It Is Related	Relationship between the other assets and the asset that you open. Hover the pointer over the arrows to see if the relationship is direct, indirect, inbound, or outbound. The term **this asset** refers to the asset that is open.
Hierarchy	Hierarchical path of the asset. **Note:** This column is hidden by default. To display the column, right-click the column header and select **Hierarchy**.

The following table describes the filters you can apply to the list of relationships:

Filter	Description
Asset Type	Select one or more values to view related assets of specific asset types.
Defined Group	Specify whether you want to view related business or technical assets. You can select one of the following values: - Governance: View assets for which the relationship is created in Data Governance and Catalog to add governance context to the technical asset. - Source System: View assets that are organically related to the technical asset in the catalog source system.
Direction	View related assets of a particular origin. You can select the following values: - Outbound: The relationship is created from the AI model to the related asset. - Inbound: The relationship is created from the related asset to the AI model.
Lifecycle	The lifecycle status of the published asset.
Relationship Type	View assets of a particular direction. You can select the following values: - Direct: View assets that are directly connected to the AI model. - Indirect: View assets that are connected to other assets, which are connected to the AI model that you have opened.

Hierarchy tab

The **Hierarchy** tab appears for technical data containers like schemas and databases. You can view the hierarchy of the technical asset in the source system. This tab displays the names of the technical assets in the hierarchy, the type of the technical asset, and the description of the asset.

On the **Hierarchy** tab, the open asset is highlighted. The page displays the count of downstream assets for the currently open asset. Click the expand icon to view the upstream and downstream assets of the technical asset.

Note: In Metadata Command Center, if you modify the properties of the **Extract Group Elements from Hierarchical Files** field and run the catalog source job again, the asset page doesn't display the hierarchical elements in their proper hierarchy groups. To display the assets in their correct hierarchy after you modify the properties of the **Extract Group Elements from Hierarchical Files** field, purge the catalog source before running the job again.

Stakeholders tab

The **Stakeholders** tab of a technical asset displays the stakeholder assignment. Stakeholders are authorized users who are responsible for the asset, and can approve or reject change requests for the asset. To view the

stakeholders for a technical asset, the organization administrator must provide your user role the **Read** permission on the following Administrator service asset types:

- Folder
- Group
- Organization
- Privilege
- Role
- User

For more information about assigning stakeholders for technical assets, see the *Asset Management*help.

The following table describes the fields that appear on the **Stakeholders** tab of technical assets:

Field	Description
Name	Name of the stakeholder.
Role	The role that is assigned to the stakeholder.
User Origin	The origin of the users. For example, when a user logs in using SSO, the value for this field is displayed as SAML.
Email	The email ID of the user.

Tickets tab

If your administrator configures a workflow for the asset in Metadata Command Center, you can view the number of open and overdue tickets for the asset. Open tickets are tickets for the asset that are still in progress. Overdue tickets are tickets past their due date that require a stakeholder to intervene. You can also view the lifecycle of the asset to identify its current stage in the workflow.

The following table describes the properties of the **Tickets** tab:

Field	Description
Name	Name of the ticket.
Description	Description of the ticket.
Type	Type of ticket.
Status	Status of the change ticket.
Current Task Owner	Stakeholders assigned to the tasks in the ticket.

You can filter the list of tickets by selecting available filters options. For more information about workflow and tickets, see the *Asset Management* help.

History tab

View changes that users have made to the asset. The **History** tab provides an audit log that you can use for compliance requirements.

The following table describes the properties of the **History** tab:


Field	Description
Date	Created and last updated dates of the asset.
Event Type	Type of event that is performed on the asset. Event Types include the following: - Asset. Displays changes in the name, description, certification, or the reference ID of the asset. - Relationship. Displays additions, deletions, and the updates of the relationships between the assets. - Stakeholder. Displays additions and deletions of stakeholders to the asset.
Action	Actions performed on the asset: Actions on assets include the following: - Create. Displayed if the asset is created. - Updated. Displayed if the asset is updated. - Deleted. Displayed if the asset is deleted.
Current Attributes	Recently changed attributes of the asset.
Previous Attributes	Earlier attributes of the asset.
Changed By	User who performed any action on the asset.
Asset Name	Name of the asset.
Asset Path	Origin path of the asset.
Asset Type	Type of the asset.
From Asset Type	Source asset type for which the change is applicable. This is applicable when the event type is Relationship.
To Asset Type	Target asset type for which the change is applicable. This is applicable when the event type is Relationship.

Attributes tab

View the system attributes and custom attributes for technical assets. The system attributes are the predefined properties of the asset. The custom attributes are user-configured attributes of the asset that allow you to specify which information relevant to your business to store.

On the **Custom Attributes** sub-tab, you can edit the values of custom attributes.

The following image shows the **Attributes** tab on a technical asset page:

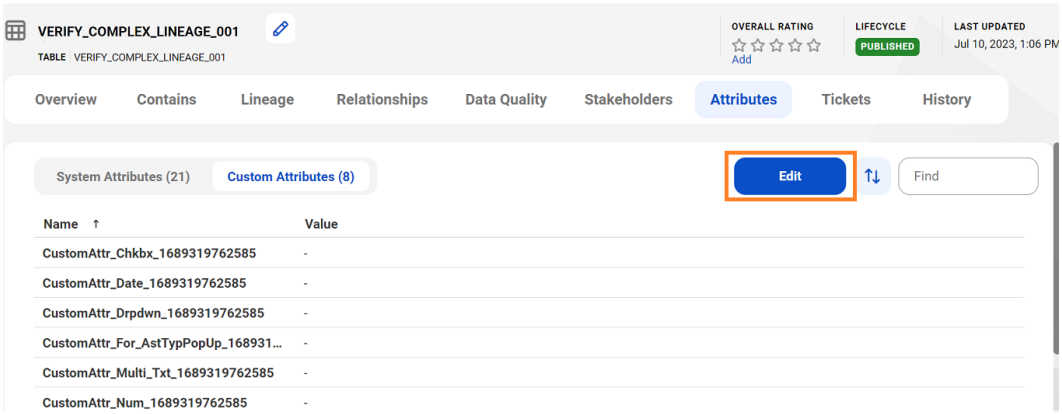


Enforcement tab

View whether Data Governance and Catalog applies data access policies to the asset in your source system through pushdown enforcement.

The following table describes the fields that appear on the **Enforcement** tab:

Field	Description
User Group	User group that you granted or denied access to the asset.
Access	Type of access the user group has to the asset. The types of access are **Grant** and **Deny**.
Permissions	Permissions that the user group has for the asset. Permissions are **Read**, **Write**, and **Delete**.
Enforcement Status	Whether Data Governance and Catalog applies the data access policy to the asset. The status is either **ENFORCED**, **PARTIALLY ENFORCED**, or **NOT ENFORCED**.
Policy	Data access policy that Data Governance and Catalog potentially applies to the asset.
Rule	Rule within the data access policy that Data Governance and Catalog applies to the asset.
Updated On	Time stamp of the most recent enforcement.
Job Monitor	Click **Agent Job / Sync Job** to monitor the process to push down the policy initiated by using the data access sync job type on the **Monitor** page in Metadata Command Center. For more information about data access sync jobs, see the *Administration* help in Metadata Command Center.

The following image shows the **Enforcement** tab of an asset:

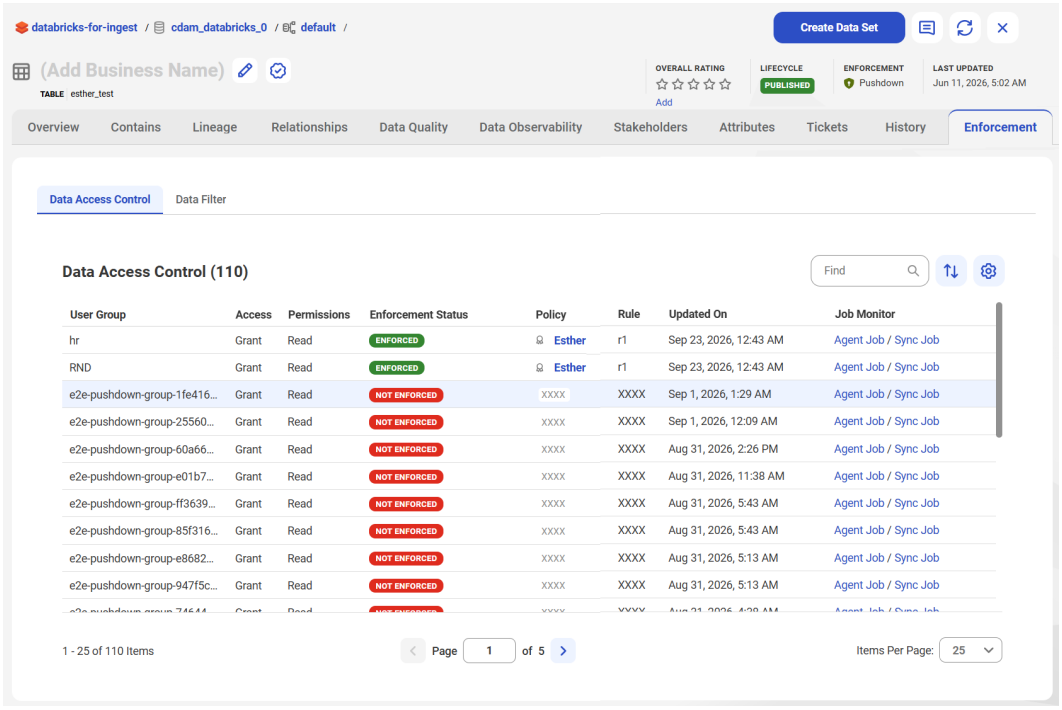


Data profiling statistics

When you enable the data profiling task for a catalog source in Metadata Command Center, the system runs a profile to evaluate the quality of the metadata extracted from the source system. The profile extracts various types of statistics to discover content and structure, such as value distribution, patterns, and data types. The profiling statistics appear in Data Governance and Catalog when you open the technical assets.

You can view profiling statistics and sensitive data if the organization administrator has assigned access policies to you in Metadata Command Center with **Read** permission on the **Profiling** and **Data** attribute groups for the technical assets. For more information about how administrators manage access to assets and attributes, see the *Asset Management* help.

The scope of profiling statistics that Data Governance and Catalog displays depends on the data profiling configuration parameters that you set while configuring a catalog source in Metadata Command Center. If you do not want to run the profile on all the metadata that is extracted from the source system, you can limit the scope of profiling to a subset of metadata by configuring filters for data profiling in Metadata Command Center. For example, you can choose to run data profiling on only three schemas out of the six schemas that the system is configured to extract.

The following sample image shows the data profiling statistics that appear on a column asset page in Data Governance and Catalog after you configure and run the data profiling task for a catalog source in Metadata Command Center:

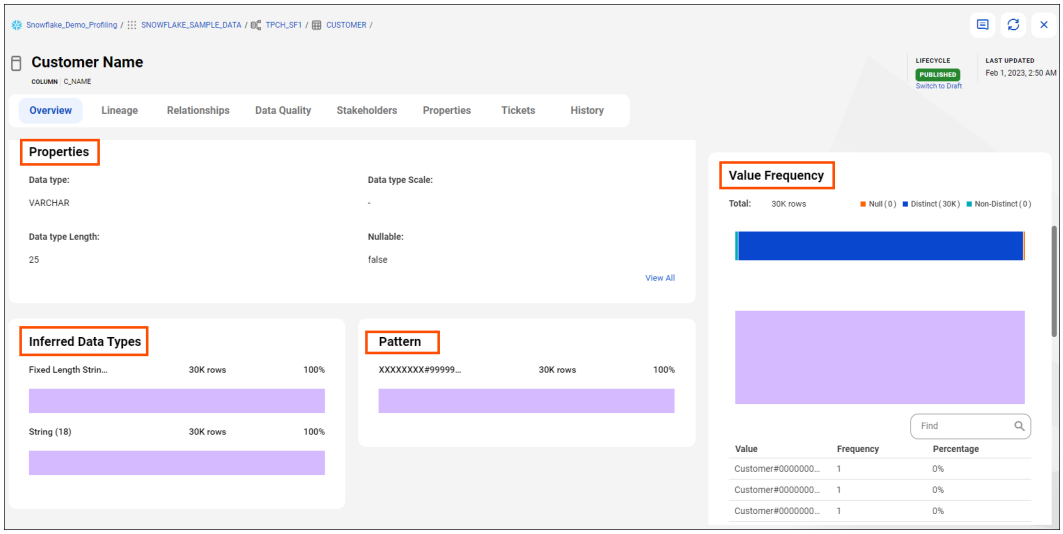

Properties

This section displays the key data profiling statistics such as the data type of the data element, data type length and scale, and nullable value that indicates if the column can be null or not. You can view more properties of the column on the **Properties** tab.

Inferred data types

This section displays the data types inferred for each data element after you run a profile. It also displays the count of rows that were sampled, along with the percentage of rows containing the data type. Fixed Length String and String are some data types inferred for the column in the above example.

Note: If the precision or scale of a number type value in a column exceeds 28 digits, the precision and scale of the inferred pattern might appear truncated.

Patterns

This section displays the inferred patterns for data elements after you run a profile. Column patterns can include special characters, such as ~, [,], =, -, ?, =, {, *, -, >, <, and $.

Note: If the precision or scale of a number type value in a column exceeds 28 digits, the precision and scale of the inferred data type might appear truncated.

The following table describes the pattern characters and what they represent:

Character	Description
"B" or "b" or " "	Represents a blank space.
"C" or "c"	Represents any character.
"L" or "l"	Represents any lowercase alphabetic character.
{T} or {t}	Represents a tab.
{U} or {u}	Represents any uppercase alphabetic character.

Character	Description
9	Represents any numeric character. Data Governance and Catalog displays up to three characters separately in the "9" format. The tool displays more than three characters as a value within parentheses. For example, the format "9(8)" represents a numeric value with eight digits.
"X" or "x"	Represents any alphabet character. Data Governance and Catalog displays up to three characters separately in the "X" format. The tool displays more than three characters as a value within parentheses. For example, the format "X(6)" might represent the value "Boston." **Note:** The pattern character X is not case-sensitive and might represent uppercase characters or lowercase characters from the source data.
"P" or "p"	Represents "(", the opening parenthesis.
"Q" or "q"	Represents ")", the closing parenthesis.

Value frequency

This section displays the count of Null, Distinct, and Non-distinct values for the data element or the rule after the profile is run. It also displays the frequent values along with the frequency and frequency percentage of each value. Data Governance and Catalog displays the top 20 value frequencies.

Data quality scores

The **Data Quality** tab for a technical asset displays the individual and aggregate data quality scores for the data elements that comprise the technical asset.

The following table describes the scores in the **Dimensions Latest Scores** panel on the **Data Quality** tab of a technical asset:

Dimension	Explanation
Validity	Aggregate score of the data elements with respect to valid and meaningful data.
Accuracy	Aggregate score of the data elements with respect to accurate and useful data.
Completeness	Aggregate score of the data elements with respect to data that is complete and usable.
Timeliness	Aggregate score of the data elements with respect to data that is sufficiently recent for use.
Consistency	Aggregate score of the data elements with respect to data that is consistently and regularly entered.

The following table describes the scores in the **Rules Against Target** panel on the **Data Quality** tab of a technical asset:

Rules	Explanation
Good	Aggregate scores that are higher than the target value across each dimension for the data elements.
Acceptable	Aggregate scores that are higher than the threshold value but lower than the target value across each dimension for the data elements.
Not Acceptable	Aggregate scores that do not meet the data quality threshold across each dimension for the data elements.

The **Total Rule Occurrence** table shows the individual occurrences of the data quality rule that is run on the data elements. The aggregate scores on the **Dimensions Latest Scores** and **Rules Against Target** panels are a composite of the individual occurrences in the **Total Rule Occurrence** table. The following table describes the fields that appear in the **Total Rule Occurrence** table on the **Data Quality** tab of a technical asset:

Field	Description
Name	Name of the rule occurrence. If the rule occurrence is created from an automated rule template, the term `Auto-` is prefixed to the name of the rule occurrence.
Dimension	Data quality dimension for which the data quality rule is run.
Latest Score	Data quality score from the latest rule run.
Date	Date of the latest rule run.
Total Rows	Total number of rows on which the data quality rule is run.
Failed Rows	Number of failed rows as determined by the data quality rule run.
Primary Data Element	Data element on which the data quality rule is run. This data element is the input port for the rule in the integrated data quality system. The data quality score is always generated for the primary data element.
Primary Data Element Hierarchy	The hierarchy of the data element on which the data quality rule is run.
Secondary Data Element	Secondary input port for the data quality rule that is run on the **Primary Data Element**.
Description	Description of the rule occurrence.
Related Rule Template	Data quality rule template that defines the rule that is run on the data element.

For more information about configuring data quality rules for data elements and interpreting data quality scores, see the *Data Quality for Assets* help.

Data observability events

If you organization administrator has configured the **Data Observability** capability for a catalog source in Metadata Command Center, you analyze deviations from usual trends in your source system data through the anomaly events generated in Data Governance and Catalog .

The **Data Observability** tab for a technical asset in Data Governance and Catalog displays the open events for the anomalies identified for technical data sets, data elements, and catalog sources.

The **Open Events by Metric** and **Open Events by Severity** sections represent open events for the data observability anomalies identified in your source data. The identified events are categorized by metrics and severity levels. The **Open Events** table shows all open events for the asset. To view the summary of an event, click the event to open an event page.

The following table describes the fields that appear in the **Open Events** section:

Field	Description
Name	Name of the event that data observability creates when it detects an anomaly in the source data.
Metric	Metric type against which the anomaly was identified and the event was created.
Asset	Source data within which the anomaly was identified. **Note:** The **Asset** field appears for data sets and catalog sources.
Severity	Severity level of the event that data observability identified.
Last Detected	Timestamp that indicates when the anomaly was identified during the catalog source job.
Status	Current state of the event.

Reference data for data elements

On the **Reference Data** tab, you can view and associate reference data from Reference 360 with data elements.

Note: If you have the **View Reference Data** privilege for the Data Governance and Catalog service in Administrator, you can associate the data element to a glossary that is associated with reference data or select new reference data from Reference 360. The curated reference data from Reference 360 enhances your assets and improves data accuracy.

The **Reference Data** tab shows the first 50 code values. To see the complete list of code values, navigate to Reference 360.

If multiple glossaries are associated with reference data, select which glossary to link to the data element. To select a different reference data that is more suitable for the data element, click **Switch Reference Dataset**. To remove an already associated reference data, click the **Remove associated reference data** icon. Additionally, you can also view the general properties of the reference data.

For more information about associating reference data with data elements, see the *Asset Management* help.

Glossary association

You can associate glossary terms with technical assets to provide user-friendly business names to technical assets.

A glossary is a collection of business-friendly terms that when associated with technical assets helps business users manage technical data using terminology that is familiar to them. This leads to consistency and better governance across your organization.

The **Glossary Association** capability for a catalog source in Metadata Command Center automatically associates glossary terms with technical assets or recommends glossary terms that you can curate in Data Governance and Catalog.

For more information about curating glossaries for technical assets, see the *Asset Management* help.

Data classifications

The **Data Classification** capability for the catalog source in Metadata Command Center helps identify and organize technical data into relevant categories based on the functional meaning of the data. Classifying data can help your organization manage risks, compliance, and data security.

For example, you organization administrator can create and run data classification rules in Metadata Command Center to identify and tag sensitive information such as credit card numbers or customer addresses contained in columns or tables in Data Governance and Catalog.

After your organization administrator creates and runs data classification rules for the catalog source in Metadata Command Center, you can curate data classifications for the extracted technical assets in Data Governance and Catalog. When you curate data classifications, you either accept the inferred data classifications to associate them to technical assets, or decline the inferred data classification associations. You can also manually associate technical assets with one or more data classification rules that you have created. For more information about curating data classifications for technical assets, see the *Asset Management* help.

Types of data classifications

Depending on the type of data that you want to identify and classify in your organization, there are various types of classifications that your organization administrator can create in your organization.

Data element classification

This is the smallest unit of data classification. It refers to the classification of columns, fields, structured and unstructured files.

Data element classification labels and categorizes information in data elements based on the metadata extracted from source systems and the facts collected as the result of data profiling.

For example, you can use data element classification to find sensitive information in assets, such as, credit card numbers, Social Security Numbers or the driver's license numbers. You can then take actions to secure access to sensitive data and set standards for data privacy in your organization.

Administrators can configure predefined and custom classifications for unstructured files in Metadata Command Center.

Data entity classification

A data entity is a collection of data elements and is derived based on an inclusion scope. For example, if "Full Name", "Gender", "Date of Birth", "Email", or "Phone #" are identified in one or more columns of a table, then that table is classified as a 'person' entity. You can use entity classifications to identify important characteristics of data and group them together as entities. This classification identifies data entities such as purchase order, invoice, customer, location, person, or address contained in a data set.

CLAIRE-generated data classification

This classification is powered by CLAIRE. When you select it, the system automatically generates data classifications for the data elements extracted from a source system. CLAIRE can identify, analyze, and classify the data contained in the data elements without any human input.

When you use rule-based data classifications, you choose from predefined or custom data classifications. When you use CLAIRE-generated data classifications, CLAIRE uses the nomenclature of technical data assets to generate classifications. To generate potential classification labels based on asset names, CLAIRE uses an embedded dictionary.

Generated data classification powered by CLAIRE has the following advantages:

- You can generate data classifications without creating data classification rules. You don't have to know how to create inclusion rules in Metadata Command Center.
- You can generate data classifications even if you don't know which of the existing predefined rule-based data classifications you need to select. CLAIRE automatically generates data classifications for the data elements.
- If you use generated data classification, you don't have to perform profiling. If you use rule-based classifications with Statistics attributes, you need to run data profiling.

For more information about working with generated data classifications, see the *Asset Management* help.

Document classification

This AI-powered classification lets you identify and classify unstructured data into meaningful categories that are specific to your organization. You can configure and run this capability on a catalog source to automatically classify PDFs and text files based on the content of the data.

Document classification has the following advantages:

- Search and discover unstructured data assets alongside existing structured data assets, creating a unified catalog for all your organizational data.
- Fuel your enterprise AI initiatives with well-categorized unstructured data.
- Easily identify sensitive information hidden in documents to meet regulatory compliance standards.

For example, a banking organization stores its loan agreements, mortgage agreements, and risk assessment reports in PDFs and text files in Amazon S3 buckets. After you scan and catalog these documents, you can apply document classification to automatically identify and classify the documents as *Loan Agreement*, *Mortgage Agreement*, and so on based on the structure and content of the documents.

Data sensitivity levels for assets

Sensitivity labels in Data Governance and Catalog help you classify and protect important data in your organization. This helps an organization understand the value of its data and evaluate whether the data is at risk. It also performs control measures to mitigate risks and helps the organization to comply with relevant industry-specific regulatory mandates.

While creating a data element or document classifications in Metadata Command Center, your organization administrator can select the sensitivity level to indicate whether an asset is sensitive or non-sensitive. For

more information on creating a data element classification, see the *Administration* help in Metadata Command Center.

In Data Governance and Catalog, you can view the sensitivity labels for the data elements that the classification is related to. You can search and find assets based on the sensitivity level by using appropriate search queries. For more information about search query examples, see the *Asset Discovery* help.

View sensitivity of a technical asset

To view the sensitivity of a technical asset in Data Governance and Catalog, the organization administrator must assign the following permission to you through access policies in Metadata Command Center:

- **Read** permission on technical assets for which you want to view the sensitivity.
- **Read** permission on the data classification assets.


By default, the sensitivity attribute has the following levels:

- **High**. Use for data that is sensitive for your organization. Typically, these can be confidential information, such as credit card details, customer emails and contact numbers, intellectual property, or financial records.
- **Medium**. Use for data that is moderately sensitive for your organization. Typically, these can be internally confidential information, such as employee IDs, technical information, or emails.
- **Low**. Use for data that is not sensitive for your organization. Typically, these can be public information, such as names, designations, qualifications, or public website content. The low sensitivity level is not specifically shown on the Data Governance and Catalog page.

Apart from the predefined sensitivity levels that are listed in this help, you might see other sensitivity levels that your organization administrator can customize exclusively for your organization in Metadata Command Center. For information about how your administrator can customize sensitivity levels, see the *Administration* help in Metadata Command Center.

You can view the sensitivity for data elements and unstructured data assets on various pages in Data Governance and Catalog. Sensitivity is assigned to unstructured data assests based on the sensitivity rules defined in data classifications in Metadata Command Center. For more information about rule-based sensitivity for document assets, see the *Administration* help in Metadata Command Center.

The following image displays the sensitivity of an asset on the asset page:

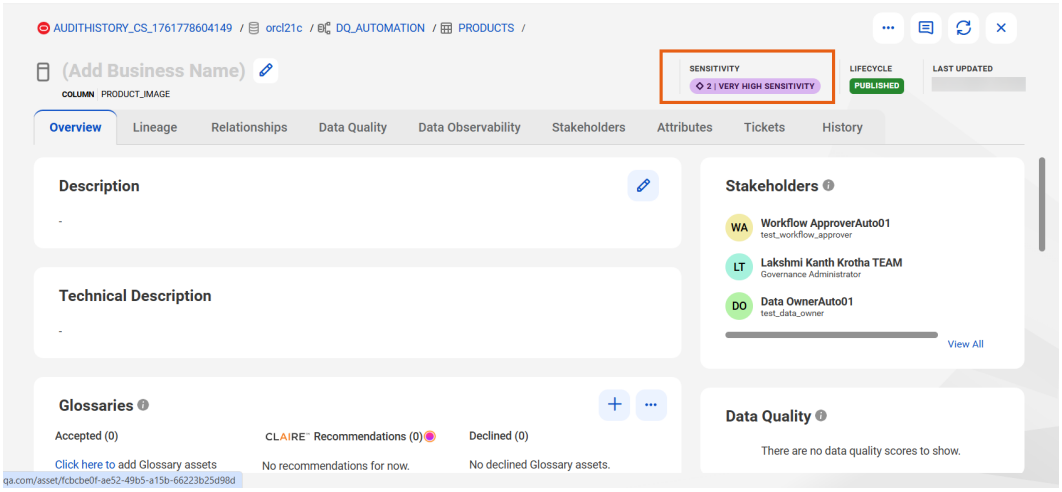

Data classification categories for assets

Classification categories put data element classifications into relevant groups. Your organization administrator can add multiple categories for a data element classification in Metadata Command Center. Adding categories to a data element classification helps you identify and curate assets for various business domains.

Data Governance and Catalog displays the classification category of data element classifications on various pages. On the data element classification page, the category appears as an attribute of the data element classification. The **Overview** tab of an asset also displays the categories that the data element classifications are associated with. For search-based widgets of the list type, you can select classification categories as a column to display on the widget.

You can search and find assets based on the asset's categories by using appropriate search queries. While searching for assets, you can apply classification categories as a filter to refine your search. For more information about widgets and search, see the *Asset Discovery* help.

The following image displays the **Classification Categories** panel on a data element classification page:

