Informatica® Cloud Data Governance and Catalog

October 2026

What's New

Informatica Cloud Data Governance and Catalog What's New
October 2026

© Copyright Informatica LLC 2021, 2026

Publication Date: 2026-10-31

Table of Contents

Preface. 4

Chapter 1: October 2026. 5

Changelog October 2026. 5

Important notices and upcoming changes. 7

New features and enhancements. 8

Changed behavior. 26

Chapter 2: July 2026 30

Changelog July 2026 30

Important notices. 31

New features and enhancements. 31

Changed behavior. 34

Chapter 3: April 2026. 36

Changelog April 2026. 36

Important notices. 37

New features and enhancements. 38

Changed behavior. 51

Documentation changes. 53

Chapter 4: November 2025. 54

Changelog November 2025. 54

Important notices. 55

New features and enhancements. 56

Changed behavior. 72

Preface

Read *What's New* to learn about the new features, enhancements, and behavior changes in Data Governance and Catalog.

CHAPTER 1

October 2026

The following topics provide information about new features, enhancements, and changes in the October 2026 release of Data Governance and Catalog.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 29, 2026	Added	"Enhancements to AI governance" on page 8
October 29, 2026	Added	"Use REST APIs to manage metadata access policies" on page 26
October 29, 2026	Added	"Changes to data quality rule occurrences" on page 26
October 29, 2026	Added	"Enhancements to notifications" on page 17
October 29, 2026	Added	"Changes to freshness anomaly generation" on page 28
October 29, 2026	Modified	"Changes to data quality rule occurrences" on page 26
October 29, 2026	Added	"Changes to data quality rule occurrences" on page 26
October 29, 2026	Added	"Preview valid rows of a data quality rule occurrence" on page 14
October 29, 2026	Added	"Use REST APIs to create and manage data profiles" on page 17
October 29, 2026	Modified	"Change in data element selection limit for data profiling" on page 28

Publication Date	Type of Change	Section Title
	Modified	"Enhancements to data lineage" on page 9
October 16, 2026	Added	"Changes to the Data Governance and Catalog help modules" on page 8
October 16, 2026	Added	"Changes to stakeholder management" on page 26
October 16, 2026	Added	"Changes to propagation jobs" on page 28
October 16, 2026	Modified	"Enhancements to stakeholder propagation for assets" on page 13
October 16, 2026	Modifed	"Enhancements to bulk import" on page 12
October 7, 2026	Modified	"Enhancements to stakeholder propagation for assets" on page 13
October 1, 2026	Modified	"Enhancements to bulk import" on page 12
October 1, 2026	Added	"Change in export behavior for rich text fields" on page 27
October 1, 2026	Added	"Changes to the CLAIRE Activity widget" on page 27
October 1, 2026	Added	"Enhancements to notifications" on page 17
October 1, 2026	Modified	"Enhancements to stakeholder propagation for assets" on page 13
October 1, 2026	Modified	"Changes to stakeholder management" on page 26
September 24, 2026	Modified	"Curation Center" on page 9
September 24, 2026	Modified	"Enhancements to data lineage" on page 9
September 24, 2026	Modified	"Customize the Create Asset page for business assets" on page 12
September 24, 2026	Added	"Include technical data elements in export" on page 28
September 24, 2026	Added	"Changes to stakeholder management" on page 26
September 24, 2026	Added	"Enhancements to stakeholder propagation for assets" on page 13

Publication Date	Type of Change	Section Title
September 24, 2026	Added	"Enhancements to bulk import" on page 12
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Data Governance and Catalog includes the following important notices and upcoming changes.

Preview initiated

Effective in the October 2026 release, periodic review of assets is available for preview when you configure workflow events in Metadata Command Center.

Note: Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Preview lifted

Effective in the October 2026 release, the Salesforce Marketing Cloud catalog source and its functionalities are production-ready.

Previously, this catalog source was only available in preview.

Deprecated support

Effective in the October 2026 release, the Swagger API catalog source that was available for preview is deprecated. Informatica intends to drop support for the catalog source in a future release.

You can use the new API Design catalog source to extract metadata from an OpenAPI specification document provided as a JSON file or a public URL.

Post-upgrade tasks

Run a full metadata extraction job

Transformation Details information isn't available for assets whose last full extraction occurred before the upgrade. To view transformation details for an asset, the asset must be included in a full metadata extraction job run after the upgrade. After you upgrade to the October 2026 release, run a full metadata extraction job for each catalog source to view transformation details in the lineage.

If you continue running only incremental metadata extraction jobs, you won't be able to view transformation details in the lineage for those assets.

Unassign and re-run SAP ERP catalog source jobs

If you created SAP ERP catalog sources and performed connection assignment with SAP Table assets prior to the October 2026 release, perform the following tasks after you upgrade:

1. Unassign the assigned connections.

2. Run the SAP ERP catalog source job.
3. Run catalog source jobs for all previously-assigned reference catalog sources.
4. Perform connection assignment.

Lineage between source and target might not appear as expected unless you perform these tasks post upgrade.

For information about how to unassign and assign connections, see *Connections* in Administration.

Changes to the Data Governance and Catalog help modules

The information in the *Understanding Business Assets* help and *Understanding Technical Assets* help is consolidated into a single help called *Asset Reference* in the Data Governance and Catalog help system.

The *Understanding Business Assets* help module has been retired and is no longer available in the online help and Doc Portal.

New features and enhancements

The October 2026 release of Data Governance and Catalog includes the following new features and enhancements.

Enhancements to AI governance

To help your organization manage AI technologies and the data used by them responsibly and effectively, Data Governance and Catalog introduces the following enhancements:

New asset types

The October release introduces the following types of assets to Data Governance and Catalog:

- **AI Use Case**. An AI Use Case asset represents an initiative that uses AI to solve a specific problem or produce measurable outcomes.
- **AI Agent**. An AI Agent asset represents an AI-powered autonomous entity that uses a model and a set of tools to make decisions and take actions toward a goal.
- **Questionnaire Template**. A Questionnaire Template asset represents a set of questions that gathers information for a governance assessment, such as an impact, risk, or intake review. You can associate the questionnaire template with an AI Use Case that you want to assess.
- **Risk Template**. A Risk Template asset helps you document details of a potential risk in an enterprise initiative. You can associate a risk template with an AI Use Case, and associate one or more mitigation plans with the risk to address it.
- **Mitigation Plan Template**. A Mitigation Plan Template asset helps you document the plan of action for addressing a risk, and track its progress.

You can create the assets individually in Data Governance and Catalog interface or use bulk import templates to create multiple assets at once.

On the **AI Inventory** and **Risk and Evaluation** tabs of the **Browse** page, you can discover the new assets. Additionally, the **AI Inventory** tab contains the AI Model assets and AI System assets.

In Metadata Command Center, your organization administrator can customize these assets and enforce workflows for creating and updating them, as well as for associating them with an AI Use Case.

Orchestration flow

This release introduces a new lineage type that is unique to AI Agent assets, orchestration flow. On the **Lineage** tab of an AI Agent asset, you can view a visual representation of the tools, data, and other AI assets that are associated with the AI agent.

For more information about business assets, see *Asset Reference*.

Curation Center

Data Governance and Catalog introduces the **Curation Center**, a single page where you can review and act on all recommendations for the assets that you're responsible for, without the need to hunt through individual assets one at a time. **Curation Center** shows recommendations for glossary, business names, business descriptions, and classifications from all sources, including CLAIRE. You can curate recommendations and use Gen AI to generate business names and descriptions for assets.

You can use the following features of the Curation Center:

- View the summary of your recommendations from all enrichment sources at a glance. Summary charts show the number of assets that have pending, accepted, declined, or no recommendations.
- Act on recommendations from the new lineage propagation enrichment source. See Enrichment propagation based on lineage.
- Filter assets using various filter criteria to find recommendations you want to review.
- Review and act on one or more recommendations at once with full context.
- Use the **Advanced Edit** page to act on recommendations in bulk and edit them inline.

You can access the **Curation Center** page directly, or navigate to it from one of the following locations:

- The CLAIRE Activity widget
- In-app and email notifications you receive for recommendations in a catalog source
- The **Assets with Recommendations** widget on the catalog source asset page

For more information about Curation Center, see *Asset Management*.


Enhancements to data lineage

This release includes the following enhancements to data lineage:

View control flows

Show or hide control flow lines on an asset's lineage page. An asset's control flow reveals objects that influence how your data moves in the catalog. These lines show join conditions and expressions that apply to the transformation of data and appear as flow lines on the lineage interface.

The following image shows the control flow options for a lineage:

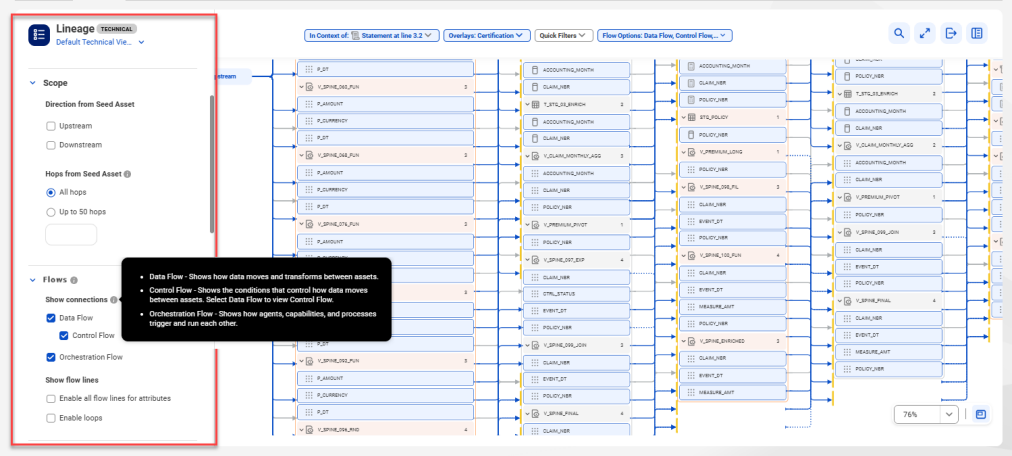


For more information about configuring an asset's lineage graph, see *Asset Discovery*.

Open transformation details

Open a lineage page that shows different transformation details for an asset in a lineage. On the lineage interface, click **Open Transformation Details** to view how your data moves from source to target. Detailed lineage for an asset show its data mapping, ETL pipeline, control flow, data type, data input and output, and applied SQL expressions.

The following image shows a data element's focused path and the asset's transformation details:

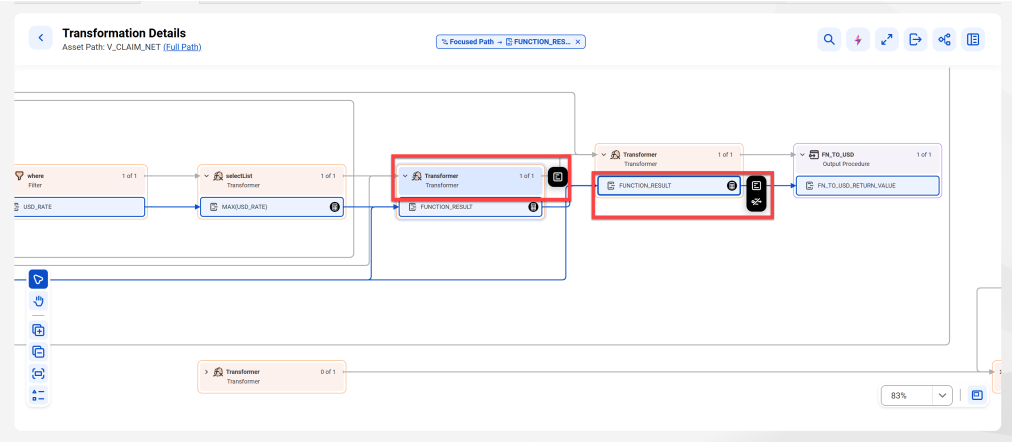

For more information about transformation details of an asset, see *Asset Discovery*.


Summarize transformation details

View an AI-generated explanation of the detailed lineage based on the catalog source metadata. Click **Generate Summary** when you view the detailed lineage of an asset to generate the explanation.

Manage additional configurations for a lineage view

Adjust the depth and direction of a lineage, and define the assets you want to see from an asset hierarchy. You can set the scope of the lineage view to a number of hops, and you can choose the lineage direction from the seed asset. You can also show or hide schemas in a lineage based on the data set parent name.

The following image shows **Scope** in **Manage Configuration** and the scope overlay on the toolbar:

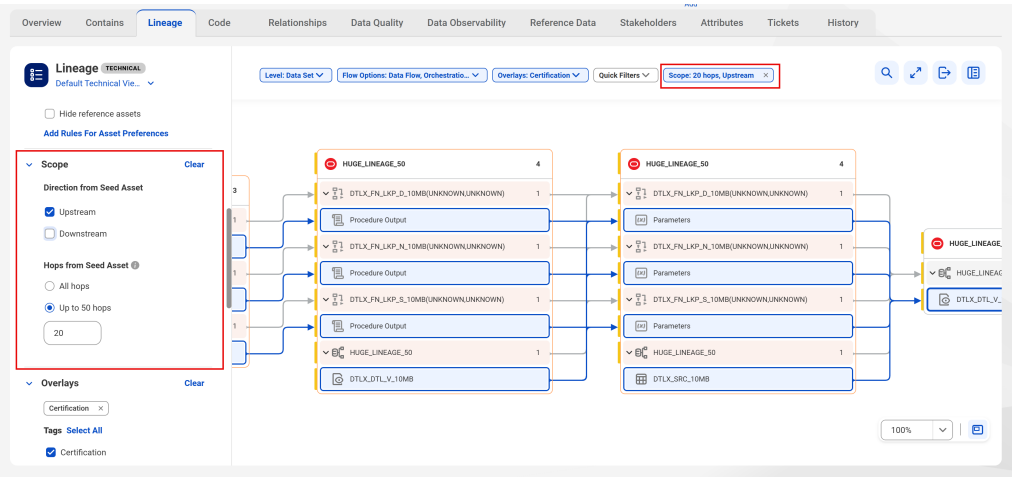

Assign lineage views

As an administrator in Data Governance and Catalog, you can assign lineage views to user roles in your organization. You can also set a lineage view as the default view that a user sees when they land on the **Lineage** tab of an asset page.

Performance enhancement

For organizations that run Data Governance and Catalog on Neo4j, you can load additional hops when you expand the depth of the lineage for upstream and downstream assets.

Lineage across spaces for SAP Datasphere

You can now extract and view lineage across multiple spaces within the SAP Datasphere source systems.

The SAP Datasphere catalog source extracts lineage across spaces for the following object types:

- AnalyticModel
- BusinessEntity
- DataFlow
- SAPDatasphereView
- TransformationFlow

For more information, see the *SAP Datasphere* catalog source help.

Enhancements to data profiling

This release includes the following enhancements to data profiling:

Adding passive mapplets as rules

You can add passive mapplets as rules to a profiling task to calculate advanced column statistics on the output ports of the mapplets.

The mapplets can contain the following passive transformations:

- Data Masking
- Expression

Profiling business data sets

You can link a business data set with a Data Integration source mapplet that receives inputs from multiple tables. You can then create a data profile for the business data set. This allows you to run a profiling task and view advanced statistics for columns from multiple data sets.

For more information about Data Profiling, see *Data Profiling for Assets*.


Customize the Create Asset page for business assets

In Metadata Command Center, you can customize what a user sees on the **Create** page for business assets. You can customize an asset's create page by selecting the attributes that users fill when creating the asset. It also determines what a user views on an asset's **Overview** tab.

You can perform the following tasks to customize the create page for an asset:

- Design multiple versions of the **Create** page and assign them to different users, user groups, and user roles.
- Organize attribute panel and even remove optional attributes from the page.
- After you publish a custom create page, you can hide the visibility of default asset creation and preview pages.

The following image shows the **New Asset** page for an AI Model asset in Data Governance and Catalog:

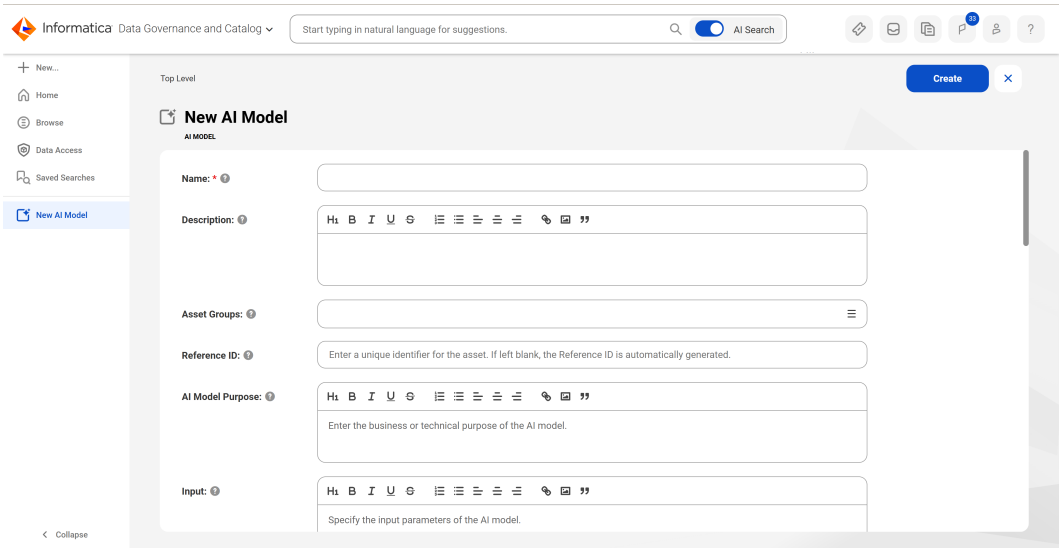

For more information about asset customization, see *Asset Management*. For information about custom layouts, see *Administration* in the Metadata Command Center help.

Enhancements to bulk import

This release includes the following enhancements to bulk import:

Asset Group management through bulk import

You can assign and update asset groups for multiple business and technical assets in a single operation using import files. In import and export template files, use the **Asset Group** column to associate asset groups with assets.

For more information about managing asset groups in bulk, see *Bulk Import Assets*.

Manage recommendations for Glossaries and Data Classifications

You can remove glossary and data classification associations from multiple assets using import files. You can remove an association regardless of its current state. Enter the glossary or classification name or reference ID in the **Glossaries: Remove** and **Data Classifications: Remove column**.

For more information about curating assets in bulk, see *Bulk Import Assets*.

Manage Policy to Data Classification relationships

The export and import files for Policy assets include the **Classifications** column. When you import assets,you can use the column to create associations between a Policy and Data Element or Entity classifications. When you export assets, existing associations between a Policy and Data Classifications appear in the sheets for Policy.

Export the technical data elements of a business data set

When you export a business data set that includes child assets, the exported file includes technical data elements. In the export file, the assets appear in a separate sheet that includes the data elements contained within each business data set. The sheet also contains an **Operation** column so that you can add or remove those relationships when you re-import the file.

Enhancements to stakeholder propagation for assets

This release includes the following enhancements to stakeholder propagation for assets:


Control propagation on assets

You can control the propagation of an asset's stakeholders to child assets in the hierarchy. With the **Propagate Stakeholders** and **Append Stakeholders** options, you can set how you want the stakeholders of a parent asset to propagate to its child assets. You can also configure these options to remove inherited stakeholders from child assets.

For technical assets, propagation options appear when an administrator enables **Assign Stakeholders** for a catalog source in Metadata Command Center. In Data Governance and Catalog, the options appear at the top most asset in a technical hierarchy. For business assets, you can set stakeholder propagation from asset pages in Data Governance and Catalog and during asset creation.

In Data Governance and Catalog, the **Stakeholder** tab of an asset pages shows different propagation details. The header of the **Stakeholder** tab shows if the propagation and append status is enabled or disabled. In the **Stakeholder** grid, the **Stakeholder Source** column shows **Inherited** if a stakeholder is inherited from a parent asset and **Assigned** indicates if the stakeholder is assigned to the asset. You can also view if a parent asset is propagating and appending on the asset in the **Edit Stakeholders** dialog box.

The following image shows the **Modify Stakeholders** dialog box with details of a parent asset's propagation on the asset and the **Stakeholder Source** column for the asset:

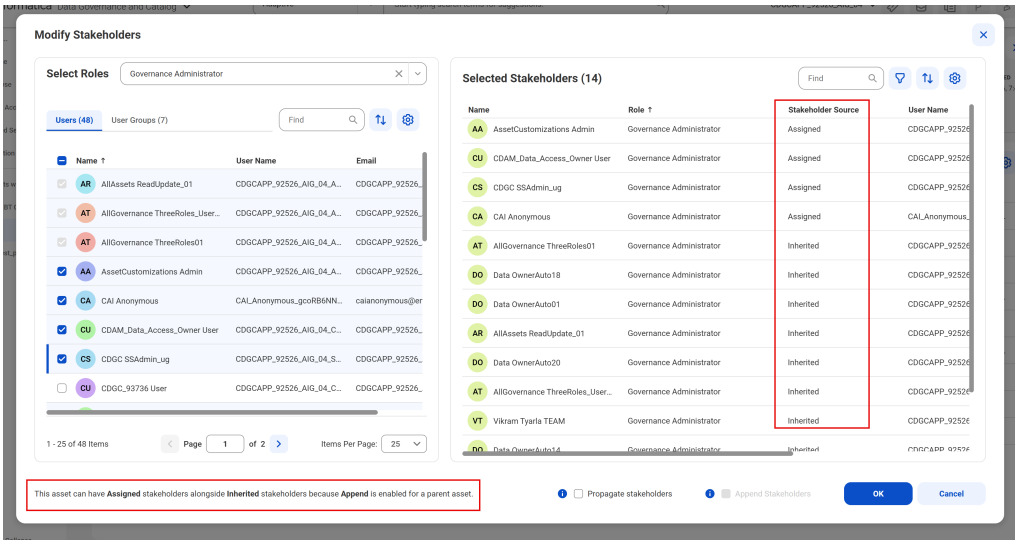

Propagate stakeholders through bulk import

When you export assets and re-import them, you can set the Propagate and Append options for an asset's stakeholders. In the **Propagate Stakeholders** and **Append Stakeholders** columns, select `Disabled` or `Enabled` to configure stakeholder propagation for an asset.

For more information about propagating stakeholders to asset hierarchies, see *Asset Management*.

Enhancements to governing unstructured data

This release includes the following enhancements to governing unstructured data:

Glossary association

You can associate glossary terms with unstructured files to relate them to your business vocabulary. Associate a metric or a business term manually, or use the bulk import and export templates to manage associations.

Data element classification

Data Governance and Catalog uses the name and description of a data element classification to classify unstructured files with greater accuracy. You can use custom data element classifications to classify unstructured files.

Sensitivity

Data Governance and Catalog automatically applies sensitivity level to unstructured files, based on the rules defined in data classifications in Metadata Command Center.

Preview valid rows of a data quality rule occurrence

You can preview the valid rows for a data quality rule occurrence from the **Data Preview** options in the **Score** tab of a rule occurrence or the **Ruel Occurrences** tab of a rule template. The preview grid displays up to 1,000 valid rows.

Valid row preview and download are available for rule occurrences that you create in Data Governance and Catalog and for rule occurrences that you migrated from Data Profiling.

Data quality score upload using a JSON payload

You can use a public REST API to update the data quality score of a data quality rule occurrence by passing the score as a JSON payload in the request body. The API accepts one or more data quality scores in a single request and returns a success response with the job URI and job ID or a failure response with the appropriate response code.

Define column-level data quality checks through mapplets

You can use mapplets to define column-level data quality checks in Data Governance and Catalog. Mapplets let you encapsulate complex, reusable data quality logic and apply it consistently across rule occurrences, rule templates, and deep profiling workflows. Use mapplets when you want to reuse logic across multiple rules.

You can associate a mapplet with the following assets:

- A data quality rule template
- A manually created data quality rule occurrence
- A rule occurrence generated by CLAIRE

Additional asset search options

On the search page and within the search widgets, you can search for, filter, and group data elements by the following attributes:

- Associated data classifications
- Associated glossaries
- Classification categories
- Critical data element
- Sensitivity level

Additionally, on the data element page, Data Governance and Catalog displays a Critical Data Element (CDE) icon to indicate that the data element is a CDE on an associated glossary.

Data access management enhancements

You can use the following new and enhanced features for data access management:

- You can view pushdown enforcement information on the new Enforcement tab. You can view which assets a data access policy protects and which data access rules a data access policy applies to an asset. The status of the data access policy also appears. You can also view which technical assets have data access policies applied.
- You can push down data de-identification policies to the Databricks and Snowflake source systems.
- You can push down data access policies to external tables in the Databricks and Snowflake source systems.

Enhancements to widgets

This release includes the following enhancements:

Search-based widgets

The following enhancements apply to search-based widgets:

- **Alphabetical ordering**. The list of assets in the **Group By** options and the **Select Display Columns** list appear in alphabetical order.

- **Additional Group By options and columns**. You can group by and display additional columns based on the following asset types:
  - **AI System**. AI System Type, Development Stage, Hierarchy, Asset Groups
  - **Business assets**. Hierarchy, Asset Groups
  - **Technical assets**. Hierarchy, Asset Groups, Glossaries, Classifications
- **Improved stakeholder display**. In the list view, stakeholders are shown by role, with a separate column for each role that lists the users assigned to it. Stakeholders display with their avatars.
- **Classifications for unstructured assets**.
  When a grid contains unstructured assets, each supported classification type appears as its own column in the following way:
  - Document classification
  - Data entity classification
  - Data element classification

  Each classification type is a separate column that you can show or hide in grid customization. You can view the classification type in the grid.
- **Grid customization in the widget drilldown**. Similar to the Data Quality widget, you can customize the columns displayed in the widget drilldown grid. You can also set a sorting preference by **Name** or **Last Updated**.
- **Change of assets in a widget**. If the asset types in a widget change because the query results change, the system keeps your saved grid customization in the following ways:
  - **Available Columns:** A column that applies to only some of the asset types remains in the list of available columns.
  - **Grid Display:** When a selected column does not apply to an asset type, the column stays in the grid, and cells for that asset type remain blank.
  - **Saved Preferences:** Every column you selected are saved in the saved preferences when the widget content changes.
- **Additional filters**. The widget drilldown includes additional filters, some of which apply only to specific asset types. In addition to the **Group By** attribute, you can filter by the following attributes:
  - AI System Type
  - Asset Groups
  - Catalog Source Name
  - Catalog Source Type
  - Certified
  - Critical Data Element
  - Data range
  - Environment
  - Last Updated
  - Policy Type
  - Ratings
  - Stakeholders
  - System Type

- **Filter components**.
  The drilldown grid uses the following filter components.
  - **Single Select with Find**. It is used when you can select one value, for example, Critical Data Element, Certified, Last Updated, custom attributes.
  - **Multi-select with Find**. It is used when you can select more than one value. Every other grid filter uses this component.
  - **Critical Data Element and Certified filters**. Only **True** and **False** value options are displayed. The **No** value option is not displayed.
- **Grid header**.
  The drilldown grid header is **Assets** for list, count, bar, and donut charts. The header stays Assets when you apply a filter.
- **Percentage with counts**. When you select a donut chart or a bar chart in a search-based widget, you can enable the option to show the percentage along with the counts.
- **Result count**. Search-based widgets show the result count against the total count.

Dashboard widgets

You can resize dashboard widgets to smaller dimensions. For the Donut, Count, and Bar Chart widgets, the chart adjusts as you resize the widget, displaying more or less detail based on the available space.

Use REST APIs to create and manage data profiles

You can use the following REST APIs to create and manage data profiles:

- Retrieve data profile summary. Use the API to retrieve the details of a data profile.
- Update data profile. Use the API to edit a data profile.
- Delete data profile. Use the API to delete a data profile.
- Retrieve data profiles configured for a data set. Use the API to retrieve a list of data profiles associated with the specified data set.
- Create a data profile for a data set. Use the API to create a data profile for the specified data set.
- Retrieve profile run details. Use the API to retrieve the details of a data profiling job instance.
- Export profiling results. Use the API to export the profiling results of a data profiling job instance to a CSV or Microsoft Excel file and download the file.
- Retrieve data profile runs. Use the API to retrieve a list of job instances from the last ten occasions on which the data profiling job ran.
- Run a data profile. Use the API to run a data profiling task.

For information about the data profiling APIs, see the Informatica Developer Portal.

Enhancements to notifications

Notifications for enrichment recommendations

Receive in-app and email notifications that summarize the number of assets with pending and automatically accepted recommendations in a catalog source. To review the recommendations in the **Curation Center**, click **Review All Recommendations** in the in-app notification or use the link in the email notification.

Notifications for business asset changes

Stakeholders of a business asset receive in-app and email notifications when users change the system and custom attribute values of the asset. Data Governance and Catalog groups the changes made within an hour into each notification.

Note: Data Governance and Catalog doesn't send notifications for changes to AI Agent business assets.

New catalog sources

This release includes the following new catalog sources:

- Amazon Bedrock
- Amazon SageMaker AI
- API Design
- dbt Cloud
- MuleSoft
- OpenLineage
- MCP Server
- Microsoft Fabric
- SAP Ariba
- SAP Cloud for Customer
- Trino

For more information about catalog sources, see the corresponding catalog source help.

Enhanced catalog sources

This release includes the following enhancements to catalog sources:

Amazon S3

You can use the IAM Roles Anywhere authentication type to connect to Amazon S3 source systems.

For more information, see the *Amazon S3* catalog source help.

Databricks

This release includes the following enhancements:

- From Databricks Unity Catalog, you can extract metadata of foreign catalogs that connect to the following source systems:
  - Amazon Redshift
  - Databricks
  - Google BigQuery
  - Microsoft Azure Synapse Data Warehouse
  - Microsoft SQL Server
  - Salesforce
  - Snowflake
- You can extract metadata of the following objects:
  - AI Search Indexes
  - AI Search Index Columns

- Genie Spaces
- Knowledge Assistants
- MCP Servers
- MCP Server Tools
- Metric Views
- Serving Endpoints
- Stored Procedures
- Supervisor Agents
- Supervisor Agent Tools

- You can add metadata extraction filters based on the following objects:
  - AI Search Indexes
  - Genie Spaces
  - Knowledge Assistants
  - MCP Servers
  - Metric Views
  - Stored Procedures
  - Supervisor Agents

For more information, see the *Databricks* catalog source help.

dbt

This release includes the following enhancements:

- You can extract metadata and generate lineage from manifest files created with dbt version 1.11.
- You can extract metadata and generate lineage from dbt snapshots.

For more information, see the *dbt* catalog source help.

Denodo

After you run a catalog source job, you can view lineage for views that use full outer joins.

For more information, see the *Denodo* catalog source help.

Google Gemini Enterprise Agent Platform

This release includes the following enhancements:

- The Google Vertex AI catalog source is renamed to Google Gemini Enterprise Agent Platform.
- You can extract metadata from AI Agents and related assets.

For more information, see the *Google Gemini Enterprise Agent Platform* catalog source help.

Informatica Intelligent Cloud Services

This release includes the following enhancements:

- You can extract metadata from Informatica Application Integration source systems.
- You can perform connection assignment to view lineage between an SAP ERP source system and an Informatica Intelligent Cloud Services source system.
- You can perform connection assignment to view lineage between an SAP Business Warehouse source system and an Informatica Intelligent Cloud Services source system source system.

- You can now configure how the catalog source reads Cloud Data Integration mapping task XML files when you extract metadata. Choose one of the following input fetch modes:
  - API. Default. Fetches tasks through the Informatica Intelligent Cloud Services API.
  - Files. Reads only the files in the input files folder.
  - Both. Combines both modes, matching objects in the files and through the API.

For more information, see the *Informatica Intelligent Cloud Services* catalog source help.

JDBC

This release includes the following enhancements:

- You can use the Amazon DocumentDB JDBC driver to connect to and extract metadata from Amazon DocumentDB source systems.
- You can extract metadata from Dremio sources.
- You can run data profiling and data quality jobs on metadata extracted from Trino source systems.

For more information, see the *JDBC* catalog source help.

Kafka

You can now extract metadata from JSON Schema and Protocol Buffers messages when Schema Registry is enabled.

For more information, see the *Kafka* catalog source help.

Microsoft Fabric Data Lakehouse

You can generate accurate reference assets from Microsoft Fabric Data Lakehouse source systems to files in Microsoft Fabric OneLake source systems.

For more information, see the *Microsoft Fabric Data Lakehouse* catalog source help.

Microsoft Power BI

Metadata extraction jobs now extract descriptions of data set tables as technical descriptions in Data Governance and Catalog.

For more information, see the *Microsoft PowerBI* catalog source help.

Qlik Sense Cloud

You can now extract metadata from Variable and Variables object types.

For more information, see the *Qlik Sense Cloud* catalog source help.

Salesforce

This release includes the following enhancements:

- You can extract metadata from Agentforce agents.
- You can add metadata extraction filters based on Agentforce agents.
- You can now extract metadata and add metadata extraction filters for the following Salesforce Data 360 objects:
  - Activation
  - Data Action
  - Data Graph

- Segment
- Semantic Model

- You can now extract metadata of filtered data lake objects located in Salesforce Data 360 data spaces.

For more information, see the *Salesforce* catalog source help.

Salesforce Marketing Cloud

This release includes the following enhancements:

- You can now extract metadata from the following activities in Automation Studio:
  - Data Copy or Import
  - Data Extract with no wildcard characters
  - File Transfer
  - Filter
  - SQL Query with data extension and data view sources
- You can add metadata extraction filters based on the automation object type.
- You can now extract metadata and add metadata extraction filters for the following Salesforce Data 360 and Salesforce CRM objects:
  - Activation
  - Segmentation
- You can perform connection assignment to view lineage between a Salesforce Marketing Cloud source system and the Salesforce Data 360 and Salesforce CRM applications.

For more information, see the *Salesforce Marketing Cloud* catalog source help.

SAP Business Warehouse (BW)

This release includes the following enhancements:

- You can now add metadata extraction filters based on the Open ODS View object type.
- You can extract metadata from planning sequences and planning services.

For more information, see the *SAP BW* catalog source help.

SAP Datasphere

This release includes the following enhancements:

- You can now perform connection assignment to view lineage between a Microsoft Power BI source system and an SAP Datasphere source system.
- You can now perform connection assignment to view lineage between an SAP Datasphere source system and an SAP Sales & Service Cloud source system.

For more information, see the *SAP Datasphere* catalog source help.

SAP BW/4HANA

You can run data profiling and data quality jobs on the following objects extracted from the SAP BW/4HANA source system:

- Advanced DataStore Object (ADSO)
- CompositeProvider

For more information, see the *SAP BW/4HANA* catalog source help.

SAP HANA Database

This release includes the following enhancements:

- You can perform connection assignment to view lineage between SAP HANA DB virtual tables and SAP Business Warehouse composite provider assets.
- You can extract metadata from column views.
- You can extract metadata from SQL Script calculation views.

For more information, see the *SAP HANA Database* catalog source help.

SAP S/4HANA Cloud

You can now extract metadata from an SAP S/4HANA Cloud source system that uses a proxy server-based connection.

For more information, see the *SAP S/4HANA Cloud* catalog source help.

SAP Sales & Service Cloud

You can now extract metadata from an SAP Sales & Service Cloud source system that uses a proxy server-based connection.

For more information, see the *SAP Sales & Service Cloud* catalog source help.

Snowflake

This release includes the following enhancements:

- You can extract metadata of semantic views.
- You can add metadata extraction filters based on semantic views.

For more information, see the *Snowflake* catalog source help.

Tableau

This release includes the following enhancements:

- You can perform connection assignment to view lineage between a Cloudera Hadoop source system and a Tableau source system.
- You can extract metadata from published data sources and Salesforce sources such as CRM, Data360, and Semantic Layer through Tableau. You can also view the real project hierarchy along with more detailed assets information and lineage in Data Governance and Catalog.

For more information, see the *Tableau* catalog source help.

Configure additional data capabilities

You can configure Data observability on the IBM DB2 LUW catalog sources.

For more information about catalog sources, see the corresponding catalog source help.

Profiling enhancements

This release includes the following profiling enhancements:

Amazon Redshift

You can enter a custom SQL query to select sample rows to run data profiling and data quality jobs using the Custom Query sampling type.

For more information, see the *Amazon Redshift* catalog source help.

SAP HANA Database

You can run data profiling and data quality jobs on SQL Script calculation views.

For more information, see the *SAP HANA Database* catalog source help.

Rule-based sensitivity for Document assets

You can now define rules that assign a sensitivity level to Document assets. A Document asset represents an unstructured file, such as a PDF or Microsoft Word document, in the catalog. You can apply sensitivity levels to these assets based on the classification policies that you define.

For more information, see Data Classification in *Administration*.

Enrichment propagation based on lineage

You can configure catalog sources to propagate enrichments to related assets based on lineage.

Enable autonomous enrichment to propagate curation values such as classifications, descriptions, business names, and glossary associations across catalog source assets. Enable autonomous enrichment globally, and then configure each catalog source to control how it receives enrichments.

Propagation settings determine which enrichment types propagate, from how many lineage levels they propagate, and whether values are automatically accepted or recommended.

For information about autonomous enrichment, see Autonomous Enrichment in *Administration* and the corresponding catalog source help.

Global settings for generated descriptions

You can now configure global settings that shape the descriptions Data Governance and Catalog generates for your assets. Set the industry and text length that apply to all generated descriptions. You can override these settings in Data Governance and Catalog.

For information about configuring generated descriptions, see Autonomous Enrichment in *Administration*.

Incremental metadata extraction

You can now run incremental metadata extraction jobs on the following catalog sources:

- Microsoft Fabric OneLake
- Microsoft OneDrive

A full metadata extraction extracts all objects from the source to the catalog. An incremental metadata extraction considers only the changed and new objects since the last successful catalog source job run. Incremental metadata extraction doesn't remove deleted objects from the catalog and doesn't extract metadata of code-based objects.

For more information about catalog sources, see the corresponding catalog source help.

LIKE operators in data classification rules and lookup tables

When you build data classification rules in Cloud Data Governance and Catalog, you can use the LIKE ALL, LIKE SOME, and LIKE ANY operators to match a value against multiple patterns in a single condition. You can also reference a lookup table column as the pattern source. Use LIKE (lkp.<table>.<column>), LIKE SOME (lkp.<table>.<column>), or LIKE ANY (lkp.<table>.<column>) to match against the values in a lookup column.

For more information, see *Data classification* and *Lookup tables* in the *Administration* help.

Metadata extraction from additional file types

You can now extract metadata from additional file formats across multiple catalog sources.

Newly Supported File Types:

- EML
- EMLX

- MSG
- RTF
- PPT
- PPTX
- JSONL

Supported Catalog Sources:

- Amazon S3
- File System
- Google Cloud Storage
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Classify Microsoft Word documents

You can now use **Document Classification** in Metadata Command Center to classify Microsoft Word documents with the DOC and DOCX extensions. You can classify Microsoft Word documents for the following catalog sources:

- Amazon S3
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Deleting lookup tables

You can delete a lookup table that is not used in any data classification rule.

For more information, see *Lookup tables* in the *Administration* help.

Workflow enhancements

This release includes the following workflow enhancements:

Periodic review of assets (Preview)

You can set up a periodic review of assets while configuring workflow events in Metadata Command Center to certify business and data access assets on a schedule. Periodic review helps you keep assets

accurate, up to date, and audit ready. You can configure a workflow event that reviews the assets that meet a condition, such as glossaries in a specific domain. When the schedule runs, the event automatically creates a review ticket for each qualifying business asset and data access asset.

Data Governance and Catalog creates review tickets automatically for the qualifying assets based on the schedule. The stakeholders defined in the workflow can review the asset, set its lifecycle to complete the review, and close the ticket. Each asset shows the last review date and the next review date. You can also search and browse assets by the last review date and the next review date.

Inclusive gateway

You can add an inclusive gateway to a workflow to route the flow along one or more outgoing paths based on conditions. The inclusive gateway evaluates the condition on each outgoing path independently, and the workflow follows every path whose condition is true. If no condition is true, the workflow follows a default path. An inclusive gateway activates one or more paths based on conditions.

Approval workflows for asset lifecycle changes

You can configure a workflow that runs when the lifecycle of an asset changes. Under the asset management event category, a new event type, **Approval Request for Lifecycle Change**, triggers a workflow when an asset's lifecycle state changes. The workflow runs when an asset moves from the Published state to the Obsolete state, or from the Obsolete state to the Published state. When you configure a workflow for this event type, you can select only the Obsolete or Published state.

Service task to retrieve asset details in a workflow

You can add a service task to route a workflow dynamically, based on asset groups and the custom attribute values of the asset the workflow runs on. You can use these values in expressions that define the gateway conditions.

Using the asset details available in the gateway conditions, you can configure an inclusive gateway that directs the workflow based on the asset metadata. For example, you can route the workflow along a different path for an asset that belongs to a specific asset group.

For more information, see *Workflows* in the *Administration* help.

REST API enhancements

You can use REST APIs to perform the following tasks on catalog source jobs:

- Cancel jobs. Use the API to cancel a job based on the job ID.
- List jobs. Use the API to list jobs based on the specified filters.
- Download logs. Use the API to download log files for a job based on the job ID.

For information about the job management APIs, see the Informatica Developer Portal.

Monitor Informatica Processing Unit (IPU) usage for catalog source jobs in Administrator

You can now monitor the catalog source job IPU usage in Administrator. IPU consumption details are available under Project **CDGC** and Folder **Scanner**.

For more information, see *IPU Meters* in the Organization Administration guide.

SAP transports

New SAP transports are available for SAP BW and SAP BW/4HANA catalog sources.

For more information about SAP transports, see
HOW TO: Import the latest transports for SAP catalog sources in Metadata Command Center.

Access control based on data classification sensitivity

When you create or modify an access policy in Metadata Command Center, you can add a sensitivity level as a predicate to a condition. The new predicate allows you to control access to assets based on the sensitivity level of their data classifications.

For more information, see *Metadata access control* in the *Administration* help.

Use REST APIs to manage metadata access policies

You can use REST APIs to perform the following tasks on metadata access policies:

- Export access policies
- Import access policies
- Enable multiple access policies
- Disable multiple access policies
- Publish multiple access policies
- Delete multiple access policies

Changed behavior

The October 2026 release of Data Governance and Catalog includes the following changed behavior.

Changes to stakeholder management

Options for the Stakeholder Status column

In a search export file, the **Stakeholder Status** column includes the `Both` option. This status indicates that the asset can include stakeholders who are assigned by you or inherited through its hierarchy.

Previously, the available status options for stakeholders on an asset were either `Inherited` or `Assigned`.

Prevent stakeholder re-inheritance

You can prevent the re-inheritance of a parent asset's stakeholders after you remove them from a child asset.

Previously, when you removed all stakeholders from an asset, the stakeholders of the parent asset were immediately re-inherited.

Changes to data quality rule occurrences

Delete data quality rule occurrences that have scores

You can delete a data quality rule occurrence after it generates data quality scores.

Previously, you couldn't delete a rule occurrence that had data quality scores because Data Governance and Catalog treated the scores as child assets.

Select data elements from different tables for data quality rule occurrences

When the measuring method of a data quality rule occurrence is any value other than **Informatica Cloud Data Quality**, you can select primary and secondary data elements that belong to different sources and tables for the rule occurrence. This change also applies when you create a rule occurrence with a bulk import template.

Previously, the secondary data element had to belong to the same table as the primary data element regardless of the measuring method.

Higher row counts for rule occurrences

Data quality rule occurrences can report larger values for total rows and failed rows. The **Total Rows** and **Failed Rows** attributes use the long data type.

Previously, the attributes used the integer data type.

Higher row counts for failed row previews

When you preview failed rows for a data quality rule occurrence, the preview grid displays up to 1,000 failed rows.

Previously, the preview grid displayed up to 100 failed rows.

Changes to total rows and failed rows of rule occurrences

The attributes for total rows and failed rows of a data quality rule occurrence depend on when the rule occurrence was created. This behavior applies to the following areas:

- REST API responses. If the rule occurrence was created before the October 2026 release, the response of a search API or the audit history API contains `totalRecords` and `failedRecords` in addition to the `totalCount` and `exception` attributes. When you modify the score of the rule occurrence, Data Governance and Catalog updates only the `totalRecords` and `failedRecords` attribute values. If the rule occurrence was created after the October 2026 release, the response contains only `totalRecords` and `failedRecords`.
- History tab. For changes made before the October 2026 release, the **History** tab shows **Total Records** and **Failed Records**. For later changes, the **History** tab shows **Total Rows** and **Failed Rows**.
- Audit history exports. When you export the audit history of a rule occurrence, the export follows the same logic as the **History** tab.

Previously, API responses contained `totalCount` and `exception` for all rule occurrences. The **History** tab showed **Total Rows** and **Failed Rows** for all changes.

Changes to the CLAIRE Activity widget

When you click the CLAIRE Activity widget on the dashboard, the **Curation Center** page opens, where you can review and curate recommendations for assets. While the CLAIRE Activity widget shows the total number of recommendations for all assets in your catalog, the **Curation Center** shows the total number of assets that have recommendations. In the **Curation Center**, you can view and act only on assets for which you're responsible.

You can click the different types of recommendations on the CLAIRE Activity widget to open the filtered assets in the **Curation Center.** The generated classification recommendation type is disabled on the CLAIRE Activity widget because you cannot curate generated classifications in the **Curation Center**.

Previously, the CLAIRE Activity widget opened its own drilldown page where you could only view assets with different types of recommendations and their statuses.

Change in export behavior for rich text fields

When you export assets that contain rich text fields, such as Description, Business Logic, rich-text custom attributes, you can preserve the HTML formatting or export the fields as plain text without HTML tags. If you preserve the formatting of the rich text fields, the field remains editable. Your edits take effect when you re-import the file. If you export the fields without HTML tags, you cannot edit the fields for re-import.

If the rich text fields contain non-HTML strings in angle brackets, the export preserves the formatting regardless of your choice during the export. For example, the fields might contain `<Enterprise>` and `<CustomerName>`.

Previously, rich text fields were always exported with HTML tags.

Changes to lifecycle status updates for business assets

You can configure an approval worflow when a business asset changes its lifecycle status from Published to Obsolete. Data Governance and Catalog creates a ticket and starts the configured approval workflow. The asset remains visible to other users with its Published status, and edits are blocked for all users, including stakeholders, until the ticket is closed. When the ticket is approved and closed, the lifecycle status changes to Obsolete. The ticket captures the lifecycle change.

Similarly, when you change the lifecycle status from Obsolete to Published, Data Governance and Catalog creates a ticket for approval. The ticket captures the lifecycle change along with any description updates since the asset was last published.

Previously, if you had edit permission, you could change an asset's lifecycle status from the asset page without triggering a workflow or creating a ticket.

Obsolete asset modifications

You can remove a reference dataset association from an obsolete asset. To keep obsolete assets consistent with their lifecycle state, you can no longer associate a reference dataset with obsolete assets.

Previously, you could add or change the reference dataset associated with an obsolete asset.

Include technical data elements in export

When you export a business data set with the **Include Child Assets** option, the export includes technical data elements that are children of the business data set. You export the assets in a separate sheet along with the business data set's manual data elements.
Previously, a Business Data Set export with child assets included only manually created Data Elements.

Changes to propagation jobs

Data Governance and Catalog runs batch jobs for propagating data set relationships, stakeholders, and asset groups. For these updates, a placeholder job queues the changes you make. After which, Data Governance and Catalog runs a dedicated job for each propagation. The batch job propagates the changes in the order you make them and changes appear on assets after the job completes.

Relationship Batch Propagation is the batch job for data set relationships, and **Asset Group & Stakeholder Batch Propagation** is the batch job for propagations in asset stakeholders and groups.

Previously, propagation jobs for data set relationships, stakeholders and asset groups ran concurrently.

Changes to freshness anomaly generation

Data observability generates a freshness anomaly event only when the freshness of data of a data set doesn’t change within its usual update interval. If a data update arrives after the update interval, data observability doesn’t generate an anomaly event.

Previously, data observability generated a freshness anomaly event when the freshness of data of a data set changed after the update interval.

For more information about anomaly events, see *View anomaly events* in the *Data Quality for Assets* help.

Change in data element selection limit for data profiling

You can include up to 200 data elements in a profiling task.

Previously, you included up to 50 data elements in a profiling task.

Catalog source configuration options based on the selected model

When a catalog source type supports more than one model, you now view only the configuration options that apply to the model you select. Previously, you viewed all the configuration options for the catalog source type regardless of the selected model.

Microsoft Power BI connector name change

The Microsoft Power BI connector in Administrator is renamed to Microsoft Fabric. Both the Microsoft Power BI catalog source and the new Microsoft Fabric catalog source use this connector. The Microsoft Fabric connector also includes additional connection properties.

For more information, see the *Microsoft Power BI* catalog source help.

Decision gateway path conditions based on expressions

You can configure the outgoing paths from a decision gateway with an expression or with a previous user task outcome. When you use an expression, a path can use the outcome of a service task that runs earlier in the workflow.
Previously, you could configure the outgoing paths from a decision gateway only with a user task outcome.

For more information, see *Configuring a workflow* in the *Administration* help.

Changes to permissions to manage connections of a catalog source

In Metadata Command Center, you can assign, modify, and unassign the connections to a catalog source for which you aren't a stakeholder. To manage the connections of a catalog source, the organization administrator must grant you the Manage Lineage Settings and Super Admin privileges for the Metadata Command Center service in Administrator. With these privileges, you can manage connections without edit permissions on catalog source assets.

Previously, you had to be a stakeholder of the catalog source to manage its connections.

For more information, see *Connections* in the *Administration* help.

CHAPTER 2

July 2026

The following topics provide information about new features, enhancements, and changes in the July 2026 release of Data Governance and Catalog.

Changelog July 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
August 24, 2026	Added	"AI-powered data management with Gemini Enterprise Agent Platform" on page 31
July 24, 2026	Deleted	Preview initiated
July 24, 2026	Added	"Changes to unstructured data assets" on page 34
July 24, 2026	Added	"Deprecated support" on page 31
July 24, 2026	Added	"Data quality score aggregation system jobs schedule" on page 35
July 24, 2026	Modified	"Unstructured data discovery and classification" on page 32
July 24, 2026	Added	Preview initiated
July 24, 2026	Added	"Bulk import behavior for obsolete assets" on page 34
July 16, 2026	Modified	"Changes to permissions to manage jobs" on page 34
July 11, 2026	Modified	"Unstructured data discovery and classification" on page 32

Publication Date	Type of Change	Section Title
June 25, 2026	Added	"Changes to permissions to manage jobs" on page 34
June 25, 2026	Added	"Handle unrecognized files during metadata extraction" on page 32
June 25, 2026	Modified	"Unstructured data discovery and classification" on page 32
June 18, 2026	Added	"Enhanced catalog sources" on page 33
June 18, 2026	Modified	Microsoft Power BI
June 11, 2026	Initial publication	

Important notices

The July 2026 release of Data Governance and Catalog includes the following important notices.

Deprecated support

Effective in the July 2026 release, the Preview Data feature privilege is deprecated.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.
As an alternative to the Preview Data feature privilege, you can enable a Data Governance and Catalog user to view the failed rows for a data quality rule occurrence in the following way:

Configure a user role policy for the user role that grants Read permission on the Data attribute group.

AI-powered data management with Gemini Enterprise Agent Platform

Effective in the July 2026 release, for organizations on Google Cloud Platform, Data Governance and Catalog may use the generative AI capabilities of Gemini Enterprise Agent Platform for data management capabilities.

New features and enhancements

The July 2026 release of Data Governance and Catalog includes the following new features and enhancements.

Natural Language Search

To simplify asset discovery, you can search using natural language phrases instead of constructing complex keywords or rigidly structured queries. Data Governance and Catalog interprets your natural language search and returns matching assets and related results based on your query.

In the search results page, you can view your query, explanation of how it was interpreted, and the generated query used to retrieve results, providing transparency into the AI reasoning process. Save your natural language search queries as a saved search for future use or for sharing with your team.

For more information, see the *Search for Assets* in Asset Discovery help.

Unstructured data discovery and classification

You can catalog, discover, and classify unstructured documents alongside your structured data assets in Data Governance and Catalog to gain complete visibility across your data landscape.

This release includes the following key capabilities:

- Extract unstructured documents, including PDFs, Word documents, and text files from the following catalog sources:
  - Amazon S3
  - Databricks
  - File System
  - Google Cloud Storage
  - Hadoop Distributed File System
  - Microsoft OneDrive
  - Microsoft SharePoint Online
  - Microsoft Azure Blob Storage
  - Microsoft Azure Data Lake Storage Gen2
  - Microsoft Fabric OneLake
  - Oracle Cloud Object Storage
  - SFTP File System
- Automatically classify PDFs and text files into categories defined by you. You can classify unstructured documents using the new **Document Classification** capability in Metadata Command Center for the following catalog sources:
  - Amazon S3
  - Hadoop Distributed File System
  - Microsoft Azure Blob Storage
  - Microsoft Azure Data Lake Storage Gen2
  - Microsoft SharePoint Online
  - Oracle Cloud Object Storage
  - SFTP File System

For information about unstructured data discovery and classification, see the corresponding catalog source help.

Handle unrecognized files during metadata extraction

You can now configure how Metadata Command Center handles files with unrecognized formats during metadata extraction from the following catalog sources:

- Amazon S3
- Databricks
- File System

- Google Cloud Storage
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

You can configure the catalog sources to treat all unrecognized file formats as either structured or unstructured files. Optionally, you can define specific path-level exceptions to override whether the unrecognized files should be treated as structured or unstructured files.

For information about handling unrecognized files, see the corresponding catalog source help.

Enhanced catalog sources

This release includes the following enhancements to catalog sources:

Microsoft Azure Data Factory

When you run a metadata extraction job on Microsoft Azure Data Factory pipelines, the job uses operational metadata from trigger runs to generate lineage for pipelines.

For more information, see the *Microsoft Azure Data Factory* catalog source help.

Microsoft Power BI

You can now extract PaginatedReportDataset objects that connect to Power BI datasets which use DAX and MDX queries.

For more information, see the *Microsoft Power BI* catalog source help.

SAP BW/4HANA

When you run a metadata extraction job on Composite Providers objects, you can extract all navigational attributes.

For more information, see the *SAP BW/4HANA* catalog source help.

SAP SuccessFactors

You can now extract metadata from an SAP SuccessFactors source system that uses a proxy server-based connection

For more information, see the *SAP SuccessFactors* catalog source help.

Snowflake

You can use the Programmatic Access Token authentication type to connect to source systems.

For more information, see the *Snowflake* catalog source help.

Snowflake SQL Script

You can use the Programmatic Access Token authentication type to connect to source systems.

For more information, see the *Snowflake SQL Script* catalog source help.

REST API enhancements

This release includes the following enhancements:

- You can choose the `multipart/form-data` content type header when you use REST APIs to perform the following tasks on catalog sources:
  - Create catalog source
  - Update catalog source
- You can use the catalog source management APIs to upload catalog source configuration files.

For information about the catalog source management APIs, see the Informatica Developer Portal.

Changed behavior

The July 2026 release of Data Governance and Catalog includes the following changed behavior.

Changes to unstructured data assets

Prior to the July 2026 release, unstructured files such as PDF, Text, DOC, and DOCX files were catalogued as structured file assets.

If you have existing PDF, Text, DOC, or DOCX files in your catalog and your organization administrator re-runs the catalog source job after upgrading to the July 2026 release, the files get catalogued as unstructured files with specific asset types. For more information, see "Unstructured data discovery and classification" on page 32.

As a result, you might see duplicate assets in the catalog. Previously discovered unstructured files are deprecated and their lifecycle status is marked as **Obsolete**. The new assets don't retain the existing enrichments from the deprecated assets. You can add enrichments to the new assets. To remove duplicate assets from the catalog, your organization administrators can purge deprecated assets using the '**Purge Obsolete Objects** option on the **Explore** page for the catalog source in Metadata Command Center.

Bulk import behavior for obsolete assets

You can't create business assets in the **Obsolete** lifecycle through the bulk import process.

Previously, you could create obsolete assets through bulk import if you selected the **Skip Errors or Warnings** option.

Reference data access modifications

You can view reference data for a data element with Read permissions alone.

Previously, viewing reference data required both Read and Update permissions for the asset type.

Changes to permissions to manage jobs

To cancel a job that another user started, or to download its export file, the organization administrator must assign you the **Manage Access Control** feature privilege in Administrator. You can cancel a job that you started and download its export file without additional privileges.

Previously, you didn't need additional privileges to cancel a job that another user started or to download its export file.

For more information about managing jobs, see *Jobs* in the *Administration* help.

Data quality score aggregation system jobs schedule

The system jobs that propagate updated data quality scores to data elements run once every 12 hours. When a rule occurrence is created from a scorecard and you manually associate a data element with the rule occurrence, the aggregated data quality score on the data element is updated within 12 hours, at the next scheduled run.

Previously, the system jobs ran automatically after the profiling job completed.

CHAPTER 3

April 2026

The following topics provide information about new features, enhancements, and changes in the April 2026 release of Data Governance and Catalog.

Changelog April 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
May 14, 2026	Modified	"Preview lifted" on page 37
May 14, 2026	Deleted	Deleted uploading of configuration files in "REST API enhancements" on page 51.
May 14, 2026	Added	"Post-upgrade tasks" on page 38
April 24, 2026	Modified	"Enhanced catalog sources" on page 45
April 23, 2026	Added	"Specify exception file path for data quality rule occurrences in bulk upload files" on page 43
April 23, 2026	Added	"REST API enhancements" on page 51
April 23, 2026	Added	"Preview lifted" on page 37
April 7, 2026	Added	"Workflow enhancements" on page 42
April 7, 2026	Modified	"Faster export and import for assets" on page 41
March 26, 2026	Added	"Performance enhancement" on page 52
March 26, 2026	Modified	"Bulk modifications to a data set" on page 52

Publication Date	Type of Change	Section Title
March 26, 2026	Modified	"Data access management enhancements" on page 45
March 26, 2026	Added	"Documentation changes" on page 53
March 26, 2026	Added	"Enhanced catalog sources" on page 45
March 26, 2026	Deleted	Deleted the advanced configuration setting in "Profiling enhancements" on page 49.
March 11, 2026	Initial publication	

Important notices

The April 2026 release of Data Governance and Catalog includes the following important notices.

Preview initiated

Catalog sources

Effective in the April 2026 release, the Salesforce Marketing Cloud catalog source is available for preview.

Note: Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Preview lifted

Effective in the April 2026 release, the following catalog source and functionality are production-ready.

- The SAP Datasphere catalog source. Previously, this catalog source was only available in preview.
- The Command Line Interface (CLI) metadata extraction method. Previously, this functionality was only available in preview.

Deprecation initiated

Effective in the April 2026 release, the usage of the following API endpoint to upload data quality scores to data quality rule occurrences is deprecated:

```
<baseApiUrl>/ccgf-ruleautomation/api/v1/dataQuality/publishScore?refBy=INTERNAL
```

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica will continue to support the existing endpoint until the July 2026 release.

Post-upgrade tasks

Google Looker and Qlik Sense Cloud catalog sources

Effective in the April 2026 release, Google Looker and Qlik Sense Cloud catalog sources use a connection created in Administrator.

If your existing catalog sources use a serverless runtime environment, perform the following steps after you upgrade to the April 2026 release:


1. Create a connection for the catalog source in Administrator.
2. Update the catalog source in Metadata Command Center to use the connection you created.

For information about how to create a connection, see the corresponding catalog source help.

New features and enhancements

The April 2026 release of Data Governance and Catalog includes the following new features and enhancements.

Watch the following What's New video to learn about the new features and enhancements in the April 2026 release:

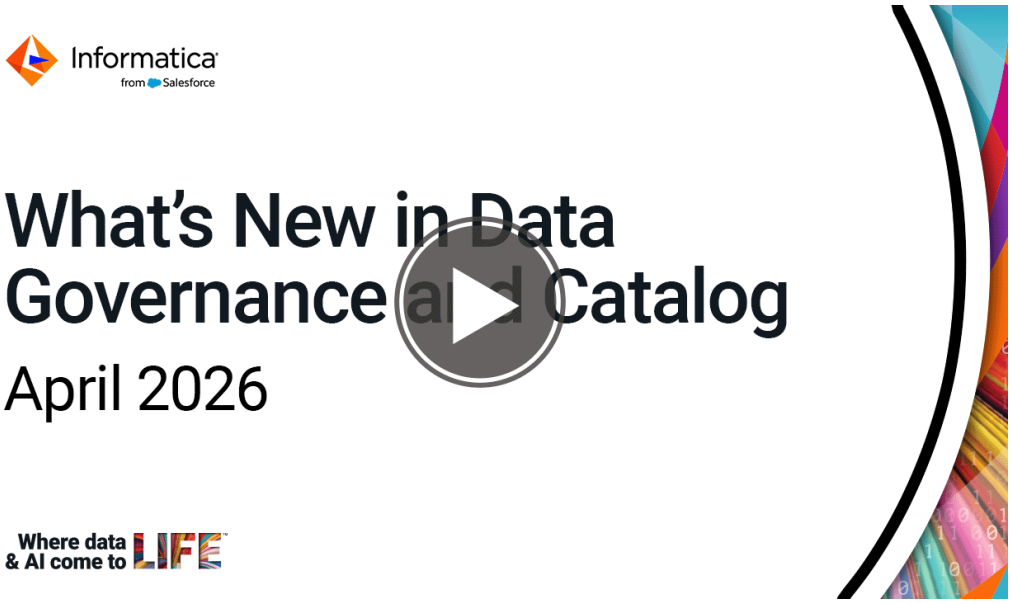

Enhanced lineage experience


Data lineage in Data Governance and Catalog has been redesigned to provide a more intuitive and powerful way to visualize and interact with the data flow across your organization.

This release includes the following key enhancements:

- A new user experience and improved interface offers clearer visualization and makes it easier to navigate and interact within the lineage canvas.

- Create and save your lineage preferences as views. To enhance collaboration on data governance initiatives, you can share these lineage views with other users in your organization.
- Pin lineage views to quickly access them or easily search among the different views available to you.
- Apply advanced filters to focus on specific assets in the lineage, making it easier to trace data flow and dependencies.
- Export lineage in tabular format as an XLSX or a CSV file.

The following image shows the new **Lineage** page of a sample technical asset:

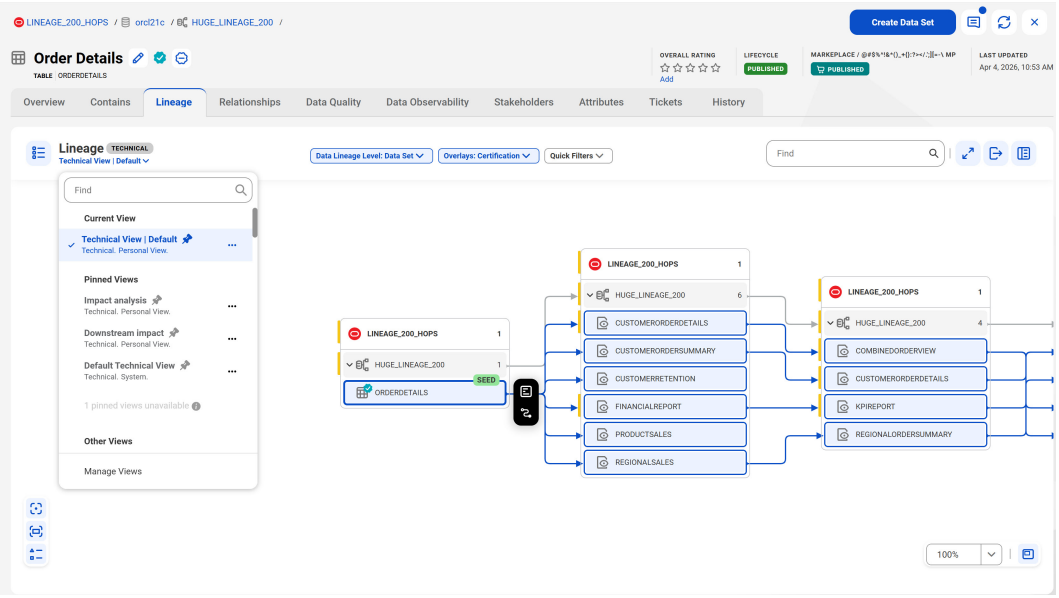


For more information about changes to data lineage, see the *Asset Discovery* help.

Dashboard enhancements

This release includes the following enhancements to dashboards:


- You can modify dashboards and their widgets using the **Edit Dashboard** option.
  Along with modifying the dashboard name and description, you can perform various activities on dashboard widgets. You can resize widgets by dragging widget edges and you can drag and drop widgets to create customized layouts.

  The following image shows an edit dashboard page:

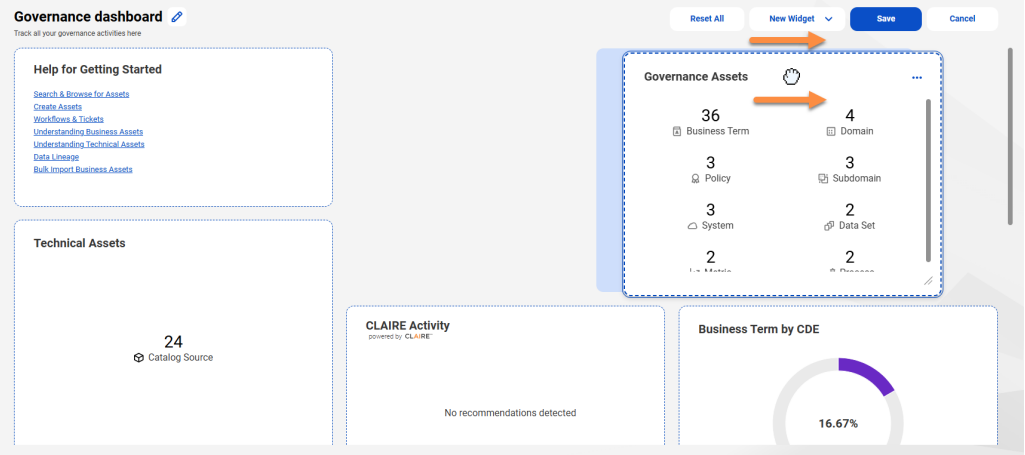

  For more information about working with dashboards, see *Working with dashboards* in the *Asset Discovery* help.

- You can share a dashboard with other users using a URL so that they can open the same dashboard with the same widgets. The following image shows the **Manage Dashboards** dialog box:

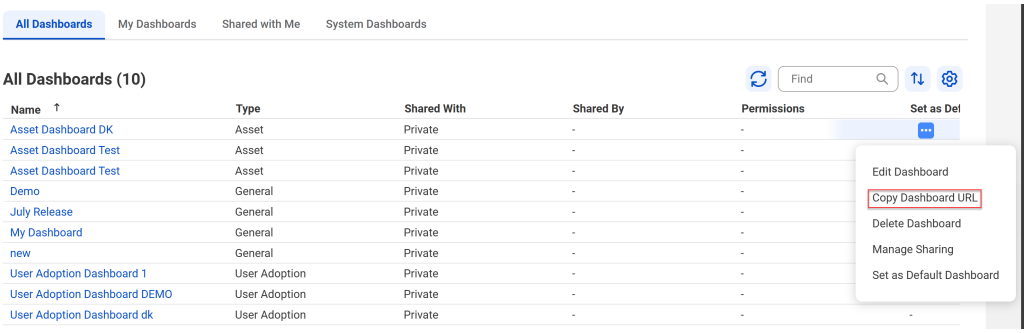

  For more information about sharing dashboards, see *Sharing dashboards* in the *Asset Discovery* help.

Data profiling enhancements

This release includes the following enhancements to data profiling:


- You can export a part of the profiling results or the complete results to a Microsoft Excel file.
- After you run a profile, you can drill down on a value, data type, or pattern and view the drilldown results in the **Data Preview** area.

For more information about data profiling, see the *Data Profiling for Assets* help.


Data observability enhancements

The release includes the following enhancements to data observability:

- If you have enabled the data observability capability for a catalog source, the **Freshness and Volume** widget on the **Data Observability** tab shows an **Outdated** label in red for outated catalog source data. The following image shows the **Data Observability** tab for a table:

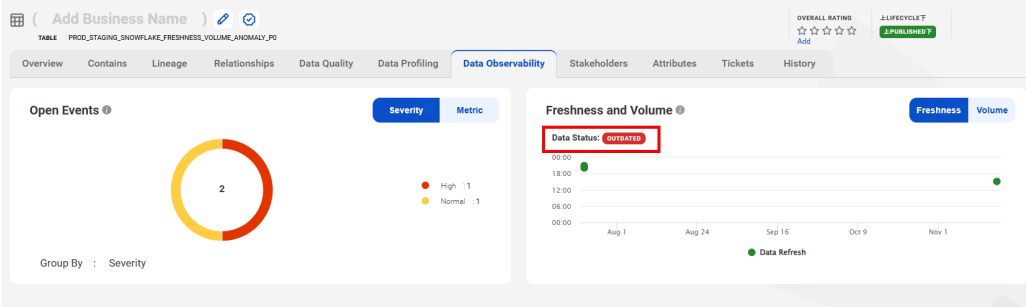

- Freshness and volume event pages show data on visualization widgets. Freshness event pages include a widget that visualizes data in a scatter plot and volume event pages include a widget that visualizes data in a bar chart.
  The following image shows a freshness event page:

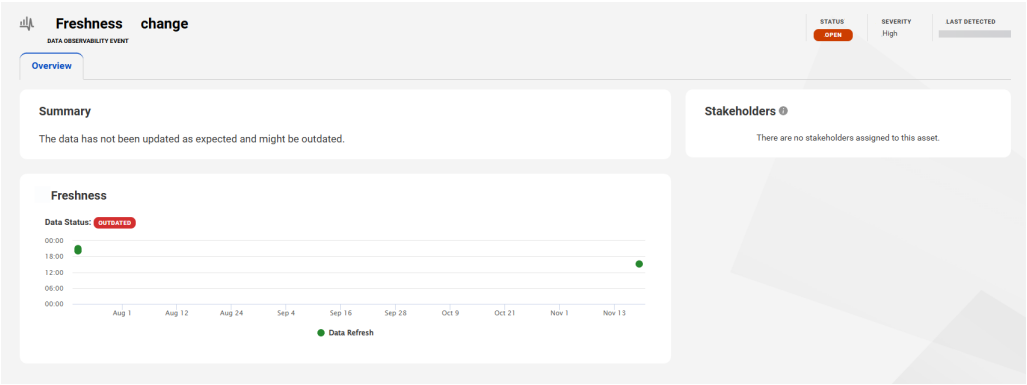

For more information about viewing data observability, see *View technical assets* in the *Understanding Technical Assets* help.

Faster export and import for assets

Import and export of assets are quicker in Data Governance and Catalog. From a search result, if you export up to 10,000 assets without their relationships, the export is significantly faster. If you include relationships in your export, you export the assets through a standard export job.


If you import up to 500 assets using the bulk import template, the import is significantly faster. The import can include business and technical assets, and business assets configured with workflows.

For more information about exporting and importing assets, see *Overview* in the *Bulk Import Assets* help.

Create a Data Marketplace data collection

For assets that are **Published** to Data Marketplace, you can create a data collection from asset pages in Data Governance and Catalog.

The following image shows a Data Governance and Catalog asset page:

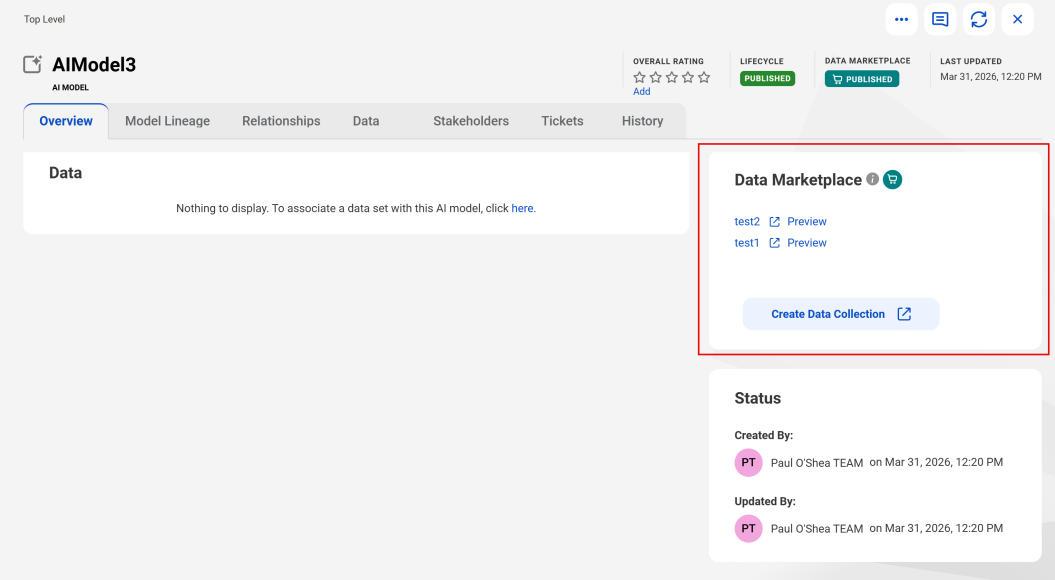

For more information about assets with which you can create data collections in Data Marketplace, see the following:

- For business assets, see *Business asset types* in the *Understanding Business Assets* help.
- For technical assets, see *View technical assets* in the *Understanding Technical Assets* help.

Public APIs for lineage and data quality score

The April release includes the following public APIs for lineage and data quality scores:

Export full lineage

Use an API to export full lineage of an asset in a CSV or Microsoft Excel file. The Microsoft Excel file includes worksheets for upstream and downstream asset lineages.

Retrieve data quality scores

Use an API to retrieve the data quality scores of data quality rule occurrences.

Upload data quality scores


Use an API to upload data quality scores to data quality rule occurrences.

Workflow enhancements

The following workflow updates improves efficiency in task handling by grouping tasks, triggering approvals for bulk imports, and easy identification of tasks with asset labels.

Task grouping and bulk actions

In the **Tasks Inbox**, you can perform bulk actions on tasks grouped by workflow and outcome. For example, you can perform task actions, comment, claim and assign tasks based on your user privileges.

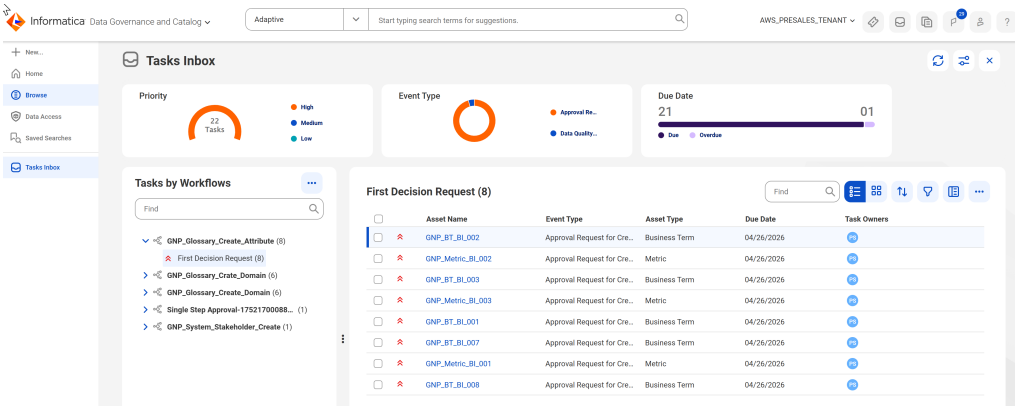

Approval process for business asset updates in bulk import operations

When you create or update a business asset in a bulk import operation, Data Governance and Catalog triggers an approval process and assigns task to the appropriate stakeholders. Adding a relationship or stakeholder will not trigger an approval process.

Asset labels for tasks in Tasks Inbox

The **Tasks Inbox** displays asset labels alongside task names to clearly distinguish tasks based on the asset information.

Directly publish draft assets

For assets that have had their previously associated workflows disabled or if the workflow configuration conditions are modified or invalidated, the asset page displays the **Publish** button. You can click **Publish** to manually publish the asset. The asset then moves from the Draft to Published lifecycle.

For more information about bulk actions and task grouping, see *Workflows and Tickets* in the *Asset Management* help.

Specify exception file path for data quality rule occurrences in bulk upload files


The bulk import template for data quality rule occurrences introduces the **Exception File** Path column. You can use this column to specify the path to the file that stores the exception records that fail to meet the criteria defined by a data quality rule occurrence.

For more information about how you can bulk import data quality rule occurrences, see the *Data Quality Rule Occurrence* topic in the *Bulk Import Assets* help.

Export of assets enhancement

In addition to the Microsoft Excel file in the .xlsx or .xls file format, you can also search for assets and export the results of a search as CSV file. You can download data in multiple files within a compressed folder.

The following image shows the **Export Assets** dialog box:

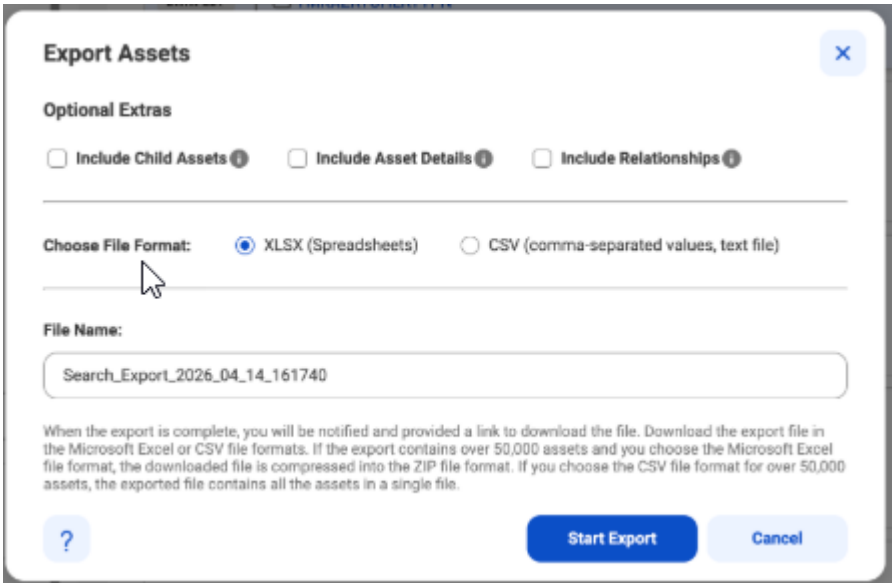


For more information about how to export assets, see the *Export assets* topic in the *Asset Discovery* help.

Enhancements to data quality task monitoring

You can click the counts of successful, skipped, and failed rule occurrences in a catalog source job in Metadata Command Center. This enables you to view further details about each occurrence. Find the rule occurrences in the **Data Quality Details** section on the job overview page. You can view their details on the **Logs** tab of the page.

The following image shows the job **Overview** page for a data quality task:

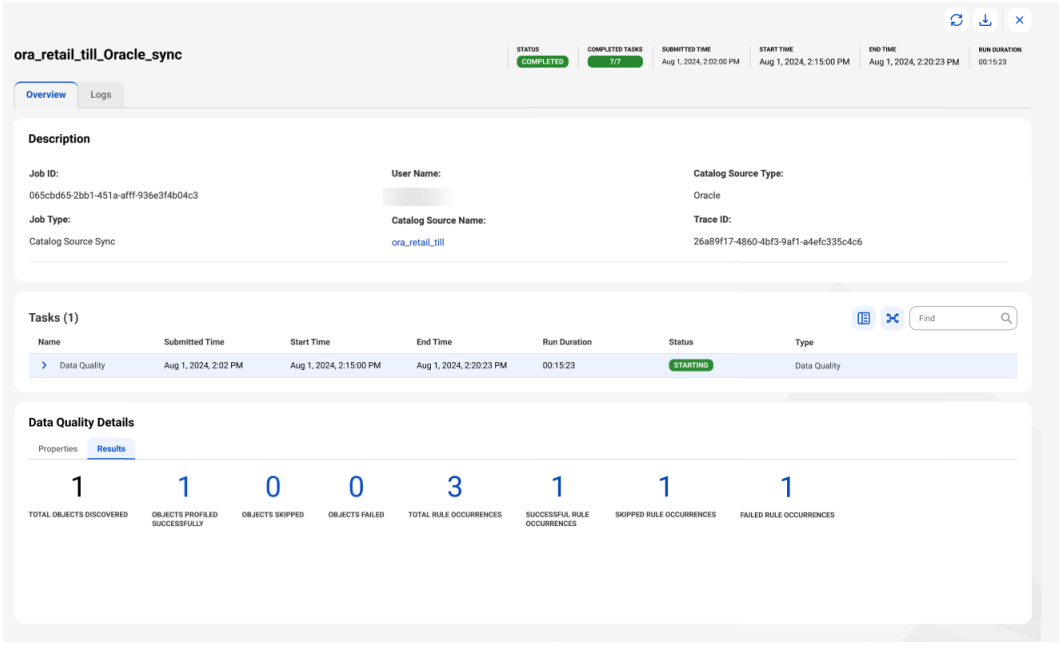

For more information about data quality task monitoring, see the *Administration* help in Metadata Command Center.

Data access management enhancements

You can use the following new and enhanced features for data access management:

- You can enforce data filter policies and data de-identification policies within database ingestion and replication jobs. The policies protect sensitive data during bulk ingestion and replication by applying filters and data protections before your data reaches the target.
  For more information about enforcing data filter policies and data de-identification policies within database ingestion and replication jobs, see *Database Ingestion and Replication* in the Data Ingestion and Replication documentation.
- You can push down data access control policies to the Amazon S3, Google BigQuery, and Tableau source systems.
  For more information about pushing down data access control policies, see the *Data Access Management* in the Data Governance and Catalog documentation.
- You can push down data access control policies and data filter policies to the Microsoft Fabric Lakehouse source system.
  For more information about pushing down data access control policies and data filter policies, see the *Data Access Management* in the Data Governance and Catalog documentation.
- You can push down data filter policies to the Microsoft Power BI source system.
  For more information about pushing down data filter policies, see the *Data Access Management* in the Data Governance and Catalog documentation.
- You can use an AND operator in the filter criteria in data filter rules.
  For more information about creating data filter rules on the Data Access Management page in Data Governance and Catalog, see *Data Access Management* in the Data Governance and Catalog documentation.

New catalog sources

This release includes the following new catalog sources:

- Microsoft Azure Machine Learning
- Salesforce Marketing Cloud (Preview)

For more information about catalog sources, see the corresponding catalog source help.

Enhanced catalog sources

This release includes the following enhancements to catalog sources:

Amazon Athena

This release includes the following enhancements:

- You can use the EC2 Role to Assume Role authentication type to connect to Amazon Athena source systems.
- You can extract metadata from nested field objects.
- You can extract objects with the following complex data types and their nested fields:
  - Array
  - Map
  - Struct

For more information, see the *Amazon Athena* catalog source help.

Amazon S3

You can now configure an IAM user to assume an IAM role. You can specify the role without associating it with an EC2 role in the IAM Role ARN option.

For more information, see the *Amazon S3* catalog source help.

Databricks

This release includes the following enhancements:

- You can use OAuth Machine-to-Machine authentication to run data profiling and data quality jobs.
- When you extract metadata from Databricks Unity Catalog, you can use the **Extract Tags** property to specify whether you want to extract tags assigned to the objects you extract.
- You can now extract metadata from the following Databricks Unity Catalog objects:
  - Volume
  - Function
  - Dashboard
- You can add metadata extraction filters based on volumes and dashboard paths.

For more information, see the *Databricks* catalog source help.

Google BigQuery

You can now extract the following complex data types along with their nested fields:

- Array
- Range
- Struct

For more information, see the *Google BigQuery* catalog source help.

Informatica Intelligent Cloud Services

This release includes the following enhancements:

- You can now extract metadata from the following objects:
  - Database ingestion and replication task
  - Application ingestion and replication task
- You can extract metadata from mappings that include Salesforce connections with custom queries.

For more information, see the *Informatica Intelligent Cloud Services* catalog source help.

JDBC

You can now use the Additional Security Properties field of the JDBC V2 connection in Administrator to enter sensitive authentication information.

For more information, see the *JDBC* catalog source help.

Microsoft Azure Blob Storage

You can use the Shared Access Signature authentication type to connect to Microsoft Azure Blob Storage source systems.

For more information, see the *Microsoft Azure Blob Storage* catalog source help.

Microsoft Azure Data Factory

You can configure Microsoft Azure Synapse Analytics Parameters to extract Microsoft Azure Synapse Analytics notebooks with a Microsoft Azure Synapse Analytics connection in the Microsoft Azure Data Factory catalog source.

For more information, see the *Microsoft Azure Data Factory* catalog source help.

MicroStrategy

You can now extract metadata from ReportMetric objects.

For more information, see the *MicroStrategy* catalog source help.

Microsoft Power BI

You can view data types for metadata extracted from dataset tables.

For more information, see the *Microsoft Power BI* catalog source help.

PostgreSQL

This release includes the following enhancements:

- You can now extract metadata from foreign table objects.
- You can perform connection assignment to view lineage between the following source systems and a PostgreSQL source system:
  - Oracle
  - SQL Server

For more information, see the *PostgreSQL* catalog source help.

Salesforce

This release includes the following enhancements:

- You can extract metadata from Salesforce Flows and Salesforce Data 360 applications. (Preview)
- When you add metadata extraction filters, you can select object types based on the Salesforce application that you extract metadata from.

For more information, see the *Salesforce* catalog source help.

SAP Datasphere

This release includes the following enhancements:

- You can perform connection assignment to view lineage between the following source systems and an SAP Datasphere source system:
  - SAP SuccessFactors
  - Oracle
  - SQL Server
- You can now extract the metadata from the following objects in an SAP Datasphere source system:
  - Data Access Control
    - Data Access Control Column

- Data Flow
  - Data Flow Operator
    - Data Flow Operator Column
- Task Chain
  - Task Chain Node
- Transformation Flow
  - View Transformation
    - View Transformation Column

For information, see the *SAP Datasphere* catalog source help.

SAP ERP

You can add metadata extraction filters based on the asset type.

For information, see the *SAP ERP* catalog source help.

SAP Business Warehouse

This release includes the following enhancements:

- You can connect to SAP Business Warehouse deployed on RISE with SAP.
- You can add metadata extraction filters based on the asset type.

For more information, see the *SAP Business Warehouse* catalog source help.

SAP BW/4HANA

This release includes the following enhancements:

- You can extract metadata from SAP BW/4HANA deployed on RISE with SAP.
- You can add metadata extraction filters based on the asset type.

For more information, see the *SAP BW/4HANA* catalog source help.

SFTP File Systems

You can use private key authentication to connect to the source system.

For more information, see the *SFTP File System* catalog source help.

Snowflake

This release includes the following enhancements:

- You can extract metadata from Iceberg tables.
- You can use authorization code authentication to connect to the source system.

For more information, see the *Snowflake* catalog source help.

Snowflake SQL Script

You can use authorization code authentication to connect to the source system.

For more information, see the *Snowflake SQL Script* catalog source help.

Tableau

This release includes the following enhancements:

- You can now extract calculations included in a dashboard.

- You can now extract tags from objects such as data sources, dashboards, workbooks, and worksheets.

For more information, see the *Tableau* catalog source help.

Configure additional data capabilities

You can configure glossary association and data classification capabilities on the following catalog sources:

- Oracle Business Intelligence
- TIBCO Spotfire

For more information about catalog sources, see the corresponding catalog source help.

Profiling enhancements

This release includes the following profiling enhancements:

Amazon Redshift

You can use the Redshift IAM Authentication via AssumeRole authentication type to connect to Amazon Redshift source systems and run a data profiling job.

Apache Hive

You can run data profiling and data quality jobs on metadata extracted from any schema regardless of the schema name that you specified in the connection properties.

Google BigQuery

This release includes the following enhancements:

- You can apply profiling filters based on external tables and stored procedures.
- When you choose All Rows or Limit N Rows as the sampling type, you can run data profiles on external tables.

Salesforce

This release includes the following enhancements:

- You can run data profiling and data quality jobs using the Salesforce Data 360 connection on the following objects extracted from Salesforce Data 360 applications:
  - Data Lake Object
  - Data Model Object
  - Calculated Insights
- When you apply data profiling filters, you can select object types based on the Salesforce application that you extract metadata from.

SAP Datasphere

You can run data profiling and data quality jobs on the following objects:

- Views
- Analytical Modules

Snowflake

This release includes the following enhancements:

- You can run profiling jobs on Snowflake Hybrid tables and views.
- You can run data profiling and data quality jobs on metadata extracted from any database or schema regardless of the database or schema name that you specified in the connection properties.

Microsoft Azure SQL Server

You can use the Service Principal authentication to connect to Microsoft Azure SQL Server source systems and run data profiling jobs.

Microsoft Fabric Data Lakehouse

You can run data profiling and data quality jobs on metadata extracted from any database or schema regardless of the database or schema name that you specified in the connection properties.

For more information about catalog sources, see the corresponding catalog source help.

Authenticate with an external secrets manager

You can now configure AWS Secrets Manager and Azure Key Vault authentication tools when you configure the following catalog sources:

- MySQL
- SAP HANA Database
- Teradata Database

You can use secrets manager authentication when you run data profiling and data quality jobs and to preview failed rows with and without cache.

For information about how to configure Secrets Manager in Administrator, see Organization Administration in the *Administration* help.

Incremental metadata extraction

You can now run incremental metadata extraction jobs on the following catalog sources:

- Amazon Athena
- Strategy Cloud

A full metadata extraction extracts all objects from the source to the catalog. An incremental metadata extraction considers only the changed and new objects since the last successful catalog source job run. Incremental metadata extraction doesn't remove deleted objects from the catalog and doesn't extract metadata of code-based objects.

For more information about catalog sources, see the corresponding catalog source help.

Workflow enhancements

This release includes the following workflow enhancements:

Define workflow events based on conditions

You can configure workflows tailored to your organization's specific requirements, enabling different approval processes. For example, a highly sensitive glossary or related to GDPR demands a stringent multi-step approval, whereas finance and HR processes follow their own distinct approval workflows.

You can add conditions for workflows used in tickets for approval based on asset hierarchies, relationships, attributes, stakeholder roles, and asset groups. You can select asset types and add conditions in Metadata Command Center. Data Governance and Catalog evaluates workflow events by prioritizing the first matching condition and then starts the appropriate workflow.

For more information, see *Configuring a workflow event* in the *Administration* help.

Reordering workflow events

You can reorder existing workflow events to ensure that high-priority events are processed first. You can move a workflow event up, down, to the top, or to the bottom of the list of workflow events, based on your business requirement.

For more information, see *Reordering workflow events* in the *Administration* help.


REST API enhancements

You can use the catalog source management APIs to run incremental metadata extraction jobs.

For information about the catalog source management APIs, see the Informatica Developer Portal.

Data observability enhancement

When you run a data observability job on a catalog source in Metadata Command Center, you can use a statistical volume measurement based on the earlier collection of the metadata, or you can measure the current volume when you run the job. For catalog sources that provide the data observability, you can choose **Statistic** or **Calculated** to configure how the data observability job measures metadata volume.
The following image shows a catalog source with data observability enabled:

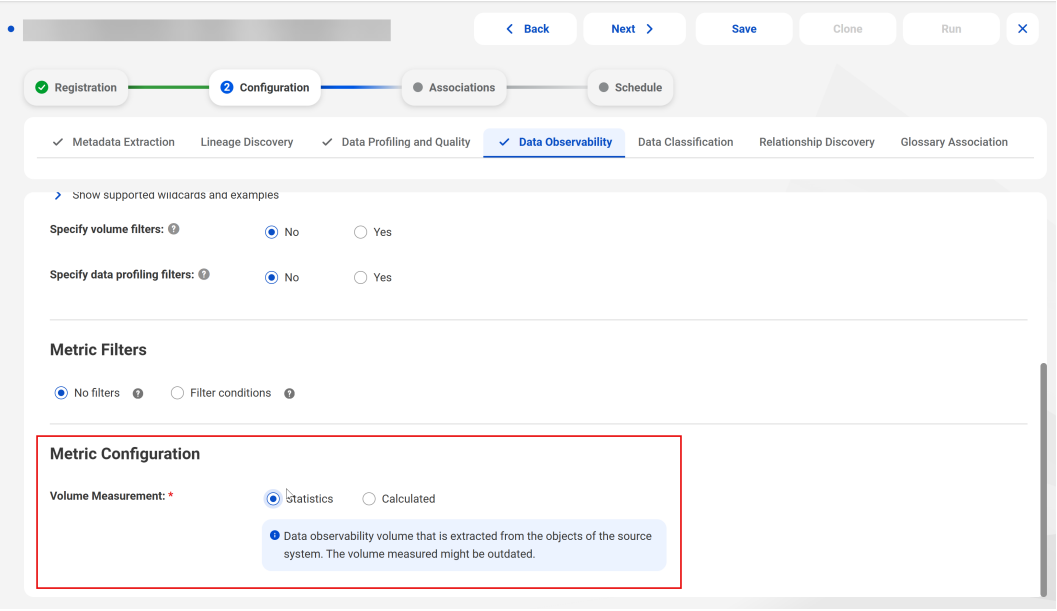

For more information about data observability, see *Data observability* in the *Administration* help.

Changed behavior

The April 2026 release of Data Governance and Catalog includes the following changed behaviors.

Tasks Inbox filter update

In the **Tasks Inbox**, to view tasks claimed by you, use the **Me** filter under the **Task Owners** filter option.

Previously, the **Claimed** and **Other** filters included the tasks claimed by you.

Changes to technical rule reference configuration

If you want to use the **Create a Rule** option when configuring a technical rule reference for a data quality rule template or occurrence in Data Governance and Catalog, your organization administrator must enable the **Enable CLAIRE Generative AI Services** setting in Administrator.

Previously, the **Enable CLAIRE Generative AI Services** setting in Administrator didn't influence the **Create a Rule** option in Data Governance and Catalog.

Make any dashboard your default dashboard

You can set any dashboard as your default dashboard. After you set a default dashboard, you can revert to a default dashboard based on your role, the system default dashboard, or your organization default dashboard.

Previously, you could set only dashboards shared with edit permissions as your default dashboard.

Changes to default value for custom attributes

When you create a business asset in Data Governance and Catalog, the default value for any optional or mandatory custom attribute is not pre-populated. You must specify a value for the custom attribute. An error message appears if you do not specify the value for mandatory custom attributes.

Previously, the default value for optional or mandatory custom attributes was pre-populated in Data Governance and Catalog.

Bulk modifications to a data set

You can modify up to 500 data element in a data set. If you add or remove more than 50 data elements in a data set, a job is triggered to track the progress. The job pauses modifications to the data set, after which you can add or remove the data elements to the data set.

Previously, you could modify only up to 25 data elements in a data set.

Performance enhancement

The April release increases the default limit on the number of jobs that you can run parallely for a given job type in Data Governance and Catalog. If you require further support, contact Informatica Global Customer Support.

Previously, Data Governance and Catalog provided a fixed limit for parallel jobs of a given job type.

Connection for catalog sources

You now use a connection when you configure the following catalog sources:

- Google Looker
- Qlik Sense
- Qlik Sense Cloud

Before you configure the catalog source, create the corresponding connection in Administrator.

Previously, you entered the connection properties directly in Metadata Command Center when you created the catalog source.

For more information, see the corresponding catalog source help.

Data profiling jobs in PostgreSQL catalog sources

Data profiling jobs now ignore unsupported data types and continue to run.

Previously, data profiling jobs that included unsupported data types failed on PostgreSQL catalog sources.

For more information, see the *PostgreSQL* catalog source help.

Removed default swimlane names

While designing workflows, you must now specify a name for each swimlane to proceed, as the default name has been removed.

Previously, swimlanes had default names.

For more information, see *Designing a workflow* in the *Administration* help.

Documentation changes

The April 2026 release of Metadata Command Center includes the following documentation changes.

Removed Catalog Source Configuration publication and online help

The *Catalog Source Configuration* help is removed from the Metadata Command Center help and the *Catalog Service Configuration* publication is removed from the Informatica Documentation Portal. Information that was available in this publication and online help is now available in the individual catalog source publications and online help.

For more information about catalog sources, see the corresponding catalog source help or publications.

New Custom Metadata Integration Reference publication and online help

Information related to custom metadata integration that was available in the *Catalog Source Configuration* publication and online help is now available in a new publication and online help titled *Custom Metadata Integration Reference*.

For more information, see the *Custom Metadata Integration Reference* help or publication.

New Catalog Sources Quick Reference page

The source systems table that was available in the *Catalog Source Configuration* publication and online help is now available in a new page titled *Catalog Sources Quick Reference* on the Informatica Documentation Portal.

For more information, see the *Catalog Sources Quick Reference* page.

CHAPTER 4

November 2025

The following topics provide information about new features, enhancements, and changes in the November 2025 release of Data Governance and Catalog.

Changelog November 2025

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
December 19, 2025	Added	Display updated data quality scores for an asseton page 73
November 28, 2025	Updated	Data quality remediationon page 58
November 20, 2025	Added	"Connection name for referenced source systems " on page 74
November 20, 2025	Updated	"Data access management enhancements" on page 58
November 20, 2025	Added	"New filters for data observability" on page 59
November 20, 2025	Added	"Data quality remediation" on page 58
November 20, 2025	Added	"Data quality enhancement" on page 73
November 20, 2025	Updated	"Task notifications for new stakeholders" on page 60
November 20, 2025	Added	"Changes to Tasks Inbox" on page 73
November 20, 2025	Added	"Design workflows with tasks that run concurrently" on page 70
November 13, 2025	Added	"Enhanced catalog sources" on page 64

Publication Date	Type of Change	Section Title
November 13, 2025	Updated	"Enhanced catalog sources" on page 64
November 6, 2025	Updated	"Enhanced catalog sources" on page 64
November 4, 2025	Added	"Connection permissions required for catalog source jobs" on page 74
November 4, 2025	Added	"Generating JSON Web Token (JWT) to authenticate REST API requests" on page 70
October 28, 2025	Initial publication	

Important notices

The November 2025 release of Data Governance and Catalog includes the following important notices.

Microsoft Azure private link on Azure Japan POD

You can use Azure private link with the following services on the Azure Japan POD:

- Data Governance and Catalog
- Metadata Command Center

For more information about Microsoft Azure private link configuration, see the following How-To Library article: *Microsoft Azure Private Link Onboarding Guide for Informatica Intelligent Cloud Services*.

Preview initiated

Catalog sources

Effective in the November 2025 release, the Swagger API catalog source is available for preview.

Note: Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

For more information about new features and enhancements, see "New features and enhancements" on page 56.

Preview lifted

Effective in the November 2025 release, the following catalog sources are production-ready:


- Informatica Developer
- Workday

Previously, these catalog sources were only available in preview.

New features and enhancements

The November 2025 release of Data Governance and Catalog includes the following new features and enhancements.

Watch the following What's New video to learn about the new features and enhancements in the November 2025 release:

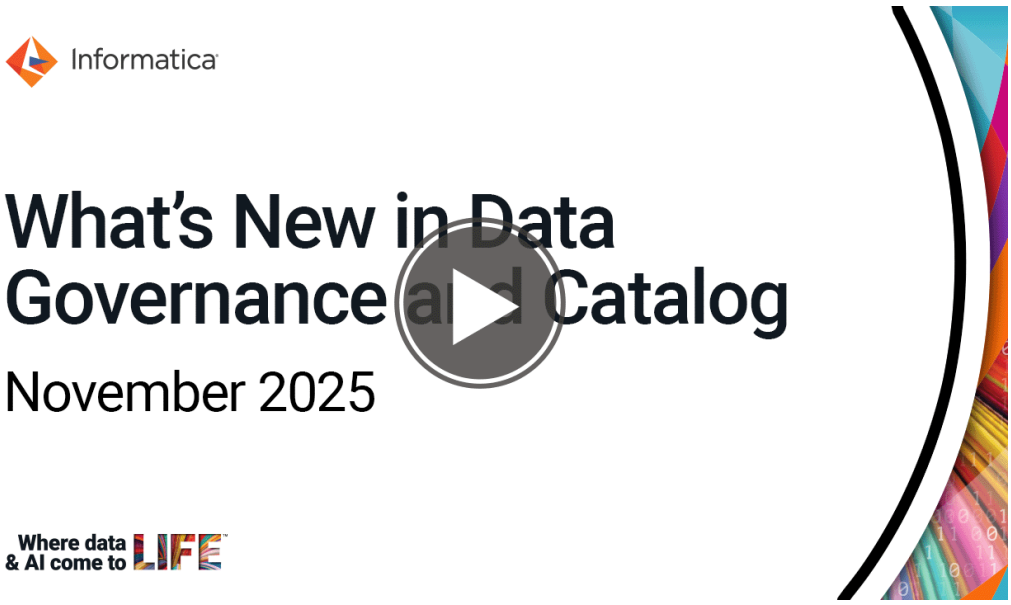


Usage analytics for governance

Usage analytics help you track and report the impact of governance on data and data users. You can monitor analytics for various user and asset trends on dashboards for **Assets** and **User Adoption**. The dashboards have various widgets that show data on several predefined metrics across user adoption and engagement, and data curation and management.

In Metadata Command Center, administrators can enable usage analytics from the **Configure** page. Enabling usage analytics starts collecting metric data and also activates usage analytics dashboards in Data Governance and Catalog.

In Data Governance and Catalog, administrators can share usage analytics dashboards to users and groups. You can perform various activities on the dashboards such as customize dashboards, add widgets, and share dashboards.

The following image shows a system-generated **User Adoption** dashboard with various preconfigured widgets:

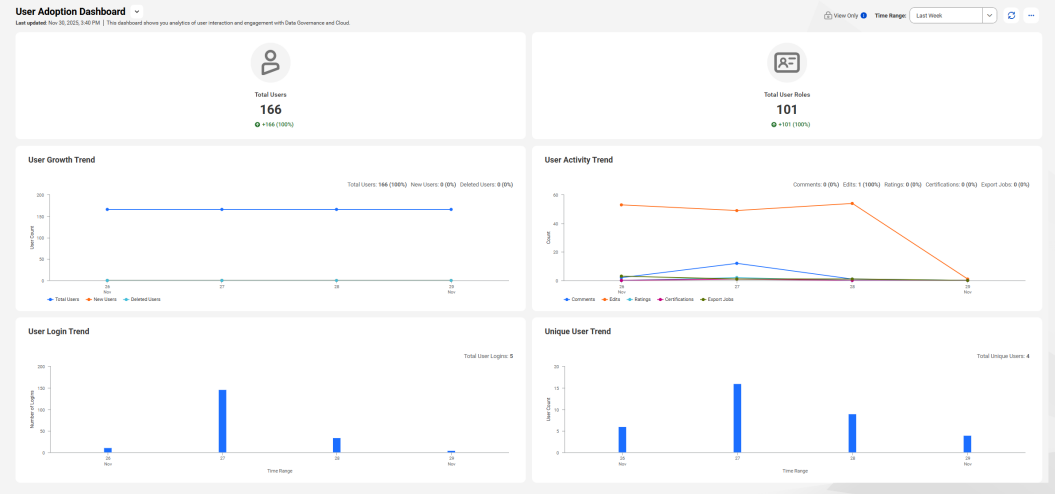


For more information about usage analytics dashboards, see the *Asset Discovery* help.

Task assignment

You can assign an unclaimed task or reassign a task that is already claimed by a user. Find the assignment options in the **Assign Tasks** dialog box on the **Tasks Inbox** page.

The following image shows the **Assign Task** dialog box:

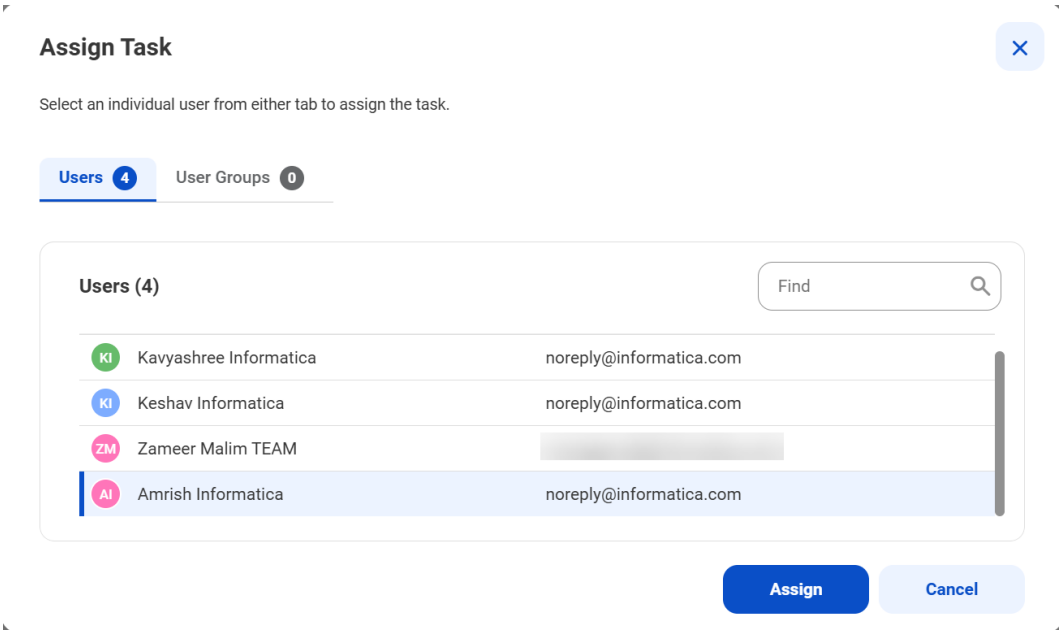

For more information about the new **Tasks Inbox**, see the *Asset Management* module in Data Governance and Catalog.

Data access management enhancements

You can use the following new and enhanced features for data access management:


- You can reverse the effect of a data de-identification technique on your data and return the data to its original state. To unmask the data, configure an Access Policy transformation in a mapping in Data Integration and run the mapping.
  For more information about the Access Policy transformation, see the *Transformations* help in Data Integration.
- You can push down data filter policies to the Amazon Redshift cloud data platform.
  For more information about pushing down data filter policies, see the *Data Access Management* help in Data Governance and Catalog.
- You can push down data filter policies to the Databricks cloud data platform.
  For more information about pushing down data filter policies, see the *Data Access Management* help in Data Governance and Catalog.
- You can push down data access control policies and data filter policies to the Microsoft Azure Fabric Data Warehouse cloud data platform.
  For more information about pushing down data access control policies, see the *Data Access Management* help in Data Governance and Catalog.
- You can use the constant value data de-identification technique to mask decimal and integer values with a constant value when you create or edit a data protection.
  For more information about the constant value data de-identification technique, see the *Data Access Management* help in Data Governance and Catalog.

Data quality remediation

If you are the stakeholder of a data quality rule occurrence and you opt for notifications, you receive in-app and email notifications when the data quality score in the rule occurrence changes between two consecutive runs. Your organization administrator can enable automatic creation of tickets if the data quality score goes below the threshold that you specify in the rule occurrence. The administrator can set the **Data Quality Remediation** option in the **Data Quality** section of the catalog source configuration to **Yes** and enable the **Data Quality Failure Ticket** option. The **Data Quality Remediation** option is disabled by default.


The administrator can define downward and upward score thresholds based on the criticality of the rule occurrence for which you receive notifications in Metadata Command Center.

The following image shows the **Notifications** tab in the **Configure** page in Metadata Command Center:

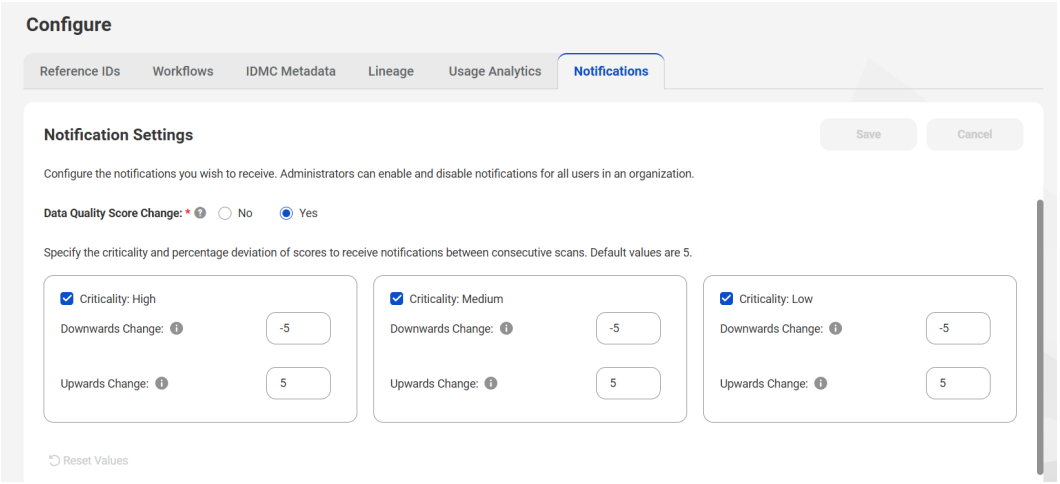

When the administrator enables the **Data Quality Remediation** option, you can select a flat file connection in Metadata Command Center, and specify a location where the failed rows are written during each rule occurrence execution. If you want to preview all failed rows and download them for further remediation action, you can copy the file path link from the rule occurrence and navigate to the location that you specified.

The following image shows the **Data Quality Remediation** and the **Create Data Quality Failure Ticket** options in Metadata Command Center:

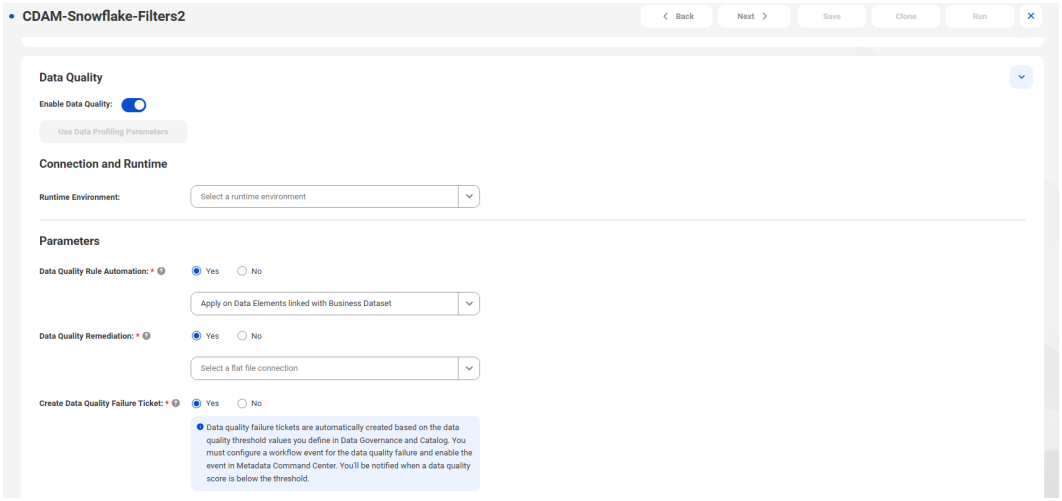


For more information about data quality remediation, see the *Administrator* help in Metadata Command Center.

New filters for data observability

You can filter data entities and observe the entities for freshness and volume by configuring the **Asset filters** panel on the **Data Observability** tab of a catalog source in Metadata Command Center. You don't need to manually enable the **Metadata Extraction** or **Data Profiling** options to observe your data.

The following image shows the new data observability filters in Metadata Command Center:

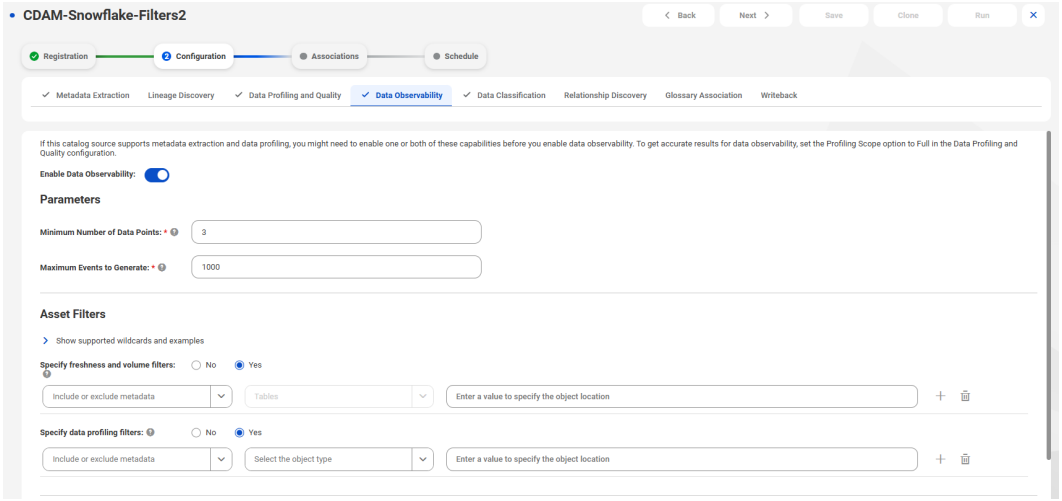


For more information about data observability filters, see the *Administrator* help in Metadata Command Center.

AI System asset relationship

You can establish a direct relationship between AI System assets.

The following image shows the **Relationships** tab of a sample AI System asset:

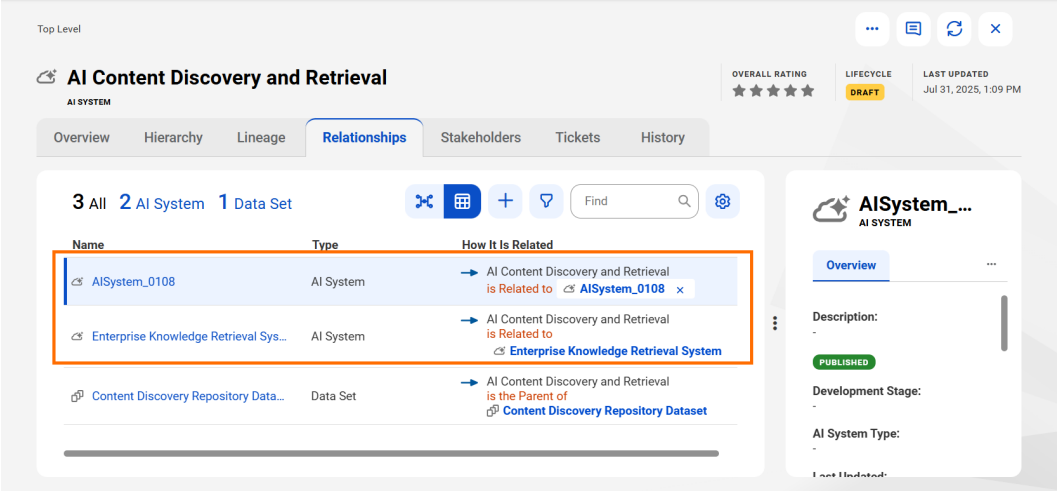

For more information about AI System asset relationships, see the *Asset Discovery* help in Data Governance and Catalog.

Task notifications for new stakeholders

If you modify the stakeholders on an asset, the newly added stakeholders will receive notifications for the active workflow tasks that are associated with the asset. Data Governance and Catalog will send only new task notifications to the newly added stakeholders. Notifications sent before their addition will not be reissued to the new stakeholders.

For more information about notifications, see the *Introduction and Getting Started* help in Data Governance and Catalog.

Enhanced notifications for technical asset updates

Metadata Command Center notifies stakeholders of a catalog source when a technical asset in the source system changes.

Metadata Command Center sends a notification for the following types of change to a technical asset in the source system:

- **Updates to the attributes of an asset**. For example, a technical asset is renamed and its description is updated.
- **Updates to asset structure**. For example, the data type of the asset is changed or a child asset is removed from the asset.
- **Discovery of new assets**. New assets are discovered when the source system is scanned.

If a catalog source is assigned more than one stakeholder, all the stakeholders receive the notification. Stakeholders receive an email notification and a notification within the Data Governance and Catalog interface that summarizes all asset changes within the source. To manage these notifications, you can use the **Technical Asset Changes** subcategory on the **Asset Changes** tab of the **Notification Settings** page.


For more information about notifications, see the *Introduction and Getting Started* help in Data Governance and Catalog.

URL as a custom attribute

You can add a URL or a hyperlinked label as a custom attribute for asset types. Select the **URL Field** data type in Metadata Command Center to add a URL as an attribute.

Then in Data Governance and Catalog, you can modify the URL on associated asset pages or through bulk import and export operations.


The following image shows a business term with a custom attribute of the **URL field** data type:

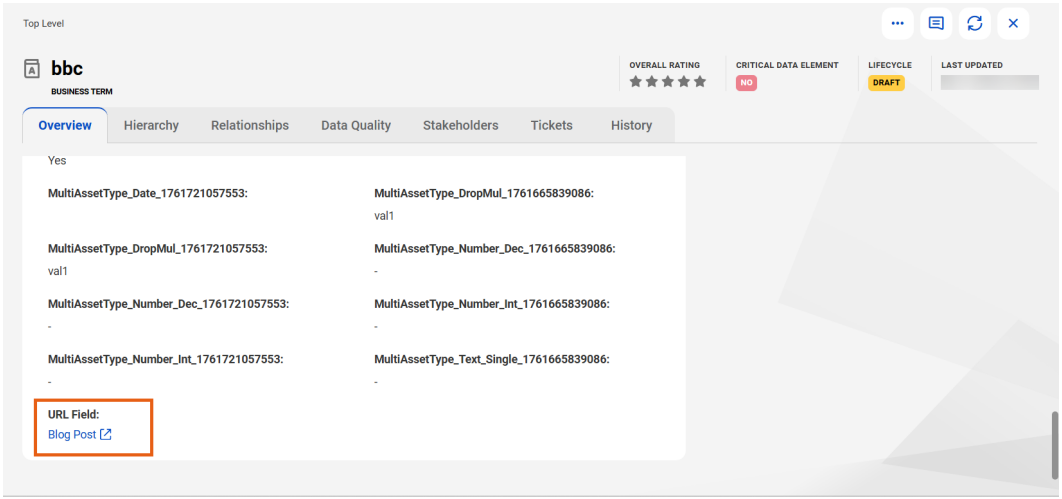

For more information about the bulk import process, see the *Bulk Import Assets* help.

Updates to Save options for search results

When you save your search, you can save the sorting order along with the search query and any filters you applied.

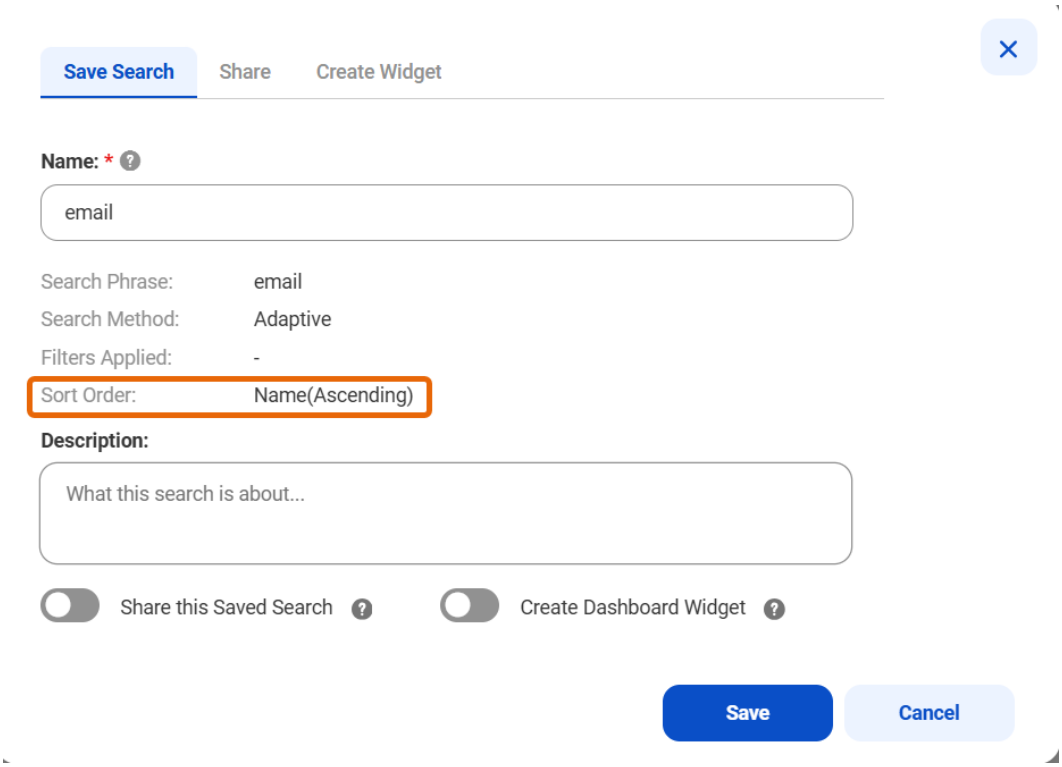


For more information about saving search results, see the *Asset Discovery* help.

New attribute for catalog sources

For catalog sources that extract XML objects, you can view the attribute **Repeatable**. In an XML schema, the attribute indicates if a node can repeat under the parent node. If the value for **Repeatable** is yes, then the node can repeat multiple times under the parent node. If the value for **Repeatable** is no, then the node does not repeat under the parent node.

The following image shows the attribute **Repeatable** for an XML object:

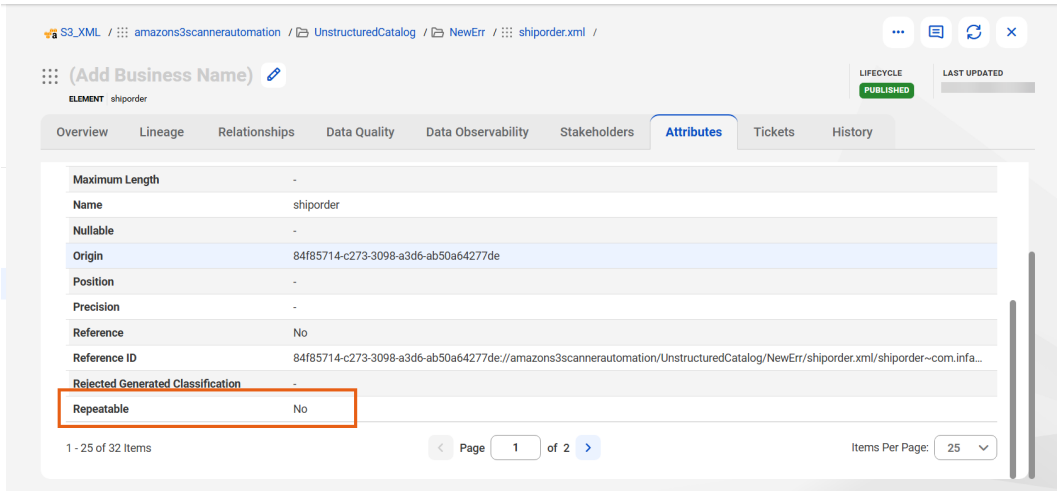


For more information about viewing technical assets, see the *Understanding Technical Assets* help.

QuickLook enhancements

Data Marketplace asset discovery in QuickLook

The QuickLook browser extension introduces the **Data Marketplace** filter that enables you to discover Data Governance and Catalog assets that are added by stakeholders to data collections in Data Marketplace. You can also view the data collections that are associated with these assets and open the data collections in Data Marketplace.

The following image shows the **Data Marketplace** filter in the Informatica QuickLook browser extension:

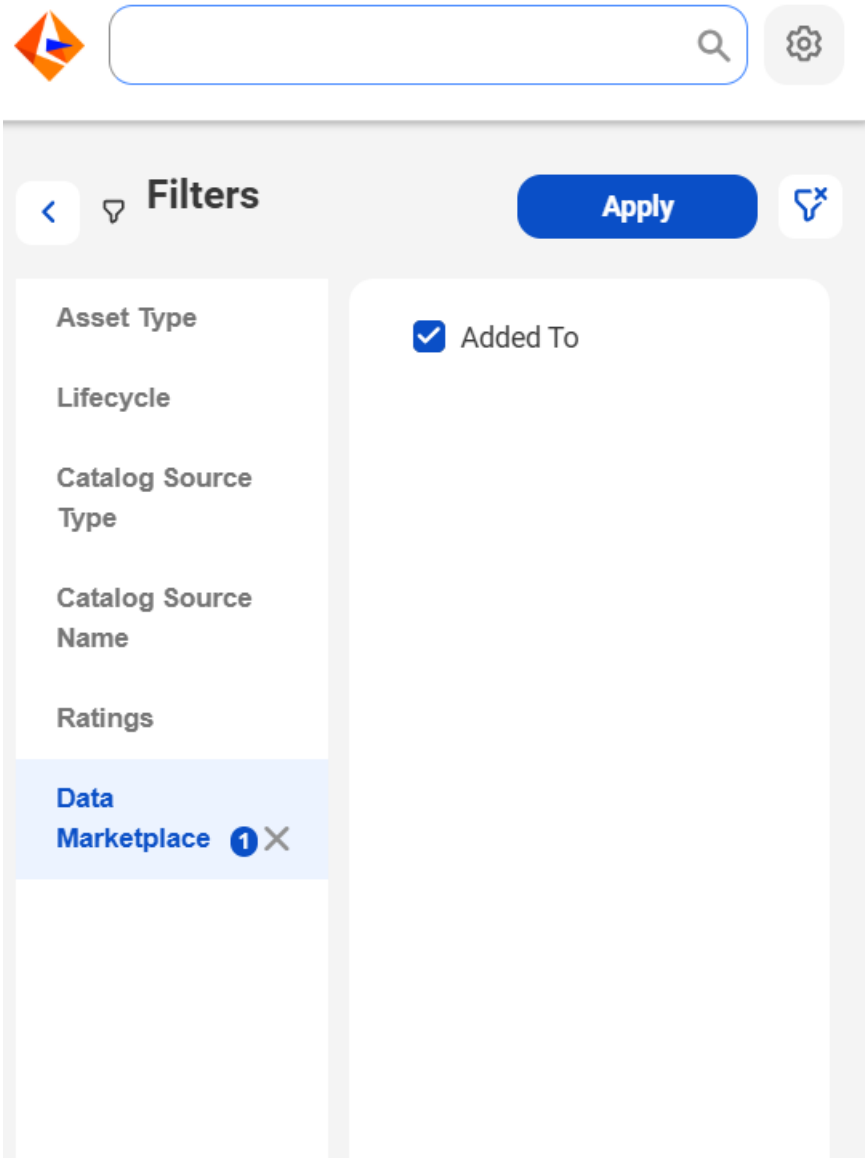

For more information about how you can search for assets in QuickLook, see the *Informatica QuickLook Browser Extension* help in Data Governance and Catalog.

Support for all custom metadata objects in QuickLook

You can search for all custom metadata objects within the QuickLook extension.

New catalog sources

This release includes the following new catalog sources:

- Denodo
- Fivetran Platform
- Google Vertex AI
- Oracle SQL Loader

- SAP Sales & Service Cloud
- Strategy Cloud
- Swagger API (Preview) For more information about catalog sources, see the corresponding catalog source help.

Enhanced catalog sources

This release includes the following enhancements to catalog sources:

Amazon Redshift

You can use the Redshift IAM Authentication via AssumeRole authentication type to connect to Amazon Redshift source systems.

For more information, see the *Amazon Redshift* catalog source help.

Apache Hive

You can extract metadata from source systems hosted on Google Cloud Dataproc clusters using non-Kerberos authentication and on Cloudera Data Platform (CDP) version 7.3.1.

For more information, see the *Apache Hive* catalog source help.

AWS Glue

You can use the IAM Roles Anywhere authentication type to connect to AWS Glue source systems.

For more information, see the *AWS Glue* catalog source help.

Databricks

When you extract metadata from Databricks notebooks, you can use the Notebooks Preload Paths property to specify the paths to the Databricks notebooks that you want to preload.

For more information, see the *Databricks* catalog source help.

IBM InfoSphere DataStage

You can extract jobs that contain a Google BigQuery connector stage.

For more information, see the *IBM InfoSphere DataStage* catalog source help.

Informatica Developer

This release includes the following enhancements:

- You can extract metadata from applications.
- You can add metadata extraction filters based on workflows and applications.

For more information, see the *Informatica Developer* catalog source help.

Informatica Intelligent Cloud Services

This release includes the following enhancements:

- You can perform connection assignment to view lineage between Data Integration mappings and a Workday source system.
- You can extract metadata from hierarchy instances of MDM SaaS source systems.
- You can extract metadata from dynamic mapping tasks of Data Integration source systems.

For more information, see the *Informatica Intelligent Cloud Services* catalog source help.

Microsoft Azure Data Factory

This release includes the following enhancements:

- You can extract metadata from pipelines that connect to SAP HANA source systems.
- You can perform connection assignment to view lineage between an SAP HANA Database source system and a Microsoft Azure Data Factory source system.
- You can extract metadata from Salesforce datasets that use Salesforce Object Query Language (SOQL) queries.

For more information, see the *Microsoft Azure Data Factory* catalog source help.

Microsoft Azure Synapse Analytics

This release includes the following enhancements:

- You can extract metadata from pipelines that connect to SAP HANA source systems.
- You can perform connection assignment to view lineage between an SAP HANA Database source system and a Microsoft Azure Synapse Analytics source system.
- You can extract metadata from Salesforce datasets that use Salesforce Object Query Language (SOQL) queries.

For more information, see the *Microsoft Azure Synapse Analytics* catalog source help.

Microsoft Power BI

You can perform connection assignment to view lineage between the following source systems and a Microsoft Power BI source system:

- SAP Business Warehouse
- SAP BW4/HANA
- SAP HANA Database

You can extract metadata from Power BI Power Query expressions that retrieve data from PostgreSQL sources using an ODBC connection.

For more information, see the *Microsoft Power BI* catalog source help.

Qlik Sense

You can view lineage information for application assets that contain binary statements.

For more information, see the *Qlik Sense* catalog source help.

SAP Enterprise Resource Planning (ERP)

This release includes the following enhancements:

- You can use the catalog source with SAP S/4 HANA applications hosted on a private cloud such as Amazon Web Services (AWS).
- You can perform connection assignment to view lineage between the following source systems and an SAP ECC source system:
  - SAP Business Warehouse (SAP BW)
  - SAP BW/4HANA
  - SAP BusinessObjects Data Services

- You can perform connection assignment to view lineage between the following source systems and an SAP S/4HANA source system:
  - SAP Business Warehouse (SAP BW)
  - SAP BW/4HANA
  - SAP BusinessObjects Data Services

  For more information, see the *SAP ERP* catalog source help.

SAP Business Objects Data Services

You can perform connection assignment to view lineage between the following source systems and an SAP Business Objects Data Services source system:

- SAP Business Warehouse
- SAP BW4/HANA
- SAP HANA Database
- SAP ECC

For more information, see the *SAP Business Objects Data Services* catalog source help.

SAP Datasphere

This release includes the following enhancements:

- You can run metadata extraction jobs with the SAP Datasphere Command Line Interface. You can choose the metadata extraction method when you configure metadata extraction.
- You can perform connection assignment to view lineage between the following source systems and an SAP Datasphere source system:
  - SAP Enterprise Resource Planning
  - SAP Business Warehouse
  - SAP HANA
  - SAP BW/4HANA
  - SAP S/4HANA
  - SAP Analytics Cloud

  For more information about catalog sources, see the *SAP Datasphere* catalog source help.

SAP SuccessFactors

You can use OAuth 2.0 authentication to connect to an SAP SuccessFactors source system.

For more information, see the *SAP SuccessFactors* catalog source help.

Tableau

This release includes the following enhancements:

- You can extract metadata from measure names.
- You can perform connection assignment to view lineage between the following source systems and a Tableau source system:
  - Databricks
  - SAP Business Warehouse
  - SAP BW4/HANA

- SAP HANA Database

For more information, see the *Tableau* catalog source help.

Talend Data Integration

You can run connection-aware scans to view complete lineage with reference source system objects.

For more information, see the *Talend Data Integration* catalog source help.

Workday

This release includes the following enhancements:

- You can add metadata extraction filters based on data sources, business objects, and reports.
- You can use OAuth 2.0 Refresh Token Flow authentication to connect to a Workday source system.

For more information, see the *Workday* catalog source help.

Configure additional data capabilities

You can configure the following additional data capabilities on catalog sources:

- Glossary association, data classification, and relationship discovery capabilities on Greenplum.
- Glossary association and data classification capabilities on the following catalog sources:
  - SAP Datasphere
  - Workday
- Profiling and data quality capabilities on SAP SuccessFactors.

For more information about catalog sources, see the corresponding catalog source help.

Incremental metadata extraction

You can now run incremental metadata extraction jobs on the following catalog sources:

- Databricks
  Applicable only to Databricks Unity Catalog.

  Applies to the following Databricks Unity Catalog objects:
  - Table
  - View
- Google BigQuery
- Google Cloud Storage
- Microsoft Sharepoint Online
- Workday

A full metadata extraction extracts all objects from the source to the catalog. An incremental metadata extraction considers only the changed and new objects since the last successful catalog source job run. Incremental metadata extraction doesn't remove deleted objects from the catalog and doesn't extract metadata of code-based objects.

For more information about catalog sources, see the corresponding catalog source help.

Technical Description extraction

You can now view the technical description after you run a metadata extraction job on pipelines and activities with the following catalog sources:

- Microsoft Azure Synapse Analytics

- Microsoft Azure Data Factory

For more information about catalog sources, see the corresponding catalog source help.

Metadata extraction from partitioned JSON files

You can extract metadata from partitioned JSON files with the following catalog sources:

- Amazon S3
- File System
- Google Cloud Storage
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Configure partition detection for JSON and XML files

You can enable partition detection for JSON and XML files in the following catalog sources:

- Amazon S3
- File System
- Google Cloud Storage
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft Sharepoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Deprecate objects deleted from a source system

When you configure or run a catalog source, you can choose to deprecate objects that are deleted from a source system using the **Metadata Change Option**. If you delete objects from the source or make changes to the filter, the objects imported into the catalog before the change move to the "Obsolete" lifecycle in the catalog.

You can purge such obsolete objects from a catalog source. This permanently deletes all objects with the "Obsolete" lifecycle status, along with associated enrichments, from the catalog.

For more information about catalog sources, see the corresponding catalog source help.

Modify assigned connections

You can modify connection assignments to endpoint catalog source objects. After you modify connections, the connection assignment job starts. When the job completes, the old connections are unassigned, new connections are assigned, and Metadata Command Center creates links between matching objects in the connected catalog sources.

For more information about modifying assigned connections, see *Modifying assigned connections* in the *Administration* help.

Export lists of matched and unmatched objects after assigning connections

After you assign connections to endpoint catalog source objects, there can be both matched and unmatched objects in the catalog. Matched objects are objects that directly match the assigned endpoint objects. Unmatched objects are objects that don't directly match the assigned endpoint objects and are not found in the source system.

After assigning connections, you can export a list of matched and unmatched objects to a Microsoft Excel file. You can use these lists for remediation or for reference.

For more information, see *Export lists of matched and unmatched objects* in the *Administration* help.

Select paths for metadata extraction filters

When you define filters for metadata extraction, you can include or exclude metadata from a folder or file path. You can either enter the path as the filter value or select a path from a list of folders and files available in the source system.

You can filter based on a folder, file, or path when you configure the following catalog sources:

- Amazon S3
- File System
- Google Cloud Storage
- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For more information about catalog sources, see the corresponding catalog source help.

Generate lineage for file system based catalog sources

When you link catalog sources to generate lineage, you can select file system based catalog sources as the source and target catalog sources.

You can choose any of the following file system based catalog sources when you link catalog sources:

- Amazon S3
- File System
- Google Cloud Storage

- Hadoop Distributed File System
- Microsoft Azure Blob Storage
- Microsoft Azure Data Lake Storage Gen2
- Microsoft Fabric OneLake
- Microsoft OneDrive
- Microsoft SharePoint Online
- Oracle Cloud Object Storage
- SFTP File System

For information about linking catalog sources, see *Link catalog sources* in the Administration help.

Select objects for metadata extraction filters

When you define filters for metadata extraction, you can select objects from a list of objects available in the source system.

You can select objects from a list when you configure the following catalog sources:

- Google BigQuery
- IBM Netezza
- Microsoft Azure Synapse Data Warehouse

For more information about catalog sources, see the corresponding catalog source help.

Synchronize metadata from Data Integration dynamic mapping tasks

The IDMC metadata now synchronizes metadata from dynamic mapping tasks in Data Integration.

For information about IDMC metadata, see *IDMC Metadata* in the Administration help.

Use REST APIs to manage catalog sources

You can use REST APIs to perform the following tasks on catalog sources:

- Create catalog source. Use the API to create a catalog source.
- Retrieve catalog source. Use the API to retrieve a catalog source based on the source ID.
- List catalog sources. Use the API to list catalog sources based on the specified filter.
- Update catalog source. Use the API to edit the catalog source configuration.
- Delete catalog source. Use the API to delete a catalog source.

For information about the catalog source management APIs, see the Informatica Developer Portal.

Generating JSON Web Token (JWT) to authenticate REST API requests

To authenticate users to REST API endpoints, organization administrators can choose the JSON Web Token-based authentication method in Administrator. This method allows you to generate JWT tokens without a session ID.

With this method, you can authenticate to REST API endpoints with only the JWT token. However, generating the JWT token from a session ID remains the default.

For more information, see the JWT Support Knowledge article.

Design workflows with tasks that run concurrently

You can use the parallel gateway component to design workflows that require multiple tasks to run concurrently.

For example, when you create a workflow for processing a loan application, you can add multiple tasks that can run in parallel to speed up the process. Customer credit risk validation, KYC collection, asset details, and legal inputs are tasks that users can perform concurrently.

For more information about how you can design a workflow, see *Designing a workflow* in the *Administration* help.


Modify published workflows

You can now edit an existing workflow that is already published.

For more information about how you can modify a workflow, see *Update a workflow* in the *Administration* help.

Custom layouts for the Browse page

Administrators can configure custom layouts for the **Browse** page. The configuration options are similar to the custom layout options for the **Asset** page.

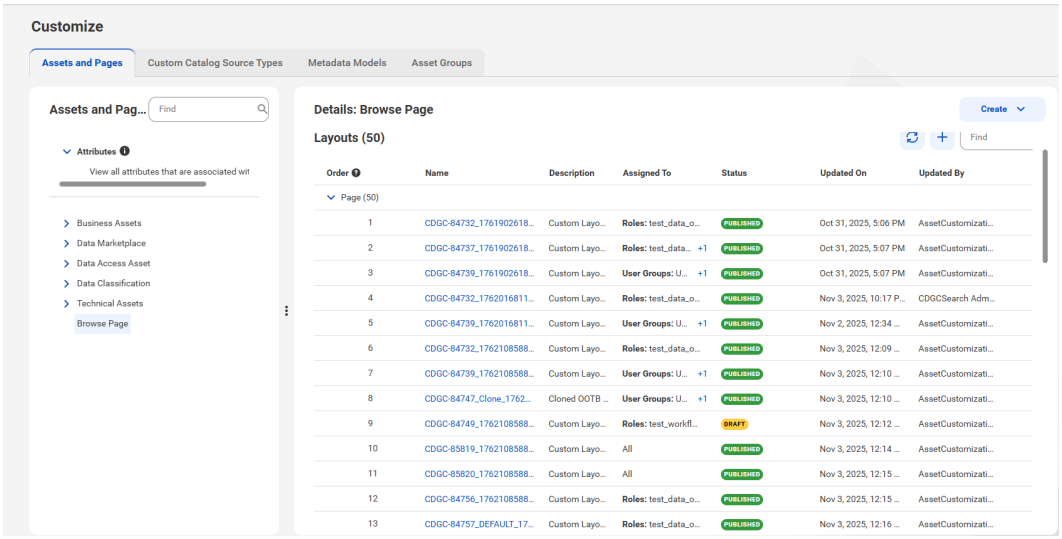

For more information about how you can create custom layouts for the Browse page, see *Custom layouts for the Browse page* in the *Administration* help.

Upgrade notifications

Metadata Command Center now sends email notifications about organization upgrades to the latest versions of Metadata Command Center, Data Governance and Catalog, and Data Marketplace.

As an administrator, you receive notifications for the following events:

- An upgrade is scheduled
- An upgrade schedule is updated
- An upcoming upgrade
- An upgrade starts
- An upgrade completes

For more information about upgrades, see *Upgrade an organization to the latest version* in the *Administration* help.

Changed behavior

The November 2025 release of Data Governance and Catalog includes the following changed behaviors.

Data access management operations now use the Data Access Management Agent service associated with the connection

Whenever Data Governance and Catalog pushes down a data access control policy or data filter policy to your cloud data platform, it now uses the Data Access Management Agent service configured in the runtime environment that is associated with the connection.

Previously, Data Governance and Catalog used any Data Access Management Agent service.

For more information about the Data Access Management Agent service, see the *Secure Agent Services* help in Administrator.

Increased sensitivity levels for data classifications

You can now customize up to 10 sensitivity levels for data element classifications in Metadata Command Center. Configure sensitivity labels on the **Customize** page and update the associated data classifications on the **Explore** page. Data Governance and Catalog shows the new sensitivity labels on assets when you update the data classifications.

Previously, you created up to five sensitivity levels for a data element classification.

For more information about customizing sensitivity levels for data classifications, see the *Administration* help in Metadata Command Center.

Enhancement to export and import of asset relationships

If you include relationships while exporting assets, you can export relationships that have a business source asset and a technical target asset. Similarly, you can import relationships whose source is a business asset and target is a technical asset in template files for relationships.

The following table lists the relationships between asset types for which you can run Import and Export jobs:

Source Asset Type	Target Asset Type	Relationship Type
Policy	Data Set	is Regulating
Policy	Data Element	is Regulating
Process	Data Set	is Related to
Process	Data Element	is Related to
Project	Data Set	is Related to
Project	Data Element	is Related to
AI Model	Resource	is Used in
AI Model	Data Process	is Used in
Data Set	AI Model	is in Direct Lineage with
System	Resource	is Derived from

Source Asset Type	Target Asset Type	Relationship Type
System	Data Source	is Derived from
Manual Data Element	Data Element	is in Manual Lineage with

Previously, you exported and imported relationships exclusively between business assets.

For more information about the bulk import process, see the *Bulk Import Assets* help.

Data quality enhancement

You can now preview and download up to 1,000 failed rows from a rule occurrence.

Previously, you could preview up to 100 failed rows. You could not download the failed rows from a rule occurrence.

Display updated data quality scores for an asset

If you update data quality scores through API, bulk import, or data profiling, the updated data quality scores can take up to one hour to reflect in the **Total Runs Table** of the **Score** tab of a rule occurrence.

Previously, you could see the updated data quality scores in real time.

Changes to Tasks Inbox

You can no longer use the **Name** field to sort the **Tasks** grid on the **Tasks Inbox** page.

Users, roles, and groups no longer require the **Read** privilege to create and manage workflow tickets.

Automatic synchronization of glossary updates to technical assets

When you link a technical asset to a glossary asset so that the technical asset obtains its name and description from the glossary asset, Data Governance and Catalog can automatically update the technical asset details if the name or description of the glossary asset changes.

Previously, changes made to the glossary names and descriptions were not automatically reflected in the associated technical assets.

For more information about **Associate business names and descriptions with technical assets**, see the *Asset Management* module in Data Governance and Catalog.

Updates to public REST APIs

You can create all types of business assets through the Manage Assets API.

You can create relationships between assets by using Update Asset API.

For more information, see the *Manage Content* help.

Action label name change

To create a catalog source, a data classification, or a linked catalog source configuration that is similar to an existing one, you now click **Clone**.

Previously, you clicked **Copy**.

For more information, see the *Catalog Source Configuration* help.

REST API resource identification

The URI to access the catalog source management REST API endpoints has been updated to `/data360/catalog-source-management/v1`.

Previously, you had to use the following URI to access catalog source management endpoint: `/data360/executable/v1`

For information about the catalog source management APIs, see the Informatica Developer Portal.

Connection permissions required for catalog source jobs

For catalog sources that require a connection in Administrator, or include a capability that needs a connection, you now need to have permissions on connections to perform the following tasks:

- Create or edit a catalog source
- Configure a catalog source to run on a schedule
- Manually run a catalog source job

This applies to all types of connections, such as source, staging, and flat file connections.

To run a catalog source job for catalog sources that reference other source systems, you need permissions on the connections for all the reference source systems.

Previously, you didn't need permissions on connections to perform these tasks.

For more information, see the *Catalog Source Configuration* help.

Connection name for referenced source systems

The connection names for referenced source system assets now appear in the following format: `Host_Port_DB`.

Previously, the connection names appeared in the following format: `HOST_Port_DB_Schema`.

This applies to the Talend Data Integration catalog source.

For more information, see the *Talend Data Integration* catalog source help.