Informatica® Metadata Command Center
October 2026

IBM Mainframe Job Control Language (Accelerator)

Informatica Metadata Command Center IBM Mainframe Job Control Language (Accelerator)
October 2026

© Copyright Informatica LLC 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, Informatica Cloud, Informatica Intelligent Cloud Services, PowerCenter, PowerExchange, and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-30

Table of Contents

Preface. 4

Chapter 1: IBM Mainframe Job Control (Accelerator). 5

Introduction to IBM Mainframe Job Control Language (Accelerator). 5

Appendix A: Managing catalog sources. 7

Cloning a catalog source configuration. 7

Deleting or purging a catalog source. 8

Purging obsolete objects from a catalog source. 8

Curating CLAIRE recommendations. 9

Managing configuration permissions for catalog sources. 9

Preface

Read *IBM Mainframe Job Control Language (Accelerator)* to learn how to register and configure IBM Mainframe Job Control Language (Accelerator) sources in Metadata Command Center as catalog sources. After you configure a catalog source, you extract metadata and then view the results in Data Governance and Catalog.

CHAPTER 1

IBM Mainframe Job Control (Accelerator)

You can register and configure IBM Mainframe Job Control Language (Accelerator) source systems as catalog sources in Metadata Command Center. After you configure a catalog source, you extract metadata and then view the results in Data Governance and Catalog.

Job Control Language (JCL) is a scripting language used on IBM mainframe operating systems to instruct the systems on how to run a batch job or start a subsystem. The use of JCL involves the specification of job parameters through the JOB, EXEC, and DD statements to manage input, processing, and output tasks in a structured manner.

Introduction to IBM Mainframe Job Control Language (Accelerator)

You can use Metadata Command Center to extract metadata from a source system.

A source system is any system that contains data or metadata. For example, IBM Mainframe is a source system from which you can extract metadata through an IBM Mainframe Job Control Language (Accelerator) catalog source with Metadata Command Center.

Before you extract metadata from a source system, you first create and register a catalog source that represents the source system.

When Metadata Command Center extracts metadata, Data Governance and Catalog displays the extracted metadata and its attributes as technical assets. You can then perform tasks such as analyzing the assets, viewing lineage, and creating links between those assets and their business context.

Note: To enable and configure this catalog source, you need assistance from Informatica Professional Services. For more information, contact your account representative.

Objects extracted

You can use the IBM Mainframe Job Control Language (Accelerator) catalog source to extract metadata from the following objects in the IBM Mainframe Job Control Language source system:

- JCL Job
- JCL Step
- Calculation
- COBOL Program

- COBOL Program Instance
- JCL Procedure
- JCL Procedure Instance
- Partitioned Dataset
- Mainframe File Field
- Mainframe File Format

APPENDIX A

Managing catalog sources

You can update, copy, delete, purge, and run a catalog source. You can also grant configuration permissions for catalog sources to different roles in your organization.

On the **Catalog Sources** page of the **Explore** page, you can select a catalog source to see its overview and related catalog sources. The **Overview** tab displays the capabilities, filters, stakeholders, asset groups, and schedules enabled for a catalog source. The **Related Catalog Sources** tab displays a list of related catalog sources that are either assigned manually using connection assignment or are curated based on CLAIRE recommendations using the lineage discovery capability. You can view related catalog sources and accept or reject CLAIRE recommendations for catalog sources that are run with the lineage discovery capability.

Cloning a catalog source configuration

You can clone the configuration of a catalog source to create another catalog source with the same configuration.

Note: Cloning doesn't copy the content of the catalog source.

1. In Metadata Command Center, go to the **Explore** page.
2. Select **Catalog Sources** from the menu.
3. You can clone a catalog source in one of the following ways:
   - Hover your mouse over the catalog source that you want to clone and click **Clone** from the **Action** menu.
   - Open the catalog source that you want to clone and click **Clone**.

   Note: By default, the cloned catalog source has the same name suffixed with _Clone. You can change the name if needed.
4. If needed, modify the configuration of the catalog source by updating the parameters on each tab.

   Cloning doesn't copy the content of sensitive fields. If the catalog source contains sensitive fields such as Client Secret, enter the values.
5. Click **Save**.

Deleting or purging a catalog source

Delete or purge a catalog source based on your business requirements.

When you delete a catalog source, you delete all the configuration specific to that catalog source, along with all the metadata that was extracted and any enrichment made to the associated metadata. Purging a catalog source deletes all the metadata that was extracted, along with any enrichment made to the associated metadata.

Note: Before you delete or purge a catalog source, manually unassign the connections that are assigned to that catalog source.

1. Go to the **Explore** page in Metadata Command Center.
2. Select **Catalog Sources** from the menu.
3. From the list of catalog sources, search for the catalog source that you want to delete or purge.
4. Click the **Action** menu, and select **Delete** or **Purge**.

   Note: You can't delete or purge a catalog source if the catalog source job is in the running state.
5. To confirm delete or purge, click **OK**.

   The catalog source is triggered to delete or purge. You can monitor the status of the job on the **Monitor** page.

   Note: If the deletion job succeeds, the catalog source disappears from Metadata Command Center. If it fails, some associated objects might still be present in Data Governance and Catalog. Such catalog sources continue to appear in the list of catalog sources in Metadata Command Center, but are marked as **Deleted**. Delete the catalog sources to remove them along with any remaining objects present in Data Governance and Catalog.

Purging obsolete objects from a catalog source

You can purge obsolete objects from a catalog source.

When you configure or run a catalog source, you can choose to deprecate objects that are deleted from a source system. If you delete objects from the source system or make changes to the filter, the objects imported into the catalog before the change move to the Obsolete lifecycle in the catalog. You can purge obsolete objects from a catalog source. This permanently deletes all objects with the Obsolete lifecycle status, along with associated enrichments, from the catalog.

1. Go to the **Explore** page in Metadata Command Center.
2. Select **Catalog Sources** from the menu.
3. From the list of catalog sources, search for the catalog source from which you want to purge obsolete objects.
4. Click the **Action** menu, and select **Purge Obsolete Objects**.

   A warning message appears on the page.
5. Click **Yes** to confirm.

   A confirmation message appears on the page and the purge job starts. You can monitor the status of the job on the **Monitor** page. If the job succeeds, all obsolete objects present in the catalog source disappear from the catalog.

   Note: If the job fails, some obsolete objects might remain in the catalog. To remove the remaining obsolete objects, run the purge job again.

Curating CLAIRE recommendations

You can view related catalog sources and accept or reject CLAIRE recommendations for a catalog source.

Applicable to catalog sources that generate lineage.

1. Go to the **Explore** page in Metadata Command Center.
2. Select **Catalog Sources** from the menu.
3. From the list of catalog sources, search for the catalog source for which you want to curate CLAIRE recommendations.
4. Hover your mouse over the catalog source and click **View Lineage Discovery** from the **Action** menu.

   Note: The **View Lineage Discovery** option is available for catalog sources that are run with the lineage discovery capability.

   The **Configure** page appears with the catalog source filtered on the **Lineage Discovery** tab of the **Lineage** tab.
   The **Related Catalog Sources** tab displays a list of related catalog sources.
5. Hover your mouse over a related catalog source and click **Accept** or **Reject** from the **Action** menu.

   For more information about lineage discovery and curating CLAIRE recommendations, see *Lineage discovery* in the *Administration* help.

Managing configuration permissions for catalog sources

As a service administrator, you can grant configuration permissions for catalog sources to different roles in your organization, and add specific users and user groups to those roles so that they can perform operational activities on a catalog source.

To manage permissions for catalog source configuration, verify that at least one role has the catalog source configuration **Set Permissions** functionality enabled for Metadata Command Center in Administrator. In Administrator, create the required roles, assign users and user groups to the roles, and specify appropriate permissions to the roles.

You can select roles and add specific users or user groups to those roles to grant the following levels of permission for catalog source configuration:


- Create
- Read
- Update
- Run
- Set Permissions

Based on the permissions granted to the roles, the selected users and user groups belonging to that role can perform appropriate operations for configuring catalog sources.

1. Go to the **Explore** page in Metadata Command Center.
2. From the list of catalog sources, search for the catalog source for which you want to manage permissions.


3. Click the **Action** menu, and select **Permissions**.

   The **Catalog Source Permissions** dialog box appears.

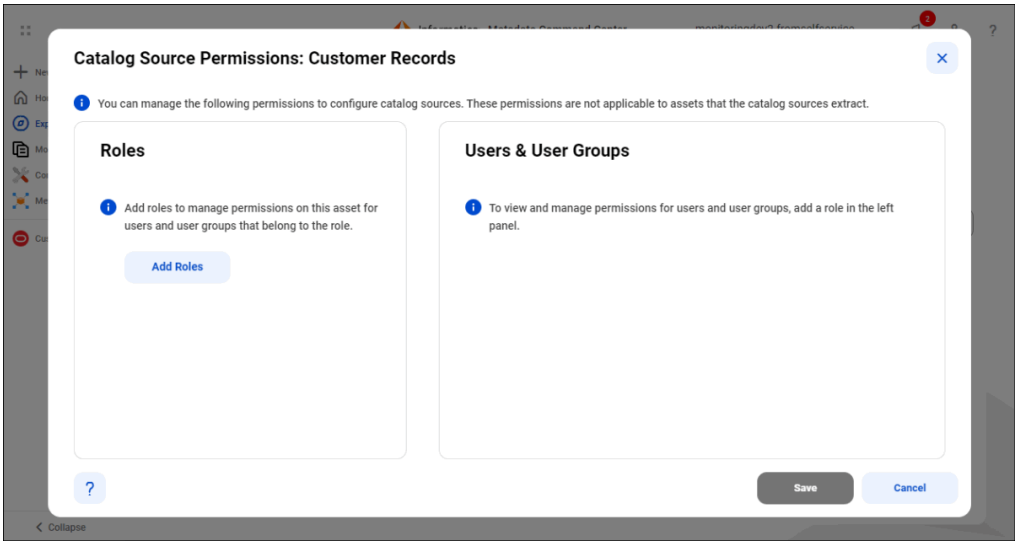


4. In the **Roles** panel, click **Add Roles**.

   The **Add Roles** dialog box appears.

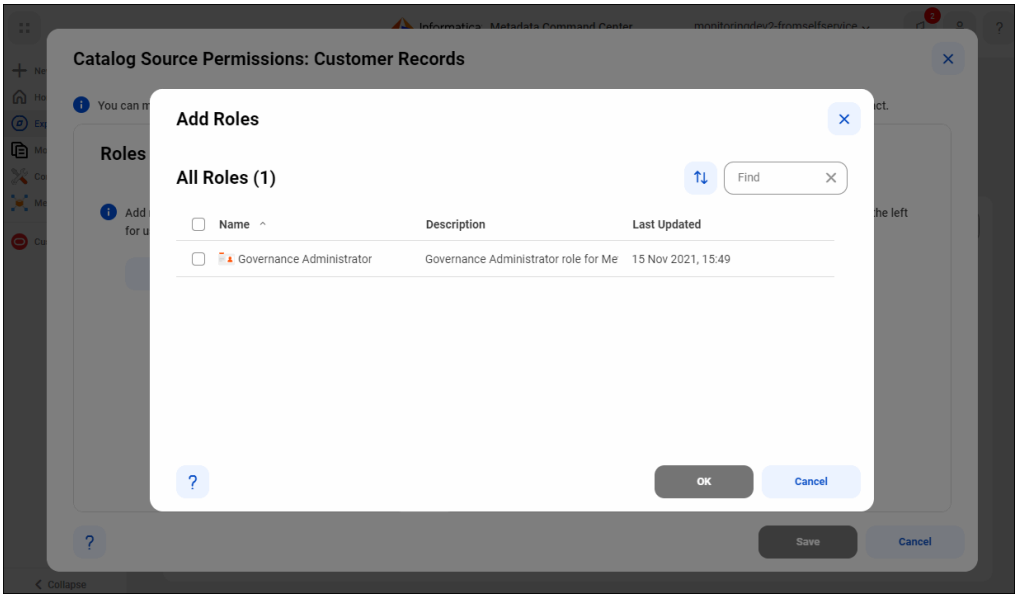

5. Select one or more roles, and click **OK** to add the roles.
6. In the **Add Users & User Groups** panel, by default, all users and user groups that belong to the selected role are granted the role-defined permissions for the catalog source configuration.

To assign permissions only to the selected users and user groups that belong to this role, choose **Specific Users and User Groups**.

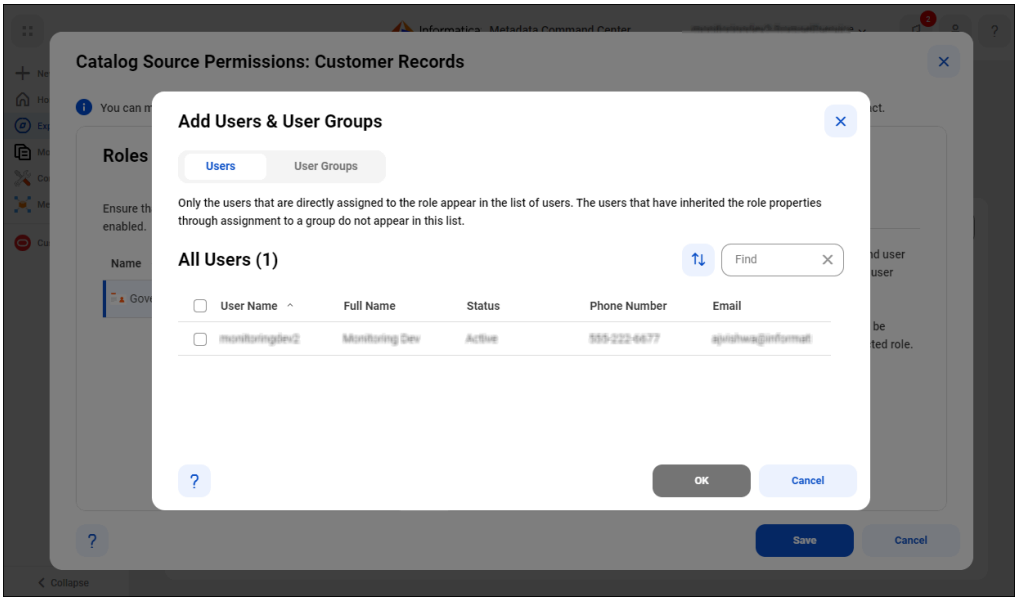

7. Select **Add Specific Users and User Groups**.

   The **Add Users & User Groups** dialog box displays the list of users and user groups that the administrator has assigned to the selected role.

8. Select one or more users or user groups to assign to the selected role, and click **OK**.

   Only the selected users and user groups belonging to the specified role will be granted the role-defined permissions for catalog source configuration.

9. View the assigned permissions for each user and or group, and click **Save**.