Informatica® Cloud Business 360 Console
October 2026

Business 360 REST API Reference

Informatica Cloud Business 360 Console Business 360 REST API Reference
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-11-02

Table of Contents

Preface 7

Informatica Resources 7

- Informatica Documentation 7
- IDMC web site 7
- Intelligent Data Management Cloud Communities 7
- IDMC Marketplace 7
- Informatica Knowledge Base 8
- IDMC Trust Center 8
- Informatica Global Customer Support 8

Chapter 1: Business 360 REST API 9

REST API guidelines 9

REST API collection 10

REST API Explorer 10

REST API versions of the login resource 11

Authentication method 12

Session IDs and JSON Web Tokens 13

Resources 15

Request header 16

Response header 17

Multilingual picklist field values 17

REST API requests and responses 18

Read content meta 19

Search API 20

- Request body 22
- Request response 26
- Sample requests 27
- Sample responses 33
- Filtering and sorting search results 47
- Filtering records that exceed the index limit 49

Business entity record APIs 51

- Create Master Record 51
- Read Master Record by Business ID 56
- Read Master Record by SourcePKey 61
- Update Master Record 65
- Update Master Record Field 67
- Read Source Records by Master Record 70
- Delete Master Record 72
- Restore Master Record 73
- Related Entities API 75

Anonymize History of Master Record API. . . . 79
Direct link API. . . . 80
Source record API. . . . 81
Read Source Record. . . . 81
Update Source Record. . . . 86
Update Source Record Field. . . . 89
Delete Source Record. . . . 92
Restore Source Record. . . . 93
Relationship API. . . . 95
Metadata API. . . . 95
Filter Relationship. . . . 97
Create Relationship. . . . 100
Read Relationship by Business ID. . . . 102
Update Relationship. . . . 104
Delete Relationship. . . . 106
Merge API. . . . 107
Request body. . . . 107
Request response. . . . 107
Sample Request. . . . 108
Sample Response. . . . 108
Unmerge API. . . . 108
Request body. . . . 110
Request response. . . . 110
Sample Request. . . . 111
Sample Response. . . . 111
Search Match API version 1. . . . 112
Request body. . . . 113
Formats of search terms for Search Match API version 1. . . . 114
Finding details for the request. . . . 115
Request response. . . . 117
Sample Request. . . . 118
Sample Response. . . . 119
Search Match API version 2 120
Prerequisites. . . . 121
Request body (v2). . . . 122
Formats of search terms for Search Match API version 2. . . . 123
Finding details for the request (v2). . . . 123
Request response (v2). . . . 125
Sample Request (v2). . . . 126
Sample Response (v2). . . . 126
Job instance API. . . . 127
Create Ingress Job Instance. . . . 127

Create Egress Job Instance. . . . 128
Create Match and Merge Job Instance. . . . 129
Search Job Instances. . . . 131
Read Job Instance Summary. . . . 135
Read Job Instance Details. . . . 138
Export and import API. . . . 142
Data anonymization. . . . 142
Running MDM SaaS jobs through managed APIs 143
Modernization REST APIs. . . . 143
Guidelines for creating canonical files. . . . 144
Create migration mappings and index. . . . 144
Create optional JSON files. . . . 148
Generate canonical schema. . . . 179
Create modernization project. . . . 199
Generate data model. . . . 200
Migrate data model. . . . 201
Generate match configurations. . . . 201
Migrate match configurations. . . . 202
Generate hierarchies. . . . 203
Migrate hierarchies. . . . 204
Generate hierarchical relationships. . . . 204
Migrate hierarchical relationships. . . . 205
Generate network relationships. . . . 206
Migrate network relationships. . . . 207
Generate user roles. . . . 207
Migrate user roles. . . . 208
Generate user accounts. . . . 209
Migrate user accounts. . . . 210
Download canonical file. . . . 211
View modernization project status. . . . 211
View Canonical Formats. . . . 213
Generate canonical schema formats. . . . 214
Download event logs. . . . 216
View modernization project details. . . . 217
View all modernization projects. . . . 219
Migrate API. . . . 224
Request body. . . . 225
Request response. . . . 225
Sample requests. . . . 225
Sample responses. . . . 225
Hierarchy API. . . . 225
Create Hierarchy. . . . 226

Add Root Nodes to a Hierarchy. 228
Add Child Nodes to a Hierarchy 232
Fetch Root Nodes of a Hierarchy. 238
Fetch Child Nodes. 243
Move Nodes Within or Across Hierarchies. 246
Delete Nodes from a Hierarchy. 250
Filter Hierarchy. 253
Update Hierarchy. 257
Delete Hierarchy. 258
Find Hierarchies by Business ID of a Record. 259
Location of a Record in a Hierarchy. 261

Index. 264

Preface

Use the Business 360 REST APIs to interact with your Informatica Intelligent Cloud Services organization through API calls. You can use the REST APIs to perform tasks and get data from your organization.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Business 360 REST API

Use the Business 360 REST APIs to interact with your IDMC organization through API calls. You can use the REST APIs to perform tasks and get data from your organization.

REST API guidelines

Consider the following guidelines when working with Business 360 REST APIs:

- All resources and attributes are case sensitive.
- Use the login resource to start a REST API session.
- Use the logout resource to log out of the Business 360 session included in the request header.
- Specify the format of the request and response in the header. Use the Content-Type attribute to specify the request format and the Accept attribute to specify the response format.
- If a request or response type is not configured, Business 360 uses JSON by default.
- To pass a null value for a field, exclude the field from the request payload or pass an empty string "". If you pass a null value, the REST APIs treat it as the string "null".
- For requests in XML, use an enclosing tag to define an object.
- XML responses that include a list of objects return the objects enclosed in the tag.
- For all resources except login, use a placeholder for the session ID in request headers. Replace the placeholder with the session ID data returned when you log in to a session.
- For all resources except login, use a placeholder for the base URL. For version 2 resources, replace the placeholder with the URL returned in the serverUrl. For version 3 resources, replace the placeholder with the URL returned in the baseApiUrl.
- For POST requests, you must include all fields in the request object unless you submit the request in the JSON format using partial mode. Partial mode is not applicable to most resources. By default, the REST API uses full mode.
- Where indicated, enclose POST request attributes in the specified object. When no object is specified, include attributes in the request body.
- After you add or update records, the records take about a second to become searchable through the Search API.
- Specify the MODEL_VERSION header to avoid request failures due to version differences. To enhance performance and avoid failures, use the same model version parameter in successive request headers. For more information about the MODEL_VERSION header, see “Request header” on page 16.
- REST APIs aren't designed for batch operations due to potential performance impacts.

- To process a large volume of data efficiently, use batch jobs instead of REST APIs.
- If records are created through the MDM SaaS user interface, the Boolean field values remain undefined unless you explicitly set the values to true or false through an API.
- To search for records, use the search API because the use of the search match API is resource-intensive. Use the search match API only when the search API doesn't meet your requirements. The performance of the search match API depends on match models, match rules, and data volume.
- When you use a job instance API, avoid sending multiple sequential job instance requests. Monitor jobs and ensure that the previously triggered job is complete before you send the next request.
- The performance of the business entity record APIs depends on the complexity and the number of data quality rule associations.
- Informatica enforces API rate limits for MDM SaaS REST APIs to ensure performance and allow appropriate resource allocation. If you exceed the limit, the REST APIs return an HTTP 429 error. You can retry the request immediately because the limits reset continuously.
- MDM SaaS limits the number of resolve long-running operations jobs that can run concurrently on a POD. When the number of concurrent jobs reaches the limit on a POD, API requests for operations might return an HTTP status code 429. You can retry those requests later. For more information about resolve long-running operations job, see *Monitor MDM SaaS*.

REST API collection

The API collection contains all the REST API requests that you can use to interact with MDM SaaS. You can use this API collection to test the APIs before you deploy them to production. You can import the API collection to any API platform and then test the APIs.

You can download the REST API collection from the following link:

Business 360 API collection

After you import the API collection into an API platform, you can authenticate the API requests. For more information about authenticating the API requests, see "Authentication method" on page 12.

REST API Explorer

Use the REST API Explorer, a Swagger UI, to view and test the MDM SaaS REST APIs.

Effective in the October 2026 release, the option to view the REST API Explorer is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

The REST API Explorer lists API categories, such as Jobs, Business Entity, Match, and Search. You can select a category to view the associated APIs.

The following table lists the API categories and the associated APIs:

Category	API Name in Explorer: API Reference
Jobs	Job Instance API: "Job instance API" on page 127
Business Entity	Relationship API: "Relationship API" on page 95 Entity Record API: "Business entity record APIs" on page 51 Entity Xref API: "Source record API" on page 81 Related Entities API: "Related Entities API" on page 75 Anonymize API: "Anonymize History of Master Record API" on page 79 Entity Group API: "Unmerge API" on page 108 Entity Member API: "Read Master Record by Business ID " on page 56
Match	Match Pair Generation Public API: "Search Match API version 1" on page 112 Match Pair Generation Public API: "Search Match API version 2 " on page 120
Search	Public Search API: "Search API" on page 20

The following APIs aren't available in the Swagger workspace:

- Direct link API
- Modernization REST APIs

Authentication method

By default, the REST API Explorer uses the credentials you use to access Business 360 Console to authenticate API requests. To run an API as a different user, provide a session ID or JSON web token to authenticate API requests. For more information about authenticating the API requests, see "Authentication method" on page 12.

Download REST API collection

To download the REST API collection as JSON files, use one of the following options:

- **Download**- Downloads the API collection for the selected category.
- **Download All**- Downloads the API collection for all categories.

REST API versions of the login resource

You can log in to IDMC using the platform REST API version 2 or version 3 login resource.

Note: The version of any subsequent resource that you use does not need to match the version of the login resource that you use to log in.

Note the following differences between REST API version 2 and version 3 calls:

Format

You can use the following formats depending upon which API version you use:

- Version 2 supports XML and JSON calls.
- Version 3 supports JSON calls.

Login URL

Use one of the following login URLs:

- For version 2, use `https://dm-<POD region>.informaticacloud.com/ma/api/v2/user/login`.
- For version 3, use `https://dm-<POD region>.informaticacloud.com/saas/public/core/v3/login`.

Your POD (Point of Deployment) region is based on the location of your IDMC data center. The POD region is included in the URL that you received when you registered with IDMC. For North America, use us.

Base URL

The login response includes the base URL that you must include in subsequent calls. The base URL includes the following components:

- The name and region of the POD that your organization uses, for example, use4-mdm.dm-us.
- The IDMC domain, informaticacloud.com.
- The internal service that manages the API calls, for example, saas.

The following example is a base URL for an organization on the use4-mdm.dm-us POD:

```
https://use4-mdm.dm-us.informaticacloud.com/saas
```

In the login response, the attribute that provides the base URL depends on the API version that you use to log in. For example:

- In a version 2 response, the attribute name is serverUrl.
- In a version 3 response, the attribute name is baseApiUrl.

Session ID

The login response includes a session ID that you must include in headers for subsequent requests during this session. In the login response, the name of the session ID attribute depends on the API version that you used to log in.
Use one of the following attributes:

- For version 2, use icSessionId in the header.
- For version 3, use sessionId in the header.

For more information about session IDs, see "Session IDs and JSON Web Tokens" on page 13

Authentication method

The REST APIs use the basic HTTP authentication method to authenticate users. When you first log in with your browser, you must provide your user name and password. After successful authentication, you get the base URL in the <serverUrl> or <baseApiUrl> attribute, which you must modify before you can make your REST API calls.

To log in and authenticate, you can use Login API V3 or Login API V2. After you log in, you get a session ID that you must use to authenticate API requests. Ensure that you use only the IDS-SESSION-ID header for authentication, not the Authorization header.

Login API V3

To get a session ID using Login API V3, submit the following POST request with your credentials:

```
POST https://dm-us.informaticacloud.com/saas/public/core/v3/login
Accept: application/json
Content-Type: application/json

{
     "username": "myUser",
     "password": "myPassword",
}
```

The login response includes the session ID and base URL that you need to include in subsequent REST API calls. Use values from the following fields:

- sessionId. A REST API session ID that you include in the header for version 3 REST API calls. The session ID expires after 30 minutes of inactivity. After the session ID expires, log in again to continue working with the REST API.
- baseApiUrl. The base URL that you use for subsequent requests during this session.

Login API V2

To get a session ID using Login API V2, submit the following POST request with your credentials:

```
POST  https://dm-us.informaticacloud.com/ma/api/v2/user/login
Accept: application/json
Content-Type: application/json

{
     "username": "myUser",
     "password": "myPassword",
}
```

Use the base URL and session ID returned in the response for subsequent requests during this session. Use the logout resource to end the session.

Modifying the baseApiUrl

When you log in, you get the following <baseApiUrl> value:

```
https://use4.dm-us.informaticacloud.com/saas
```

Modify the <baseApiUrl> value as follows:

- Remove `/saas`.
- Replace `use4` with `use4-mdm`.

To make your REST API calls, use the following <baseApiUrl> value:

```
https://use4-mdm.dm-us.informaticacloud.com
```

Session IDs and JSON Web Tokens

When you log in to an IDMC organization using the REST API, the login resource returns a session ID or JSON Web Token (JWT). You include this session ID or JWT token in subsequent REST API requests during the session.

You can configure the organization to use one of following authentication types:

- Session ID. A session ID expires after 30 minutes of inactivity. A grace period of up to 2 minutes might be included to account for any network or unexpected delays.

- JSON Web Token (JWT). A JWT token expires based on the expiration time set by an administrator. If you use custom scripts, ensure that the scripts handle automatic re-authentication before the JWT token expires to avoid any interruptions. For more information, see the JWT Support Knowledge article.

If your session ID or JWT token expires, you can log in again to get a new value.

To get a session ID or JWT token, submit a POST request with your credentials. For more information, see "Authentication method" on page 12.

If you use session-based authentication, the response returns a session ID. For example, you might receive the following response when you log in using Login API V3:


```
{
    "products": [
        {
            "name": "Integration Cloud",
            "baseApiUrl": "https://qa-pod1.rel.infaqa.com/saas"
        }
    ],
    "userInfo": {
        "sessionId": "2hJtHrszOGjloYpFNYdmic",
        "id": "ke4eMsBKKmwh978SIbFyaT",
        "name": "rel_ebf2",
        "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "orgId": "5ONW1IYW5L6ljpkkUqfBGK",
        "orgName": "rel_ebf2",
        "groups": {},
        "status": "Active"
    }
}
```


If you use JWT-based authentication, the response returns a JWT token. For example, you might receive the following response when you log in using Login API V3:


```
{
    "products": [
        {
            "name": "Integration Cloud",
            "baseApiUrl": "https://qa-pod1.rel.infaqa.com/saas"
        }
    ],
    "userInfo": {
        "sessionId":
"eyJraWQiOiJnOElCd3pEd1hVc2owRHQ4RjJQVjhjIiwidHlwIjoiSldUIiwiYWxnIjoiRVMyNTYifQ.eyJyZWxlY
XNlX2lkIjoiIiwiY3JfaWQiOiI4MGZrSTdlT2IxWGV4aTJVNnUyTjBRIiwidXNlcl9uYWllIjoicmVsX2ViZjIiLC
Jpc3MiOiJodHRwczovL3FhLW1hLnJlbC5pbmZhcWEuY29tL2lkZW50aXR5LXNlcnZpY2UiLCJjdXJyZW50X29yZ19
pZCI6IjVPTlcxSVlXNUw2bGpwa2tVcWZCR0siLCJkZXBsb3ltZW50R3JvdXBJZCI6IjE5TFZwOHJlVjZKZlM5MTRK
R3hlNjEiLCJ1dHlwZSI6MCwiY2xpZW50X2lkIjoiaWRtY19hcHAiLCJ1c2VyX29yZ19pZCI6IjVPTlcxSVlXNUw2b
Gpwa2tVcWZCR0siLCJ1c3QiOjEsImNvbnRleHRfdHlwZSI6InVzZXItd2ViLWFwcCIsImV4cCI6MTc3NTIzNTcwMC
wib3JnX25hbWUiOiJyZWxfZWJmMiIsInRpbWVfem9uZV9pZCI6IkFtZXJpY2EvTG9zX0FuZ2VsZXMiLCJpYXQiOjE
3NzUyMzM5MDAsImp0aSI6ImRETUJlMllFbVEwYjR2SXhkNUN0bzEiLCJlZmZlY3RpdmVfcHJpdmlsZWdlc19sdyI6
IlBMZS9sZC8vaytzM3VaZTMvMC9OL25uOTlYL2Q3WS8vLy84dkFBREFBQUFjQVFDLy8vLy8vLy8vLy8vLy8rN
y8vLy8zdmYrOER4UC8vLy8vLy94MEFBdmgvRGdBQUFBQUFnUEgvQVFCNG51ZDVudWQ1QU9BQkJ3QUFBQUFBQUFBQU
FBQWd3RThBQVArL2tlZjQvMy80L3YvLy8vLy8vd0VmQVB3QUFBQUFBQUFBQUFBQUFBQUFBUEFIbnVmLy8vK0ZIL0Q
vLy8vL1h4RUFCdkRoQndMeS8vL1A4enhQL2kvLy8vOGJBQUFBL0IvL0J3QUFHaU1JLy8vMy8vLy93d01EQVB3LyIs
ImVmZmVjdGl2ZV9yb2xlcyI6eyJEZXNpZ25lciI6IjFWZm5zZ1ppQ1QxZmkyNVZBdXBRZzEiLCJEYXRhIFByZXZpZ
XciOiI5YzJYcmRwQXo4MGhnMjl5WERCUEVOIiwiQWRtaW4iOiI5Z2VkQkRvWVFvUWliTk1vaGY1S0NoIn0sImN1cn
JlbnRfb3JnX25hbWUiOiJyZWxfZWJmMiIsInVuaXF1ZV9pZCI6IiQyYSQwNyQ4NWtXTDM3UjNSQ2VIRzFKRDBVM3k
uZXM2aElkcUZVSGFQSGp5UTVKazY4M1NiLnBZVHU4QyIsInVzZXJfZm5hbWUiOiJwcmFzYW5uYSIsImdyb3VwcyI6
e30sIm5vbmNlIjoiNXNiMm1hZjVkdzNpdzhZS1dXRWxmZyIsInVzZXJfbG5hbWUiOiJrdW1hciIsImF1ZCI6Imlkb
WNfYXBwIiwidXNlcl9pZCI6ImtlNGVNc0JLS213aDk3OFNJYkZ5YVQiLCJvcmdfaWQiOiI1T05XMUlZVzVMNmxqcG
trVXFmQkdLIiwic3NfYXRyIjp7fSwicGFyZW50X29yZ19pZCI6IjUyWlNUQjBJREs2ZFh4YUVRTFVhUXUifQ.nI8W
cJDIMflXI000WAimwffLyZUcMUhET451v7mGuZxrHTdNyy0fPVgJPaRhj5JXv_lZpMakFlk2psMoe8yyHg",
        "id": "ke4eMsBKKmwh978SIbFyaT",
        "name": "rel_ebf2",
        "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "orgId": "5ONW1IYW5L6ljpkkUqfBGK",
        "orgName": "rel_ebf2",
        "groups": {},
```

```
            "status": "Active"
        }
    }
```

To make a request, add the session ID or JWT token you retrieved to the IDS-SESSION-ID header in the request. Ensure that you use only the IDS-SESSION-ID header for authentication, not the Authorization header.

The following example shows how to use a retrieved session ID in the request header:

```
POST https://use4.dm-us.informaticacloud.com/search/public/api/v1/search \
     --header 'Accept: application/json \
     --header 'Content-Type: application/json \
     --header 'IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX \

{
       "entityType": "Example Entity"

 }
```

Resources

Use the Business 360 REST API resources to interact with your IDMC organization through API calls.

The following table describes the resources that you can use:

Resource	Supported API	Resource Description
search	Search	Finds records that match your search criteria across all the business entities or within a specific business entity.
entity	Create master record Read Master Record by Business ID Read Master Record by SourcePKey Update Master Record (PUT) Update Master Record (PATCH) Read Source Records by Master Record	Creates, reads, or updates master records. Searches for source records that contribute to a master record.
entity-xref	Read source record Update Source Record (PUT) Update Source Record (PATCH)	Reads and updates source records.
entity-group	Merge Unmerge	Merges and unmerges source records and master records.
relationship	Filter Relationship Create Relationship Read Relationship by Business ID Update Relationship Delete Relationship	Filters, creates, reads, updates, and deletes business entity relationships.

Resource	Supported API	Resource Description
jobInstance	Create Ingress Job Instance Create Egress Job Instance Create Match and Merge Job Instance Search Job Instances Read Job Instance Summary Read Job instance Details	Manage ingress, egress, and match and merge jobs. Create and run job instances, search for job instances, and retrieve a short summary or the complete details of a job instance.
searchmatch	Search Match API	Use the search match API to search for matching records based on the published match model configuration. The required input parameters for the REST API vary based on the business entity and selected match model.

Request header

Use a request header to define the operating parameters or the metadata of a REST operation.

The following table lists the request header parameters:

Parameter	Description
Content-Type	Format of the request body.
Accept	Format of the request response. Accepts `application/json`.
IDS-SESSION-ID	The session ID of the user. See "Session IDs and JSON Web Tokens" on page 13.
MODEL_VERSION	Current version of the MDM SaaS configuration that includes the data model. Specify the model version as the current epoch timestamp in milliseconds. If you don't specify the model version, the REST API defaults to using the cached version. Metadata related to the model is refreshed and cached every five minutes. If you submit API requests immediately after significant model changes without specifying the model version, responses might be based on an outdated cached model version. To get a correct response, specify the model version or wait up to five minutes until the metadata related to model refreshes and caches before you submit requests. To improve performance and avoid request failures due to version differences, specify the same model version parameter in the request header when you send multiple requests in succession.
Accept-Language	Optional. Preferred languages for localized picklist field values and messages in the response. Enter one or more BCP 47 language codes in order of preference. You can assign a quality value to each language tag to set how strongly you prefer it. For example, `fr-FR,en;q=0.8`.

To construct the REST API request header for a resource, add the header parameter after the following request line:

```
//<baseURL>/v1/api/
```

Use the following syntax to construct the REST API request header for a REST API resource:

```
<METHOD> https: //<baseApiURL>/business-entity/public/api/v1/<resource name>
Content-Type: application/json
Accept: application/json
Accept-Language: <language-tag>,<language-tag>;q=<value>
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

For example, you might use the following request to read a business entity master record:

```
GET https: //<baseApiURL>/business-entity/public/api/v1/entity/c360.organization/
70046899550283630729399822719 HTTP/1.1
Content-Type: application/json
Accept: application/json
Accept-Language: fr-FR,en;q=0.8
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
MODEL_VERSION:1706774113534
```

Response header

The following response header parameter applies to the GET, POST, PUT, PATCH and DELETE methods:

Parameter	Description
Content-Type	The format of the response body. Accepts `application/json`.

Multilingual picklist field values

If a picklist field references reference data that has multilingual attributes in Reference 360, the business entity APIs can return the picklist field values in your preferred language. To return picklist field values in a language, use the optional Accept-Language request header .

For example, the Gender field of a business entity references a code list with a multilingual Name attribute that stores values in English (en-US) and Brazilian Portuguese (pt-BR). If you send a request with `Accept-Language: pt-BR`, the response returns `Feminino` as the Name value. If you send the request without the header, the response returns `Female`, the value in the default language.

The API matches the requested language tags against the languages in the Localization Languages code list in Reference 360. To return values in a language, add its BCP 47 language code to the Localization Languages code list. Then add values in that language for the multilingual attributes. Only the values of the multilingual attributes, such as Name, change based on the requested language. The Code value is the same in every language.

The following table describes the language of picklist field values that the API returns for each `Accept-Language` header value:

Accept-Language Header	Language of Picklist Field Values
Not specified or blank.	The default language defined in the Localization Languages code list.
Contains one or more languages in the Localization Languages code list, such as `fr-FR` or `fr-FR,en;q=0.8`.	The first language in order of preference that's in the Localization Languages code list. The API orders the language tags based on their quality values.
Contains a language that's specified in the Localization Languages code list, but the picklist field has no value or a blank value in that language.	The default language.
Contains only languages that aren't specified in the Localization Languages code list.	The default language. The API processes the request as if you didn't include the header.

For more information about multilingual reference data and the Localization Languages code list, see *Manage multilingual assets* in the Reference 360 help.

Effective in the October 2026 release, the ability to manage multilingual reference data is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

REST API requests and responses

When you make a REST API request, the REST API returns an HTTP response code.

The following table describes the responses to the REST API requests:

REST API Request	Successful Response	Failure Response
GET	For an information request, returns the requested object or an array of objects when applicable. For an action request, returns the HTTP 200 success code. Can also return the REST API success object.	HTTP 403 error, including a REST API error object.
POST	The object that you created or updated. Can also return the HTTP 200 or 201 success codes.	HTTP 403 error, including a REST API error object.
PUT	The object that you updated. Can also return the HTTP 201 success code.	HTTP 403 error, including a REST API error object.

REST API Request	Successful Response	Failure Response
DELETE	The object that you deleted. Can also return the HTTP 201 success code.	HTTP 403 error, including a REST API error object.
PATCH	The object that you updated. Can also return the HTTP 201 success code.	HTTP 403 error, including a REST API error object.

Read content meta

You can use the `_showContentMeta` parameter to retrieve the content meta of the record. The content meta provides the trust score, survivorship configuration and rule association information.

Use the `_showContentMeta` parameter with the following APIs:

- Read Master Record by Business ID
- Read Master Record by SourcePKey
- Read Source Record

To get the content meta, add the `_showContentMeta` query parameter at the end of the REST API URI.

For example, submit a GET request with the following URI:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<id>?
_showContentMeta=true
```

The response body includes the content metadata.

The following table lists the parameters that appear in the `_contentMeta` section of the response body:

Name	Type	Description
trust	Object	An object with the fieldData array that contains details about the fields participating in the trust score calculation. The fieldData array contains the following parameters: - fieldRef. Fields that have different trust scores. The value "/" indicates that all fields in the record share the same trust score. - lastUpdatedDate. Date when the field value was last updated. - manualOverride. Indicates whether a field value was manually overridden. - sourcePrimaryKey. Primary key of the source record. - sourceSystem. Internal ID of the source system to which the record belongs. - trustRule. Survivorship configuration that identified the best value for the field. - trustScore. Latest trust score of the field value.
ruleAssociation	Object	An object that contains details of failed or in-progress rule associations. The object includes the fail array that contains details about the failed or in-progress rule associations and the fields to which these rules were applied. The fail array contains the following parameters: - provider. For internal use only. - rule. Array that contains details about failed or in-progress rule associations. The array contains the following parameters: - id. Internal ID of the failed or in-progress rule association. - fieldRef. Array that contains the fields to which the rule associations were applied. - dynErrorDetail. Error message that appears when a custom rule specification is configured from Data Quality.

Search API

Use the Search API to search for records that match your search criteria. You can search across all the business entities or within a specific business entity, in English or Japanese. You can filter the search results based on severity levels and validation statuses. You can also filter search results based on fields that are blank or contain values.

The API uses the search resource.

To search for records, submit a POST request with the following URI:

```
<baseApiUrl>/search/public/api/v1/search
```

Note: After you edit record and field privileges or data access rules, users with custom user roles must wait at least 10 minutes before they search for records using Search REST API. If users search for records immediately after the changes, the API returns inaccurate results.

When you search for records with multiple conditions on fields in the same field group or nested field group, the Search API evaluates the conditions within each entry. The API returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has the city New York and the street Main Street. The office address has the city Chicago and the street Oak Avenue.

If you search for the record with the condition `city = Chicago` and `street = Main Street`, the search doesn't return the record because no single address entry matches both conditions.

To search for records with multiple conditions based on the fields of a field group, ensure that you reindex the records.

Note: Effective in the October 2026 release, the ability to search for records with multiple conditions within a single field group entry is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Request body

You can use the following parameters in the search request body:

Note: Use either the `search` or `fields` parameter, but not both.

Parameter	Type	Description

search	String	Search string.
		To retrieve all the records, use an asterisk (*).
		To perform a fuzzy search, enter a search word or phrase. When you search for records, you can use additional wildcard characters, such as *, ~, &&, and ||.
		You can use search strings similar to the ones in the following examples:
		- `John Smith`. Searches for records that contain `John Smith` as a field value.
		- `Jo*n`. Searches for records that start with `Jo` and end with `n`, such as `Johansson` or `Jordan`.
		- `Hans && Williams`. Searches for records that contain `Hans` and `Williams` in the same record. For example, the first name is `Hans`, and the last name is `Williams`.
		To perform an exact search, enclose the search string within double quotes in the following format:
		`"\"<Field_Value>\""`
		For example, to search for records that contain the field value `London`, specify the value in the following format:
		`"\"London\""`
		Use this format to perform exact searches for string, date, and date and time field types. To perform an exact search on records based on other field types, don't enclose the value in the specified format.
		Note: When you use only white spaces as a search string without any other characters, the search doesn't return any results. To search for records by specifying a date, ensure that you use the YYYY-MM-DD format.
		When you search for records with keywords, such as `AND`, `OR`, and `NOT`, as field values, ensure that you specify the values in the following format:
		- `"\"OR\""`
		- `"\"AND\""`
		- `"\"NOT\""`
		If you don't enter the values in the specified format, the Search REST API doesn't return any response.
		However, if these keywords are part of a field value, such as `SAND AND MARVEL`, you don't have to enclose the keyword part of the value in the specified format for the Search REST API to return the response.
		You can't search for records with similar values in system fields. However, you can search for records that exactly match the specified values in system fields and continue to use the supported wildcards in search strings for system fields.

Parameter	Type	Description
		For more information about these wildcard characters, see *Using the search box to find records* in the *Customer 360* help. **Note:** Informatica recommends that you enter a search string that doesn't exceed 4,000 characters. If the recommended character limit exceeds, the search request might fail intermittently.
fields	String	Searches records for specific basic, smart, system, and dynamic fields. For example , searching "J*" for the first name field returns all names starting with "J".
entityType	String	Internal ID of the business entity you want to search.
filters	Array	Specifies a list of fields that you want to use to filter the search results. When you search for records with multiple conditions on fields in the same field group or nested field group, the Search API evaluates the conditions within each record. The API returns a record only if a single entry matches all the conditions. To search for records with multiple conditions within a single field group entry, ensure that you reindex the records.
filter > operator	String	The Boolean operator that joins multiple filters that you specify. Use AND or OR as the Boolean operator.

Parameter	Type	Description
filters > filter > comparator	String	Condition that specifies how to filter search results. Use one of the following comparators: - EQUALS. Returns records that match the specified field value. For example, you can filter the employees whose department is equal to product management. - NOT_EQUALS. Returns records that don't match the specified value. **Note:** When you use the NOT_EQUALS filter comparator in the request, the response doesn't return records based on fields that contain blank or null values. To search for records with fields that contain blank or null values, use the IS_MISSING filter comparator in the request. For example, you can filter employees whose country is not equal to India. - IN. Returns records with field values that match any of the specified values. For example, you can filter employees who belong to cities such as Chennai, Bangalore, and Hyderabad. - BETWEEN. Returns records that contain field values within the specified range. For example, you can filter people aged between 20 and 30. - GREATER_THAN. Returns records with field values greater than the specified value. For example, you can filter employees with more than 5 years experience. - LESS_THAN. Returns records with field values less than the specified value. For example, you can filter employees with less than 3 years experience. - GREATER_THAN_EQUAL_TO. Returns records with field values greater than or equal to the specified value. For example, you can filter students with a score greater than or equal to 80. - LESS_THAN_EQUAL_TO. Returns records with field values less than or equal to the specified value. For example, you can filter students with a score less than or equal to 35. - STARTS_WITH. Returns records with field values that start with a specified value. For example, you can filter records where the first name starts with John. - CONTAINS. Returns records with field values that contain the exact words in the same sequence as specified in the filter condition. For example, if you filter results by first names that contain the word James, the filter can return names

Parameter	Type	Description
		such as James Earl, James Henry, and William James. However, the filter doesn't return Jameson. Similarly, if you filter results by first names that contain Anne Marie, the filter can return names, such as Anne Marie and Anne-Marie. However, the filter doesn't return Marie Anne because the order of words doesn't match. - IS_MISSING. Returns records that don't contain values in specific fields. For example, you can filter records that don't contain values in the middle name field. - IS_NOT_MISSING. Returns records that contain values in specific fields. For example, you can filter records that contain values for the country field. **Note:** If you want to you use the IS_MISSING and IS_NOT_MISSING filter comparators, ensure that you run the Generate Search or Report Indexes or Match Keys job at least once to reindex records.
filters > filter > fieldName	String	Name of the business entity field or system field that you want to use as a filter. You can use the following system fields: - validationType. Filters search results by error types, such as ERROR, WARNING, or INFO. You can also filter search results by internal IDs of failed rule associations. To view the internal rule ID, open the rule association. - validationState. Filters search results by the specified validation status, such as PASSED or FAILED. - _indexValidationError.code. Filters search results to retrieve the records with index validation errors, such as records that exceed the dynamic field index limit or the field group entry index limit.
filters > filter > fieldValue	String	Value to use to filter the results. **Note:** You can use a partial word or value with the STARTS_WITH or CONTAINS comparators. To filter records that exceed the index limit, use the following error codes: - INDEX.100001. For dynamic field index limit. - INDEX.100002. For field group entry index limit.
filters > filter > fieldValueGroups	String	Filters search results based on certain criteria that define a group. For example, you can filter search results based on their error type groups, such as error, warning, and info.
pageSize	Number	Number of search results to display on each page.
pageOffset	Number	Optional. Number of pages to skip. For example, pageOffset=2 means that the search must skip the first two pages of the search results. Default is 0.

Parameter	Type	Description
recordsToReturn	Number	Number of search results to return.
recordOffset	Number	Number of records to skip. For example, recordOffset=200 indicates that the search must skip the first 200 search results. Default is 0.
maxRecords	Number	Maximum number of records to return. **Note:** The search cannot return more than 10,000 records per page.
sort	Array	Specifies a list of fields based on which you want to sort the search results.
sort > fieldName	String	Name of the field by which you want to sort the search results.
sort > order	String	Order in which you want to sort the search results. Use one of the following sort orders: - ASCENDING - DESCENDING
searchLocale	String	Optional. Code of the language that you want to use to search for records. Use one of the following codes: - `en` - `ja` Default is `en`. Before you specify any value other than `en`, ensure that the language is configured as a searchable language in Business 360 Console.

Request response

The request response returns the search results.

The following table lists the response parameters:

Parameter	Type	Description
searchResult	Object	Contains the search results.
hits	Number	Number of search results.
records	Array	Lists the search results with their failed rule association details, based on the filter and sort criteria that you specify.
pageSize	Number	Number of search results on a page.
pageOffset	Number	Number of pages to skip. For example, pageOffset=2 means that the search must skip the first two pages of the search results. Default is 0.
recordsToReturn	Number	Number of search results to return.

Parameter	Type	Description
recordOffset	Number	Number of records to skip. For example, recordOffset=200 indicates that the search must skip the first 200 search results. Default is 0.
maxRecords	Number	Maximum number of records to return. **Note:** The search cannot return more than 10,000 records per page.

The POST response includes the following `meta` parameters:

Parameter	Type	Description
score	Number	The current trust score of the record.
businessId	String	Unique identifier of the business entity record.
id	String	Internal ID of the record. Do not use.
businessEntity	String	Name of the business entity to which the record belongs.
createdBy	String	Name of the person who created the record.
creationDate	String	Date when the record was created.
updatedBy	String	Name of the user who last updated the record.
lastUpdateDate	String	Date when the master record was last updated.
type	String	Internal ID of the business entity to which the record belongs.
status	String	Indicates whether the record is active, inactive, or in pending status. **Note:** This parameter is the same as the `state` parameter in the business entity record APIs. For more information about the `state` parameter, see "Read Master Record by Business ID " on page 56.

Sample requests

Request with the search parameter

You might use the following request to find all the records of the Person business entity associated with the name Arny and the state of California:

```
POST https://use4-mdm.dm-us.informaticacloud.com/search/public/api/v1/search
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
MODEL_VERSION: 1583398245259

{
   "entityType":"c360.person",
   "search":"Arny*",
   "filters":{
      "filter":[
         {
            "comparator":"EQUALS",
            "fieldName":"c360person.PostalAddress.state.Name",
            "fieldValue":"California"
         }
```

```
        ]
    }
}
```

To use the latest search configuration, ensure that you include the model version in the search request. If you don't include the model version, the search request might use the search configuration from the metadata cache of the previous REST API requests.

For more information about model version, see "Request header" on page 16.

Request with the fields parameter

You might use the following request to find all the records that start with "Jona" for the full name field:

```
{
    "entityType": "c360.person",
    "fields": {
        "c360person.fullName": "Jona*"
    },
    "filters": {
        "filter": [
            {
                "comparator": "EQUALS",
                "fieldName": "c360person.gender.Name",
                "fieldValue": "Male"
            }
        ]
    }
}
```

Note: If you use filter comparators other than `IS_MISSING` or `IS_NOT_MISSING`, ensure that you specify a field in the fields section.

Request to filter search results based on validation errors

The following table lists the parameters to use to filter search results based on error type, rule ID, and validation status:

Parameter	System Field	Search Parameter Value	Description
fieldName > fieldValueGroups	validationType	ERROR, WARNING, or INFO	Filters search results based on error types, such as ERROR, WARNING, or INFO.
fieldName > fieldValue	validationType	<Internal ID of rule associations>	Filters search results based on the internal IDs of failed rule associations. To view the internal rule ID, open the rule association.
fieldName > fieldValue	validationState	PASSED or FAILED	Filters search results based on the specified validation status.

You might use the following request to filter records based on the error type INFO, rule ID should_not_contain_number_1687874505794, and validation status FAILED:

```
{
    "recordOffset": 0,
    "debug": true,
    "recordsToReturn": 25,
```

```
    "sort": [],
    "entityType": "custombe1",
    "search": "*",
    "pageSize": 25,
    "pageOffset": 0,
    "filters": {
        "filter": [
        {"comparator": "IN","fieldName": "validationType",  "fieldValue":
["should_not_contain_number_1687874505794"],
        "fieldValueGroups": ["INFO"]
        },
        {"comparator": "IN","fieldName": "validationState",  "fieldValue": ["FAILED"]}
        ]},
    "facets": [
        {
            "facetField": "validationType",
            "type": "SIMPLE",
            "orderField": "KEY",
            "order": "ASCENDING"
        }
    ],
    "highlight": true,
    "hierarchyFilters": []
}
```

Request to search for deleted master records

The following table lists the parameter to use to filter search results based on record state indicator:

Parameter	System Field	Search Parameter Value	Description
fieldName > fieldValue	recordStateIndicator	ACTIVE or DELETED	Filters search results that are active or deleted based on the parameter value.

You might use the following request to search for all the deleted master records of the Person business entity:

```
{
    "entityType": "c360.person",
    "search": "*",
    "filters":{
      "filter":[

            {
                "comparator":"IN",
                "fieldName": "recordStateIndicator",
                "fieldValue": [
                    "DELETED"
                ]
            }

      ]
   },
    "pageSize":25,
    "pageOffset":0,
    "recordOffset":0,
    "recordsToReturn":25
}
```

Request to filter fields with or without values

You can use the `IS_MISSING` and `IS_NOT_MISSING` filter comparators to search for records with fields that are blank or contain values.

Consider the following guidelines when you use the `IS_MISSING` and `IS_NOT_MISSING` filter comparators:

- Don't specify a field value for the `IS_MISSING` and `IS_NOT_MISSING` filter comparators.
- If you use the `IS_MISSING` and `IS_NOT_MISSING` filter comparators for a field, don't use another comparator for the same field.
  For example, you can't use both `EQUALS` and `IS_MISSING` filter comparators for the first name field.

You might use the following request to find all the records for the Person business entity that don't contain any value for the Designation field and matches the specified value for the First Name field:

```
 POST https://use4-mdm.dm-us.informaticacloud.com/search/public/api/v1/search
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
MODEL_VERSION: 1583398245259
{
    "recordOffset": 0,
    "recordsToReturn": 25,
    "sort": [],
    "entityType": "c360.person",
    "search": "*",
    "pageSize": 25,
    "pageOffset": 0,
    "filters": {
        "filter": [
            {
                "fieldName": "c360person.designation",
                "comparator": "IS_MISSING"
            },
            {
                "comparator": "IN",
                "fieldName": "c360person.firstName",
                "fieldValue": [
                    "Dav"
                ]
            }
        ]
    },
    "highlight": true,
    "hierarchyFilters": [],
    "searchLocale": [
        "en"
    ],
    "aggregateSelectedFacetFilterValues": false
}
```

You might use the following request to find all the records of the Person business entity that contain values for the Designation field and the First Name field equals to John:

```
 POST https://use4-mdm.dm-us.informaticacloud.com/search/public/api/v1/search
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
MODEL_VERSION: 1583398245259
{
    "recordOffset": 0,
    "recordsToReturn": 25,
    "sort": [],
    "entityType": "c360.person",
    "search": "*",
    "pageSize": 25,
    "pageOffset": 0,
    "filters": {
        "filter": [
            {
                "fieldName": "c360person.designation",
                "comparator": "IS_NOT_MISSING"
            },
```

```
            {
                "comparator": "EQUALS",
                "fieldName": "c360person.firstName",
                "fieldValue":
                    "John"

            }
        ]
    },
    "highlight": true,
    "hierarchyFilters": [],
    "searchLocale": [
        "en"
    ],
    "aggregateSelectedFacetFilterValues": false
}
```

Request to filter records updated within a specific time period

You might use the following request to find all the Person records that were updated within a specified time period:

```
POST https://use4-mdm.dm-us.informaticacloud.com/search/public/api/v1/search
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
MODEL_VERSION: 1583398245259
{
    "recordOffset": 0,
    "recordsToReturn": 25,
    "sort": [],
    "entityType": "c360.person",
    "search": "*",
    "pageSize": 25,
    "pageOffset": 0,
    "filters": {
        "filter": [
            {
                "comparator": "BETWEEN",
                "fieldName": "_meta.lastUpdateDate",
                "range": {
                    "from": "1719987281000",
                    "to": "1728300436000"
                }
            }
        ]
    }
}
```

You can use additional `_meta` parameters, such as creationDate, updatedBy, and createdBy, to filter records. For more information about `_meta` parameters, see _meta parameters tableon page 62.

Request to search for records based on dynamic field values

You might use the following request to find all the records of the Product business entity based on dynamic field values, such as product description, quantity, and electronics display size:

```
POST https://use4-mdm.dm-us.informaticacloud.com/search/public/api/v1/search
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
MODEL_VERSION: 1583398245259
{
  "recordOffset": 0,
  "recordsToReturn": 25,
  "sort": [],
  "entityType": "Product",
  "search": "ABC",
  "pageSize": 25,
  "pageOffset": 0,
```

```
  "filters": {
    "filter": []
  },
  "facets": [
    {
      "facetField": "Product.product_name",
      "type": "SIMPLE",
      "orderField": "KEY",
      "order": "ASCENDING",
      "searchFieldId": "Product.sConfig.product_name"
    },
    {
      "facetField": "_meta.states.base",
      "type": "SIMPLE",
      "orderField": "KEY",
      "order": "ASCENDING",
      "searchFieldId": "entity.search.be.sConfig._meta.states.base"
    },
    {
      "facetField": "_cm.vader.message",
      "type": "SIMPLE",
      "orderField": "KEY",
      "order": "ASCENDING",
      "searchFieldId": "entity.search.be.sConfig._cm.vader.fail.rule.idWithProvider"
    },
    {
      "facetField": "_meta.states.validation",
      "type": "SIMPLE",
      "orderField": "KEY",
      "order": "ASCENDING",
      "searchFieldId": "entity.search.be.sConfig._meta.states.validation"
    }
  ],
  "highlight": true,
  "hierarchyFilters": [],
  "searchLocale": [
    "en"
  ],
  "aggregateSelectedFacetFilterValues": false,
  "includeDynamicFaceting": true
}
```

Request to filter records that exceed the dynamic field index limit

You might use the following request to find the Keyboard record in the Item business entity that exceeds the dynamic field index limit:

```
{
  "entityType": "Item",
  "fields": {
    "Product.product_name": "Keyboard"
  },
  "filters": {
    "filter": [
      {
        "comparator": "EQUALS",
        "fieldName": "_indexValidationError.code",
        "fieldValue": "INDEX.100001"
      }
    ],
    "operator": "AND"
  },
  "facetSize": 0,
  "searchLocale": []
}
```

For more information, see “Filtering records that exceed the index limit” on page 49.

Request to filter records that exceed the field group entry index limit

You might use the following request to find the James Patel record in the c360.person business entity that exceeds the field group entry index limit:

```
{
  "entityType": "c360.person",
  "fields": {
    "c360person.lastName": "Patel"
  },
  "filters": {
    "filter": [
      {
        "comparator": "EQUALS",
        "fieldName": "_indexValidationError.code",
        "fieldValue": "INDEX.100002"
      }
    ],
    "operator": "AND"
  },
  "facetSize": 0,
  "searchLocale": []
}
```

For more information, see "Filtering records that exceed the index limit" on page 49.

Sample responses

When you make a search request, the response retrieves records that match your search criteria.

Response with the search parameter

The following search response contains the Person business entity record associated with the name Arny:

```
{
  "searchResult": {
    "hits": 1,
    "pageSize": 25,
    "pageOffset": 0,
    "recordsToReturn": -1,
    "recordOffset": -1,
    "maxRecords": 10000,
    "records": [
      {
        "c360person.Insurance": [
          {
            "insuranceType": {
              "Name": "Casualty"
            }
          }
        ],
        "_meta": {
          "score": 13,
          "lastUpdateDate": "1622227656589",
          "businessId": "299248184004388324411256347 28",
          "id": "60b13ac80cabf75604b602a9",
          "businessEntity": "c360.person",
          "type": "c360.person",
          "status": "ACTIVE"
        },
        "c360person.designation": "Assistant Professor",
        "c360person.lastName": "Eidelburg",
        "c360person.Phone": [
          {
            "phoneNumber": "016-7658"
          }
        ],
        "c360person.AlternateName": [
```

```
            {
              "AlternateName": "Arny Eidelburg"
            }
          ],
          "c360person.firstName": "Arny",
          "c360person.gender": {
            "Name": "Male"
          },
          "c360person.PostalAddress": [
            {
              "country": {
                "Name": "United States"
              },
              "city": "San Jose",
              "postalCode": "95111",
              "county": "Santa Clara",
              "addressLine1": "17 W Jackson Blvd",
              "state": {
                "Name": "California"
              }
            }
          ],
          "c360person.dfv_person": {
            "birthday": 1753783759000,
            "size": "Small",
            "color": "Red",
            "alive": true,
            "species": [
              {
                "color": "Blue",
                "size": "7",
                "gene": [
                  {
                    "mutation": 1754474996000,
                    "gene_val": 9,
                    "gene_sequence": "gene sequence",
                    "_id": "b77d7d013b074042adca6e9eb53da31a"
                  }
                ],
                "name": "Arny",
                "count": 5,
                "extinct": true,
                "_id": "f877d857000e459c81e9695381554352",
                "measurement": "6"
              }
            ],
            "uni_picker": {
              "Code": "M",
              "Name": "Male"
            },
            "temperature": 3,
            "name": "Root name",
            "radius": "4",
            "measurement": "1",
            "miles": 2
          }
        }
      ]
    }
}
```


Response with the fields parameter

The following search response contains all records for the full name field that start with "Jona":


```
{
    "searchResult": {
        "hits": 1,
        "pageSize": 25,
        "pageOffset": 0,
```

```
            "recordsToReturn": -1,
            "recordOffset": -1,
            "maxRecords": 10000,
            "records": [
                {
                    "c360person.fullName": "Jonathon Javier Crasford",
                    "_meta": {
                        "score": 13.0,
                        "lastUpdateDate": "1617657132604",
                        "businessId": "298405062624866534015534719 70",
                        "id": "29840506262486653401553471970",
                        "businessEntity": "c360.person",
                        "type": "c360.person",
                        "status": "ACTIVE"
                    },
                    "c360person.designation": "Analyst Programmer",
                    "c360person.lastName": "Crasford",
                    "c360person.Phone": [
                        {
                            "phoneNumber": "298-9816"
                        }
                    ],
                    "c360person.AlternateName": [
                        {
                            "AlternateName": "Ferrel Vannah"
                        }
                    ],
                    "c360person.firstName": "Jonathon",
                    "c360person.gender": {
                        "Name": "Male"
                    },
                    "c360person.PostalAddress": [
                        {
                            "country": {
                                "Name": "United States"
                            },
                            "city": "Los Angeles",
                            "postalCode": "90006",
                            "county": "Los Angeles",
                            "addressLine1": "5 Tomahawk Dr",
                            "state": {
                                "Name": "California"
                            }
                        }
                    ]
                }
            ]
        }
    }
```


Response with search results containing validation errors

The following request contains a search result with error type INFO, rule ID should_not_contain_number_1687874505794, and validation status FAILED:


```
        {
        "searchResult": {
            "hits": 1,
            "pageSize": 25,
            "pageOffset": 0,
            "recordsToReturn": 25,
            "recordOffset": 0,
            "maxRecords": 10000,
            "records": [
                {
                    "_cm": {
                        "ruleAssociation": {
                            "fail": [
```

```
                                {
                                    "provider": "mdm-business-entity",
                                    "rule": [
                                        {
                                            "id": "should_not_contain_number_1687874505794"
                                        }
                                    ]
                                }
                            ]
                        }
                    },
                    "_meta": {
                        "score": 5.1987,
                        "updatedBy": "mdm-enrichment-service",
                        "createdBy": "delta_mrel1s1_jun27",
                        "lastUpdateDate": "1687874602219",
                        "businessId": "MDM0000000LFLS",
                        "id": "MDM0000000LFLS",
                        "businessEntity": "custombe1",
                        "type": "custombe1",
                        "creationDate": "1687874601610",
                        "states": {
                            "validation": "FAILED"
                        },
                        "status": "ACTIVE"
                    },
                    "custombe1.fname": "user12"
                }
            ]
        }
    }
```


Response with deleted master records

The following search response contains all the deleted master records of the Person business entity:


```
    {
        "searchResult": {
            "hits": 3,
            "pageSize": 25,
            "pageOffset": 0,
            "recordsToReturn": 25,
            "recordOffset": 0,
            "maxRecords": 10000,
            "records": [
                {
                    "c360person.middleName": "Hunar",
                    "_meta": {
                        "score": 1.0,
                        "updatedBy": "mdm-org-provisioning",
                        "createdBy": "c360_delta_s1_25aug",
                        "lastUpdateDate": "1715665888564",
                        "businessId": "MDM000000RE5JL",
                        "id": "MDM000000RE5JL",
                        "businessEntity": "c360.person",
                        "type": "c360.person",
                        "creationDate": "1704257316720",
                        "states": {
                            "recordStateIndicator": "DELETED",
                            "validation": "SKIPPED"
                        },
                        "status": "ACTIVE"
                    },
                    "c360person.title": "Minima.",
                    "c360person.designation": "Administrator, arts",
                    "c360person.lastName": "Lewis",
                    "c360person.firstName": "Maria 08_10",
                    "c360person.suffixName": {
                        "Code": "III",
                        "Name": "III"
```

```
    },
    "c360person.gender": {
        "Code": "M",
        "Name": "Male"
    },
    "c360person.PostalAddress": [
        {
            "country": {
                "Code": "GQ",
                "Name": "Equatorial Guinea"
            },
            "city": "South Megan",
            "postalCode": "18102660.4",
            "county": "Dolore.",
            "addressLine1": "8231 Sanchez Ranch",
            "_id": "31af7c32a4cf4557767b"
        }
    ]
},
{
    "c360person.middleName": "Hunar",
    "_meta": {
        "score": 1.0,
        "updatedBy": "c360_delta_s1_25aug",
        "createdBy": "c360_delta_s1_25aug",
        "lastUpdateDate": "1718703319506",
        "businessId": "MDM000000RE5JU",
        "id": "MDM000000RE5JU",
        "businessEntity": "c360.person",
        "type": "c360.person",
        "creationDate": "1704257316720",
        "states": {
            "recordStateIndicator": "DELETED",
            "validation": "SKIPPED"
        },
        "status": "ACTIVE"
    },
    "c360person.title": "Minima.",
    "c360person.designation": "Administrator, arts",
    "c360person.lastName": "Lewis",
    "c360person.firstName": "Maria 08_19",
    "c360person.suffixName": {
        "Code": "III",
        "Name": "III"
    },
    "c360person.gender": {
        "Code": "M",
        "Name": "Male"
    },
    "c360person.PostalAddress": [
        {
            "country": {
                "Code": "GQ",
                "Name": "Equatorial Guinea"
            },
            "city": "South Megan",
            "postalCode": "18102660.4",
            "county": "Dolore.",
            "addressLine1": "8240 Sanchez Ranch",
            "_id": "31af7c32a4cf4557767b"
        }
    ]
},
{
    "_meta": {
        "score": 1.0,
        "updatedBy": "mdm-org-provisioning",
        "createdBy": "c360_delta_s1_25aug",
        "lastUpdateDate": "1715665888933",
        "businessId": "MDM000000S08AO",
```

```
                    "id": "MDM000000S08AO",
                    "businessEntity": "c360.person",
                    "type": "c360.person",
                    "creationDate": "1708336773195",
                    "states": {
                        "recordStateIndicator": "DELETED",
                        "validation": "SKIPPED"
                    },
                    "status": "ACTIVE"
                },
                "c360person.lastName": "Kumar",
                "c360person.firstName": "manoj",
                "c360person.PostalAddress": [
                    {
                        "country": {
                            "Code": "AL",
                            "Name": "Albania"
                        },
                        "county": "sdfddsfsd",
                        "addressLine1": "asdfsdfdsfds",
                        "_id": "578f78ea24ef46b0968627fd452d05f0"
                    },
                    {
                        "country": {
                            "Code": "DZ",
                            "Name": "Algeria"
                        },
                        "addressLine1": "xxxxxxx",
                        "_id": "bc31aa2db5184bf3949f145b06732c06"
                    },
                    {
                        "country": {
                            "Code": "AU",
                            "Name": "Australia"
                        },
                        "addressLine1": "RRRRRRRR",
                        "_id": "b01d8cfb3f5a4854a0390b888bf52430"
                    }
                ]
            }
        ]
    }
}
```


Response with fields that are blank

The following search response contains the Person business entity record that doesn't contain a value for the Middle Name field, and the First Name field matches the specified search term:


```
{
    "searchResult": {
        "hits": 1,
        "pageSize": 25,
        "pageOffset": 0,
        "recordsToReturn": 25,
        "recordOffset": 0,
        "maxRecords": 10000,
        "records": [
            {
                "_meta": {
                    "score": 1.0,
                    "updatedBy": "user1",
                    "createdBy": "user1",
                    "lastUpdateDate": "1725429200669",
                    "businessId": "MDM000004DLV9D",
                    "businessEntity": "c360.person",
                    "id": "MDM000004DLV9D",
                    "type": "c360.person",
                    "creationDate": "1725429200669",
                    "states": {
```

```
                        "recordStateIndicator": "ACTIVE"
                    },
                    "status": "ACTIVE"
                },
                "c360person.lastName": "Mark",
                "c360person.firstName": "David"
            }
        ]
    }
}
```


Response with fields that contain a value

The following search response contains the Person business entity record that has a Designation field, and the First Name field is equal to John.


```
{
    "searchResult": {
        "hits": 1,
        "pageSize": 25,
        "pageOffset": 0,
        "recordsToReturn": 25,
        "recordOffset": 0,
        "maxRecords": 10000,
        "records": [
            {
                "_meta": {
                    "score": 1.0,
                    "updatedBy": "user1",
                    "createdBy": "user1",
                    "lastUpdateDate": "1715708126414",
                    "businessId": "MDM000004DGQ2O",
                    "businessEntity": "c360.person",
                    "id": "MDM000004DGQ2O",
                    "type": "c360.person",
                    "creationDate": "1715708124169",
                    "states": {
                        "recordStateIndicator": "ACTIVE"
                    },
                    "status": "ACTIVE"
                },
                "c360person.designation": "Doctor",
                "c360person.lastName": "Joseph",
                "c360person.firstName": "John"
            }
        ]
    }
}
```


Response with records updated within a specific time period

The following response contains all the Person records that were updated within a specified time period:


```
{
    "searchResult": {
        "hits": 1027,
        "pageSize": 25,
        "pageOffset": 0,
        "recordsToReturn": 25,
        "recordOffset": 0,
        "maxRecords": 10000,
        "records": [
            {
                "_meta": {
                    "score": 1.0,
                    "updatedBy": "Delta_Jul2Adm",
                    "createdBy": "Delta_Jul2Adm",
                    "lastUpdateDate": "1719987281992",
                    "businessId": "MDM00000000000",
                    "id": "MDM00000000000",
                    "businessEntity": "c360.person",
```

```
                    "type": "c360.person",
                    "creationDate": "1719987281992",
                    "states": {
                        "recordStateIndicator": "ACTIVE",
                        "validation": "PASSED"
                    },
                    "status": "ACTIVE"
                },
                "c360person.title": "xPzlPH",
                "c360person.AlternateName": [
                    {
                        "_id": "1",
                        "AlternateName": "gAdBOj"
                    }
                ],
                "c360person.birthPlace": "atjMFH",
                "c360person.middleName": "FqZNng",
                "c360person.prefixName": {
                    "Code": "Mr.",
                    "Name": "Mr."
                },
                "c360person.birthDate": "0020-01-01",
                "c360person.designation": "rKYQYf",
                "c360person.lastName": "jHqhMp",
                "c360person.firstName": "Rajni_1",
                "c360person.gender": {
                    "Code": "M",
                    "Name": "Male"
                },
                "c360person.PostalAddress": [
                    {
                        "country": {
                            "Code": "US",
                            "Name": "United States"
                        },
                        "city": "NwEqOa",
                        "postalCode": "16361",
                        "county": "kKveYx",
                        "addressLine1": "jUHfYL",
                        "_id": "1",
                        "state": {
                            "Code": "AK",
                            "Name": "Alaska"
                        }
                    }
                ]
            }

        ]
    }
}
```


Response with records based on dynamic field values

The following response contains the Product business entity records based on dynamic field values, such as product description, quantity, and electronics display size:


```
{
  "status": "OK",
  "startTime": "12:12:40:144",
  "endTime": "12:12:40:159",
  "timeTaken": "15ms",
  "searchRequest": {
    "tenantId": "xxxxxxxxxxxxxxxxxxxxx",
    "search": "ABC",
    "source": [],
    "entityType": "Product",
    "recordsToReturn": 25,
    "recordOffset": 0,
    "pageSize": 25,
```

```
  "pageOffset": 0,
  "filters": {
    "filter": [
      {
        "fieldName": "_meta.states.base",
        "fieldValue": [
          "ACTIVE"
        ],
        "comparator": "IN"
      }
    ]
  },
  "facets": [
    {
      "type": "SIMPLE",
      "facetField": "Product.product_name",
      "orderField": "KEY",
      "order": "ASCENDING"
    },
    {
      "type": "SIMPLE",
      "facetField": "_meta.states.base",
      "orderField": "KEY",
      "order": "ASCENDING"
    },
    {
      "type": "SIMPLE",
      "facetField": "_cm.vader.message",
      "orderField": "KEY",
      "order": "ASCENDING"
    },
    {
      "type": "SIMPLE",
      "facetField": "_meta.states.validation",
      "orderField": "KEY",
      "order": "ASCENDING"
    }
  ],
  "sort": [],
  "debug": false,
  "highlight": true,
  "hierarchyFilters": [],
  "aggregateSelectedFacetFilterValues": false,
  "includeDynamicFaceting": true,
  "searchRequestType": "GENERIC_SEARCH",
  "filterDeleted": true,
  "searchLocale": [
    "en"
  ],
  "fetchSource": true,
  "topNValue": 0
},
"searchResult": {
  "hits": 3,
  "pageSize": 25,
  "pageOffset": 0,
  "recordsToReturn": 25,
  "recordOffset": 0,
  "maxRecords": 10000,
  "records": [
    {
      "Product.product_code": "abc_1",
      "_meta": {
        "updatedBy": "voyagers",
        "createdBy": "voyagers",
        "lastUpdateDate": "1760594159120",
        "businessId": "MDM00000003UW4",
        "businessEntity": "Product",
        "id": "68d4e5fa18a170c7cf26eae3",
        "type": "Product",
```

```
      "creationDate": "1758782970911",
      "states": {
        "validation": "PASSED",
        "recordStateIndicator": "ACTIVE"
      },
      "status": "ACTIVE",
      "score": 20.780094
    },
    "highlight": {
      "Product.product_code": [
        "<em>abc_1</em>"
      ],
      "Product.product_name": [
        "<em>ABC</em>"
      ]
    },
    "Product.product_name": "ABC",
    "Product.Product_dfv": {
      "amount": "4",
      "electronics": [
        {
          "display_size": 536,
          "_id": "3e9c8a4dc4644b1aa4377852d9c72427",
          "connectivity_type": "65"
        }
      ],
      "product_description": "ABC gives a seamless smart TV experience",
      "quntity": 3
    }
  },
  {
    "Product.product_code": "3434",
    "_meta": {
      "updatedBy": "voyagers",
      "createdBy": "voyagers",
      "lastUpdateDate": "1761872326244",
      "businessId": "MDM00000006FHC",
      "businessEntity": "Product",
      "id": "6904093bf294de1941e7b321",
      "type": "Product",
      "creationDate": "1761872187671",
      "states": {
        "validation": "PASSED",
        "recordStateIndicator": "ACTIVE"
      },
      "status": "ACTIVE",
      "score": 20.780094
    },
    "highlight": {
      "Product.product_name": [
        "<em>ABC</em>"
      ]
    },
    "Product.product_name": "ABC",
    "Product.Product_dfv": {
      "amount": "4545454",
      "product_description": "ABC gives a seamless smart TV experience",
      "quntity": 55
    }
  },
  {
    "Product.product_code": "S001",
    "_meta": {
      "updatedBy": "voyagers",
      "createdBy": "voyagers",
      "lastUpdateDate": "1762929015177",
      "businessId": "MDM00000004ABK",
      "businessEntity": "Product",
      "id": "68e5f1cd55ebb333754ebaf2",
      "type": "Product",
```

```
      "creationDate": "1759900109492",
      "states": {
        "validation": "PASSED",
        "recordStateIndicator": "ACTIVE"
      },
      "status": "ACTIVE",
      "score": 11.712665
    },
    "highlight": {
      "Product.product_name": [
        "<em>ABC</em> TV"
      ]
    },
    "Product.product_name": "ABC TV",
    "Product.Product_dfv": {
      "amount": "45635",
      "electronics": [
        {
          "os_specification": [
            {
              "os_type": "Android",
              "_id": "530a815d0a204a9fa44d20dea01d763f"
            }
          ],
          "display_size": 55,
          "_id": "dd6ecd8ab194411bacbd34810efa03ed"
        }
      ],
      "quantity": 100
    }
  }
],
"facetResults": [
  {
    "facetField": "Product.Product_dfv.quantity",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "3",
        "count": 1
      },
      {
        "key": "55",
        "count": 1
      },
      {
        "key": "100",
        "count": 1
      }
    ],
    "totalCount": 3
  },
  {
    "facetField": "Product.Product_dfv.electronics.os_specification.os_type",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "android",
        "count": 1
      }
    ],
    "totalCount": 1
  },
  {
    "facetField": "Product.Product_dfv.electronics.connectivity_type",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "65",
        "count": 1
```

```
      }
    ],
    "totalCount": 1
  },
  {
    "facetField": "Product.Product_dfv.electronics.display_size",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "55",
        "count": 1
      },
      {
        "key": "536",
        "count": 1
      }
    ],
    "totalCount": 2
  },
  {
    "facetField": "_meta.states.base",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "ACTIVE",
        "count": 3
      }
    ],
    "totalCount": 3
  },
  {
    "facetField": "Product.product_name",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "abc",
        "count": 2
      },
      {
        "key": "abc tv",
        "count": 1
      }
    ],
    "totalCount": 3
  },
  {
    "facetField": "Product.Product_dfv.product_description",
    "type": "SIMPLE",
    "facetTerms": [
      {
        "key": "abc gives a seamless smart TV experience",
        "count": 2
      }
    ],
    "totalCount": 2
  },
  {
    "facetField": "Product.Product_dfv.amount",
    "type": "RANGE",
    "facetTerms": [
      {
        "key": "4.0 - 4545454.0",
        "count": 3
      }
    ],
    "totalCount": 3
  },
  {
    "facetField": "_cm.vader.message",
    "type": "SIMPLE",
```

```
          "facetTerms": [],
          "validationBreakDown": {},
          "totalCount": 0
        },
        {
          "facetField": "_meta.states.validation",
          "type": "SIMPLE",
          "facetTerms": [
            {
              "key": "PASSED",
              "count": 3
            }
          ],
          "totalCount": 3
        }
      ],
      "dynamicFacetFields": {
        "topNValue": 25,
        "totalFacets": 6,
        "topFacetFields": [
          {
            "key": "Product.Product_dfv.amount",
            "count": 3
          },
          {
            "key": "Product.Product_dfv.quntity",
            "count": 3
          },
          {
            "key": "Product.Product_dfv.product_description",
            "count": 2
          },
          {
            "key": "Product.Product_dfv.electronics.display_size",
            "count": 2
          },
          {
            "key": "Product.Product_dfv.electronics.os_specification.os_type",
            "count": 1
          },
          {
            "key": "Product.Product_dfv.electronics.connectivity_type",
            "count": 1
          }
        ]
      }
    }
  }
```


Response with search results that exceed the dynamic field index limit

The following search response contains Keyboard record in the Item business entity that exceeds the dynamic field index limit:


```
{
    "searchResult": {
        "hits": 1,
        "pageSize": 0,
        "pageOffset": 0,
        "recordsToReturn": 0,
        "recordOffset": 0,
        "maxRecords": 10000,
        "records": [
            {
                "_meta": {
                    "updatedBy": "user1",
                    "createdBy": "user1",
                    "lastUpdateDate": "1783084483210",
                    "businessId": "MDM0000000003C",
                    "id": "MDM0000000003C",
```

```
                    "businessEntity": "Item",
                    "type": "Item",
                    "creationDate": "1782441105026",
                    "states": {
                        "validation": "PASSED",
                        "recordStateIndicator": "ACTIVE"
                    },
                    "status": "ACTIVE",
                    "score": 6.1987
                },
                "_indexValidationError": [
                    {
                        "code": "INDEX.100001"
                    }
                ],
                "Item.item_dfv": {
                    "release_date": "2026-06-01",
                    "fg": [
                        {
                            "name": "Keyboard",
                            "warranty_months": 24,
                            "weight_kg": 1.0
                        }
                    ],
                    "unit_count": 1,
                    "in_stock": true,
                    "launch_timestamp": 1782824430000,
                    "rating": 1.0,
                    "description": "Keyboard",
                    "price": "1"
                },
                "Item.item_name": "Keyboard",
                "Item.item_code": 1
            }
        ]
    }
}
```


Response with search results that exceed the field group entry index limit

The following search response contains James Patel record in the c360.person business entity that exceeds the field group entry index limit:


```
{
    "searchResult": {
        "hits": 1,
        "pageSize": 0,
        "pageOffset": 0,
        "recordsToReturn": 0,
        "recordOffset": 0,
        "maxRecords": 10000,
        "records": [
            {
                "c360person.firstName": "James",
                "c360person.lastName": "Patel",
                "_meta": {
                    "updatedBy": "user1",
                    "createdBy": "user1",
                    "lastUpdateDate": "1781202587702",
                    "businessId": "MDM0000000003W",
                    "id": "MDM0000000003W",
                    "businessEntity": "c360.person",
                    "type": "c360.person",
                    "creationDate": "1778571050125",
                    "states": {
                        "validation": "PASSED",
                        "recordStateIndicator": "ACTIVE"
                    },
                    "status": "ACTIVE",
                    "score": 10.962221
                },
```

```
                "_indexValidationError": [
                    {
                        "code": "INDEX.100002"
                    }
                ],
                "c360person.designation": "Director",
                "c360person.dfv_c360person": {
                    "name": "James Patel",
                    "city": "San Jose",
                    "postalCode": "95111"
                }
            }
        ]
    }
}
```


Filtering and sorting search results

When you submit a search request, you can specify how to filter and search the search results.

The following table lists the predefined fields you can use to filter and sort the search results:

Business Entity	Filter by	Sort by
Category	- _cm.vader.message - _meta.states.validation - p360category.keywords.keyword	- p360category.descriptions.name - p360category.descriptions.description - p360category.descriptions.descriptionsLanguage.Name - p360category.identifier - p360category.keywords.keyword - p360category.keywords.keywordsLanguage.Name
Contact	- _cm.vader.message - _meta.states.validation - s360Contact.gender.Name - s360Contact.PostalAddress.country.Name - s360Contact.PostalAddress.state.Name - s360Contact.PostalAddress.city	- s360Contact.firstName - s360Contact.lastName - s360Contact.gender.Name - s360Contact.jobTitle.Name - s360Contact.department.Name - s360Contact.language.Name - s360Contact.PostalAddress.country.Name - s360Contact.PostalAddress.state.Name - s360Contact.PostalAddress.city - s360Contact.PostalAddress.postalCode - s360Contact.PostalAddress.addressLine1 - s360Contact.PhoneCommunication.phoneNumber - s360Contact.ElectronicAddressCommunication.electronicAddress

Business Entity	Filter by	Sort by
Item	- _cm.vader.message - _meta.states.validation - p360item.availabilityDate - p360item.availability.Name - p360item.brand - p360item.countryOfOrigin.Name - p360item.expirationDate - p360item.keywords.keyword - p360item.manufacturer - p360item.metaInformation.metaDescription - p360item.status.Name - p360item.sellingPrice.sellingValidTo - p360item.sellingPrice.sellingValidFrom - p360item.sellingPrice.sellingCurrency.Name - p360item.sellingPrice.sellingTerritory.Name - p360item.sellingPrice.sellingPriceType.Name - p360item.sellingPrice.sellingPriceAmount - p360item.subBrand - p360item.tags.tag	- p360item.availabilityDate - p360item.availability.Name - p360item.brand - p360item.countryOfOrigin.Name - p360item.description.longDescription - p360item.description.productTitle - p360item.description.shortDescription - p360item.expirationDate - p360item.gtin - p360item.identifier - p360item.keywords.keyword - p360item.manufacturer - p360item.manufacturerProductNumber - p360item.manufacturerGLN - p360item.metaInformation.metaDescription - p360item.metaInformation.metaTitle - p360item.productHighlights.productHighlight - p360item.status.Name - p360item.sellingPrice.sellingValidTo - p360item.sellingPrice.sellingValidFrom - p360item.sellingPrice.sellingCurrency.Name - p360item.sellingPrice.sellingTerritory.Name - p360item.sellingPrice.sellingPriceType.Name - p360item.sellingPrice.sellingPriceAmount - p360item.subBrand - p360item.tags.tag
Organization	- _cm.vader.message - _meta.states.validation - c360organization.companyType.Name - c360organization.PostalAddress.city - c360organization.PostalAddress.country.Name - c360organization.PostalAddress.state.Name	- c360organization.name - c360organization.companyType.Name - c360organization.PostalAddress.addressLine1 - c360organization.PostalAddress.country.Name - c360organization.PostalAddress.state.Name - c360organization.PostalAddress.city - c360organization.PostalAddress.county - c360organization.PostalAddress.postalCode - c360organization.PhoneCommunication.phoneNumber - c360organization.AlternateName.name - c360organization.Segment.segmentType.Name

Business Entity	Filter by	Sort by
Person	- _cm.vader.message - _meta.states.validation - c360person.gender.Name - c360person.PostalAddress.city - c360person.PostalAddress.country.Name - c360person.PostalAddress.state.Name	- c360person.firstName - c360person.lastName - c360person.designation - c360person.gender.Name - c360person.AlternateName.AlternateName - c360person.PostalAddress.addressLine1 - c360person.PostalAddress.city - c360person.PostalAddress.county - c360person.PostalAddress.country.Name - c360person.PostalAddress.state.Name - c360person.PostalAddress.postalCode - c360person.Phone.phoneNumber
Supplier	- _cm.vader.message - _meta.states.validation - s360Supplier.supplierType - s360SupplierPostalAddress.country.Name - s360SupplierPostalAddress.state.Name - s360SupplierPostalAddress.city	- s360Supplier.name - s360Supplier.dunsNumber - s360Supplier.supplierType - s360SupplierPostalAddress.country.Name - s360SupplierPostalAddress.state.Name - s360SupplierPostalAddress.city - s360SupplierPostalAddress.postalCode - s360SupplierPostalAddress.addressLine1 - s360Supplier.PhoneCommunication.phoneNumber - s360Supplier.Diversity.diversityStatus - s360Supplier.Diversity.diversityType - s360Supplier.SourcingManager.sourcingManagerName - s360Supplier.SourcingManager.sourcingManagerEmployeeId - s360Supplier.Segment.segmentType - s360Supplier.Segment.segmentName - s360Supplier.ElectronicAddressCommunication.electronicAddress

Note: Effective in the May 2023 release, _cm.vader.message and _meta.states.validation fields are available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Filtering records that exceed the index limit

When the generate search index job runs, it indexes a limited number of dynamic fields and field group entries for each record. If a record exceeds a limit, the job indexes only the values within the limit and adds an error code to the record.

The generate search index job applies the following index limits:

Dynamic field index limit

The job indexes a maximum of 100 dynamic fields for each record. If a record contains more than 100 dynamic fields, the job indexes only the first 100 fields. When you search for records based on dynamic fields, the search returns results only for the indexed fields.

For each record that exceeds the dynamic field limit, the job adds the error code `INDEX.100001` to the record in the `_indexValidationError.code` system field.

Field group entry index limit

The job indexes a maximum of 25,000 field group and nested field group entries for each record. If a record contains more than 25,000 entries, the job indexes only the first 25,000 entries. When you search for records, the search returns results only for the indexed entries.

The 25,000 entry limit includes field group entries and dynamic fields. Field group entries also include validation errors, which MDM SaaS generates when a record doesn't satisfy a data quality rule. When the job indexes records, validation errors take precedence over other field group entries and dynamic fields. For example, a record contains 20,000 validation errors and 6,000 address field group entries. The job indexes all 20,000 validation errors and only 5,000 of the 6,000 address field group entries.

For each record that exceeds the field group entry index limit, the job adds the error code `INDEX.100002` to the record in the `_indexValidationError.code` system field.

Note: Effective in the October 2026 release, the ability to filter records that exceed the field group entry index limit is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Filter records based on the error code

You can filter the search results on the `_indexValidationError.code` system field to retrieve only the records that exceed a limit.

The following table lists the filter parameters to use:

Parameter	System Field	Search Parameter Value	Description
fieldName > fieldValue	_indexValidationError.code	INDEX.100001	Filters search results to retrieve records that exceed the dynamic field index limit.
fieldName > fieldValue	_indexValidationError.code	INDEX.100002	Filters search results to retrieve records that exceed the field group entry index limit.

You can use only the following filter comparators to search for records with fields that contain the error code:

- `NOT_EQUALS`
- `IN`
- `IS_MISSING`
- `IS_NOT_MISSING`

Note: To apply these changes, reindex the records in your business entities. To reindex the records, run the Generate Search and Report Indexes or Match Keys job by using the MDMSearchIndex process.

For more information, see filter records that exceed the dynamic field index limiton page 32 and “Request to filter records that exceed the field group entry index limit” on page 33.

Business entity record APIs

Use the business entity record APIs to read, create, update, delete, or restore master records. These APIs use the entity resource.

Ensure that you have the required privileges to create, update, read, or delete a record.

Note: If you don't have the read privilege for a field, the response of Business Entity Record REST APIs don't include the field.

For more information about record and field privileges, see *Manage User Roles and Privileges*.

Create Master Record

Use the Create Master Record API to create a master record for a business entity.

The API supports the POST method.

POST request

To create a business entity master record, submit a POST request with the following URI:

```
POST <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>?
sourceSystem=<sourceSystem>[&sourcePKey=<pkey>][&_resolveCrosswalk=true|false]
[&businessId=999456789222123][&_population=<value>]
```

The following table describes the parameters that you can use in the URI:

Parameter Name	Description
businessEntity	Internal ID of the business entity for which you want to create a master record.
sourceSystem	Internal ID of the source system to which the record belongs.
sourcePKey	The primary key of the source record. The source primary keys of records can contain the following characters: `~!'={}|:@#$^&*()-_+,<>?` `
_resolveCrosswalk	Indicates whether to standardize picklist values based on the source system configuration. To standardize the picklist values, set to true. If set to true, ensure that the picklist values belong to a code list that's part of a crosswalk. Default is false. For more information about standardizing picklist values, see *Define Source Systems*.

Parameter Name	Description
businessId	Unique identifier of the business entity record. When you specify a custom business ID for records, ensure that its length differs from the length of the business ID format of the business entity. For example, if you specified 111 as the prefix and 15 as the length in the business ID format for a business entity, don't use 111560000800000 as a custom business ID. However, you can use a custom business ID with the same prefix, 111, provided the overall length is different. For more information about the business ID format, see *Define the Data Model*. **Note:** If a record contains more than 2,000 field group entries and 23 data quality rule associations, the request might time out.
_population	Specifies the population of the record. Match keys for the record are generated based on the population that you assign to improve match accuracy. You can assign a population such as usa to a record to generate match keys based on the record data, such as name or address, that account for USA data characteristics. If you don't specify the population of the record, the population that's configured for the match model is applied to the record. For more details about the values that you can specify for the parameter, see *Configure Match and Merge*.

Request body

You must include the record details in the request body. To view the request body parameters, submit a GET request and retrieve an active business entity master record.

If a business entity field in a field group has a data quality rule, specify the `_id` parameter value for the field group entry that you create. For example, if the Postal Code field in the Address field group has a data quality rule, specify an ID for an address entry that you create.

For more information about data quality rules, see *Configure Data Quality*.

If a business entity is configured with dynamic field definition and dynamic field value attributes, you can configure values for these attributes when you create or update master records.

The following table describes the parameters that you can use to add or update dynamic field definitions:

Parameter Name	Description
<Internal ID of a dynamic field definition attribute>	An array of dynamic fields from the dynamic pool that's associated with the dynamic field definition attribute. Use the following parameters to add a dynamic field definition: - _id - template - mandatory - inheritance > mode
_id	Unique identifier for the dynamic field definition entry.
template	Name of a dynamic field from the dynamic pool that's associated with the dynamic field definition attribute.

Parameter Name	Description
mandatory	Optional. Specifies whether the dynamic field is required. Default is false.
inheritance > mode	Optional. Controls inheritance of a dynamic field definition. Specify one of the following modes: - NONE. Adds a dynamic field definition to the record without enabling inheritance for the definition. This prevents the record from propagating the dynamic field definition to its child records. Default is NONE. - START. Enables the inheritance of a dynamic field definition from the record to its child records. The inheritance of the definition starts from the record. For example, when you add the Color dynamic field definition to the Mobile Phones category record with the START mode, the child records of the Mobile Phones record get the Color dynamic field definition. Any changes to the definition are also propagated to the child records. - PASS: The record inherits the dynamic field definition from its parent record and propagates it to the child records. - STOP. Stops the inheritance chain for a definition at the record. The record continues to inherit modifications to the definition. If the child records inherited the definition previously, they will no longer get the definition. - DISABLED. Hides the dynamic field definition in the user interface for the record. The child records can't inherit the definition.

Note: Even if you don't specify the required dynamic field values in a request, the record is created or updated without any validation.

POST response

The response is in the JSON format. The response shows the HTTP 200 OK response code and retrieves the business ID of the record you created. When you submit a REST API request to create a record, MDM SaaS verifies the permissions of your user role and the approval workflow configuration. The response indicates whether a data steward must approve the records you created.

Note: The response contains the id parameter that's deprecated. Use the businessId parameter instead.

POST example

You might use the following request to create a master record for the c360.organization business entity:

```
POST <baseApiUrl>/business-entity/public/api/v1/entity/c360.organization?
sourceSystem=c360.default.system&sourcePKey=pkey910&_resolveCrosswalk=true
&businessId=999456789222123
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX


{

    "firstName": "Lewis",
    "lastName": "Hamilton",
    "middleName": "Decay",
    "PostalAddress": [
                    {
                        "_id": "3d4a8f4d07cb4f0db9ea1be9bf8d27e8",
                        "defaultIndicator": true,
                        "addressType": {
                            "Name": "Home",
                            "Code": "Home"
                        },
                        "usageType": {
                            "Name": "Home",
                            "Code": "Home"
                        },
                        "addressStatus": {
```

```
                            "Name": "Active",
                            "Code": "Active"
                        },
                        "addressLine1": "789456, park road",
                        "country": {
                            "Name": "United States",
                            "Code": "US"
                        },
                        "state": {
                            "Name": "California",
                            "Code": "CA"
                        },
                        "city": "California"
                    }
                ],
                "Phone": [
                    {
                        "_id": "f142a11b916c4a1b8239466f15852",
                        "phoneUsageType": {
                            "Name": "Home",
                            "Code": "Home"
                        },
                        "phoneType": {
                            "Name": "Mobile",
                            "Code": "Mobile"
                        },
                        "phoneNumber": "9900202777"
                    }
                ],
    "_contentMeta": {
"trust": {
"fieldData": [
{
"fieldRef": "/",
"sourceLastUpdateDate": 1654058410000
},
{
"fieldRef": "PostalAddress[3d4a8f4d07cb4f0db9ea1be9bf8d27e8]",
"sourceLastUpdateDate": 1654058410000
},
{
"fieldRef": "Phone[f142a11b916c4a1b8239466f15852]",
"sourceLastUpdateDate": 1654839671000
}
]

}
    }
}
```

You might use the following excerpt in the request body to create a master record with dynamic field definitions:

```
{
  "identifier" : "SmartPhones",
  "categoryName": "Smart Phones",
  "product_dynamic_field_definitions" : [
    {
      "_id": "color_001_dfd1",
      "template": "color",
      "mandatory": true,
      "allowMany": true,
      "inheritance": [
        {
          "mode": "NONE"
        }
      ]
    },
    {
```

```
      "_id": "dimensions_001_dfd1",
      "template": "dimensions",
      "mandatory": true,
      "allowMany": true,
      "inheritance": [
        {
          "mode": "NONE"
        }
      ]
    }
  ]
}
```

In the sample request, product_dynamic_field_definitions is the internal ID of a dynamic field definition attribute in a business entity. The `_id` parameter contains a unique identifier for each dynamic field definition entry. The `template` parameter specifies a dynamic field from the dynamic field pool that's associated with the dynamic field definition attribute.

You might use the following request to create a master record with dynamic field values:

```
{
  "identifier" : "iPhone17Pro",
   "GTN": "GHN456",
   "brand": "Apple",
   "product_description": "<p>The <strong>iPhone 17 Pro</strong> is a high-performance
smartphone featuring an A19 Pro chip, a Super Retina XDR display with ProMotion, and an
upgraded camera system with 48MP sensors for the main, ultrawide, and telephoto lenses.
</p>",
   "product_specifications": "<ul><li>Super Retina XDR display</li><li>15.93 cm / 6.3″
(diagonal)</li><li>All-screen OLED display</li><li>2622 × 1206 pixel resolution at 460
ppi</li></ul>",
   "product_dynamic_field_values" : {
      "color" : "red",
      "dimensions" : [
        {
          "height" : "15.93",
          "width" : "6.3"
        }
      ]
  }
}
```

In the sample request, dynamic_field_values is the internal ID of a dynamic field values attribute in a business entity.

Note: Ensure that you specify the dynamic fields from the dynamic field pool that's associated with the dynamic field definition attribute. If you include rich text in your request, ensure that you use the supported HTML tags and attributes. For more information about rich text formatting, see Rich text formatting for text fields.

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false,
   "id":"9991234567890123",
   "businessId:"999456789222123"
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true,
   "id":"9991234567890123",
```

```
    "businessId:"999456789222123"
}
```

Read Master Record by Business ID

Use the Read Master Record by Business ID API to retrieve an active business entity master record based on the business ID of the record.

To get the business ID of a record for use with the API, you can submit a search request.

The API supports the GET method.

GET request

To retrieve a business entity master record, submit a GET request with the following URI:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<businessId>?
[_skipLookup=true|false]?[&_showContentMeta=true|false][&_showPending=true|false]
```

The GET request contains the following parameters that you can use in the URI:

Name	Description
businessEntity	Internal ID of the business entity from which you want to retrieve the master record.
businessId	Unique identifier of the business entity record.
_skipLookup	Optional. Indicates whether to retrieve picklist values from the Business 360 data store or Reference 360 data store. The response time improves when you retrieve values from the Business 360 data store. To retrieve picklist values from the Business 360 data store, set to true. The picklist values are based on the data from the last updated record and might not include subsequent changes to the Reference 360 data. To retrieve picklist values from the Reference 360 data store, set to false. Default is false.
_showContentMeta	Optional. Indicates whether to retrieve content metadata of a record. The content metadata contains the trust score, survivorship configuration, and details of any failed data enhancement rule. To retrieve content metadata of a record, set _showContentMeta to true. Default is false.
_showPending	Optional. Indicates whether to retrieve only master records that are pending review for record creation, update, or deletion. To retrieve pending records, set to true. Default is false.

You can use the Accept-Language parameter in the request header to specify the preferred languages for localized picklist field values and response messages in the response. You can specify one or more BCP 47 language codes in order of preference. You can assign a quality value to each language tag. For example, `fr-FR,en;q=0.8`.

GET response

The response is in the JSON format. The response body contains the business entity master record data.

The GET response includes the following `_meta` parameters:

Name	Type	Description
id	String	Unique identifier of the business entity record. Do not use.
businessEntity	String	Internal ID of the business entity from which you retrieved the master record.
businessId	String	Unique identifier of the business entity record.
state	String	Indicates whether the record is active, inactive, or in pending state. **Note:** This parameter is the same as the `status` parameter in the search API. For more information about the `status` parameter, see "Request response " on page 26.
validation	String	Indicates the validation status of the record. The record can have one of the following statuses: - PENDING. Indicates that the record is not yet validated. - PASSED. Indicates that the record is validated and has no errors. - FAILED. Indicates that the record is validated and has validation and data quality errors. - IN_PROGRESS. Indicates that the record is being validated.
consolidation	String	Match and merge status of the master record.
searchIndex	String	Indicates that the record is in the SEARCH_INDEXED state and is searchable.
createdBy	String	Name of the person who created the record.
creationDate	String	Date when the record was created.
updatedBy	String	Name of the user who last updated the record.
lastUpdateDate	String	Date when the master record was last updated.
changeList	String	ID of the workflow task that's associated with the record in the pending state.

The GET response includes the following `_contentMeta` parameters:

Name	Type	Description
trust	Object	An object with the fieldData array that contains details about the fields participating in the trust score calculation. The fieldData array contains the following parameters: - fieldRef. Fields that have different trust scores. The value "/" indicates that all fields in the record share the same trust score. - lastUpdatedDate. Date when the field value was last updated. - manualOverride. Indicates whether a field value was manually overridden. - sourcePrimaryKey. Primary key of the source record. - sourceSystem. Internal ID of the source system to which the record belongs. - trustRule. Survivorship configuration that identified the best value for the field. - trustScore. Latest trust score of the field value.
ruleAssociation	Object	An object that contains details of failed or in-progress rule associations. The object includes the fail array that contains details about the failed or in-progress rule associations and the fields to which these rules were applied. The fail array contains the following parameters: - provider. For internal use only. - rule. Array that contains details about failed or in-progress rule associations. The array contains the following parameters: - id. Internal ID of the failed or in-progress rule association. - fieldRef. Array that contains the fields to which the rule associations were applied. - dynErrorDetail. Error message that appears when a custom rule specification is configured from Data Quality.

GET examples

You might use the following request to retrieve the active master record based on the business ID MDM0000000GXKU:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/c360.person/MDM0000000GXKU?
_showContentMeta=true
```

The sample response shows the HTTP 200 OK response code and retrieves the business entity master record that matches the specified business ID. The response shows the content metadata in the `_contentMeta` section.


```
{
    "firstName": "Andrew",
    "middleName": "Xio",
    "lastName": "Plata",
    "fullName": "Andrew Xio Plata",
    "gender": {
        "Code": "M",
        "Name": "Male"
    },
    "_meta": {
        "id": "MDM0000000GXKU",
        "businessEntity": "c360.person",
        "businessId": "MDM0000000GXKU",
        "state": "ACTIVE",
        "validation": "IN_PROGRESS",
        "consolidation": "MATCH_INDEXED",
        "searchIndex": "SEARCH_INDEXED",
        "createdBy": "Allied",
        "creationDate": 1748510430175,
        "updatedBy": "Allied",
        "lastUpdateDate": 1748510430175
```

```
        },
        "_contentMeta": {
            "trust": {
                "fieldData": [
                    {
                        "fieldRef": "middleName",
                        "lastUpdatedDate": 1748510430175,
                        "manualOverride": false,
                        "sourcePrimaryKey": "683826de176d8555c1172fd7",
                        "sourceSystem": "c360.default.system",
                        "trustRule": "SourceRanking",
                        "trustScore": 0.9
                    },
                    {
                        "fieldRef": "/",
                        "lastUpdatedDate": 1748510430175,
                        "manualOverride": false,
                        "sourcePrimaryKey": "683826de176d8555c1172fd7",
                        "sourceSystem": "c360.default.system",
                        "trustRule": "SourceRanking",
                        "trustScore": 1.0
                    }
                ]
            },
            "ruleAssociation": {
                "fail": [
                    {
                        "provider": "mdm-business-entity",
                        "rule": [
                            {
                                "id": "min5_middlename_1743147609745",
                                "fieldRef": [
                                    "middleName"
                                ],

                                "dynErrorDetail": "Requires a minimum of five alphabetic
characters."
                            }
                        ]
                    }
                ],
                "exception": []
            }
        }
}
```


For more information about content metadata, see “Read content meta ” on page 19.

The following sample response returns a record that contains dynamic field definitions:


```
{
    "identifier": "Electronics",
    "category_name": "Electronics",
    "product_dynamic_field_definitions": [
        {
            "_id": "color_property_01",
            "template": "color",
            "mandatory": false,
            "allowMany": true,
            "inheritance": [
                {
                    "_id": "6835ab2ca1d3e6000f749d84",
                    "mode": "START"
                }
            ]
        }
    ],
    "_meta": {
        "id": "MDM00000000FFL",
        "businessEntity": "custom_category",
        "businessId": "MDM00000000FFL",
```

```
        "state": "ACTIVE",
        "validation": "PASSED",
        "consolidation": "MATCH_DIRTY",
        "searchIndex": "SEARCH_INDEXED",
        "createdBy": "Marexus_S10_Mar_11",
        "creationDate": 1748341536222,
        "updatedBy": "Marexus_S10_Mar_11",
        "lastUpdateDate": 1748347692193
    }
}
```


The following sample response returns a record that contains dynamic field values:


```
{
    "identifier": "JBL Cinema SB510",
    "gtn": "SB510",
    "brand": "JBL",
    "product_number": "CINEMA SB510",
    "product_name": "JBL Cinema SB510",
    "product_description": "<p>The <strong>JBL Cinema SB510</strong> is a 3.1 channel
all-in-one soundbar with a built-in subwoofer. It delivers 200 watts of powerful Dolby
Audio with deep bass, all in a hassle-free, compact design that fits neatly into any
room. A dedicated center channel driver means TV and film dialogue is always crystal
clear. Setup is easy using either one-cable HDMI ARC or optical connections, and
convenient Bluetooth connectivity means you can use it for wireless music streaming from
any device.</p>",
    "product_specifications": "<ul><li>Model: CINEMA SB510</li><li>Sound system: 3.1
channel</li><li>Power supply: 100-240 V AC, ~50/60 Hz</li><li>Total speaker power output
(Max @ THD 1%): 200 W</li><li>Soundbar output power (Max @ THD 1%): 150 W</
li><li>Subwoofer output power (Max @ THD 1%): 50 W</li><li>Soundbar transducer: 3 × (45
× 80) mm racetrack drivers</li><li>Subwoofer transducer: 1 × (70 × 88) mm built-in
subwoofer</li><li>Standby power: &lt; 0.5 W</li><li>Operating temperature: 0°C–45°C</
li></ul>",
    "status": {
        "Code": "active",
        "Name": "Active"
    },
    "availability": {
        "Code": "in_stock",
        "Name": "In Stock"
    },
    "product_dynamic_field_values": {
        "dolby_atmos": true,
        "color": "Red",
        "dimensions": [
            {
                "_id": "dbb63393e71b424e8873d0e921622e1e",
                "width": "8.6 cm",
                "height": " 7.12 cm"
            }
        ]
    },
    "_meta": {
        "id": "MDM00000000000",
        "businessEntity": "customitem",
        "businessId": "MDM00000000000",
        "state": "ACTIVE",
        "validation": "PASSED",
        "consolidation": "MATCH_DIRTY",
        "searchIndex": "SEARCH_INDEXED",
        "createdBy": "Marexus_S10_Mar_11",
        "creationDate": 1748345857233,
        "updatedBy": "Marexus_S10_Mar_11",
        "lastUpdateDate": 1748501231546
    }
}
```

You might use the following request to retrieve the pending master record based on the business ID MDM0000000PXN5:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/c360.person/MDM0000000PXN5?
_showContentMeta=true&_showPending=true
```

The sample response shows the HTTP 200 OK response code and retrieves the pending master record that matches the specified business ID. The response includes the `changeList` parameter in the `_meta` section.


```
{
    "firstName": "Anita",
    "middleName": "Jane",
    "lastName": "Kumar",
    "fullName": "Anita Jane Kumar",
    "_meta": {
        "id": "MDM0000000PXN5",
        "businessEntity": "c360.person",
        "businessId": "MDM0000000PXN5",
        "state": "PENDING_CREATE",
        "validation": "PASSED",
        "consolidation": "MATCH_INDEXED",
        "searchIndex": "SEARCH_INDEXED",
        "createdBy": "Impact",
        "creationDate": 1756473570942,
        "updatedBy": "Impact",
        "lastUpdateDate": 1756473570942,
        "changeList": "68b1a8e24fb65c72f80df3c0"
     },
    "_contentMeta": {
        "trust": {
            "fieldData": [
                {
                    "fieldRef": "middleName",
                    "lastUpdatedDate": 1756473570942,
                    "manualOverride": false,
                    "sourcePrimaryKey": "683826de176d8555c1172fd7",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "SourceRanking",
                    "trustScore": 0.9
                },
                {
                    "fieldRef": "/",
                    "lastUpdatedDate": 1748510430175,
                    "manualOverride": false,
                    "sourcePrimaryKey": "683826de176d8555c1172fd7",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "SourceRanking",
                    "trustScore": 1.0
                }
            ]
        }
    }
}
```


Read Master Record by SourcePKey

Use the Read Master Record by SourcePKey API to retrieve an active business entity master record associated with a particular source system and the primary key.

The API supports the GET method.

GET request

To retrieve a business entity master record, submit a GET request with the following URI:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<sourceSystem>/
<sourcePKey>/[&_skipLookup=true|false]?[_showContentMeta=true|false][&_showPending=true|
false]
```

The GET request contains the following parameters that you can use in the URI:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to retrieve the master record.
sourceSystem	Internal ID of the source system to which the record belongs.
sourcePKey	The primary key of the source record.
_skipLookup	Optional. Indicates whether to retrieve picklist values from the Business 360 data store or Reference 360 data store. The response time improves when you retrieve values from the Business 360 data store. To retrieve picklist values from the Business 360 data store, set to true. The picklist values are based on the data from the last updated record and might not include subsequent changes to the Reference 360 data. To retrieve picklist values from the Reference 360 data store, set to false. Default is false.
_showContentMeta	Optional. Indicates whether to retrieve content metadata of a record. The content metadata contains the trust score, survivorship configuration, and details of any failed data enhancement rule. To retrieve content metadata of a record, set _showContentMeta to true. Default is false.
_showPending	Optional. Indicates whether to retrieve only master records that are pending review for record creation, update, or deletion. To retrieve pending records, set to true. Default is false.

GET response

The response is in the JSON format. The response body contains the business entity master record data.

The GET response includes the following `_meta` parameters:

Name	Type	Description
id	String	Unique identifier of the business entity record. Do not use.
businessEntity	String	Internal ID of the business entity from which you retrieved the master record.
businessId	String	Unique identifier of the business entity record.
state	String	Indicates whether the record is active, inactive, or in pending state. **Note:** This parameter is the same as the `status` parameter in the search API. For more information about the `status` parameter, see "Request response " on page 26.

Name	Type	Description
validation	String	Indicates the validation status of the record. The record can have one of the following statuses: - PENDING. Indicates that the record is not yet validated. - PASSED. Indicates that the record is validated and has no errors. - FAILED. Indicates that the record is validated and has validation and data quality errors. - IN_PROGRESS. Indicates that the record is being validated.
createdBy	String	Name of the person that created the record.
creationDate	String	Date when the record was created.
updatedBy	String	Name of the person that updated the record.
lastUpdateDate	String	Date when the record was last updated.
changeList	String	ID of the workflow task associated with the record, if it's in the pending state.

The GET response includes the following `_contentMeta` parameters:

Name	Type	Description
trust	Object	An object with the fieldData array that contains details about the fields participating in the trust score calculation. The fieldData array contains the following parameters: - fieldRef. Fields that have different trust scores. The value "/" indicates that all fields in the record share the same trust score. - lastUpdatedDate. Date when the field value was last updated. - manualOverride. Indicates whether a field value was manually overridden. - sourcePrimaryKey. Primary key of the source record. - sourceSystem. Internal ID of the source system to which the record belongs. - trustRule. Survivorship configuration that identified the best value for the field. - trustScore. Latest trust score of the field value.
ruleAssociation	Object	An object that contains details of failed or in-progress rule associations. The object includes the fail array that contains details about the failed or in-progress rule associations and the fields to which these rules were applied. The fail array contains the following parameters: - provider. For internal use only. - rule. Array that contains details about failed or in-progress rule associations. The array contains the following parameters: - id. Internal ID of the failed or in-progress rule association. - fieldRef. Array that contains the fields to which the rule associations were applied. - dynErrorDetail. Error message that appears when a custom rule specification is configured from Data Quality.

GET examples

You might use the following request to retrieve the business entity master record associated with the `c360.default.system` source system and the `pkzkey31` primary key:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/c360.person/c360.default.system/
pkzkey3?_showContentMeta=true
```

The following sample response shows the active master record that matches the specified source name and sourcePKey:


```
{
    "firstName": "James",
    "middleName": "Mc",
    "lastName": "Gill",
    "fullName": "James MC Gill",
    "gender": {
        "Code": "M",
        "Name": "Male"
    },
    "_meta": {
        "id": "683d6537fe40f71fb1f7dd5f",
        "businessEntity": "c360.person",
        "businessId": "MDM0000000I05J",
        "state": "ACTIVE",
        "validation": "IN_PROGRESS",
        "createdBy": "tanmaya",
        "creationDate": 1748510430175,
        "updatedBy": "tanmaya",
        "lastUpdateDate": 1748510430175
    },
    "_contentMeta": {
        "trust": {
            "fieldData": [
                {
                    "fieldRef": "middleName",
                    "lastUpdatedDate": 1748510430175,
                    "manualOverride": false,
                    "sourcePrimaryKey": "683826de176d8555c1172fd7",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "SourceRanking",
                    "trustScore": 0.9
                },
                {
                    "fieldRef": "/",
                    "lastUpdatedDate": 1748510430175,
                    "manualOverride": false,
                    "sourcePrimaryKey": "683826de176d8555c1172fd7",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "SourceRanking",
                    "trustScore": 1.0
                }
            ]
        },
        "ruleAssociation": {
            "fail": [
                {
                    "provider": "mdm-business-entity",
                    "rule": [
                        {
                            "id": "min5_middlename_1743147609745",
                            "fieldRef": [
                                "middleName"
                            ],

                        }
                    ]
                }
            ],
            "exception": []
        }
    }
}
```


You might use the following request to retrieve the pending business entity master record associated with the `c360.default.system` source system and the `pendpkzkey32` primary key:

```
GET <baseApiURL>/business-entity/public/api/v1/entity/c360.person/c360.default.system/
pendpkzkey32?_showContentMeta=true&_showPending=true
```

The following sample response shows the pending master record that matches the specified source name and sourcePKey:


```
{
    "firstName": "Anita",
    "middleName": "Jane",
    "lastName": "Kumar",
    "fullName": "Anita Jane Kumar",
    "_meta": {
        "id": "MDM0000000PXN5",
        "businessEntity": "c360.person",
        "businessId": "MDM0000000PXN5",
        "state": "PENDING_CREATE",
        "validation": "PASSED",
        "consolidation": "MATCH_INDEXED",
        "searchIndex": "SEARCH_INDEXED",
        "createdBy": "Impact",
        "creationDate": 1756473570942,
        "updatedBy": "Impact",
        "lastUpdateDate": 1756473570942,
        "changeList": "68b1a8e24fb65c72f80df3c0"
    },
    "_contentMeta": {
        "trust": {
            "fieldData": [
                {
                    "fieldRef": "middleName",
                    "lastUpdatedDate": 1756473570942,
                    "manualOverride": false,
                    "sourcePrimaryKey": "683826de176d8555c1172fd7",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "SourceRanking",
                    "trustScore": 0.9
                },
                {
                    "fieldRef": "/",
                    "lastUpdatedDate": 1748510430175,
                    "manualOverride": false,
                    "sourcePrimaryKey": "683826de176d8555c1172fd7",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "SourceRanking",
                    "trustScore": 1.0
                }
            ]
        }
    }
}
```


For more information about content metadata, see “Read content meta ” on page 19.

Update Master Record

Use the Update Master Record API to update an existing active business entity record based on the business ID that you specify.

Before you update a deleted master record, restore it by using the Restore Master Record API.

For more information about the Restore Master Record API, see “Restore Master Record” on page 73.

The API supports the PUT method.

PUT request

To update an active master record associated with a business ID, submit a PUT request with the following URI:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<businessId>?
sourceSystem=<sourceSystem>[&_resolveCrosswalk=true|false]
```

The PUT request contains the following parameters that you can use in the URI:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to update the master record.
businessId	Unique identifier of the business entity record. When you specify a custom business ID for records, ensure that its length doesn't match the length that the business entity uses for the business ID format. For example, if you specified 111 as the prefix and 15 as the length in the business ID format for a business entity, ensure that you don't use 111560000800000 as a custom business ID. However, you can use a custom business ID with a prefix of 111 but with a different length. For more information about the business ID format, see *Define the Data Model*.
sourceSystem	Internal ID of the source system to which the record belongs.
_resolveCrosswalk	Optional. Indicates whether to standardize picklist values based on the source system configuration. To standardize the picklist values, set to true. If set to true, ensure that the picklist values belong to a code list that's part of a crosswalk. Default is false. For more information about standardizing picklist values, see *Define Source Systems*.

If a business entity field in a field group has a data quality rule, specify the `_id` parameter value for the field group entry that you create. For example, if the Postal Code field in the Address field group has a data quality rule, specify an ID for an address entry that you create.

For more information about data quality rules, see *Configure Data Quality*.

PUT response

The response is in the JSON format. The PUT response returns HTTP 200 success code. When you submit a REST API request to update a record, Business 360 verifies your existing user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the records you updated.

PUT examples

The following request updates a master record for the c360.organization business entity:

```
PUT <baseApiUrl>/business-entity/public/api/v1/entity/c360.organization/
3013509950132552198361965082l?sourceSystem=c360.default.system&_resolveCrosswalk=true
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
  "name": "NewElectronics",
  "numberOfEmployees": 12,
  "companyType": {
    "Code": "Chartered"
  },
  "dateOfIncorporation": "2021-06-01",
```

```
  "TaxDetail": [
    {
      "taxNumberType": {
        "Code": "ITIN"
      },
      "taxNumber": "12"
    }
  ]
}
}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

Update Master Record Field

Use the Update Master Record API to add, replace, or remove a field in an existing business entity record based on the business ID that you specify.

The API supports the PATCH method.

PATCH request

To update a business entity master record associated with a business ID, submit a PATCH request with the following URI:

```
PATCH <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<businessId>?
sourceSystem=<sourceSystem>[&_resolveCrosswalk=true|false]
```

The PATCH request contains the following parameters that you can use in the URI:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to update the master record.
businessId	Unique identifier of the business entity record. If you specify the business ID of an inactive merged master record, the active master record, to which the inactive master record is merged, is updated.

Parameter	Description
sourceSystem	Internal ID of the source system to which the record belongs.
_resolveCrosswalk	Indicates whether to standardize picklist values based on the source system configuration. To standardize the picklist values, set to true. If set to true, ensure that the picklist values belong to a code list that's part of a crosswalk. Default is false. For more information about standardizing picklist values, see *Define Source Systems*.

The PATCH request body includes the following parameters:

Parameter	Description
op	The operator that indicates the type of update. You can specify the following operators: - add. Adds new data to the record. - replace. Replaces the existing data. - remove. Removes the data from the record.
path	The name of the field you want to update. **Note:** If the field contains multiple values, specify the name and the internal ID of the field. For example, the Postal Address field contains multiple values.
value	Contains the values that you want to use to update the record.

PATCH response

The response is in the JSON format. The PATCH response returns HTTP 200 success code. When you submit a REST API request to update a record, Business 360 verifies your existing user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the records you updated.

PATCH examples

The following request updates the first name of a person to Marko:

```
PATCH  <baseApiUrl>/business-entity/public/api/v1/entity/c360.person/
300071670570890732818218522 31?sourceSystem=c360.default.system&_resolveCrosswalk=true
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX


[
   {
      "op":"replace",
      "path":"firstName",
      "value":"Marko"
   }
]
```

The following request adds a postal address, replaces a postal address, and removes a postal address:

```
[{
        "op": "add",
        "path": "PostalAddress",
        "value": {
```

```
            "_id": "60f01672b9bac05632a3111111",
            "addressLine1": "Nikola Tesla Avenue",
            "country": {
                "Code": "US",
                "Name": "America"
            },
            "state": {
                "Code": "CA",
                "Name": "California"
            }
        }
    },
    {
        "op": "replace",
        "path": "PostalAddress[1ebb60fbf93d41518f86f79f7211c3be]",
        "value": {
            "_id": "1ebb60fbf93d41518f86f79f7211c3be",
            "addressLine1": "Cambie Street",
            "country": {
                "Code": "US",
                "Name": "America"
            }
        }
    },
    {
        "op": "remove",
        "path": "PostalAddress[60f01672b9bac05632a3d522]"
    }
]
```

The following PATCH request stops the inheritance of the Color dynamic field definition and adds the Material dynamic field definition to a category record:

```
[
  {
      "op": "replace",
      "path": "product_dynamic_field_definitions[color_001_dfd1]",
      "value": {
          "template": "color",
          "mandatory": true,
          "allowMany": true,
          "inheritance": [
            {
              "mode": "STOP"
            }
          ]
      }
  },
  {
    "op": "add",
    "path": "product_dynamic_field_definitions[material_property_001]",
    "value": {
      "template": "material",
      "mandatory": false,
      "allowMany": false
    }
  }
]
```

The following PATCH request adds and updates dynamic field values:

```
[
  {
      "op": "replace",
      "path": "product_dynamic_field_values.color",
      "value": "Blue"
  },
  {
      "op": "add",
      "path":
"product_dynamic_field_values.manufacturing_details[dbb63393e71b42_entry1]",
```

```
        "value": {
          "brand" : "JBL" ,
          "country_of_origin":"US"
        }
    },
    {
      "op": "replace",
      "path": "product_dynamic_field_values",
      "value": {
          "dimensions": [
            {
              "_id": "dbb63393e71b424e8873d0e921622e1e",
              "width": "950 mm",
              "height":"67 mm"
            }
          ]
      }
    }
]
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

Read Source Records by Master Record

Use the Read Source Records by Master Record API to identify all the source records that contribute to a master record.

Before you begin, you must know the business ID of the master record. To get the business ID of a master record, you can submit a search request.

The API supports the GET method.

GET request

To get the source records that contribute to a master record, submit a GET request with the following URI:

```
GET <baseApiURL>/business-entity/public/api/v1/entity-member/<businessEntity>/
<businessId>[&_skipLookup=true|false]
```

The GET request contains the following parameters that you can use in the URI:

Parameter	Description
businessEntity	Internal ID of the business entity to which the master record belongs.
businessId	Unique identifier of the master record whose source records you want to retrieve.
_skipLookup	Optional. Indicates whether to retrieve picklist values from the Business 360 data store or Reference 360 data store. The response time improves when you retrieve values from the Business 360 data store. To retrieve picklist values from the Business 360 data store, set to true. The picklist values are based on the data from the last updated record and might not include subsequent changes to the Reference 360 data. To retrieve picklist values from the Reference 360 data store, set to false. Default is false.

GET response

The response is in the JSON format. The response body contains the source records that contribute to the specified master record.

Name	Type	Description
sourcePKey	String	Primary source key of the source record.
sourceSystem	String	Unique identifier of the source system for the source record.

GET examples

You might use the following request to retrieve the business entity source member records based on the business ID MDM0000007QMV4:

```
GET <baseURL>/business-entity/public/api/v1/entity-member/c360.person/
MDM0000007QMV4
```

The sample response retrieves the source records that contribute to the master record that matches the specified business ID.

```
{
   "content": [
      {
         "sourcePKey": "ex62854adaf03192610b6ad9c0",
         "sourceSystem": "c360.default.system"
      },
      {
         "sourcePKey": "ex628547194fa64531c105625f",
         "sourceSystem": "c360.default.system"
      },
      {
         "sourcePKey": "001",
         "sourceSystem": "microsoft"
      },
      {
         "sourcePKey": "ex628549c94fa64531c105631c",
         "sourceSystem": "c360.default.system"
      },
      {
         "sourcePKey": "001",
         "sourceSystem": "salesforce"
      }
   ]
}
```

Delete Master Record

Use the Delete Master Record API to delete an active master record based on the business ID of the record. The API doesn't permanently delete the record from the data store, and you can search for the deleted record. You can also use the Delete Master Record API to delete an active source record based on the primary key and the source system of the source record.

The API supports the DELETE method.

DELETE request

To delete a business entity master record, submit a DELETE request with the following URI:

```
DELETE <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<businessId>?
sourceSystem=<source_system>
```

To delete a business entity source record, submit a DELETE request with the following URI:

```
DELETE <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<businessId>?
sourceSystem=<source_system>&sourcePKey=<sourcePKey>
```

Use the following parameters in the DELETE request:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to delete the master record.
businessId	Unique identifier of the master record.
sourceSystem	Internal ID of the source system that the record belongs to.
sourcePKey	The source primary key of the record that you want to delete.

DELETE response

The DELETE response returns the HTTP 200 success code. When you submit a REST API request to delete a record, MDM SaaS verifies the permissions of your user role and the approval workflow configuration. The response indicates whether the deletion request requires an approval.

If no approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If an approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

DELETE examples

You can use the following request to delete an active master record based on the business ID:

```
DELETE <baseApiURL>/business-entity/public/api/v1/entity/c360.person/MDM0000007DK79?
sourceSystem=c360.default.system
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If an approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
}
```

You can use the following request to delete an active source record:

```
DELETE <baseApiURL>/business-entity/public/api/v1/entity/c360.person/MDM0000007DK79?
sourceSystem=c360.default.system&sourcePKey=SFDC_566
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If an approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
}
```

Restore Master Record

Use the Restore Master Record API to restore a deleted master record. You can restore a deleted master record if it has at least one active source record.

The API supports the PUT method.

PUT request

To restore a deleted master record, submit a PUT request with the following URI:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity/<businessEntity>/<businessId>?
sourceSystem=<source_system>&_operationType=restore
```

Use the following parameters in the PUT request:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to restore a deleted master record.
businessId	Unique identifier of the deleted master record that you want to restore.

Parameter	Description
sourceSystem	Internal ID of the source system that the record belongs to.
_operationType	Type of operation that you want to perform on the deleted master record. The supported value is restore.

Request body

You must include a blank request body {} for the PUT request to succeed.

PUT response

The PUT response returns the HTTP 200 success code. When you submit a REST API request to restore a master record, MDM SaaS verifies the permissions of your user role and the approval workflow configuration. The response indicates whether the restore request requires an approval.

If no approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If an approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

PUT example

To restore a deleted master record, you can submit the following request:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity/c360.person/MDM0000007DK79?
sourceSystem=c360.default.system&_operationType=restore
```

Include a blank request body in the following format:

```
{}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If an approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
}
```

Related Entities API

Use the Related Entities API to retrieve hierarchical and non-hierarchical relationships along with related records of a master record based on its business ID. You can filter the relationships based on the relationship type.

You can retrieve maximum of 10,000 relationships.

Note: You can't retrieve relationships established through a business entity record attribute.

To retrieve relationships of a master record, submit a POST request with the following URI:

```
<baseApiUrl>/business-entity/public/api/v1/related-entities/<businessId>
```

To retrieve relationships, you can use the following query parameter in the URI:

Parameter	Type	Description
businessId	String	Unique identifier of the master record.

Request body

If you're uncertain about the business entity to which the master record belongs, you can provide a list of business entities that can contain the business ID of the master record. If a business ID belongs to multiple business entities, the API doesn't return any response.

You can use the following parameters in the request body:

Parameter	Type	Description
_page	Integer	Maximum number of pages that can contain the retrieved relationships. Specify a value between 1 and 10,000. You can retrieve up to 10,000 relationships. If the number of relationships that can appear on each page is 5, then the page size is set to 2,000 to retrieve 10,000 relationships.
_size	Integer	Maximum number of relationships that can appear on each page. Specify a value up to 50.
_anchorBusinessEntity	String	Comma-separated list of internal IDs of business entities that can contain the business ID of the master record. You can specify up to 10 business entities.
_relationship	String	Optional. Comma-separated list of internal IDs of relationships that you want to use to filter the response.

Request response

The request response returns the relationships and related records associated with the master record.

The following table lists the response parameters:

Parameter	Type	Description
content	Array	Array that contains relationship details. The array contains the following parameters: - relation. Contains the relationship details. - _from. Business entity and the business ID of the record from which the relationship starts. - _to. Business entity and the business ID of the record to which the relationship is established. - _meta. Contains the metadata of the relationship that relates the records. - targetEntity. Contains the details of related records. - _meta. Contains the metadata of related records.
resultsInPage	Integer	Number of related records on the current page.
size	Integer	Requested page size that you specify in the request.
page	Integer	Number indicating the page that's retrieved.

The POST response includes the following `_meta` parameters for relationships:

Parameter	Type	Description
relationship	String	Internal ID of the relationship.
createdBy	String	Name of the user who created the relationship.
creationDate	String	Date when the relationship was created.
updatedBy	String	Name of the user who last updated the relationship.
lastUpdateDate	String	Date when the relationship was last updated.
businessId	String	Unique identifier of the relationship.
state	String	Current state of the specified master record, such as active.

The POST response includes the following `_meta` parameters for related records:

Parameter	Type	Description
businessEntity	String	Internal ID of the business entity to which the related record belongs.
createdBy	String	Name of the user who created the related record.
creationDate	String	Date when the related record was created.
updatedBy	String	Name of the user who last updated the related record.

Parameter	Type	Description
lastUpdateDate	String	Date when the related record was last updated.
businessId	String	Unique identifier of the related record.
state	String	Current state of the related record, such as active.
consolidation	String	Match and merge status of the related record.
validation	String	Validation status of the related record.

Sample Request

You might use the following request to retrieve relationships and related records of a master record with the business ID MDM00000009N81:

```
POST <baseApiURL>/business-entity/public/api/v1/related-entities/MDM00000009N81
```

```
{
    "_page": 0,
    "_size":50,
    "_anchorBusinessEntity": [
        "c360.person",
        "c360.organization"
        ],
    "_relationship": {
        "type": [
            "c360_person_to_c360_organization",
            "c360_organization_to_c360_person",
            "c360_person_to_c360_person",
            "c360.rel.personemployeeorganization",
            "c360.rel.personchildperson",
            "colleague"
        ]
    }
}
```

Sample Response

The response includes the related records that match the criteria that you specify.

The POST response returns an HTTP 200 success code and includes the relationships and related records of the master record.

```
{
    "content": [
        {
            "relation": {
                "_from": {
                    "businessEntity": "c360.person",
                    "businessId": "MDM00000009FIB"
                },
                "_to": {
                    "businessEntity": "c360.person",
                    "businessId": "MDM00000009FI8"
                },
                "_meta": {
                    "relationship": "colleague",
                    "createdBy": "John",
                    "creationDate": 1740984999034,
                    "updatedBy": "John",
                    "lastUpdateDate": 1740984999034,
                    "businessId": "MDM000000007PT",
```

```
                        "state": "ACTIVE"
                    }
                },
                "targetEntity": {
                    "firstName": "Henry",
                    "lastName": "Scot",
                    "fullName": "Henry Scot",
                    "_meta": {
                        "businessEntity": "c360.person",
                        "createdBy": "John",
                        "creationDate": 1740984999034,
                        "updatedBy": "John",
                        "lastUpdateDate": 1740985001724,
                        "businessId": "MDM00000009FIB",
                        "state": "ACTIVE",
                        "consolidation": "MATCH_INDEXED",
                        "validation": "PASSED"
                    }
                }
            },
            {
                "relation": {
                    "_from": {
                        "businessEntity": "c360.person",
                        "businessId": "MDM00000009FI8"
                    },
                    "_to": {
                        "businessEntity": "c360.organization",
                        "businessId": "MDM00000002SB4"
                    },
                    "_meta": {
                        "relationship": "c360.rel.personemployeeorganization",
                        "createdBy": "John",
                        "creationDate": 1740974689771,
                        "updatedBy": "John",
                        "lastUpdateDate": 1740974689771,
                        "businessId": "MDM00000000UV4",
                        "state": "ACTIVE"
                    }
                },
                "targetEntity": {
                    "name": "Museum of art",
                    "numberOfEmployees": 6879,
                    "dateOfIncorporation": "2024-10-28",
                    "companyType": {
                        "Code": "Non-Government",
                        "Name": "Non-Government"
                    },
                    "countryOfIncorporation": {
                        "Code": "ZW",
                        "Name": "Zimbabwe"
                    },
                    "_meta": {
                        "businessEntity": "c360.organization",
                        "createdBy": "John",
                        "creationDate": 1740974669336,
                        "updatedBy": "John",
                        "lastUpdateDate": 1740974672159,
                        "businessId": "MDM00000002SB4",
                        "state": "ACTIVE",
                        "consolidation": "MATCH_INDEXED",
                        "validation": "PASSED"
                    }
                }
            }
        ],
        "resultsInPage": 2,
        "size": 50,
        "page": 0
    }
```

Anonymize History of Master Record API

Use the Anonymize History of Master Record API to anonymize the history of a master record, ensuring that sensitive information is protected and complies with privacy regulations. You can apply anonymization to remove personally identifiable information (PII) from the history of master records while preserving the integrity of data for analysis and reporting.

The Anonymize History of Master Record API anonymizes the historical data associated with a master record based on the source record details that you provide. The API finds data from a source record in the history of the master record and anonymizes that data.

Note: Effective in the May 2025 release, the ability to anonymize the history data of a master record is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

The API supports the POST method.

POST request

To anonymize the history of a master record, submit a POST request with the following URI:

```
POST <baseApiUrl>/business-entity/public/api/v1/entity-history/<businessEntity>/anonymize
```

The POST request contains the following parameters:

Parameter	Description
businessEntity	Internal ID of the business entity to which the master record that you want to anonymize belongs.

Request body

You can use the following parameters in the request body:

Parameter	Type	Description
sourceSystem	String	Internal ID of the source system to which the source record belongs. The source record is associated with the history of the master record.
sourcePKey	String	The primary key of the source record that's associated with the master record.

Parameter	Type	Description
fields	String	The field values that you want to use to anonymize the history of a master record. Include a field name and the anonymized value.
redoAnonymizedBefore: <Time stamp>	Epoch	Optional. Indicates that you are re-anonymizing the source record. It can be new values that aren't anonymized or already anonymized field values. The history of master records anonymized before the specified timestamp are re-anonymized. Specify the current timestamp in the epoch format.

POST response

The response is in the JSON format. The POST response returns HTTP 204 No Content.

POST example

The following sample request re-anonymizes the first name and last name in the history of a master record associated with the specified source record:

```
POST <baseApiUrl>/business-entity/public/api/v1/entity-history/c360.person/anonymize
{
  "sourceSystem": "demo.system.default",
  "sourcePKey": "001",
  "fields": {
    "firstName": "XXX",
    "lastName": "XXX"
  }
 "redoAnonymizedBefore": 1721427778000
}
```

The first name and last name values updated before the provided timestamp are anonymized.

Direct link API

Use the direct link API to securely access master records from external applications. You can open master records in business applications directly from external applications if you have access to the records and business applications. The direct link remains valid until the records are purged.

Request

To view the records from an external application, use the direct link API with the following URI:

```
https://<baseApiUrl>/ui-x360-app/app/<businessApplication>/public/<businessEntity>/
<businessId>
```

Ensure that you have a valid session. The REST API uses HTTP authentication method to authenticate the redirection link. The redirection link automatically directs you from external application to MDM SaaS.

The direct link API request contains the following parameters that you can use in the URI:

Name	Description
businessApplication	Internal ID of the business application that the business entity belongs to. Use one of the following values: - c360. Indicates that the record belongs to Customer 360 SaaS. - p360. Indicates that the record belongs to Product 360 SaaS. - s360. Indicates that the record belongs to Supplier 360 SaaS. - mde. Indicates that the record belongs to Multidomain MDM SaaS.
businessEntity	Internal ID of the business entity that the master record belongs to.
businessId	Unique identifier of the master record.

Response

When you submit a REST API request to view a master record, MDM SaaS verifies your credentials and opens the record details page of the master record.

Example

You might use the following request to open a master record in Customer 360 SaaS based on the business ID MDM0005600GXKU:

```
https://<baseApiURL>/ui-x360-app/app/c360/public/c360.person/MDM0005600GXKU
```

MDM SaaS verifies your credentials and opens the record details page of the master record.

Source record API

Use the source record API to read, update, delete, or restore a source record based on the business entity, source system, and the primary key. The API uses the entity-xref resource.

Read Source Record

Use the Read Source Record API to retrieve a business entity source record based on the source system and the primary key of the record that you specify.

The API supports the GET method.

GET request

To retrieve a source record, submit a GET request with the following URI:

```
GET <baseApiURL>/business-entity/public/api/v1/entity-xref/<businessEntity>/<sourceSystem>/
<sourcePKey>[?_showContentMeta=true|false][&_resolveCrosswalk=true|false]
```

The GET request contains the following parameters:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to retrieve the source record.
sourceSystem	Internal ID of the source system to which the record belongs.
sourcePKey	The primary key of the source record.
_resolveCrosswalk	Indicates whether to standardize picklist values based on the source system configuration. Set _resolveCrosswalk to true to standardize the picklist values. When you specify this parameter, you must set the sourceSystem parameter. Default is false. For more information about standardizing picklist values, see *Define Source Systems*.
_showContentMeta	Optional. Indicates whether to retrieve content metadata of a record. The content metadata contains the trust score, survivorship configuration, and details of any failed data enhancement rule. To retrieve content metadata of a record, set _showContentMeta to true. Default is false.

GET response

The response is in the JSON format. The response body contains the source record data.

The GET response includes `_meta` parameters and an object that contains data enrichment and validation details:

Parameter	Type	Description
businessId	String	Unique identifier of the source record.
id	String	Unique identifier of the business entity record. Don't use.
businessEntity	String	Internal ID of the business entity from which you retrieved the source record.
createdBy	String	Name of the user who created the record.
creationDate	String	Date when the record was created.
updatedBy	String	Name of the user who last updated the record.
lastUpdateDate	String	Date when the master record was last updated.
sourceLastUpdatedDate	String	Date when the source record was last updated.

Parameter	Type	Description
states	String	The different statuses of an active source record. Source records can have one of the following statuses: - base. The current status of the source record. The base value is ACTIVE. - consolidation. Match and merge status of the records. - MATCH_DIRTY. Indicates that the source records are ingressed but haven't undergone the match process. - MATCH_INDEXED. Indicates that match keys are generated for the source records. - MATCHED. Indicates that the source records matched other records based on the match configuration, and are ready for merging. - CONSOLIDATION PENDING. Indicates that the source records haven't undergone the match process because the records were ingressed with the business IDs of existing records. - CONSOLIDATION INDEXED. Indicates that match keys are generated for the source records ingressed with the business IDs of existing records. - CONSOLIDATED. Indicates that the source records are merged either manually or automatically. - NOT READY FOR MATCH. Indicates that you've excluded the source records from participating in the match process. - searchIndex. Indicates that the record is in the SEARCH_DIRTY state and is not searchable. Currently, source records aren't searchable. - validation. Indicates the validation status of the record. - PENDING. Indicates that the record isn't yet validated. - PASSED. Indicates that the record is validated and has no errors. - FAILED. Indicates that the record is validated and has validation and data quality errors.
populationName	Object	Population details for the record. The object includes the following properties: - code. Unique identifier of the population. - name. Display name of the population.
dataEnhancementRule	Object	Object that contains data enrichment and validation details. The object contains the fail parameter, which is an array of failed data enhancement rules. The array contains the following parameters: - provider. For internal use only. - rule. Array that contains details about the failed data enhancement rule. The array contains the following parameters: - id. Internal ID of the failed rule. - dts. Array that contains the trust score downgrades. The array contains the following parameters: - dtsp. The trust score downgrade percentage that was applied to the fields. - fieldRef. Array that contains the fields to which the data enrichment rule was applied.

GET examples

You might use the following request to retrieve the source record for the Person business entity associated with the `c360.default.system` source system and the primary key `6a1dbc18cefe18dd2a48c8ad`:

```
GET  <baseApiUrl>/business-entity/public/api/v1/entity-xref/c360.person/
c360.default.system/6a1dbc18cefe18dd2a48c8ad
```

The GET response returns HTTP 200 success code and retrieves the matching source record.

```
HTTP/1.1 200 OK
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

```
Content-Type: application/json
 {
    "firstName": "Raghav",
    "fullName": "Raghav Ch",
    "lastName": "Ch",
    "_meta": {
        "id": "MDM00000001PQA",
        "businessEntity": "c360.person",
        "businessId": "MDM00000001PQA",
        "createdBy": "rel_ebf1",
        "creationDate": 1781217580017,
        "updatedBy": "rel_ebf1",
        "lastUpdateDate": 1781217580017,
        "states": {
            "base": "ACTIVE",
            "consolidation": "MATCH_DIRTY",
            "createMode": "REGULAR",
            "searchIndex": "SEARCH_DIRTY",
            "validation": "PASSED"
        },
        "sourceSystem": "c360.default.system",
        "sourcePrimaryKey": "6a1dbc18cefe18dd2a48c8ad",
        "xrefType": "DATA",
        "populationName": {
            "code": "usa",
            "name": "usa"
        }
    }
}
```

To get the content metadata, add `_showContentMeta=true` at the end of the request URL. You might use the following request to retrieve a source record for the Organization business entity, which is associated with the `c360.default.system` source system and the `610959f149cba67ca253a872` primary key:

```
GET <baseApiUrl>/business-entity/public/api/v1/entity-xref/c360.organization/
c360.default.system/610959f149cba67ca253a872?_showContentMeta=true&_resolveCrosswalk=true
```

The sample response shows the HTTP 200 OK response code and retrieves the source record that matches the specified source name and sourcePKey. The response shows the content metadata in the `_contentMeta` section.

```
{
   "PhoneCommunication":[
      {
         "_id":"pkeyPhone03",
         "phoneNumber":"9900201000",
         "phoneType":{
            "Code":"Cell",
            "Name":"Cell"
         }
      }
   ],
   "PostalAddress":[
      {
         "_id":"padd061",
         "addressLine1":"Bagmane Tech Park",
         "addressLine2":"CV Raman Nagar",
         "addressLine3":"Bengaluru",
         "city":"Bangalore",
         "country":{
            "Code":"US",
            "Name":"United States"
         },
         "state":{
            "Code":"AK",
            "Name":"Alaska"
         }
      }
   ],
```

```
   "name":"Informatica",
   "numberOfEmployees":5555,
   "_meta":{
      "id":"MDM0000005CWG0",
      "businessId":"MDM0000005CWG0",
      "businessEntity":"c360.organization",
      "createdBy":"c360_delta_automation_org_Target",
      "creationDate":1662452659261,
      "updatedBy":"c360_delta_automation_org_Target",
      "lastUpdateDate":1662452659261,
      "states":{
         "base":"ACTIVE",
         "consolidation":"MATCH_INDEXED",
         "searchIndex":"SEARCH_DIRTY"
      },
      "sourceSystem":"sals_bid",
      "sourcePrimaryKey":"pkey190",
      "xrefType":"DATA",
      "populationName": {
          "code": "usa",
          "name": "usa"
      }
   },
   "_contentMeta":{
      "trust":{
         "updateCount":1,
         "fieldData":[
            {
               "fieldRef":"PostalAddress[padd061]",
               "lastUpdatedDate":1662452659261,
               "downgradeTrustScorePercent":0.0,
               "sourceLastUpdatedDate":1656996071000
            },
            {
               "fieldRef":"PhoneCommunication[pkeyPhone03]",
               "lastUpdatedDate":1662452659261,
               "downgradeTrustScorePercent":0.0,
               "sourceLastUpdatedDate":1657428071000
            },
            {
               "fieldRef":"/",
               "lastUpdatedDate":1662452659261,
               "downgradeTrustScorePercent":0.0,
               "sourceLastUpdatedDate":1657428071000
            }
         ]
      }
   },
   "dataEnhancementRule":{
      "fail":[
         {
            "provider":"mdm-enrichment",
            "rule":[
               {
                  "id":"rule1",
                  "dts":[
                     {
                        "dtsp":80.0,
                        "fieldRef":[
                           "phoneNumber",
                           "phoneType"
                        ]
                     }
                  ]
               }
            ]
         }
      ]
   }
}
```

For more information about content meta, see “Read content meta ” on page 19.

Update Source Record

Use the Update Source Record API to update a business entity source record based on the source system and the primary key of the record that you specify. If you try to update a deleted source record, the API first restores it and then updates it. If the specified business entity source record doesn't exist yet, the REST API creates a new source record.

The API supports the PUT method.

PUT request

To update a source record, submit a PUT request with the following URI:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity-xref/<businessEntity>/
<sourceSystem>/<sourcePKey>[?_forceUpdate=true|false][&_resolveCrosswalk=true|false]
[&notReadyForMatch=true|false][&_population=<value>]
```

The PUT request contains the following parameters:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to update the source record.
sourceSystem	Internal ID of the source system to which the source record belongs.
sourcePKey	The primary key of the source record. The source primary keys of records can contain the following characters: `~!'={}|:@#$^&*()-_+,<>?` `
_forceUpdate	Optional. Specifies whether to force update existing records irrespective of their source last updated dates. Default is false.
_resolveCrosswalk	Optional. Indicates whether to standardize picklist values based on the source system configuration. To standardize the picklist values, set to true. If set to true, ensure that the picklist values belong to a code list that's part of a crosswalk. Default is false. For more information about standardizing picklist values, see *Define Source Systems*.
notReadyForMatch	Optional. Specifies whether a source record can participate in the match process. Default is false.
_population	Specifies the population of the record. Match keys for the record are generated based on the population that you assign to improve match accuracy. You can assign a population such as usa to a record to generate match keys based on the record data, such as name or address, that account for USA data characteristics. If you don't specify the population of the record, the population that's configured for the match model is applied to the record. For more details about the values that you can specify for the parameter, see *Configure Match and Merge*.

You can update dynamic field definitions and dynamic field values through a PUT request. For more information about sample requests that include dynamic field definitions and dynamic field values, see "Create Master Record" on page 51.

MDM SaaS considers the picklist to be invalid if you update the picklist value to include an empty string "".

PUT response

The response is in the JSON format. The PUT response returns HTTP 200 success code. When you submit a REST API request to update a source record, Business 360 verifies your existing user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the source records you updated.

PUT example

The following request force updates a record that belongs to the Person business entity associated with the `c360.default.system` source system:

```
PUT  <baseApiUrl>/business-entity/public/api/v1/entity-xref/c360.person/
c360.default.system/pkey600?
_forceUpdate=true&_resolveCrosswalk=true&notReadyForMatch=true
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
 {
   "firstName":"john",
   "lastName":"smith",
   "middleName":"hedge",
   "title":"F1 Driver",
   "designation":"Aston Martin",
   "PostalAddress":[
      {
         "_id":"0dec181346114a6196d1313ca135bcee",
         "defaultIndicator":true,
         "addressType":{
            "Name":"Home",
            "Code":"Home"
         },
         "usageType":{
            "Name":"Home",
            "Code":"Home"
         },
         "addressStatus":{
            "Name":"Active",
            "Code":"Active"
         },
         "addressLine1":"7777, park road",
         "country":{
            "Name":"United States",
            "Code":"US"
         },
         "state":{
            "Name":"California",
            "Code":"CA"
         },
         "city":"BLR"
      },
      {
         "_id":"1dec181346114a6196d1313ca135bcee",
         "defaultIndicator":true,
         "addressType":{
            "Name":"Home",
            "Code":"Home"
         },
         "usageType":{
            "Name":"Home",
            "Code":"Home"
         },
         "addressStatus":{
            "Name":"Active",
```

```
                "Code":"Active"
            },
            "addressLine1":"7777, park road",
            "country":{
                "Name":"United States",
                "Code":"US"
            },
            "state":{
                "Name":"California",
                "Code":"CA"
             },
            "city":"MYS"
        }
    ],
    "Phone":[
        {
            "_id":"5d14a94931db4515857465c950f9b997",
            "phoneUsageType":{
                "Name":"Home",
                "Code":"Home"
            },
            "phoneType":{
                "Name":"Mobile",
                "Code":"Mobile"
            },
            "phoneNumber":"9900223344"
        }
    ],
    "_contentMeta":{
        "trust":{
            "fieldData":[
                {
                    "fieldRef":"/",
                    "sourceLastUpdateDate":1654836010000 // An earlier source last updated
date
                },
                {
                    "fieldRef":"PostalAddress[0dec181346114a6196d1313ca135bcee]",
                    "sourceLastUpdateDate":1657428010000
                },
                {
                    "fieldRef":"PostalAddress[1dec181346114a6196d1313ca135bcee]",
                    "sourceLastUpdateDate":1657428010000
                },
                {
                    "fieldRef":"Phone[5d14a94931db4515857465c950f9b997]",
                    "sourceLastUpdateDate":1657428010000
                }
            ]
        }
    }
}
```

If the `_forceUpdate` parameter isn't set to true, you get the following response:

```
{
   "path":"PostalAddress[0dec181346114a6196d1313ca135bcee]",
   "errorCode":"BES.00092.4",
   "message":"Cannot update the field group with a sourceLastUpdateDate value older or
equal to the sourceLastUpdateDate value in the existing record.",
   "localizedMessage":"Cannot update the field group with a sourceLastUpdateDate value
older or equal to the sourceLastUpdateDate value in the existing record."
}
```

Note: You can't force update a record if the source last updated date is later than current system date.

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json
```

```
{
   "approvalRequired":false
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

Update Source Record Field

Use the Update Source Record Field API to add, replace, or remove a field in a business entity source record based on the source system and the primary key of the record that you specify.

The API supports the PATCH method.

To update values of fields in a field group, ensure that you specify only the fields that you want to update.

Note: If you specify all the fields in the request, the Update Source Record Field API overwrites the other field values.

PATCH request

To update a source record, submit a PATCH request with the following URI:

```
PATCH <baseApiURL>/business-entity/public/api/v1/entity-xref/<businessEntity>/<sourceSystem>/<sourcePKey>[?_forceUpdate=true|false][&_resolveCrosswalk=true|false][&notReadyForMatch=true|false]
```

You can use the following parameters in the request:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to update the source record.
sourceSystem	Internal ID of the source system to which the source record belongs.
sourcePKey	The primary key of the source record.
_forceUpdate	Optional. Specifies whether to force update existing records irrespective of their source last updated dates. Default is false.
_resolveCrosswalk	Optional. Indicates whether to standardize picklist values based on the source system configuration. To standardize the picklist values, set to true. If set to true, ensure that the picklist values belong to a code list that's part of a crosswalk. Default is false. For more information about standardizing picklist values, see *Define Source Systems*.
notReadyForMatch	Optional. Specifies whether a source record can participate in the match process. Default is false.

You can use the following parameters in the request body:

Parameter	Description
op	The operator that indicates the type of update. You can specify the following operators: - add. Adds new data to the record. Use the add operator when you add a root field or a field group to a record. - replace. Replaces the existing data. Use the replace operator when you update a root field or a field group of a record. - remove. Removes the data from the source record. - setSourceLastUpdateDate. Sets the last updated date for a root or a field group of a source record.
path	The internal ID of the field you want to update. **Note:** If the field contains multiple values, specify the name and the internal ID of the field. For example, the Postal Address field contains multiple values.
value	Contains the values that you want to use to update the source record.

PATCH response

The response is in the JSON format. The PATCH response returns HTTP 200 success code. When you submit a REST API request to update a source record, MDM SaaS verifies your existing user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the source records you updated.

PATCH example

The following request force updates the first name, last name, and the source last updated date in the business entity source record:

```
PATCH  <baseApiUrl>/business-entity/public/api/v1/entity-xref/c360.person/
c360.default.system/pkey3132?
_forceUpdate=true&_resolveCrosswalk=true&notReadyForMatch=true
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

[
    { "op": "replace", "path": "firstName", "value": "john" },
    { "op": "replace", "path": "lastName", "value": "hedge" },
    { "op": "setSourceLastUpdateDate", "path": "/",
      "value": 1668487210000 // An earlier source last updated date
}
]
```

If the `_forceUpdate` parameter isn't set to true, you get the following response:

```
{
   "path":"PostalAddress[0dec181346114a6196d1313ca135bcee]",
   "errorCode":"BES.00092.4",
   "message":"Cannot update the field group with a sourceLastUpdateDate value older or
equal to the sourceLastUpdateDate value in the existing record.",
   "localizedMessage":"Cannot update the field group with a sourceLastUpdateDate value
older or equal to the sourceLastUpdateDate value in the existing record."
}
```

Note: You can't force update a record if the source last updated date is later than current system date.

The following request updates phone number and phone type fields in the phone field group of a business entity source record:

```
[
  {
    "op": "replace",
    "path": "Phone[cc0c54d2f59d477dabede70b3e040119].phoneNumber",
    "value": "9080908090"
  },
  {
    "op": "replace",
    "path": "Phone[cc0c54d2f59d477dabede70b3e040119].phoneType",
    "value": {
      "Name": "Cell",
      "Code": "Cell"
    }
  }
]
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

The following request updates the values of the address line 1 and city fields in the postal address field group of a business entity source record:

```
[
  {
    "op": "replace",
    "path": "PostalAddress[0dec181346114a6196d1313ca135bcee]",
    "value": {
      "addressLine1": "Plaza200",
      "city": "chennai"
    }
  }
]
```

Note: The request removes the other field values in the field group and updates the address line 1 and city field values.

The following request updates specific field values in the postal address field group of a business entity source record without removing the other field values of the field group:

```
[
  {
    "op": "replace",
    "path": "PostalAddress[0dec181346114a6196d1313ca135bcee].addressLine1",
    "value": "Plaza200"
  },
  {
    "op": "replace",
    "path": "PostalAddress[1dec181346114a6196d1313ca135bcee].city",
    "value": "mumbai"
  }
]
```

The following request removes the postal address field group of a business entity source record:

```
{
    "op": "remove",
    "path": "PostalAddress[60f01672b9bac05632a3d522]"
  }
```

Note: Ensure that you specify the field group name and ID in the path.

The following request removes the city field value in the postal address field group of a business entity source record:

```
{
    "op": "remove",
    "path": "PostalAddress[60f01672b9bac05632a3d522].city"
  }
```

Note: Ensure that you specify the field group name, ID, and the field name in the path.

You can add or update dynamic field definitions and dynamic field values through a PATCH request. For more information about sample requests that include dynamic field definitions and dynamic field values, see "Update Master Record Field" on page 67.

Delete Source Record

Use the Delete Source Record API to delete a source record based on the primary key of the source record. The API doesn't permanently delete the record from the data store, and you can search for the associated master record to view the deleted source record.

The API supports the DELETE method.

DELETE request

To delete a source record, submit a DELETE request with the following URI:

```
DELETE <baseApiURL>/business-entity/public/api/v1/entity-xref/<businessEntity>/
<sourceSystem>/<sourcePKey>
```

Use the following parameters in the DELETE request:

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to delete the source record.
sourcePKey	The source primary key of the record that you want to delete.
sourceSystem	Internal ID of the source system that the record belongs to.

DELETE response

The DELETE response returns the HTTP 200 success code. When you submit a REST API request to delete a record, MDM SaaS verifies the permissions of your user role and the approval workflow configuration. The response indicates whether the deletion request requires an approval.

If no approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If an approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

DELETE example

You can use the following request to delete an active source record based on the source primary key:

```
DELETE https://qa-pod1-mdm.mrel.infaqa.com/business-entity/public/api/v1/entity-xref/
c360.person/HRSource/SFDC_567
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If an approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
}
```

Restore Source Record

Use the Restore Source Record API to restore a deleted source record.

The API supports the PUT method.

PUT request

To restore a source record, submit a PUT request with the following URI:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity-xref/<businessEntity>/
<sourceSystem>/<sourcePKey>[?_operationType=restore]
```

Use the following parameters in the PUT request :

Parameter	Description
businessEntity	Internal ID of the business entity for which you want to restore the deleted source record.
sourcePKey	The source primary key of the record that you want to restore.
sourceSystem	Internal ID of the source system that the record belongs to.
_operationType	Optional. Type of operation that you want to perform on the deleted source record. The supported value is restore. If you don't specify the operation type, the API restores and updates the source record.

Request body

If you set the `_operationType` parameter to restore, you must include a request body that's blank {} for the PUT request to succeed. If you specify any values in the request body, the values are ignored.

If you don't specify the `_operationType` parameter and include a request body with field values, the request first restores the source record and then updates the field values that you specify in the request body.

PUT response

The PUT response returns the HTTP 200 success code. When you submit a REST API request to restore a source record, MDM SaaS verifies the permissions of your user role and the approval workflow configuration. The response indicates whether the restore request requires an approval.

If no approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":false
}
```

If an approval workflow is configured for your user role, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "approvalRequired":true
}
```

PUT example

If you specify the `_operationType` parameter to restore a deleted source record, you can submit the following request:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity/c360.person/HRSource/SFDC_148?
_operationType=restore
```

Include a blank request body in the following format:

```
{}
```

If you don't specify the `_operationType` parameter, you can use the following request:

```
PUT <baseApiURL>/business-entity/public/api/v1/entity/c360.person/HRSource/SFDC_148


Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
{
   "firstName":"Tom",
   "lastName":"smith",
   "middleName":"H",
   "title":"Sales",
   "designation":"Manager",

"Phone":[
      {
         "_id":"5d14a94931db4515857465c950f9b997",
         "phoneUsageType":{
            "Name":"Home",
            "Code":"Home"
         },
         "phoneType":{
            "Name":"Mobile",
            "Code":"Mobile"
         },
         "phoneNumber":"9900223344"
      }
   ]

}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
}
```

Relationship API

Use the relationship resource to filter, create, read, update, and delete business entity relationships.

Metadata API

Use the Metadata API to get the `relationship_Internal_ID` parameter required for the Relationship APIs. The response also contains the relationship attributes that you can include in the request body of the Create Relationship and Update Relationship APIs.

The API supports the GET method.

GET request

To get the `relationship_Internal_ID` parameter, submit a GET request with the following URI:

```
GET <baseApiURL>/metadata/api/v2/objects/relationship/?name=<>
```

You can use the following parameter in the request:

Parameter	Type	Description
name	String	The name of the relationship.

GET response

The response is in the JSON format. The response body contains the `relationship_internal_ID` parameter required for the Relationship APIs and the relationship attributes you can include in the request body of the Create Relationship and Update Relationship APIs.

Note: In the response, `guid` is the `relationship_internal_ID` parameter and `name` under `field` is a relationship attribute.

GET example

You might use the following request to get the `relationship_Internal_ID` parameter and relationship attributes based on the relationship name "Work for":

```
GET <baseApiURL>/metadata/api/v2/objects/relationship/?name=Work+for
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The sample response shows the HTTP 200 OK response code and retrieves the `relationship_Internal_ID` parameter and the relationship attributes:


```
{
    "last": true,
    "size": 1000,
    "number": 0,
    "sort": [],
    "first": true,
    "numberOfElements": 1,
    "content": [
        {
            "eClass": "http://informatica.com/mdm/v2/Core#//Relationship",
            "guid": "c360_person_to_c360_organization",
            "storage": "hierarchy",
            "name": "Work for",
            "_meta": {
                "eClass": "http://informatica.com/mdm/v2/Core#//Meta",
                "creationDate": 1633713964007,
                "lastUpdatedDate": 1634039933086,
                "createdByUser": "jacobkb_mrel",
                "lastUpdatedByUser": "jacobkb_mrel",
                "version": 2,
                "references": [
                    {
                        "eClass": "http://informatica.com/mdm/v2/Core#//
                          MetadataReference",
                        "referencePath": "//@businessEntity[guid='c360.person']",
                        "elementPath": "//@relationship[guid='c360_person_to_
                          c360_organization']/@from"
                    },
                    {
                        "eClass": "http://informatica.com/mdm/v2/Core#//
                          MetadataReference",
                        "referencePath": "//@businessEntity[guid='c360.organization']",
                        "elementPath": "//@relationship[guid='c360_person_to_
                          c360_organization']/@to"
                    }
                ]
            },
            "field": [
                {
                    "eClass": "http://informatica.com/mdm/v2/Core#//IntegerField",
                    "name": "employee_number",
                    "description": "",
                    "mandatory": false,
                    "position": 0,
                    "defaultValue": 0,
                    "allowMany": false,
                    "hasDefaultValue": false,
                    "options": {
                        "eClass": "http://informatica.com/mdm/v2/Core#//FieldOptions",
                        "uiConfiguration": {
                            "eClass": "http://informatica.com/mdm/v2/Core#//
                              FieldUIConfiguration",
                            "primary": true
                        }
                    },
                    "label": {
                        "eClass": "http://informatica.com/mdm/v2/Core#//LocalizedText",
                        "en": "Employee Number"
                    }
                },
                {
                    "eClass": "http://informatica.com/mdm/v2/Core#//TextField",
                    "name": "details",
                    "description": "",
                    "mandatory": false,
                    "position": 0,
                    "length": 255,
                    "allowMany": false,
```

```
                    "hasDefaultValue": false,
                    "options": {
                        "eClass": "http://informatica.com/mdm/v2/Core#//FieldOptions",
                        "uiConfiguration": {
                            "eClass": "http://informatica.com/mdm/v2/Core#//
                              FieldUIConfiguration",
                            "primary": true
                        }
                    },
                    "label": {
                        "eClass": "http://informatica.com/mdm/v2/Core#//LocalizedText",
                        "en": "Details"
                    }
                }
            ],
            "label": {
                "eClass": "http://informatica.com/mdm/v2/Core#//LocalizedText",
                "en": "Work for"
            },
            "from": {
                "eClass": "http://informatica.com/mdm/v2/Core#//BusinessEntityReference",
                "name": "_from",
                "mandatory": true,
                "role": "",
                "businessEntity": {
                    "$ref": "c360.person"
                }
            },
            "to": {
                "eClass": "http://informatica.com/mdm/v2/Core#//BusinessEntityReference",
                "name": "_to",
                "mandatory": true,
                "role": "",
                "businessEntity": {
                    "$ref": "c360.organization"
                }
            }
        }
    ]
}
```

Filter Relationship

Use the Filter Relationship API to retrieve a list of business entities in a relationship.

The API supports the POST method.

POST request

To filter a relationship, submit a POST request with the following URI:

```
POST <baseApiURL>/business-entity/public/api/v1/relationship/<relationship_Internal_ID>/
filter
```

You can use the following parameters in the request:

Parameter	Type	Description
relationship_Internal_ID	String	Internal ID of the relationship. To get the internal ID, use the Metadata API. For more information, see "Metadata API" on page 95.

You can use the following parameters in the request body:

Parameter	Type	Description
pageOffset	Integer	Number of pages to skip. For example, to skip the first two pages of the search results, set to pageOffset=2. Minimum value is 0.
pageSize	Integer	Number of search results to display on each page. Default is 10.
filter	String	The relationship information that needs to be filtered.
_from	String	The business entity that you want to start the relationship from.
_to	String	The business entity that you want to link the relationship to.
businessEntity	String	The internal ID of the business entity.
businessId	String	Unique identifier of the business entity.

POST response

The response is in the JSON format. The response shows the list of business entities in a relationship.

The POST response includes the following parameters:

Parameter	Type	Description
first	Boolean	The first page indicator.
last	Boolean	The last page indicator.
page	Integer	The page number.
size	Integer	The requested page size.
numberOfElements	Integer	The actual number of elements on the current page.
totalNumberofElements	Integer	The total number of elements in the collection.

The POST response includes the following `meta` parameters:

Parameter	Type	Description
relationship	String	The internal ID of the relationship.
businessId	String	Unique identifier of the business entity relationship.

Parameter	Type	Description
state	String	Indicates the state of the relationship. For example, indicates whether the relationship is active.
createdBy	String	Name of the person who created the relationship.
creationDate	String	Date when the relationship was created.
updatedBy	String	Name of the person who updated the relationship.
lastUpdateDate	String	Date when the relationship was last updated.

POST example

You might use the following request to filter a relationship:

```
POST <baseApiUrl>/business-entity/public/api/v1/relationship/colleague_of/filter
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "pageoffset": "0",
    "pageSize": "5",
    "filter": {
        "_from": {
            "businessEntity": "c360.person",
            "businessId": "298466978437828158938044729l0"
        },
        "_to": {
            "businessEntity": "c360.organization",
            "businessId": "29843230161211928798481229322"
        }
    }
}
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

 {
    "first": true,
    "last": true,
    "page": 0,
    "size": 10,
    "numberOfElements": 1,
    "totalNumberOfElements": 1,
    "content": [
        {
            "employee_id": 1031,
            "_from": {
                "businessEntity": "c360.person",
                "businessId": "298466978437828158938044729l0"
            },
            "_to": {
                "businessEntity": "c360.organization",
                "businessId": "29843230161211928798481229322"
            },
            "_meta": {
                "relationship": "c360_person_to_c360_organization",
                "businessId": "30200631346953769148683291539",
```

```
                    "state": "ACTIVE",
                    "createdBy": "bjacob_PM",
                    "creationDate": 1637179505098,
                    "updatedBy": "bjacob_PM",
                    "lastUpdateDate": 1637179669092
                }
            }
        ]
    }
```

Create Relationship

Use the Create Relationship API to create a relationship between records.

The API supports the POST method.

POST request

To create a relationship, submit a POST request with the following URI:

```
POST <baseApiURL>/business-entity/public/api/v1/relationship/<relationship_Internal_ID>?
sourceSystem=<sourceSystem>[&hierarchyType=<model name>][&hierarchyId=<ID of hierarchy>]
```

You can use the following parameters in the request:

Note: The `hierarchyType` and `hierarchyId` parameters apply only to hierarchical relationships.

Parameter	Type	Description
relationship_Internal_ID	String	Internal ID of the relationship. To get the internal ID, use the Metadata API. For more information, see "Metadata API" on page 95.
sourceSystem	String	Internal ID of the source system to which the relationship belongs.
hierarchyType	String	Optional. Name of the hierarchy model you want to base your hierarchy on.
hierarchyId	String	Optional. The business ID of the hierarchy model.

To create relationships, you can use either the business ID of the master records or a combination of the source system and source primary key of the source records in the request body.

You can use the following parameters in the request body:

Parameter	Type	Description
_from	String	Business entity that you want to start the relationship from.
_to	String	Business entity that you want to link the relationship to.
id	String	sourceSystem and sourcePKey parameters of the source record.

Parameter	Type	Description
businessEntity	String	Internal ID of the business entity.
businessId	String	Unique identifier of the master record.
sourceSystem	String	Internal ID of the source system to which the source record belongs.
sourcePKey	String	The primary key of the source record.

POST response

The response is in the JSON format. The response shows the 201 Created response code and retrieves the business ID of the relationship you created. When you submit a REST API request to create a relationship, Business 360 verifies your existing user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the records you created.

POST example

You might use the following request to create a relationship between two records using the businessId parameter:

```
POST <baseApiUrl>/business-entity/public/api/v1/relationship/colleague_of?
sourceSystem=c360.default.system&hierarchyType=organization&hierarchyId=20142786670219119
049037064968
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "_from": {
        "businessEntity": "c360.person",
        "businessId": "30136693806248569236179512998"
    },
    "_to": {
        "businessEntity": "c360.person",
        "businessId": "30136693824695313309889064620"
    }
}
```

You might use the following request to create a relationship between two records using the sourcePKey and sourceSystem parameters:

```
POST <baseApiUrl>/business-entity/public/api/v1/relationship/
c360.rel.organizationsubsidiaryorganization?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX {
    "_from": {
         "businessEntity": "c360.organization"
        "id": {
            "sourceSystem": "c360.default.system",
            "sourcePKey": "69b837a9b93110ac9b3a13c2"

        }

    },
    "_to": {
       "businessEntity": "c360.organization"
        "id": {
            "sourceSystem": "c360.default.system",
            "sourcePKey": "69b837bcb93110ac9b3a13d5"
    }
}
}
```

You can use the Metadata API to get the relationship attributes. For more information, see "Metadata API" on page 95.
If no approval workflow is configured, you get the following response:

```
HTTP/1.1 201 Created
Content-Type: application/json

{
    "approvalRequired": false,
    "businessId": "3014277097117937500366716258 4"
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
    "businessId": "3014277097117937500366716258 4"
}
```

Note: You might use the business ID to retrieve the relationship. For more information, see "Read Relationship by Business ID" on page 102.

Read Relationship by Business ID

Use the Read Relationship by Business ID API to retrieve an active business entity relationship based on the business ID of the relationship.

Before you begin, you must know the business ID of the relationship. To get the business ID of a relationship, you can submit a search request.

The API supports the GET method.

GET request

To retrieve a business entity relationship, submit a GET request with the following URI:

```
GET <baseApiURL>/business-entity/public/api/v1/relationship/<relationship_Internal_ID>/
<businessId>
```

The GET request contains the following path parameters:

Parameter	Type	Description
relationship_Internal_ID	String	Internal ID of the relationship. To get the internal ID, use the Metadata API. For more information, see "Metadata API" on page 95.
businessId	String	Unique identifier of the business entity relationship.

GET response

The response is in the JSON format. The response body contains the business entity relationship data.

The GET response includes the following `_meta` parameters:

Parameter	Type	Description
relationship	String	The internal ID of the relationship.
businessId	String	Unique identifier of the business entity relationship.
state	String	Indicates the state of the relationship. For example, indicates whether the relationship is active.
createdBy	String	Name of the user who created the relationship.
creationDate	String	Date when the relationship was created in the Unix epoch time format.
updatedBy	String	Name of the user who last updated the relationship.
lastUpdateDate	String	Date when the relationship was last updated.

GET examples

You might use the following request to retrieve an active relationship based on the business id 3014277097117937500366716258 4:

```
GET <baseApiURL>/business-entity/public/api/v1/relationship/colleague_of/
3014277097117937500366716258 4
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The sample response shows the HTTP 200 OK response code and retrieves the business entity relationship that matches the specified business ID.


```
{
    "_from": {
        "businessEntity": "c360.person",
        "businessId": "3013669380624856923617951 2998"
    },
    "_to": {
        "businessEntity": "c360.person",
        "businessId": "3013669382469531330988906 4620"
    },
    "_meta": {
        "relationship": "colleague_of",
        "businessId": "3014277097117937500366716258 4",
        "state": "ACTIVE",
        "createdBy": "JACOBKB_MREL",
        "creationDate": 1634050073948,
        "updatedBy": "JACOBKB_MREL",
        "lastUpdateDate": 1634763714047
    }
}
```


To get the content metadata, add _showContentMeta=true at the end of the request URI. You might use the following request to retrieve the active relationship with the content meta:

```
GET <baseApiURL>/business-entity/public/api/v1/relationship/colleague_of/
3014277097117937500366716258 4_showContentMeta=true
```

```
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "_from": {
        "businessEntity": "c360.person",
        "businessId": "30136693806248569236179512998"
    },
    "_to": {
        "businessEntity": "c360.person",
        "businessId": "30136693824695313309889064620"
    },
    "_meta": {
        "relationship": "colleague_of",
        "businessId": "30142770971179375003667162584",
        "state": "ACTIVE",
        "createdBy": "JACOBKB_MREL",
        "creationDate": 1634050073948,
        "updatedBy": "JACOBKB_MREL",
        "lastUpdateDate": 1634763714047
    },
    "_contentMeta": {
        "trust": {
            "fieldData": [
                {
                    "fieldRef": "/",
                    "lastUpdatedDate": 1634763714047,
                    "manualOverride": false,
                    "sourcePrimaryKey": "617083c2030f0f0759d5594b",
                    "sourceSystem": "c360.default.system",
                    "trustRule": "NoRule",
                    "trustScore": 0.0
                }
            ]
        }
    }
}
```

For more information about content metadata, see “Read content meta ” on page 19.

Update Relationship

Use the Update Relationship API to update an existing relationship between two business entities.

The API supports the PUT method.

PUT request

To update an existing relationship between two business entities, submit a PUT request with the following URI:

```
PUT <baseApiURL>/business-entity/public/api/v1/relationship/<rel_name>/<businessId>?
sourceSystem=<sourceSystem>[&hierarchyType=<model name>][&hierarchyId=<ID of hierarchy>]
```

You can use the following parameters in the request:

Note: The `hierarchyType` and `hierarchyId` parameters apply only to hierarchical relationships.

Parameter	Type	Description
relationship_Internal_ID	String	Internal ID of the relationship. To get the internal ID, use the Metadata API. For more information, see "Metadata API" on page 95.
businessId	String	Unique identifier of the relationship.
sourceSystem	String	Internal ID of the source system to which the record belongs.
hierarchyType	String	Optional. Name of the hierarchy model you want to base your hierarchy on.
hierarchyId	String	Optional. The business ID of the hierarchy model.

PUT response

The response is in the JSON format. The PUT response returns HTTP 200 success code. When you submit a REST API request to update a relationship, Business 360 verifies your existing user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the relationship you updated.

PUT example

You might use the following request to update a relationship between two business entities:

```
PUT <baseApiUrl>/business-entity/public/api/v1/relationship/colleague_of/
301427866702191190490370649 68?
sourceSystem=c360.default.system&hierarchyType=organization&hierarchyId=20142786670219119
049037064968
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

{
    "location": "North America",
    "details": "New Employee",
}
```

Note: In the request example, `location` and `details` are relationship attributes that you can add to the request body. For more information about relationship attributes, see *Define the Data Model*. You can use the Metadata API to get the relationship attributes. For more information, see "Metadata API" on page 95.

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
```

```
    "approvalRequired": true,
}
```

Delete Relationship

Use the Delete Relationship API to delete a relationship between two business entities.

The API supports the DELETE method.

DELETE request

To delete a relationship, submit a DELETE request with the following URI:

```
DELETE <baseApiURL>/business-entity/public/api/v1/relationship/<rel_name>/<businessId>?
sourceSystem=<sourceSystem>[&hierarchyType=<model name>][&hierarchyId=<ID of hierarchy>]
```

The DELETE request contains the following path parameters:

Note: The `hierarchyType` and `hierarchyId` parameters apply only to hierarchical relationships.

Parameter	Type	Description
relationship_Internal_ID	String	Internal ID of the relationship. To get the internal ID, use the Metadata API. For more information, see "Metadata API" on page 95.
businessId	String	Unique identifier of the relationship.
sourceSystem	String	Internal ID of the source system to which the record belongs.
hierarchyType	String	Optional. Name of the hierarchy model that you want to delete.
hierarchyId	String	Optional. The business ID of the hierarchy model.

DELETE example

You might use the following request to delete the active relationship based on the business ID 301427866702191190490370649 68:

```
DELETE <baseApiURL>/business-entity/public/api/v1/relationship/colleague_of/
301427866702191190490370649 68?
sourceSystem=c360.default.system&hierarchyType=organization&hierarchyId=20142786670219119
049037064968
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json
```

```
{
    "approvalRequired": true,
}
```

Merge API

Use the merge API to merge up to 10 source records or master records into a single master record. The API uses the entity-group resource.

To merge records, submit a POST request with the following URI:

```
<baseApiUrl>/business-entity/public/api/v1/entity-group/<businessEntity>
```

The businessEntity parameter is the internal ID of the business entity to which the records belong.

The response is in the JSON format.

Request body

To merge records, you can either use a combination of the sourcePKey and sourceSystem parameters or the businessId parameter in the request body.

Note: To ensure that the merge operation is successful, add up to 10 records in the request body.

To merge records, you can use the following parameters in the request body:

Parameter	Type	Description
sourcePKey	String	The primary key of the source record. Use it with the sourceSystem parameter.
sourceSystem	String	Internal ID of the source system to which the record belongs. Use it with the sourcePKey parameter.
businessId	String	Unique identifier of the record to merge.

Request response

The request response returns the business ID of the merged master record.

The following table lists the response parameters:

Parameter	Type	Description
approvalRequired	Boolean	Indicates whether an approval workflow is configured. If the response is true, approval workflow is configured. If the response is false, approval workflow isn't configured.
businessId	String	Unique identifier of the surviving master record into which the specified records are merged.

Sample Request

You might use the following request to merge the source records of the Person business entity into a single master record:

```
POST https://use4-mdm.dm-us.informaticacloud.com/business-entity/public/api/v1/entity-group/c360.person
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

[
  {
    "sourcePKey": "KR_001",
    "sourceSystem": "sales_force"
  },
  {
    "sourcePKey": "KR_002",
    "sourceSystem": "sales_force"
  },
  {
    "sourcePKey": "KR_003",
    "sourceSystem": "sales_force"
  },
{
    "businessId": "P8X4AB78YU2WE2"
   }
]
```

Sample Response

When you make a merge request, the response returns the business ID of the surviving master record.

The following merge response contains the business ID of the master record into which multiple records merged:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "approvalRequired": false,
  "businessId": "999000000000268"
}
```

Unmerge API

Use the unmerge API to unmerge up to 10 source records from a master record. The API uses the entity-group resource.

To unmerge source records, submit a POST request with the following URI:

```
<baseApiUrl>/business-entity/public/api/v1/entity-group/<businessEntity>/<businessId>[?_keepRelsWith=<value>][?_groupingForRemains=<value>][?_groupingForRemoved=<value>][&_allowMergeBack=<value>]
```

To unmerge source records and permanently delete all the relationships, submit a POST request with the following URI:

```
<baseApiURL>/business-entity/public/api/v1/entity-group/<businessEntity>/<businessId>?_groupingForRemoved=NONE&_groupingForRemains=NONE&_keepRelsWith=NONE
```

To unmerge source records and allow the source records to merge back into the master record that they were unmerged from, submit a POST request with the following URI:

```
<baseApiUrl>/business-entity/public/api/v1/entity-group/<businessEntity>/<businessId>?
_allowMergeBack=MAY_MERGE
```

You can unmerge a source record and relevant patch records from a master record. Ensure that you specify the correct combination of source and patch records. Otherwise, the unmerge operation fails.

To unmerge source records and relevant patch records, submit a POST request with the following URI:

```
<baseApiURL>/business-entity/public/api/v1/entity-group/<businessEntity>/<businessId>?
_groupingForRemoved=ALL
```

Note: To ensure that the unmerge operation is successful, add up to 10 records in the request body.

To unmerge records, you can use the following query parameters in the URI:

Parameter	Type	Description
businessEntity	String	Internal ID of the business entity that the records belong to.
businessId	String	Unique identifier of the master record.
_keepRelsWith	String	Specifies how to manage relationships between the records that you unmerge. Use one of the following values: - BUSINESS_ID. Restores the relationships that the unmerged records had before they were merged. - REMAINS. Retains the relationships with the master record that the records were unmerged from. - NONE. Permanently deletes all the relationships that are created from the user interface for the master record. For example, consider two records, Sam and Samuel, which are related and merged. Both records belong to a master record with business ID MDM0000008XJDO. If you unmerge Sam using BUSINESS_ID, the relationships of Sam revert to the original master record to which it belonged before the merge. If the relationships belong to a master record with business ID MDM0000008XJEB, then relationships revert to this master record with business ID MDM0000008XJEB. However, if you unmerge Sam using REMAINS, the relationships of Sam remain with the master record that has business ID MDM0000008XJDO. Default is REMAINS. **Note:** Use BUSINESS_ID to align with the unmerge operation that you perform from the user interface.
_groupingForRemoved	String	Determines how unmerged source records are managed in relation to master records. Use one of the following values: - ALL. Unmerges the source records and merges them into a single master record. Use ALL to unmerge source records and relevant patch records. - EACH. Unmerges each source record into a separate master record. Applicable to master records that don't have any patch records because patch records can't be unmerged into separate master records. - NONE. Applicable when you anonymize data. Unmerges source records from the master record without creating master records for them. Default is EACH.

Parameter	Type	Description
_groupingForRemains	String	Determines how the source records that aren't selected for unmerging are managed in relation to master records. Use one of the following values: - ALL. Merges the records that aren't selected for unmerging into a single master record. - EACH. Creates a master record for each source record that isn't selected for unmerging. Applicable to master records that don't have any patch records because patch records can't be unmerged into separate master records. - NONE. Applicable when you anonymize data. Source records associated with the master record remain unchanged. Default is ALL.
_allowMergeBack	String	Determines whether the source records that you unmerge from a master record can merge back into the same master record. Use one of the following values: - MAY_MERGE. The unmerged source records might match again with the master record. - NEVER_MERGE. The unmerged source records never merge back into the master record. Default is NEVER_MERGE.

The response is in the JSON format.

Request body

To unmerge records, use a combination of the sourcePKey and sourceSystem parameters in the request body.

To unmerge records, use the following parameters in the request body:

Parameter	Type	Description
sourcePKey	String	The primary key of a source record.
sourceSystem	String	Internal ID of the source system to which the record belongs.

Request response

The request response indicates whether a data steward must approve the unmerge action.

The following table lists the response parameter:

Parameter	Type	Description
approvalRequired	Boolean	Indicates whether approval workflow is configured. If the response is true, approval workflow is configured. If the response is false, approval workflow is not configured.

Sample Request

You might use the following request to unmerge the source records of the Person business entity from a master record with the business ID 999000000007755 :

```
POST https://use4-mdm.dm-us.informaticacloud.com/business-entity/public/api/v1/entity-group/c360.person/999000000007755?_keepRelsWith=BUSINESS_ID\
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

[
  {
    "sourcePKey": "KR_001",
    "sourceSystem": "sales_force"
  },
  {
    "sourcePKey": "KR_003",
    "sourceSystem": "sales_force"
  }
]
```

You might use the following request to unmerge the source records and patch records of the Person business entity from a master record with the business ID MDM0000002H5VK:

```
POST https://use4-mdm.dm-us.informaticacloud.com/business-entity/public/api/v1/entity-group/c360.person/MDM0000002H5VK?_keepRelsWith=BUSINESS_ID?_groupingForRemoved=ALL
Content-Type: application/json
Accept: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

[
  {
    "sourcePKey": "X1",
    "sourceSystem": "c360.default.system"
  },
  {
    "sourcePKey": "ex678e1f806e98f031188881d4",
    "sourceSystem": "c360.default.system"
  }
]
```

Sample Response

When you make an unmerge request, MDM SaaS verifies your user role permissions and the approval workflow configuration. The response indicates whether a data steward must approve the unmerge action.

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "approvalRequired": false,
}
```

If approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "approvalRequired": true,
}
```

Search Match API version 1

Use the Search Match API version 1 to search for matching records based on the published match model configuration. The required input parameters for the REST API vary based on the business entity and its match model.

The Search Match API version 1 searches on the source records, performs matching based on the candidate selection criteria and match rules, and returns the matched records.

For the Search Match API version 1 to use a match model configuration, you can use one of the following methods:

- Specify a match model ID and the required fields of the Directed AI match rules in the Search Match API version 1.
- Set a default match model for the Search Match API version 1 in Business 360 Console and specify the required fields of the Directed AI match rules in the Search Match API version 1.
- Specify at least one field for which you created a Directed AI match rule.

Note: Ensure that you have the list of required fields in the Directed AI match rules of the match models published in Business 360 Console.

To search for matching records, submit a POST request with the following URI:

```
<baseApiUrl>match-ng-pair-gen/public/api/v1/searchmatch/<businessEntity>?
[matchmodel=<matchModelId>]&[version=<matchModelVersion>]
```

The following table describes the parameters that you specify in the POST request:

Parameter	Type	Description
businessEntity	String	Internal ID of the business entity that contains the published match model. You must have a read access to the business entity.
matchmodel	String	Optional. Unique identifier of the published match model that contains the candidate selection criteria and Directed AI match rules required for matching the records. If you do not specify a match model, the API uses the default match model that you set for the Search Match API version 1 in Business 360 Console.
version	Number	Optional. Version number of the match model. Default is the latest version of the match model.

For more information about finding the identifiers and version numbers, see "Finding details for the request" on page 115.

The response is in the JSON format.

Request body

You can use the following parameters in the Search Match API version 1 request body:

Parameter	Type	Description
maxRecordsToReturn	Number	Optional. Maximum number of records to return in the search results. Default is 100.
searchLevel	String	Optional. Candidate search level that the match model uses to determine how stringently and thoroughly to search for match candidates. You can configure the following search levels: - Narrow - Typical - Exhaustive - Extreme If you do not provide this value, the REST API uses the value from the match model.
fileRecordLimit	Number	Optional. Maximum number of match candidates that the REST API can process for a record. You can set the limit to a maximum of 10,000. If the match candidates exceed the maximum limit, the REST API might return an empty response. Default is 10,000.
searchRecord	Array	Contains the search values, such as the required match field identifiers and their values, based on which you want to find the matching records. Enter the internal identifiers for the required match fields. For example, birthDate and fullName. For more information about finding the required match fields and their identifiers, see "Finding details for the request" on page 115. Ensure that you have read access to the match fields. Exact match field values in Directed AI match rule of a match model are case-sensitive. The API returns matching records only when field values match the exact case of the source. **Note:** To search for records by specifying a date, ensure that you use the YYYY-MM-DD format.

Parameter	Type	Description
matchPreference	String	Optional. Includes the details of source records based on which the API returns the matched master records. Each master record in the response includes a source record based on the best match score or the top-ranked declarative match rule that matches the source record with the input data. If multiple source records of a master record are matched based on the same top-ranked declarative match rule or have the same best score, the API includes the source record that has the latest last updated date. You can use one of the following values: - BEST_SCORE. Includes the details of source records based on the best match score of the source records that match the input data. Default is BEST_SCORE. - FIRST_RULE. Includes the details of source records based on the top-ranked Directed AI match rule that match the source records and input data. For example, consider a master record named MR1. It has two contributing source records, SRC1 with a match score of 90 based on Rule 1 and SRC2 with a match score of 100 based on Rule 2. If your match preference is BEST_SCORE, the API returns the master record MR1 and the source record SRC2, which has the best score. If your match preference is FIRST_RULE, the API returns the master record MR1 and the source record SRC1, which uses the top-ranked rule, Rule 1.
population	String	Optional. Certain characteristics of data in the records that you want to match.

Formats of search terms for Search Match API version 1

The formats of search terms depend on their data types.

The following table lists the data types and their supported formats:

Data Type	Valid Format	Example
String	Within double quotes	Use `"hello"` instead of `'hello'` or `hello`.
Integer	No quotes	Use `10` instead of `'10'` or `"10."`
Double	No quotes	Use `3.14` instead of `'3.14'` or `"3.14."`

Data Type	Valid Format	Example
Boolean	true, false, "true", "false"	Use `"true"` or `true` instead of `'true'`. Do not use `"True"`, `"False"`, `True`, `False`, `0`, or `1`.
Decimal	Within double quotes	Use `"3.14"` instead of non-decimal strings, such as `"hello."`
Date	`"YYYY-MM-DD"`	Use `"2023-04-20"` instead of `"20-09-2023"`, `2023-04-20`, or non-date strings, such as `"hello."`
DateTime	Strings within quotes and long or integer values without quotes	Use `"2024-12-03T00:49:00Z"`, `0`, or `1733186940000` instead of unrelated strings, such as `3.14` or `"hello."`


Finding details for the request

You must enter identifier details, such as match field identifier and match model identifier, in the REST API request. To get these details, navigate to the Business 360 Console.

Business entity identifier

To view the identifiers for a business entity, open a business entity from Business 360 Console. Click the **Actions** menu and view the properties, such as display name and internal ID.

The following image shows the properties of a business entity:

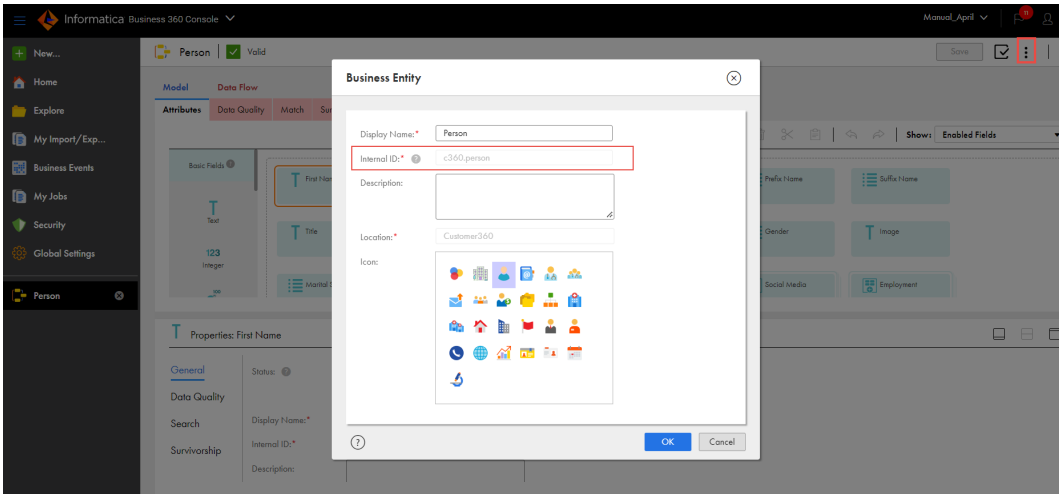


In the image, the business entity has the internal ID `c360.person`.

Match model version

To view the version of a match model, click the **Match** tab of a business entity.


The following image shows the version numbers of the sample match models:

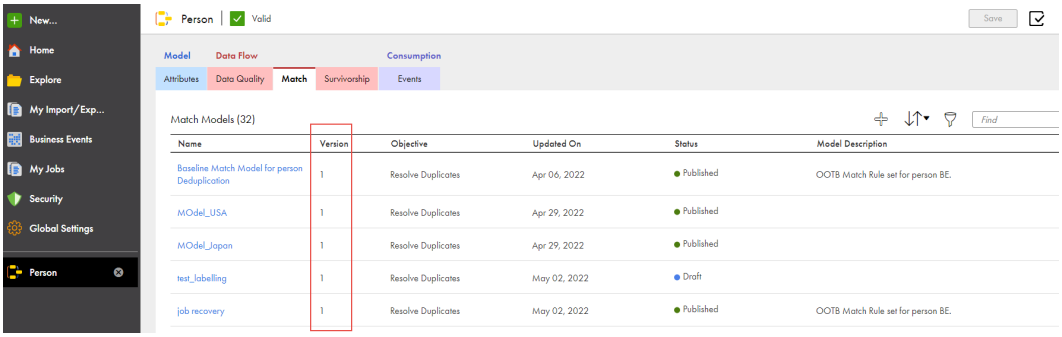

Match model identifier

To view the match model identifier, open a match model. The match model identifier appears in the **Model Configuration** tab


The following image shows the **Model Configuration** tab that contains the match model identifier:

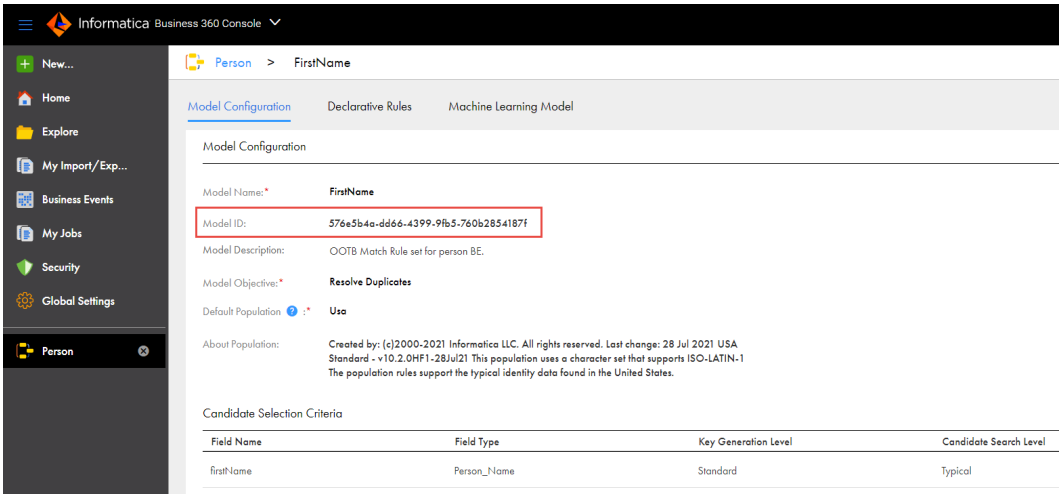

Match fields and identifiers

To view the required match fields in a match model, open a published match model of a business entity. Click the **Machine Learning Model** tab and view the match fields.

The following image shows the sample match fields for a published match model:

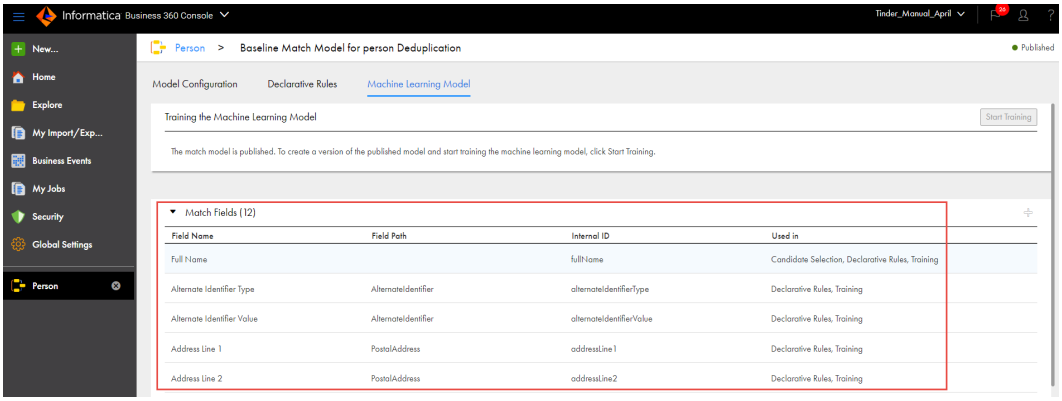

In the image, you can view the match fields that are part of the match model. Some fields are basic fields and some fields are part of a field group. For example, Address Line 1 and Address Line 2 are part of the Address

field group. The internal ID of the Address field group is `PostalAddress` that you can view in the **Field Path** column.

The **Internal ID** column displays the internal identifiers of each match field. For example, the internal identifier for the Full Name field is `fullName` and for the Address Line 1 field is `addressLine1`.

When you enter the required match fields for a field group in the Search Match API version 1 request body, specify the internal identifiers for the match fields and the field group in the search record. For example, enter the address details in the following format:

```
"PostalAddress": [
                {
                    "addressLine1": "QUINCE RD"

                }
            ]
```

Request response

The request response returns the matching records.

The following table lists the response parameters:

Parameter	Type	Description
searchResult	Object	Contains the matching records.
totalRecords	Number	Total number of matching records that the request returns.
records	Array	Contains all the matching records that are filtered and sorted based on the specified criteria.
fileRecordLimit	Number	Maximum number of match candidates that the Search Match API version 1 can process for a record.
fileRecordCandidatesCount	Number	Number of match candidates that the Search Match API version 1 identifies.
sourceSystem	String	Internal ID of the source system to which the record belongs.
sourcePKey	String	The primary key of the source record.
population	String	Certain characteristics of data in the records that you want to match.

The POST response includes the following `_meta` parameters:

Parameter	Type	Description
score	Number	The match score of the record.
rank	Number	Ranking of the matching record. Returned if a record is matched using a rank-based rule.
matchRule	String	Threshold value of the match rule. Returned if a record is matched using a threshold-based rule.
businessId	String	Unique business identifier of the master record.
data	Object	Data in the master record.

Sample Request

The following sample request specifies the match fields, such as name, address, and address type, that a published match model uses:

```
{
    "searchControls": {
        "maxRecordsToReturn": 20,
        "searchLevel": "Typical",
        "fileRecordLimit": 1000
        "matchPreference": "FIRST_RULE"
    },
    "data": {
        "searchRecord": {
            "first_name": "JAMES",
            "full_name": "JAMES Gilgen",
            "middle_name": "H",
            "last_name": "Gilgen",
            "Address": [
                {
                    "_id": "add_id2",
                    "addressLine1": "12012 N MO PAC EXPY",
                    "addressLine2": "Sound.",
                    "addressLine3": "Phone leg.",
                    "addressStatus": {
                        "Code": "Inactive",
                        "Name": "Inactive"
                    },
                    "addressType": {
                        "Code": "Office",
                        "Name": "Office"
                    },
                    "coordinateSystem": "Staff.",
                    "country": {
                        "Code": "US",
                        "Name": "United States"
                    },
                    "defaultIndicator": true,
                    "enrichedIndicator": {
                        "Code": "VALID",
                        "Name": "Valid"
                    },
                    "latitude": "28 N",
                    "locationCoordinateDesc": "Coordinates",
                    "longitude": "77 E",
                    "postalCode": "78758",
                    "postalCodeExtension": "2241",
                    "usageType": {
                        "Code": "Home",
                        "Name": "Home"
                    }
                }
            ]
        }
    }
}
```

The following sample request specifies only the required fields:

```
{
    "searchControls": {
        "maxRecordsToReturn": 10,
        "searchLevel": "Typical",
        "fileRecordLimit": 1000
    },
    "data": {
        "searchRecord": {
            "fullName": "ALEXANDRA NORMAN"
        }
```

```
    }
}
```

Sample Response

When you make a search request, the response retrieves records based on the configured match rules.

The response contains only the required match fields. To view the other fields of a record, use the Read Master Record by Business ID API.

The following sample response contains two matching master records for the specified search values:

```
{
    "searchResult": {
        "totalRecords": 2,
        "fileRecordLimit": 1000,
        "fileRecordCandidatesCount": 5,
        "records": [
            {
                "_meta": {
                    "score": 96.0,
                    "rank": 1,
                    "businessId": "MDM0000003KLMO"
                },
                "data": {
                    "PostalAddress": [
                        {
                            "addressLine1": "QUINCE RD STE"
                        }
                    ],
                    "birthDate": "2022-03-04",
                    "fullName": "BETTE Briggs"
                }
            },

            {
                "_meta": {
                    "score": 85.0,
                    "matchRule": "THD1",
                    "businessId": "MDM0000003KLMO"
                },
                "data": {
                    "PostalAddress": [
                        {
                            "addressLine1": "KUINCE RD""
                        }
                    ],
                    "birthDate": "2022-03-04",
                    "fullName": "BETTE Briggs"
                }
            }
        ]
    }

}
```

You get the following sample response when you specify only the required fields:

```
{
    "searchResult": {
        "totalRecords": 1,
        "fileRecordLimit": 1000,
        "fileRecordCandidatesCount": 4,
        "records": [
            {
                "_meta": {
                    "matchModelName": "nir_test",
                    "matchModelVersion": 1,
```

```
                    "score": 100.0,
                    "rank": 1,
                    "businessId": "MDM000000G2PC6",
                    "xrefSourceSystem": "b360.default.system",
                    "xrefSourcePKey": "pkey727",
                    "population": "usa"
                },
                "data": {
                    "fullName": "ALEXANDRA NORMAN"
                }
            }
        ]
    }
}
```


Search Match API version 2

Search Match API version 2 matches directly against master records without considering source records to retrieve matching master records. The direct match against master records enhances performance and speeds up the match process.

For example, a search for William Kenneth retrieves the matching master record William Kenneth without matching against source records such as William K or Will Kenneth that exist in the system.

Additionally, you can use the Search Match API version to search within a specific population when master records belong to multiple populations. For example, if your customer data includes the Chinese, Japanese, and US populations, specify Chinese as the population parameter to return master records that match the Chinese population.

The required input parameters for the REST API vary based on the business entity and its match model.

To specify a match model configuration in the Search Match API version 2, use one of the following methods:

- Specify a match model ID and the required fields of the Directed AI match rules in the API.
- Set a default match model for the Search Match API version 2 in Business 360 Console and specify the required fields of the Directed AI match rules in the API.
- Specify at least one field for which you created a Directed AI match rule.

Note: Ensure that the Directed AI match rules of the published match models in Business 360 Console include the required fields.

To search for matching records, submit a POST request with the following URI:

```
<baseApiUrl>match-ng-pair-gen/public/api/v2/searchmatch/<businessEntity>?
[matchmodel=<matchModelId>]&[version=<matchModelVersion>]
```

The following table describes the parameters that you specify in the POST request:

Parameter	Type	Description
businessEntity	String	Internal ID of the business entity that contains the published match model. You must have a read access to the business entity.
matchmodel	String	Optional. Unique identifier of the published match model that contains the candidate selection criteria and Directed AI match rules required for matching the records. If you don't specify a match model, the API uses the default match model that you set for the Search Match API version 2 in Business 360 Console.
version	Number	Optional. Version number of the match model. Default is the latest version of the match model.

For more information about finding the identifiers and version numbers, see "Finding details for the request" on page 115.

The response is in the JSON format.

Prerequisites

Before you use the Search Match API version 2 to search for matching records, ensure that match keys are generated for master records.

For records created before the July 2024 release, match keys weren't generated for the master records by default. To generate match keys for the master records, run the generate search indexes or match keys job. For more information about generating match keys, see Defining generate search indexes or match keys job.

Assigning populations to master records

A master record must have population data before the Search Match API version 2 can match it by population.

MDM SaaS assigns a population to a master record based on the following principles:

- If the master record has a single source record, it inherits the population of the source record.
- If the master record is formed by merging source records that have the same population, it inherits that population.
- If the master record is formed by merging source records that have different populations, MDM SaaS doesn't assign a population. For those records, the match process uses the default population of the match model.

For master records created after the April 2026 release, MDM SaaS automatically assigns population names to the master records based on the populations of their source records. For records created before the April 2026 release, use the "Migrate API" on page 224 to assign populations to these master records.

After you assign populations to master records, run the Generate Search Indexes or Match Keys job to generate match keys based on the assigned population. For more information about generating match keys, see *Defining generate search indexes or match keys job*.

Request body (v2)

The following table describes the parameters in the request body:

Parameter	Type	Description
maxRecordsToReturn	Number	Optional. Maximum number of records to return in the search results. Default is 100.
searchLevel	String	Optional. Candidate search level that the match model uses to determine how stringently and thoroughly to search for match candidates. You can configure the following search levels: - Narrow - Typical - Exhaustive - Extreme If you do not provide this value, the REST API uses the value from the match model.
fileRecordLimit	Number	Optional. Maximum number of match candidates that the REST API can process for a record. You can set the limit to a maximum of 10,000, which is also the default. If the match candidates exceed the maximum limit, the REST API might return an empty response.
searchRecord	Array	Contains the search values, such as the required match field identifiers and their values, based on which you want to find the matching records. Enter the internal identifiers for the required match fields. For example, birthDate and fullName. For more information about finding the required match fields and their identifiers, see "Finding details for the request" on page 115. Ensure that you have read access to the match fields. Exact match field values in Directed AI match rules of a match model are case-sensitive. The API returns matching records only when field values match the exact case of the source. **Note:** To search for records by specifying a date, ensure that you use the YYYY-MM-DD format.

Parameter	Type	Description
data	Object	Data in the master record. Master record data to be returned if the attributes match with the given match model criteria.
population	String	Optional. Certain characteristics of a specific population data in the records that you want to match.

Formats of search terms for Search Match API version 2

The formats of search terms depend on their data types.

The following table lists the data types and their supported formats:

Data Type	Valid Format	Example
String	Within double quotes	Use `"hello"` instead of `'hello'` or `hello`.
Integer	No quotes	Use `10` instead of `'10'` or `"10."`
Double	No quotes	Use `3.14` instead of `'3.14'` or `"3.14."`
Boolean	true, false, "true", "false"	Use `"true"` or `true` instead of `'true'`. Do not use `"True"`, `"False"`, `True`, `False`, `0`, or `1`.
Decimal	Within double quotes	Use `"3.14"` instead of non-decimal strings, such as `"hello."`
Date	`"YYYY-MM-DD"`	Use `"2023-04-20"` instead of `"20-09-2023"`, `2023-04-20`, or non-date strings, such as `"hello."`
DateTime	Strings within quotes and long or integer values without quotes	Use `"2024-12-03T00:49:00Z"`, `0`, or `1733186940000` instead of unrelated strings, such as `3.14` or `"hello."`


Finding details for the request (v2)

You must enter identifier details, such as match field identifier and match model identifier, in the REST API request. To get these details, navigate to the Business 360 Console.

Business entity identifier

To view the identifiers for a business entity, open a business entity from Business 360 Console. Click the **Actions** menu and view the properties, such as display name and internal ID.

The following image shows the Business Entity dialog box with the properties to configure for a Person business entity:

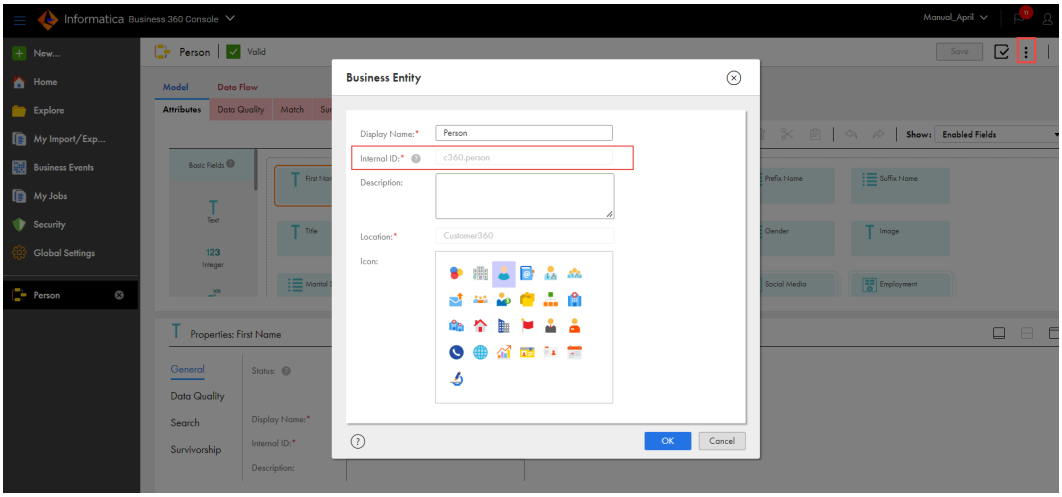


In the image, the business entity has the internal ID `c360.person`.

Match model version

To view the version of a match model, click the **Match** tab of a business entity.


The following image shows the version numbers of the sample match models:

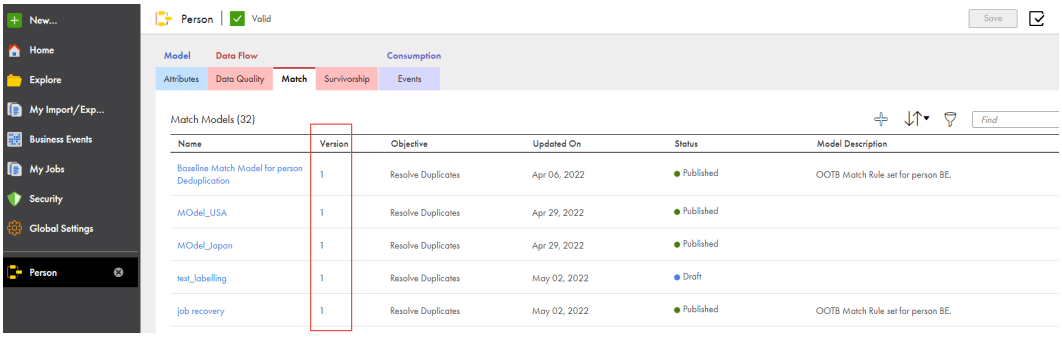

Match model identifier

To view the match model identifier, open a match model. The match model identifier appears in the **Model Configuration** tab


The following image shows the **Model Configuration** tab that contains the match model identifier:

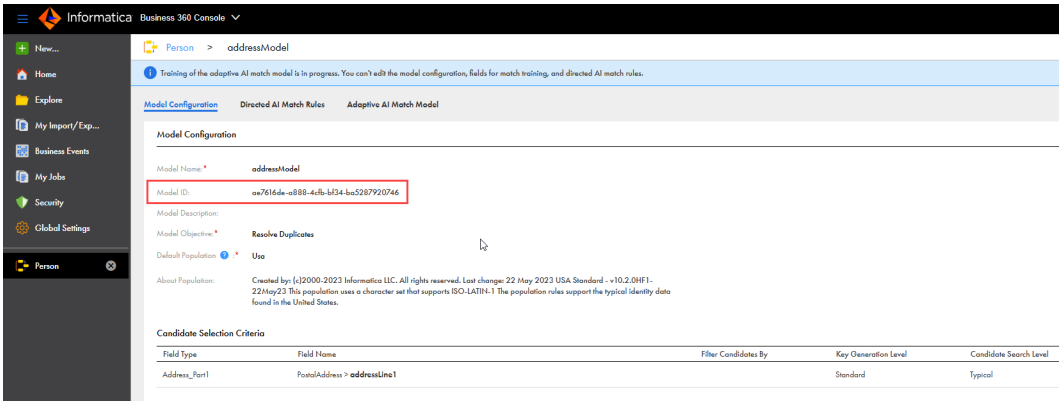

Match fields and identifiers

To view the required match fields in a match model, open a published match model of a business entity. Click the **Adaptive AI Match Model** tab and view the match fields.

The following image shows the sample match fields for a published match model:

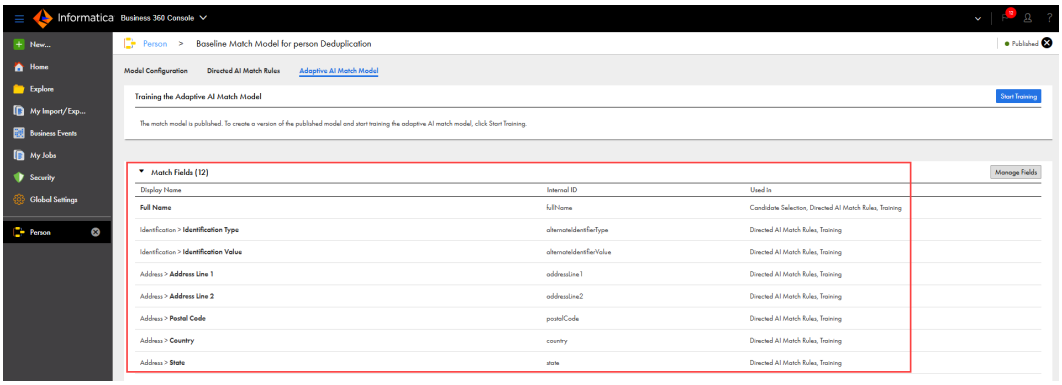

In the image, you can view the match fields that are part of the match model. Some fields are basic fields and some fields are part of a field group. For example, Address Line 1 and Address Line 2 are part of the Address field group.

The **Internal ID** column displays the internal identifiers of each match field. For example, the internal identifier for the Full Name field is `fullName` and for the Address Line 1 field is `addressLine1`.

When you enter the required match fields for a field group in the Search Match API version 2 request body, specify the internal identifiers for the match fields and the field group in the search record. For example, enter the address details in the following format:

```
"PostalAddress": [
                {
                    "addressLine1": "QUINCE RD"

                }
            ]
```

Request response (v2)

The request response returns the matching records.

The following table lists the response parameters:

Parameter	Type	Description
searchResult	Object	Contains the matching records.
totalRecords	Number	Total number of matching records that the request returns.
records	Array	Contains all the matching records that are filtered and sorted based on the specified criteria.
fileRecordLimit	Number	Maximum number of match candidates that the Search Match API version 2 can process for a record.
fileRecordCandidatesCount	Number	Number of match candidates that the Search Match API version 2 identifies.

The POST response includes the following `_meta` parameters:

Parameter	Type	Description
score	Number	The match score of the record.
rank	Number	Ranking of the matching record. Returned if a record is matched using a rank-based rule.
matchRule	String	Threshold value of the match rule. Returned if a record is matched using a threshold-based rule.
businessId	String	Unique business identifier of the master record.
population	String	Certain characteristics of data in the records that you want to match.
data	Object	Data in the master record.

Sample Request (v2)

The following sample request specifies the match fields, such as name, address, and address type, that a published match model uses:

```
{
  "searchControls": {
    "maxRecordsToReturn": 100,
    "searchLevel": "Typical",
    "fileRecordLimit": 1000
  },
  "data": {
    "searchRecord": {
      "name": "DataForge",
      "PostalAddress": [
        {
          "_id": "d264666531bd42e188cb3cea4344d7b1",
          "addressLine1": "047 Sharon Garden",
          "addressType": {
            "Code": "Office",
            "Name": "Office"
          }
        }
      ]
    }
  }
}
```

Sample Response (v2)

When you make a search request, the response retrieves records based on the configured match rules.

The response contains only the required match fields. To view the other fields of a record, use the Read Master Record by Business ID API.

The following sample response contains two matching master records for the specified search values:

```
{
  "searchResult": {
    "totalRecords": 2,
    "fileRecordLimit": 1000,
    "fileRecordCandidatesCount": 2,
    "records": [
      {
        "_meta": {
          "score": 100,
```

```
        "rank": 1,
        "matchRule": "1757065024500",
        "businessId": "MDM0000001AAO0",
        "population": "usa"
      },
      "data": {
        "name": "DataForge",
        "PostalAddress": [
          {
            "_id": "1a87b0e676e84dc4ad366bc20ceab4e5",
            "addressLine1": "047 Sharon Garden",
            "addressType": {
              "Code": "Office",
              "Name": "Office"
            }
          }
        ]
      }
    },
    {
      "_meta": {
        "score": 100,
        "rank": 1,
        "matchRule": "1757065024500",
        "businessId": "MDM0000001AIDS",
        "population": "usa"
      },
      "data": {
        "name": "DataForge",
        "PostalAddress": [
          {
            "_id": "d264666531bd42e188cb3cea4344d7b1",
            "addressLine1": "047 Sharon Garden",
            "addressType": {
              "Code": "Office",
              "Name": "Office"
            }
          }
        ]
      }
    }
  ]
 }
}
```


Job instance API

Use the job instance APIs to manage ingress, egress, and match and merge jobs. You can create and run job instances, search for job instances, and retrieve a short summary or the complete details of a job instance. The APIs use the jobInstance resource.

Create Ingress Job Instance

Use the Create Ingress Job Instance API to create and run an ingress job instance that imports data from an external source system to Business 360 data store.

Before using this API, you must first define an ingress job in Business 360 Console. For more information about defining an ingress job, see *Ingress data*.

The API supports the POST method.

POST request

To create and run an ingress job instance, submit a POST request with the following URI:

```
POST <baseApiURL>/job/public/api/v1/jobInstance/Ingress
```

You can use the following parameters in the request body:

Parameter	Type	Description
jobDefinitionId	String	The internal ID of a job. You can view the internal ID of a job when you open the job definition in Business 360 Console.

POST response

The response is in the JSON format. The response shows the HTTP 200 OK response code and returns the ID of job instance.

POST example

You might use the following sample request to create and run an ingress job instance:

```
POST <baseApiUrl>/job/public/api/v1/jobInstance/Ingress
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{

    "jobDefinitionId": "ingress_org"

}
```

The following sample response contains the HTTP 200 OK response code and the job instance ID:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "id": "714189942313869312"
}
```

Note: Use the value of `id` to retrieve a summary or the complete details of a job instance. For more information about retrieving a summary of a job instance, see "Read Job Instance Summary" on page 135. For more information about retrieving the complete details of a job instance, see "Read Job Instance Details" on page 138.

Create Egress Job Instance

Use the Create Egress Job Instance API to create and run an egress job instance that exports data from Business 360 data store to an external data source.

Before using this API, you must first define an egress job in Business 360 Console. For more information about defining an egress job, see *Egress data*.

The API supports the POST method.

POST request

To create and run an egress job, submit a POST request with the following URI:

```
POST <baseApiURL>/job/public/api/v1/jobInstance/Egress
```

You can use the following parameters in the request body:

Parameter	Type	Description
jobDefinitionId	String	The internal ID of a job. You can view the internal ID of a job when you open the job definition in Business 360 Console.

POST response

The response is in the JSON format. The response shows the HTTP 200 OK response code and returns the ID of job instance.

POST example

You might use the following sample request to create and run an egress job instance:

```
POST <baseApiUrl>/job/public/api/v1/jobInstance/Egress
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{

    "jobDefinitionId": "egress_org"

}
```

The following sample response contains the HTTP 200 OK response code and the job instance ID:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "id": "714195872447352832"
}
```

Note: Use the value of `id` to retrieve a summary or the complete details of a job instance. For more information about retrieving a summary of a job instance, see "Read Job Instance Summary" on page 135. For more information about retrieving the complete details of a job instance, see "Read Job Instance Details" on page 138.

Create Match and Merge Job Instance

Use the Create Match and Merge Job Instance API to create and run a match and merge job that matches records, merges the matched records, performs both matching and merging, or resets matched records.

Before using this API, you must first define a match and merge job in Business 360 Console. For more information about defining a match and merge job, see *Define and run a match and merge job*.

When you run the Create Match and Merge Job Instance API, you can specify the following types of match and merge processes:

- Match Only
- Merge Only
- Match and Merge
- Reset Matched Records

The API supports the POST method.

POST request

To create and run a match and merge job, submit a POST request with the following URI:

```
POST <baseApiURL>/job/public/api/v1/jobInstance/MatchMerge
```

You can use the following parameters in the request body:

Parameter	Type	Description
jobDefinitionId	String	The internal ID of a job. You can view the internal ID of a job when you open the job definition in Business 360 Console.
matchModelId	String	The ID of the match model. You can view the ID of match model when you open it in Business 360 Console.
matchModelVersion	String	The version of the match model.
parameters	Array	List of parameters that specify the details of a match and merge job definition.
parameters > name	String	Name of a parameter for which you want to specify a value. The supported value is processType.
parameters > value	String	Type of match and merge process that the job is configured to perform. You can use one of the following values: - `Match Only`. Identifies matching records. - `Merge Only`. Merges matching records that are identified by the match process based on the merge strategy. - `Match and Merge`. Identifies matching records and merges them based on the merge strategy. - `Reset Matched Records`. Resets the matched records that aren't yet merged and makes the records available for matching again. **Note:** The `matchModelId` and `matchModelVersion` parameters aren't required for the `Reset Matched Records` process type.

Note: The API retrieves the business entity details directly from the job definition, eliminating the need for the `businessEntity` parameter in the request body. If you include the parameter in the request body, the API ignores the parameter and processes the request.

POST response

The response is in the JSON format. The response shows the HTTP 200 OK response code and returns the ID of job instance.

POST example

You might use the following sample request to create and run a match and merge job that identifies matching records:

```
POST <baseApiUrl>/job/public/api/v1/jobInstance/MatchMerge
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

{
  "jobDefinitionId": "demo_match_merge",
  "matchModelId": "person.ruleset1",
  "matchModelVersion": 1,
  "parameters": [
    {
      "name": "processType",
      "value": "Match Only"
    }
  ]
}
```

The following sample response contains the HTTP 200 OK response code and the job instance ID:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "id": "714542403541159936"
}
```

Note: Use the value of `id` to retrieve a summary or the complete details of a job instance. For more information about retrieving a summary of a job instance, see "Read Job Instance Summary" on page 135. For more information about retrieving the complete details of a job instance, see "Read Job Instance Details" on page 138.

Search Job Instances

Use the Search Job Instances API to search for matching job instances based on the job name, the job type, the status of job instances, or the user who started the job instance.

The API supports the POST method.

POST request

To search for ingress, egress, and match and merge jobs, submit a POST request with the following URI:

```
POST <baseApiURL>/job/public/api/v1/search
```

You can use the following parameters in the request body:

Parameter	Type	Description
search	String	Search string to search for matching job name, job type, status of job instances, or user who started the job instance.
pageSize	Number	Number of search results to display on each page. Minimum value is 1.
pageOffset	Number	Optional. Number of pages to skip. For example, pageOffset=2 means that the search must skip the first two pages of the search results. Minimum value is 0.

Parameter	Type	Description
filter	Array	Specifies a list of fields that you want to use to filter the search results.
filters > operator	String	The boolean operator that joins multiple filters. Use AND or OR as the boolean operator. Use AND if `fieldName` has different values. Use OR if `fieldName` has the same values but `fieldValue` has different values.
fieldName	String	Type of value based on which you want to filter job instances. Use one of the following value types: - `name`. Filters job instances based on the specified job name. - `status`. Filters job instances based on the specified job status. - `jobType`. Filters job instances based on the specified job type.
fieldValue	String	Value based on which you want to filter the job instances.

POST response

The response is in the JSON format. The response returns the matching job instances.

The response includes the following parameters:

Parameter	Type	Description
totalRecords	Number	The number of job instances returned in the search.
totalPages	Number	The number of pages returned in the search.
currentPage	Number	The page number from which you view the search results.
jobInstances	Array	The list of job instances returned in the search.
metadataEntities	String	The metadata details of the job instance.
runTimeParameters	String	The runtime parameters that were used to run the job instance.
jobLevelMetrics	String	The key metrics of the job instance.
completedAt	String	Date when the job instance was completed.

Parameter	Type	Description
state	String	Status of job instances.
createdAt	String	Date when the job was created.
createdBy	String	Name of the user who created the job.
updatedAt	String	Date when the job was updated.
updatedBy	String	Name of the user who last updated the job.
startedAt	String	Date when the job instance was started.
startedBy	String	Name of the user who started the job instance.
isCompleted	Boolean	Indicates whether the job instance was completed.

POST example

You might use the following request to search for a job:

```
POST <baseApiUrl>/job/public/api/v1/search
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "search": "*",
    "pageSize": 25,
    "pageOffset": 0,
    "filters": {
        "operator": "or",
        "filter": [
            {
                "fieldName": "jobType",
                "fieldValue": "c360.be.match.finishTraining"
            },
            {
                "fieldName": "jobType",
                "fieldValue": "c360.be.matchmerge"
            },
            {
                "fieldName": "jobType",
                "fieldValue": "c360.be.match.startTraining"
            }
        ]
    }
}
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "totalRecords": 49,
    "totalPages": 2,
    "currentPage": 0,
    "jobInstances": [
        {
            "id": "714542403541159936",
            "name": "seanci1",
```

```
"jobType": "c360.be.matchmerge",
"jobDefinition": {
    "id": "seanci1",
    "caiProcess": {
        "name": "MatchMerge"
    },
    "metadataEntities": [
        {
            "name": "TARGET_ENTITY",
            "entities": [
                {
                    "name": "Baseline Match Model for person Deduplication",
                    "id": "c360.person"
                }
            ]
        }
    ],
    "parameters": [
        {
            "name": "MATCH_MODEL_ID",
            "value": "person.ruleset1",
            "type": "String"
        },
        {
            "name": "MATCH_MODEL_VERSION",
            "value": "1",
            "type": "String"
        },
        {
            "name": "MATCH_MODEL_NAME",
            "value": "Baseline Match Model for person Deduplication",
            "type": "String"
        },
        {
            "name": "SEARCH_INDEX_LOAD_TYPE",
            "value": "ALL",
            "type": "String"
        },
        {
            "name": "PROCESS_TYPE",
            "value": "Match and Merge",
            "type": "String"
        },
        {
            "name": "JOB_FLOW_NAME",
            "value": "MATCH_MERGE",
            "type": "String"
        }
    ]
},
"runTimeParameters": [
    {
        "name": "MATCH_MODEL_ID",
        "value": "person.ruleset1",
        "type": "String"
    },
    {
        "name": "MATCH_MODEL_VERSION",
        "value": "1",
        "type": "String"
    },
    {
        "name": "MATCH_MODEL_NAME",
        "value": "Baseline Match Model for person Deduplication",
        "type": "String"
    },
    {
        "name": "SEARCH_INDEX_LOAD_TYPE",
        "value": "ALL",
        "type": "String"
    },
```

```
                    {
                        "name": "PROCESS_TYPE",
                        "value": "Match and Merge",
                        "type": "String"
                    },
                    {
                        "name": "JOB_FLOW_NAME",
                        "value": "MATCH_MERGE",
                        "type": "String"
                    },
                    {
                        "name": "isTerminationAllowed",
                        "value": true,
                        "type": "Boolean"
                    },
                    {
                        "name": "MODEL_VERSION",
                        "value": "1653588983323",
                        "type": "String"
                    }
                ],
                "jobLevelMetrics": null,
                "_meta": {
                    "completedAt": 1653589344087,
                    "state": "SUCCESS",
                    "createdAt": 1653588985202,
                    "createdBy": "impactci1",
                    "updatedAt": 1653589344087,
                    "updatedBy": "impactci1",
                    "startedAt": 1653588985202,
                    "startedBy": "impactci1",
                    "isCompleted": true
                }
            }
...
```

Read Job Instance Summary

Use the Read Job Instance Summary API to retrieve a brief summary about the job instance. The summary contains the details of runtime parameters and metrics of a job instance.

The API supports the GET method.

GET request

To retrieve the summary of a job instance, submit a GET request with the following URI:

```
GET <baseApiURL>/job/public/api/v1/jobInstance/<jobInstanceId>
```

The GET request contains the following path parameters:

Parameter	Type	Description
jobInstanceId	String	The ID of the job instance.

GET response

The response is in the JSON format. The response body contains the summary of a job instance.

The GET response includes the following parameters:

Parameter	Type	Description
metadataEntities	String	The metadata details of the job instance.
runTimeParameters	String	The runtime parameters that were used to run the underlying taskflow related to the job.
jobLevelMetrics	String	The key metrics of the job instance.
completedAt	String	Date when the job was completed.
state	String	Indicates the status of the job. The job instance can have one of the following statuses: - RUNNING. Indicates that the job is being processed. - SUCCESS. Indicates that the job was successful. - FAILED. Indicates that the job failed. - STOPPED. Indicates that the job was stopped. - WARNING. Indicates that the job completed with warnings. - SKIPPED. Indicates that the job was skipped and not processed by MDM SaaS. - QUEUED. Indicates that the job was queued.
createdAt	String	Date when the job was created.
createdBy	String	Name of the user who created the job.
updatedAt	String	Date when the job was updated.
updatedBy	String	Name of the user who last updated the job.
startedAt	String	Date when the job was started.
startedBy	String	Name of the user who started the job.
isCompleted	Boolean	Indicates whether the job was completed.

Note: All dates are in the Unix epoch time format.

GET example

You might use the following request to retrieve the summary of a job instance based on the job instance ID 93d25c14-c874-438b-8ed0-442944a37a54:

```
GET <baseApiURL>/job/public/api/v1/jobInstance/93d25c14-c874-438b-8ed0-442944a37a54
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXXX
```

The sample response shows the HTTP 200 OK response code and retrieves the summary of a job instance.

```
{
    "id": "93d25c14-c874-438b-8ed0-442944a37a54",
    "name": "ingress_organization",
```

```
"jobDefinition": {
    "id": "internal.c360.ingress.fileImportJob",
    "caiProcess": {
        "name": "MDMFlowFileImportDQ"
    },
    "metadataEntities": [
        {
            "name": "TARGET_ENTITY",
            "entities": [
                {
                    "name": "Organizationwefwef",
                    "id": "c360.organization"
                }
            ]
        },
        {
            "name": "Source_System",
            "entities": [
                {
                    "name": "Default",
                    "id": "b360.default.system"
                }
            ]
        }
    ],
    "parameters": [
        {
            "name": "continueOnError",
            "value": true,
            "type": "Boolean"
        }
    ]
},
"runTimeParameters": [
    {
        "name": "continueOnError",
        "value": true,
        "type": "Boolean"
    },
    {
        "name": "USER_ID",
        "value": "9EKrJA9TwrWbrqwEUn6gA4",
        "type": "String"
    },
    {
        "name": "MODEL_VERSION",
        "value": "1649151390520",
        "type": "String"
    }
],
"jobLevelMetrics": [
    {
        "id": "NUM_OF_ASSETS",
        "name": "Target Assets",
        "type": "PROCESSED",
        "value": 1
    },
    {
        "id": "NUM_OF_INCOMING_RECORDS",
        "name": "Input Rows",
        "type": "INPUT",
        "value": 10000
    },
    {
        "id": "NUM_OF_REC_SUCCEEDED",
        "name": "Success Rows",
        "type": "SUCCESS",
        "value": 10000
    },
    {
        "id": "NUM_OF_REC_FAILED",
```

```
            "name": "Error Rows",
            "type": "FAILED",
            "value": 0
        },
        {
            "id": "NUM_OF_REC_LOAD_CREATED",
            "name": "Success Records",
            "type": "SUCCESS",
            "value": 10000
        },
        {
            "id": "NUM_OF_REC_LOAD_FAILED",
            "name": "Failed Records",
            "type": "FAILED",
            "value": 0
        }
    ],
    "_meta": {
        "completedAt": 1649151874361,
        "state": "SUCCESS",
        "createdAt": 1649151399754,
        "createdBy": "impactci1",
        "updatedAt": 1649151874361,
        "updatedBy": "impactci1",
        "startedAt": 1649151399754,
        "startedBy": "impactci1",
        "isCompleted": true
    }
}
```


Read Job Instance Details

Use the Read Job Instance Details API to retrieve the complete details of a job instance. The details include a brief summary of the job instance and the information about steps related to the job instance.

The API supports the GET method.

GET request

To retrieve the details of a job instance, submit a GET request with the following URI:

```
GET <baseApiURL>/job/public/api/v1/jobInstance/<jobInstanceId>?details=true
```

The GET request contains the following path parameters:

Parameter	Type	Description
jobInstanceId	String	The ID of the job instance.

GET response

The response is in the JSON format. The response body contains the complete details of a job instance.

The GET response includes the following parameters:

Parameter	Type	Description
metadataEntities	String	The metadata details of the job instance.
runTimeParameters	String	The runtime parameters that were used to run the underlying taskflow related to the job.
jobLevelMetrics	String	The key metrics of the job instance.
steps	String	Lists the steps and their details.
completedAt	String	Date when the job was completed.
state	String	Indicates whether the job was successful.
createdAt	String	Date when the job was created.
createdBy	String	Name of the user who created the job.
updatedAt	String	Date when the job was updated.
updatedBy	String	Name of the user who last updated the job.
startedAt	String	Date when the job was started.
startedBy	String	Name of the user who started the job.
isCompleted	Boolean	Indicates whether the job was completed.

Note: All dates are in the Unix epoch time format.

GET example

You might use the following request to retrieve the details of a job instance based on the job instance ID 93d25c14-c874-438b-8ed0-442944a37a54:

```
GET <baseApiURL>/job/public/api/v1/jobInstance/93d25c14-c874-438b-8ed0-442944a37a54?
details=true
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following sample response shows the HTTP 200 OK response code and retrieves the details of a job instance:

```
{
    "id": "93d25c14-c874-438b-8ed0-442944a37a54",
    "name": "ingress_organization",
    "jobDefinition": {
        "id": "internal.c360.ingress.fileImportJob",
        "caiProcess": {
            "name": "MDMFlowFileImportDQ"
        },
        "metadataEntities": [
            {
                "name": "TARGET_ENTITY",
                "entities": [
                    {
                        "name": "Organizationwefwef",
```

```
                    "id": "c360.organization"
                }
            ]
        },
        {
            "name": "Source_System",
            "entities": [
                {
                    "name": "Default",
                    "id": "b360.default.system"
                }
            ]
        }
    ],
    "parameters": [
        {
            "name": "continueOnError",
            "value": true,
            "type": "Boolean"
        }
    ]
},
"runTimeParameters": [
    {
        "name": "continueOnError",
        "value": true,
        "type": "Boolean"
    },
    {
        "name": "USER_ID",
        "value": "9EKrJA9TwrWbrqwEUn6gA4",
        "type": "String"
    },
    {
        "name": "MODEL_VERSION",
        "value": "1649151390520",
        "type": "String"
    }
],
"jobLevelMetrics": [
    {
        "id": "NUM_OF_ASSETS",
        "name": "Target Assets",
        "type": "PROCESSED",
        "value": 1
    },
    {
        "id": "NUM_OF_INCOMING_RECORDS",
        "name": "Input Rows",
        "type": "INPUT",
        "value": 10000
    },
    {
        "id": "NUM_OF_REC_SUCCEEDED",
        "name": "Success Rows",
        "type": "SUCCESS",
        "value": 10000
    },
    {
        "id": "NUM_OF_REC_FAILED",
        "name": "Error Rows",
        "type": "FAILED",
        "value": 0
    },
    {
        "id": "NUM_OF_REC_LOAD_CREATED",
        "name": "Success Records",
        "type": "SUCCESS",
        "value": 10000
    },
    {
```

```
            "id": "NUM_OF_REC_LOAD_FAILED",
            "name": "Failed Records",
            "type": "FAILED",
            "value": 0
        }
    ],
    "steps": [
        {
            "name": "Index for Search",
            "runTimeParameters": [
                {
                    "name": "SEARCH_INDEX_STATUS",
                    "value": {
                        "startedBy": "impactci1",
                        "startTime": 1649151812429,
                        "endTime": 1649151826197,
                        "entityInfo": [
                            {
                                "entityName": "c360.organization",
                                "jobCompleted": true,
                                "jobId": "es-index-25ca8b7ff91ba641-driver",
                                "jobContext": {
                                    "jobCallbackData": {
                                        "jobCallbackAttemptCount": 1
                                    },
                                    "jobStatus": "SUCCESS",
                                    "metrics": {
                                        "indexRecordProcessed": 10000,
                                        "deleteRecordProcessed": 0,
                                        "total_record_count": 10000,
                                        "deleteTimeTaken": 0,
                                        "deleteRecordSuccess": 0,
                                        "deleteRecordFailure": 0,
                                        "indexTimeTaken": 5205,
                                        "updateTimeTaken": 5136,
                                        "indexRecordFailure": 0,
                                        "indexRecordSuccess": 10000,
                                        "record_failure_count": 0
                                    },
                                    "runTimeParameters": {
                                        "jobInstanceId": "93d25c14-
c874-438b-8ed0-442944a37a54",
                                        "tenantId": "6MZknGZ16fLbrn9mRY2C2r",
                                        "stepId": "INDEX",
                                        "entityGuid": "c360.organization",
                                        "startTime": 1649151813374,
                                        "endTime": 1649151826164
                                    },
                                    "outputParameters": {}
                                },
                                "retry": false
                            }
                        ]
                    }
                }
            ],
            "type": "STEP",
            "metrics": [
                {
                    "id": "SEARCH_INDEX_TOTAL_RECORDS",
                    "name": "SEARCH_INDEX_TOTAL_RECORDS",
                    "type": "PROCESSED",
                    "value": 10000,
                    "subMetrics": [
                        {
                            "id": "c360.organization",
                            "name": "c360.organization",
                            "type": "PROCESSED",
                            "value": 10000
                        }
                    ]
```

```
                    },
                    {
                        "id": "SEARCH_INDEX_FAILED_RECORDS",
                        "name": "SEARCH_INDEX_FAILED_RECORDS",
                        "type": "PROCESSED",
                        "value": 0,
                        "subMetrics": [
                            {
                                "id": "c360.organization",
                                "name": "c360.organization",
                                "type": "PROCESSED",
                                "value": 0
                            }
                        ]
                    }
                ],
                "id": "93d25c14-c874-438b-8ed0-442944a37a54_INDEX",
                "_meta": {
                    "completedAt": 1649151826350,
                    "state": "SUCCESS",
                    "createdAt": 1649151812184,
                    "createdBy": "impactci1",
                    "updatedAt": 1649151826350,
                    "updatedBy": "impactci1",
                    "startedAt": 1649151812184,
                    "startedBy": "impactci1",
                    "isCompleted": true
                }
...
```


Export and import API

Use the Business 360 REST API to migrate assets and other objects between organizations.

To use the REST API requests, the source and target organizations must have the appropriate license.

To migrate objects, you export them from the source organization and then import them into the target organization.

When you export assets, you can choose whether to include dependent objects. During the import operation, you can choose which assets to import.

For more information about export and import, see Export and Import.

Data anonymization

Data anonymization is a process that protects sensitive information by deleting or hiding identifiers of records. You can anonymize data using the Business 360 REST APIs.

For example, if a customer requests data anonymization, you can use the Business 360 REST APIs to unmerge source records from a master record. You can then update the customer's first name, last name, and date of birth to anonymized values in the source record.

For more information about data anonymization, see *Anonymize data in MDM SaaS*.

Running MDM SaaS jobs through managed APIs

To run MDM SaaS jobs by using public REST APIs, you can create and use managed APIs.

All MDM SaaS jobs use predefined Application Integration processes. You can create managed APIs for these processes in API Center and use the managed APIs as public APIs.

For more information about creating managed APIs, see API Management in the *API Center* help.

Modernization REST APIs

Use the modernization REST APIs to migrate third-party MDM objects from enterprise providers, such as IBM and Semarchy, to MDM SaaS.

The modernization REST APIs require a ZIP file that contains multiple canonical JSON files. The canonical JSON files contain the configuration details of the third-party MDM objects. The number of JSON files in the archive depends on the number of MDM objects.
Note: You can't use the modernization REST APIs to migrate objects from MDM Hub to MDM SaaS.

Use the generate canonical schema API to retrieve the standardized schemas for the required and optional JSON files. You can then create the canonical JSON files based on the metadata in the response.

Before you begin, ensure that you have the required canonical JSON files ready.

The following table describes the required canonical JSON files:

Required JSON File	Description
Migration Mapping Index	List of all migration mapping JSON files included in the ZIP file.
Migration Mapping	Field mapping details of the source and target business entities.

The following table describes the optional JSON files that you can include in the canonical archive file:

Optional JSON File	Description
Data Model	Field properties of the target fields that you map in the migration mapping JSON file.
Reference Data Mapping	Mapping details of reference data objects from third-party providers and code lists from Reference 360.
Model Configuration Overwrites	Field properties, such as searchable, facetable, and auto suggest, of business entity fields in the migration mapping JSON file.
Survivorship	Survivorship rules of source entity fields.
Match Configuration	Match rules set configurations of source entity fields.
Security Configuration	Field-level and record-level privileges assigned to user roles.
Source System	Source systems that are associated with source entities.

Optional JSON File	Description
Distinct Source System	Distinct source systems that are associated with source entities.
Hierarchy Relationship	Hierarchical relationships between source entities.
Network Relationship	Non-hierarchical relationships between source entities.
Users	Details of user accounts in source entities.

Guidelines for creating canonical files

Before you create canonical JSON files, consider the following guidelines:

- Identify and analyze the source business entities and their fields that you plan to migrate to MDM SaaS. Review the data type of each field and resolve any mismatches between the source and target entities before beginning the migration.
- Create a migration mapping JSON file for each source business entity. Define the field-level mappings between the source and target business entities, and ensure data types match the target business entity.
- In the migration mapping index JSON file, list all migration mapping JSON files and include the required parameter for each entry.
- Place the migration mapping index JSON file at the root level of the ZIP archive, along with the migration mapping JSON files that are referenced in the index file.

Create migration mappings and index

After you run the generate canonical schema API, you can use the metadata in the response to create the required canonical JSON files. To modernize third-party MDM objects, you require the migration mapping index and migration mapping JSON files.

The following table describes the contents of the migration mapping index and migration mapping JSON files:

JSON Files	Description
Migration mapping index	Contains the names of the migration mapping files to include in the modernization process and mapping details of source and target entities. You can list all migration mapping JSON files that you want to include in the modernization process in this file. The APIs consider only files that have an entry in the migration mapping index file as candidates for modernization.
Migration mapping	Contains mapping details of fields mapped in the source and target entities. You can create a migration mapping file for each source entity that you plan to modernize. For example, you can create an file named Organization-MigrationMapping for a source entity called Organization and another file named Person-MigrationMapping for a source entity called Person. MDM SaaS assigns the default field properties to the target field when you map source entity fields to predefined MDM SaaS fields. However, if you map the source entity fields to custom fields in MDM SaaS, you can define the properties for those custom fields in the data model JSON file.

Migration mapping

Create a migration mapping JSON file to define the field mappings of the source and target entities. In this file, specify the source and target entity details, source and target field mappings, and data types of custom fields mapped in target entities.

The following table describes the root parameters that you can define in the migration mapping JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as MIGRATION_MAPPING.
generationDate	Date and time when the file was created. Specify the date and time value in MM/DD/YYYY HH:mm:ss format.
checksum	Optional. Checksum value for file integrity verification.
category	Category of the mapping used in the file. Specify the category as BUSINESS_ENTITY.
mapping	List of fields to map between source and target business entities.
name	Name of the target business entity, such as Person.
guid	Internal identifier of the target business entity, c360.person.

The following table describes the key parameters that you can define in the mapping parameter:

Parameter Name	Description
sourceEntity	Name of the source business entity from which the data is migrated, such as Person.
sourceElement	Name of the field to map in the source business entity, such as displayName.
targetEntity	Internal identifier of the target business entity to which the data will be mapped to in MDM SaaS, such as c360.person.
targetElement	Internal identifier of the target field in the target business entity, such as x_lastname_custom.
targetElementType	Optional. Data type of the target business entity. You can configure the field name to include data type and length or precision in parentheses, such as String(255). The targetElementType parameter supports the following data types: - String - Date - Decimal - Integer - Boolean - Picklist If you don't specify a data type, the default data type of the target field is assigned to the field.
targetFieldPath	Path to the target field. Specify the path to the target field in the <targetEntity>.<targetElement> format. For example, specify the value as c360.person.x_lastname_custom for a target field in the Person business entity.

To create the migration mapping JSON file, use the following sample schema:

```
{
  "formatType": "MIGRATION_MAPPING",
  "generationDate": "02/06/2026 09:41:32",
  "checksum": null,
  "category": "BUSINESS_ENTITY",
  "mapping": [
    {
      "sourceEntity": "Person",
      "sourceElement": "FullName",
      "targetEntity": "c360.person",
      "targetElement": "fullName",
      "targetElementType": "String(255)",
      "targetFieldPath": "c360.person.fullName"
    }
    {
      "sourceEntity": "Person",
      "sourceElement": "displayName",
      "targetEntity": "c360.person",
      "targetElement": "x_lastname_custom",
      "targetElementType": "String(255)",
      "targetFieldPath": "c360.person.x_lastname_custom"
    }
    {
      "sourceEntity": "Person",
      "sourceElement": "PolicyNumber",
      "targetEntity": "c360.person",
      "targetElement": "x_policyNumber",
      "targetElementType": "String(255)",
      "targetFieldPath": "c360.person.x_insurance.x_policyNumber"
    }
    {
      "sourceEntity": "Person",
      "sourceElement": "Employee Name",
      "targetEntity": "c360.person",
      "targetElement": "x_employeeName",
      "targetElementType": "String(255)",
      "targetFieldPath": "c360.person.x_employmentDetails.x_employer.x_employeeName"
    }
  ],
  "name": "Person",
  "uniqueName": "Person",
  "originalName": null,
  "guid": "c360.person"
}
```

Migration mapping index

Create the migration mapping index JSON file to add entries to the migration mapping JSON files that you plan to include in the modernization process. In the index file, specify the names of the migration mapping JSON files and also the mapping details of source and target entities.

The following table describes the key parameters that you can define in the migration mapping index JSON file:

Parameters	Description
formatType	Type of the JSON file. Specify the type as MIGRATION_MAPPING_INDEX.
generationDate	Date and time when the file was created. Specify the date and time value in MM/DD/YYYY HH:mm:ss format.
checksum	Optional. Checksum for file integrity.

Parameters	Description
category	Category of the mapping used in the file. Specify the category as BUSINESS_ENTITY.
entries	List of migration mapping JSON files that you plan to include in the modernization process.

The following table describes the key parameters that you can define within the entries parameter:

Parameter Name	Description
sourceGUID	Unique identifier of the source business entity. The sourceGUID field can be empty.
targetGUID	Internal identifier of the target business entity, such as c360.organization.
baseObjectSource	Optional. Specifies whether the source entity is a base object source column. Set the value to false.
mappingDocumentName	Name of the migration mapping JSON file, such as Person-MigrationMapping. Specify the file name in the <Index_File_Name>-MigrationMapping.json format.
sourceEntity	Name of the source business entity, such as Account.
targetEntity	Name of the target business entity, such as Person.
onPremOriginalBEName	Optional. Specify the value as null. **Note:** You don't require this parameter for third-party MDM objects.
onPremRootBE	Optional. Specify the value as null. **Note:** You don't require this parameter for third-party MDM objects.

To create the migration mapping index JSON file, use the following sample schema:

```
{
  "formatType": "MIGRATION_MAPPING_INDEX",
  "generationDate": "02/06/2026 09:41:31",
  "checksum": null,
  "category": "BUSINESS_ENTITY",
  "entries": [
    {
      "mappingDocumentName": "Organization-MigrationMapping",
      "sourceEntity": "CreditCard",
      "sourceGUID": null,
      "targetEntity": "Organization",
      "targetGUID": "c360.organization",
      "baseObjectSource": false,
      "onPremRootBE": "Organization",
      "onPremOriginalBEName": "CreditCard"
    },
    {
      "mappingDocumentName": "Person-MigrationMapping",
      "sourceEntity": "Person",
      "sourceGUID": null,
      "targetEntity": "Person",
      "targetGUID": "c360.person",
      "baseObjectSource": false,
      "onPremRootBE": "null",
      "onPremOriginalBEName": "null"
    }
  ]
}
```

Naming convention for required canonical files

The modernization REST APIs determine the type of each JSON file in the canonical archive based on its file name.

The following table describes the recommended file name format for the canonical files:

File Type	Format
Migration mapping index file	<Index_File_Name>-MigrationMapping.json Replace <Index_File_Name> with a name that reflects your project, such as SaasIndex. Ensure that the file name uses the suffix -MigrationMapping.
Migration mapping file	<Entity_Name>-MigrationMapping.json Replace <Entity_Name> with the name of the business entity, such as Person. Ensure that the file name matches the mappingDocumentName attribute value specified in the migration mapping index JSON file.

Note: Use the recommended naming convention for the JSON files in the archive so that the modernization APIs can identify them correctly.

Create optional JSON files

You can include optional JSON files in the canonical archive to enhance data governance, security, and survivorship capabilities of third-party MDM objects.

You can include the following optional JSON files in the canonical archive:

- "Data model" on page 149
- "Reference data mapping" on page 153
- "Survivorship" on page 159
- "Match configuration" on page 161
- "Security configuration overwrites" on page 167
- "Source system" on page 170
- "Distinct source systems" on page 172
- "Hierarchy relationship" on page 173
- "Network relationship" on page 175
- "Users" on page 176
- "Model configuration overwrites" on page 177

Data model

Create the data model JSON file to define the field properties of custom target fields in migration mapping JSON files. The modernization process assigns default properties of MDM SaaS business entity fields to predefined target fields.

The following table describes the key parameters that you can define in the data model JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as DATA_MODEL_CHANGE.
generationDate	Date and time when the file was created. Specify the date and time value in MM/DD/YYYY hh:mm:ss format.
checksum	Optional. Checksum for file integrity.
category	Category of the mapping used in the file. Specify the category as BUSINESS_ENTITY.
businessEntityGuid	Internal identifier of the target business entity.
changes	Field properties of custom target fields in migration mapping JSON files.
path	Path to the custom field in the target entity. Specify the path to a target field in the <targetEntity> format. For example, specify the value as c360.organization for a target field in the Organization business entity.
fieldGroupName	Optional. Specifies the custom field groups defined in the target business entity. The value can be empty if there are no field groups. Specify the path to a custom nested field group in the <FieldGroup1>.<FieldGroup2>....<FieldGroupN> format. For example, specify the value as PostalAddress.x_HomeAddress for a nested field group in the Organization business entity.
allowMany	Specifies whether multiple values are allowed for the field.
smartFieldGroup	Specifies whether the custom target field is a part of smart fields.
fieldDesignator	Properties of the custom target field.

The following table describes the key parameters that you can define within the fieldDesignator parameter:

Parameter Name	Description
id	Unique identifier of the custom field in the target business entity.
name	Internal identifier of the custom field in the target business entity.
label	Display name of the custom field in the target business entity.
description	Description of the custom field in the target business entity.

Parameter Name	Description
type	Data type of the custom field in the target business entity. Use one of the following values: - String - Picklist - Date - Double - Boolean - Integer
lookupCodeList	Name of the code list mapped to the target picklist fields. The value can be empty if the field property is not applicable.
masterCodeList	Name of the master code list mapped to the dependent picklist field in the target entity. Specify the value as null if the field property is not applicable.
beReferenceEntity	Business entity referenced to the field. You can leave the field empty if there is no references to other business entities.
length	Length of the custom field.
minLength	Minimum length of the custom field.
maxLength	Maximum length of the custom field.
precision	Precision of numeric fields, such as Double.
scale	Numeric scale used for numeric fields, such as Double.
mandatory	Specifies whether the custom field is a mandatory field in the target business entity. Use either true or false.
allowMany	Boolean. Specifies whether multiple values are allowed for the custom field. Use either true or false.
unique	Boolean. Specifies whether the custom field must be a unique field in the target business entity. Use either true or false.
position	Position or order of the custom field in the user interface.
searchable	Boolean. Specifies whether the custom field is searchable in the target business entity. Use either true or false.
autosuggest	Boolean. Specifies whether the auto suggest property is enabled for the custom field in the target business entity. Use either true or false.
facetable	Boolean. Specifies whether the custom field is facetable in the target business entity. Use either true or false.
reportable	Boolean. Specifies whether the custom field is reportable in the target business entity. Use either true or false.

The following table describes the data types of business entity fields:

Data Type	Description
String	Specifies the maximum character length, such as 255.
Picklist	Specifies the picklist fields that contain a list of values. If you specify picklist fields, then lookupCodeList field is required. The masterCodeList field is required for dependent picklist fields.
Dependent Picklist	Specifies the picklist fields that are dependent on another picklist field value. For example, picklist values of the States field dependent on the picklist values of the Countries field. If you specify dependent picklist fields, then masterCodeList must reference the parent picklist.
Date	Specifies the date data type.
Double	Specifies the numeric fields with decimals, such as currency and measurements.
Boolean	Specifies a boolean value. Use either true or false.
Integer	Specifies the numeric fields.

To create the data model JSON file, use the following sample schema:

```
{
  "formatType": "DATA_MODEL_CHANGE",
  "generationDate": "02/06/2026 09:41:31",
  "checksum": null,
  "category": "BUSINESS_ENTITY",
  "businessEntityGuid": "c360.person",
  "changes": [
    {
      "path": "c360.person",
      "fieldGroupName": null,
      "allowMany": false,
      "smartFieldGroup": false,
      "fieldDesignator": {
        "id": 0,
        "name": "x_custom",
        "label": "Account Type",
        "description": null,
        "type": "String",
        "lookupCodeList": null,
        "masterCodeList": null,
        "beReferenceEntity": null,
        "length": 255,
        "minLength": 0,
        "maxLength": 255,
        "precision": 0,
        "scale": 0,
        "mandatory": true,
        "allowMany": false,
        "unique": false,
        "position": 0,
        "searchable": false,
        "autosuggest": false,
        "facetable": false,
        "reportable": false
      }
      {
      "path": "c360.person",
      "fieldGroupName": x_insurance,
      "allowMany": false,
      "smartFieldGroup": false,
      "fieldDesignator": {
```

```
          "id": 0,
          "name": "x_policyNumber",
          "label": "Policy Number",
          "description": null,
          "type": "String",
          "lookupCodeList": null,
          "masterCodeList": null,
          "beReferenceEntity": null,
          "length": 255,
          "minLength": 0,
          "maxLength": 255,
          "precision": 0,
          "scale": 0,
          "mandatory": true,
          "allowMany": false,
          "unique": false,
          "position": 0,
          "searchable": false,
          "autosuggest": false,
          "facetable": false,
          "reportable": false
        }
        {
        "path": "c360.person",
        "fieldGroupName": x_employmentDetails.x_employer,
        "allowMany": false,
        "smartFieldGroup": false,
        "fieldDesignator": {
          "id": 0,
          "name": "x_employeeName",
          "label": "Employee Name",
          "description": null,
          "type": "String",
          "lookupCodeList": null,
          "masterCodeList": null,
          "beReferenceEntity": null,
          "length": 255,
          "minLength": 0,
          "maxLength": 255,
          "precision": 0,
          "scale": 0,
          "mandatory": true,
          "allowMany": false,
          "unique": false,
          "position": 0,
          "searchable": false,
          "autosuggest": false,
          "facetable": false,
          "reportable": false
        }
      }
    ],
    "name": "Person",
    "uniqueName": "Person"
  }
```


Naming convention for data model JSON file

The modernization APIs determine the type of each JSON file in the canonical archive based on its file name.

The following table describes the recommended file name format for the data model JSON file:

File Type	Format
Data model	<mappingDocumentName>-ModelChanges.json Replace <mappingDocumentName> with the mappingDocumentName attribute value in the migration mapping index file. For example, if the mappingDocumentName attribute value is Organization, then specify the file name as Organization-ModelChanges.json. Ensure that the file name uses the suffix -ModelChanges.json. Additionally, ensure that the file name matches the attribute values of the targetEntity and mappingDocumentName specified in the migration mapping index file.

Note: Use the recommended naming convention for the JSON files in the archive so that the modernization APIs can identify them correctly.

Reference data mapping

Create the reference data mapping JSON files to define field mappings between third-party reference data objects and Reference 360 code lists.

Create the following JSON files to modernize and migrate third-party reference data:

- Reference 360 Mapping Index
- Reference 360 Mapping
- Reference 360 Model Change

The following table describes the contents of the Reference 360 mapping index, migration, and model changes JSON files:

JSON File	Description
Reference 360 mapping index	Contains the names of the mapping file to include in the modernization process along with the mapping details of reference data objects from third-party providers and Reference 360 code lists. You can list all mapping files that you want to include in the modernization process in this file. The APIs consider only files that have an entry in the mapping index file as candidates for modernization.
Reference 360 mapping	Contains the field mapping details between third-party reference data objects and Reference 360 code lists. You can create a mapping file for each third-party lookup table that you plan to modernize. For example, you can create a file named LookupCountryType-R360Mapping for a lookup table called LookupCountryType and another file named LookupStateType-R360Mapping for a lookup table called LookupStateType.
Reference 360 model changes	Contains the field properties of target fields in the Reference 360 code lists.

Reference 360 mapping index

Create the reference 360 mapping index JSON file to add entries to the Reference 360 mapping files that you plan to include in the modernization process. In this file, specify the name of the Reference 360 mapping JSON files and also the mapping details between reference data objects and Reference 360 code lists.

The following table describes the key parameters that you can define in the reference data mapping index file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as MIGRATION_MAPPING_INDEX.
category	Category of the mapping file. Specify the category as REFERENCE.
entries	List of Reference 360 mapping JSON files that you plan to include in the modernization process.

The following table describes the key parameters that you can define within the entries array:

Parameter Name	Description
mappingDocumentName	Name of the Reference 360 mapping JSON file.
sourceEntity	Name of the reference data object in the source entity.
targetEntity	Name of the Reference 360 code list.
sourceGUID	Optional. Unique identifier of the reference data object in the source business entity.
targetGUID	Internal identifier of the Reference 360 code list.
baseObjectSource	Optional. Specifies whether the source entity is a base object source column. Set the value to false.
onPremOriginalBEName	Optional. Specify the value as null. **Note:** You don't require this parameter for third-party MDM objects.
onPremRootBE	Optional. Specify the value as null. **Note:** You don't require this parameter for third-party MDM objects.

To create the Reference 360 mapping index JSON file, use the following sample schema:

```
{
  "formatType": "MIGRATION_MAPPING_INDEX",
  "generationDate": "02/06/2026 09:41:30",
  "checksum": null,
  "category": "REFERENCE",
  "entries": [
    {
      "mappingDocumentName": "LookupCountryType-R360Mapping",
      "sourceEntity": "C_LU_COUNTRY",
      "sourceGUID": null,
      "targetEntity": "LookupCountryType",
      "targetGUID": null,
      "baseObjectSource": false,
      "onPremRootBE": null,
      "onPremOriginalBEName": null
    }
    {
      "mappingDocumentName": "LookupStateType-R360Mapping",
      "sourceEntity": "C_LU_State",
      "sourceGUID": null,
      "targetEntity": "LookupStateType",
      "targetGUID": null,
      "baseObjectSource": false,
      "onPremRootBE": null,
```

```
        "onPremOriginalBEName": null
      }
    ]
  }
```

Reference mapping

Create the reference mapping JSON file to define field mapping details between third-party reference data objects and fields in the Reference 360 code lists.

The following table describes the key parameters that you can define in the Reference Mapping JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as MIGRATION_MAPPING.
category	Category of the mapping used in the file. Specify the value as REFERENCE.
mapping	List of fields to map between third-party reference data objects tables and Reference 360 code lists.
name	Name of the Reference 360 code list used in the mapping.

The following table describes the key parameters that you can define within the mapping array:

Parameter Name	Description
sourceEntity	Name of the reference data object in the source entity.
sourceElement	Name of the field to map in the third-party reference data object..
targetEntity	Name of the Reference 360 code list.
targetElement	Name of the field to map in the Reference 360 code list.
targetFieldPath	Optional. Path to the target field in the Reference 360 code list.

To create the reference mapping JSON file, use the following sample schema:

```
{
  "formatType": "MIGRATION_MAPPING",
  "generationDate": "02/06/2026 09:41:31",
  "checksum": null,
  "category": "REFERENCE",
  "mapping": [
    {
      "sourceEntity": "C_LU_ADDRESS",
      "sourceElement": "ADDRESS_TYPE_DISP",
      "targetEntity": "LookupAddressType",
      "targetElement": "Name",
      "targetElementType": null,
      "targetFieldPath": null
    },
    {
      "sourceEntity": "C_LU_ADDRESS",
      "sourceElement": "ADDRESS_TYPE",
      "targetEntity": "LookupAddressType",
      "targetElement": "Code",
      "targetElementType": null,
      "targetFieldPath": null
    }
```

```
    ],
    "name": "LookupAddressType",
    "uniqueName": null,
    "originalName": null,
    "guid": null
  }
```

Reference model change

Create the reference model change JSON file to define the properties of the fields mapped in the Reference 360 code list. The Reference 360 model change JSON file is an optional file because you can't define custom fields in Reference 360 code lists for third-party reference data objects.

The following table describes the key parameters that you can define in the reference model change JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as REFERENCE_MODEL_CHANGE.
category	Category of the mapping used in the file. Specify the category as REFERENCE.
codelistName	Name of the target business entity where the code list is used. Ensure that the values defined in targetEntity and codelistName match exactly.
changes	Properties of the fields in the code list.

The following table describes the key parameters that you can define within the changes parameter:

Parameter Name	Description
id	Unique identifier of the target field.
name	Internal identifier of the target field.
label	Display name of the target field.
description	Description of the target field.
type	Data type of the target field. Use one of the following values: - String - Picklist - Date - Double - Boolean - Integer
lookupCodeList	Optional. Name of the code list mapped to the target picklist field.
masterCodeList	Optional. Name of the code list mapped to the dependent picklist field in the target entity.
beReferenceEntity	Optional. Business entity referenced to the field.
length	Length of the field.
minLength	Minimum length of the target field.

Parameter Name	Description
maxLength	Maximum length of the target field.
precision	Precision of numeric target fields, such as Double.
scale	Numeric scale used for numeric target fields, such as Double.
mandatory	Specifies whether the target field is mandatory. Use either true or false.
allowMany	Boolean. Specifies whether multiple values are allowed for the field. Use either true or false.
unique	Boolean. Specifies whether the target field must be a unique field. Use either true or false.
position	Position or order of the target field in the user interface.
searchable	Boolean. Specifies whether the target field is searchable. Use either true or false.
autosuggest	Boolean. Specifies whether the auto suggest property is enabled for the target field. Use either true or false.
facetable	Boolean. Specifies whether the target field is facetable. Use either true or false.
reportable	Boolean. Specifies whether the target field is reportable. Use either true or false.

To create the reference model change JSON file, use the following sample schema:

```
{
  "formatType": "REFERENCE_MODEL_CHANGE",
  "generationDate": "02/06/2026 09:41:31",
  "checksum": null,
  "category": "REFERENCE",
  "codelistName": "LookupAddressType",
  "parentCodelistName": null,
  "changes": [
    {
      "id": 0,
      "name": "Name",
      "label": null,
      "description": null,
      "type": "String",
      "lookupCodeList": null,
      "masterCodeList": null,
      "beReferenceEntity": null,
      "length": 0,
      "minLength": 0,
      "maxLength": 0,
      "precision": 0,
      "scale": 0,
      "mandatory": false,
      "allowMany": false,
      "unique": false,
      "position": 0,
      "searchable": false,
      "autosuggest": false,
      "facetable": false,
      "reportable": false
    },
    {
      "id": 0,
      "name": "Code",
      "label": null,
      "description": null,
```

```
        "type": "String",
        "lookupCodeList": null,
        "masterCodeList": null,
        "beReferenceEntity": null,
        "length": 0,
        "minLength": 0,
        "maxLength": 0,
        "precision": 0,
        "scale": 0,
        "mandatory": false,
        "allowMany": false,
        "unique": false,
        "position": 0,
        "searchable": false,
        "autosuggest": false,
        "facetable": false,
        "reportable": false
      }
    ],
    "name": "LookupAddressType"
  }
```

Naming convention for reference data mapping files

The modernization APIs identify the type of each JSON file in the canonical archive based on its file name.

The following table describes the recommended file name format for the reference 360 mapping index, reference mapping, and reference model change JSON files:

File Type	Format
Reference 360 migration mapping index file	<Index_File_Name>-R360MigrationMapping.json Replace <Index_File_Name> with a name that reflects your project, such as SaasIndex-R360MigrationMapping.json. Ensure that the file name uses the suffix -R360MigrationMapping.
Reference 360 migration mapping file	<Entity_Name>-R360Mapping.json Replace <Entity_Name> with the name of the business entity, such as Person. Ensure that the file name matches the mappingDocumentName attribute value specified in the reference 360 migration mapping index file.
Reference 360 model changes file	<mappingDocumentName>-ReferenceModelChanges.json Replace <mappingDocumentName> with the mappingDocumentName attribute value in the Reference 360 Migration Mapping Index file. For example, if the mappingDocumentName attribute value is LookupAddressType, then specify the file name as LookupAddressType-ReferenceModelChanges.json. Ensure that the file name matches the attribute value of the mappingDocumentName specified in the Reference 360 Migration Mapping Index file. Additionally, the targetEntity attribute value specified in the index file must match the name or codelistName attribute value specified in the reference mapping and reference model change files.

Note: Use the recommended naming convention for the JSON files in the archive so that the modernization APIs can identify them correctly.

Survivorship

Create the survivorship JSON file to define the survivorship rules of source entity fields that you want migrate to target fields in MDM SaaS. In this file, specify how trust scores decay over time, assign ranks to source systems, and configure field-level survivorship rules.

The following table describes the key parameters that you can define in the survivorship JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as TRUST_SURVIVORSHIP.
category	Category of the mapping used in the file. Specify the category as TRUST_SURVIVORSHIP.
entityName	Internal identifier of the target business entity, such as c360.person.
decayRule	Rule that identifies the trusted value based on the trust levels and the decay rate of the field values.

The following table describes the key parameters that you can define within the decayRule parameter:

Parameter Name	Description
maxTrustScore	Highest trust score that you can configure. The highest value you can specify is 1.
minTrustScore	Lowest trust score that you can configure. The lowest value you can specify is 0.1.
decayUnit	Unit of time for the decay period, such as Day, Month, or Year.
decayPeriod	Time taken for the trust score to decay.
decayPattern	Pattern in which the trust score decreases during the decay period. Specify one of the following values: - Linear - Rapid Initial - Slow Later - Slow Initial - Rapid Later
systemRanking	Source systems for which you want to assign ranking in MDM SaaS. In MDM SaaS, you can rank source systems as part of the survivorship configuration. A higher rank indicates a higher trust for that source system. After modernizing objects, MDM SaaS automatically assigns the highest rank, Rank 0, to the Informatica Customer 360 or Default source system based on the business application you use. You can manually adjust the source system rankings in Business 360 Console.
fields	Fields for which the survivorship rules are applied in the target business entities.

The following table describes the key parameter that you can define within the systemRanking parameter:

Parameter Name	Description
sourceSystem	List of source systems that are ranked based on their trustworthiness.

The following table describes the key parameters that you can define within the fields parameter:

Attribute Name	Description
fieldName	Name of the target field for which the survivorship rules apply, such as x_lastname_custom.
rules	Survivorship rules to migrate to the target field.

To create the survivorship JSON file, use the following sample schema:

```
{
  "formatType": "TRUST_SURVIVORSHIP",
  "generationDate": "02/06/2026 09:41:35",
  "checksum": null,
  "category": "TRUST_SURVIVORSHIP",
  "entities": [
    {
      "entityName": "c360.person",
      "ruleConfiguration": {
        "decayRule": {
          "maxTrustScore": "0.1",
          "minTrustScore": "0.1",
          "decayUnit": "Month",
          "decayPeriod": "12",
          "decayPattern": "Slow Initial Rapid Later"
        },
        "systemRanking": [
          {
            "sourceSystem": "dnb"
          }
        ]
      },
      "fields": [
        {
          "fieldName": "x_lastname_custom",
          "rules": []
        }
      ]
    }
  ]
}
```

Guidelines for creating the survivorship JSON file

Consider the following guidelines when you create the survivorship JSON file:

- Ensure that you include all business entities that require survivorship rules in the entities field.
- Set the entityName value to the business entity name.
- Define the decay rule parameters and source system for the ruleConfiguration field.
- List all fields with survivorship rules in the fields parameter and specify the fieldName value.
- Optionally, include specific survivorship rules in the rules attribute.
- Validate the JSON schema and ensure all required fields are present.
- Use Survivorship.json as the file name.

Match configuration

Create the match configuration JSON file to define the match configurations of source entity fields that you want to migrate to target fields in MDM SaaS.

The following table describes the key parameters that you can define in the match configuration JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as MATCH_CONFIGURATION.
category	Category of the mapping used in the file. Specify the category as MATCH_CONFIG.
matchDefinitions	Match model configurations defined for a business entity. Specify at least one match definition.

The following table describes the key parameters that you can define within the matchDefinitions array:

Parameter Name	Description
entityName	Internal identifier of the target business entity, such as c360.person.
modelName	Name of the match model.
modelId	Optional. Unique identifier of the model.
modelDescription	Optional. Description of the model.
modelObjective	Objective of the match model. Specify the objective as Resolve Duplicates.
defaultPopulation	Default population used in the match model, such as usa.
declarativeRules	List of declarative match rules used in the match model.
name3InfoItem	Optional. Additional information about the NAME3 algorithm used in the match model.
candidateSelectionCriteria	Optional. Criteria used for selecting the match candidates.

The following table describes the key parameters that you can define within the candidateSelectionCriteria array:

Parameter Name	Description
fieldType	NAME3 field type used for matching. NAME3 is an algorithm that generates match scores and rule sets.
fieldName	Internal identifier of the target field.

Parameter Name	Description
keyGenerationalLevel	Optional. Specifies the key generation level specified for generating the match keys. Use one of the following values: - Extended - Limited - Standard
candidateSearchLevel	Optional. Match candidate search level. Use one of the following values: - Exhaustive - Narrow - Typical - Extreme

The following table describes the key parameters that you can define within the rulePropertyThresholds array:

Parameter Name	Description
matchStrategy	Strategy used for matching, such as FUZZY or EXACT.
mergeStrategy	Strategy used for merging records.
matchCriterion	Match criteria used for FUZZY match strategy, such as Person_Name.
matchLevel	Indicates the level of fuzzy matching.
description	Optional. Specifies the description of the match rule.
automatedMerge	Optional. Threshold score for automated merge.

The following table describes the key parameters that you can define within the requiredExactFields array:

Parameter Name	Description
fieldName	Internal identifier of the target field.
comparisonOutcome	Expected comparison outcome of match fields.
sourceColumnName	Optional. Display name of the source object column, such as C_PARTY|DISPLAY_NAME.
matchColumnName	Optional. Display name of the match column in the source entity, such as Organization_Name.
segmentMatching	Optional. Specifies whether segment matching is enabled.
matchSegmentDataWithOtherData	Optional. Specifies whether segment data matches with other data.

Parameter Name	Description
segmentValues	Optional. List of segment values.
nullMatchIndicator	Optional. Specifies whether null matching is enabled.

The following table describes the key parameters that you can define within the requiredFuzzyFields array:

Parameter Name	Description
fieldType	NAME3 field type used for matching.
fieldName	Internal identifier of the target field.
comparisonOutcome	Expected comparison outcome of match fields.
sourceColumnName	Optional. Display name of the source object column, such as C_PARTY|DISPLAY_NAME.
matchColumnName	Optional. Display name of the match column in the source entity, such as Organization_Name.

The following table describes the populations that you can use within the matchDefinitions parameter:

Population	Description
Arabic	Standard script for the Arabic population.
Arabic_m	Contains a mix of Arabic, Romanized Arabic, English, and Arabicized English scripts for the Arabic population.
Arabic_r	Romanized Standard script for the Arabic population.
Argentina	Standard script for the Argentine population.
Australia	Standard script for the Australian population.
Belgium	Standard script for the Belgian population.
Brasil	Standard script for the Brazilian population.
Bulgaria_c	Bulgarian Cyrillic Standard script for the Bulgarian population.
Bulgaria_r	Bulgarian Romanized script for the Bulgarian population.
Canada	Standard script for the Canadian population.
Chile	Standard script for the Chilean population.
Chinese	Standard script for the Chinese population.
Chinese_i	Traditional Chinese Standard script for the Chinese population.
Chinese_r	Chinese Romanized Standard script for the Chinese population.

Population	Description
Chinese_s	Simplified Chinese Standard script for the Chinese population.
Chinese_t	Traditional Chinese Standard script for the Chinese population.
Colombia	Standard script for the Colombian population.
Croatia	Standard script for the Croatian population.
Czech	Standard script for the population of Czech Republic.
Denmark	Denmark Standard script for the Danish population.
Estonia	Standard script for the Estonian population.
Finland	Standard script for the Finnish population.
France	Standard script for the French population.
Gaelic	Standard script for the Gaelic-speaking population.
Germany	Standard script for the German population.
Greek	Standard script for the Greek population.
Greek_l	Greek Mixed Standard script for the Greek population.
Hebrew	Standard Hebrew script for the Israeli population.
Hk_r	Romanized Standard script for the population of Hong Kong.
Hungary	Standard script for the Hungarian population.
India	Standard script for the Indian population.
Indo_chin_r	Standard script for the Indo-Chinese population.
Indonesia	Standard script for the Indonesian population.
International	International Latin-1 Standard script.
Ireland	Standard script for the Irish population.
Italy	Standard script for the Italian population.
Japan	Standard script for the Japanese population.
Japan_r	Romanized Standard script for the Japanese population.
Kazakhstan	Standard script for the population of Kazakhstan.
Korean	Standard script for the Korean population.
Korean_r	Romanized Standard script for the Korean population.

Population	Description
Luxembourg	Standard script for the population of Luxembourg.
Malaysia	Standard script for the Malaysian population.
Malta	Standard script for the population of Malta.
Mexico	Standard script for the Mexican population.
Netherlands	Standard script for the Dutch population.
New Zealand	Standard script for the population of New Zealand.
Norway	Standard script for the Norwegian population.
Peru	Standard script for the population of Peru.
Philippines	Standard script for the population of Philippines.
Poland	Standard script for the Polish population.
Portugal	Standard script for the Portuguese population.
Puerto_rico	Standard script for the Puerto Rican population.
Romania	Standard script for the Romanian population.
Russia	Standard script for the Russian population.
Singapore	Standard script for the population of Singapore.
Slovakia	Standard script for the Slovak population.
South_africa	Standard script for the South African population.
Spain	Standard script for the Spanish population.
Sweden	Standard script for the Swedish population.
Switzerland	Standard script for the Swiss population.
Taiwan_r	Romanized Standard script for the Taiwanese population.
Thai	Standard script for the Thai population.
Thai_r	Romanized Standard script for the Thai population.
Turkey	Standard script for the Turkish population.
Uk	Standard script for the population of UK.

Population	Description
Usa	Standard script for the population of USA.
Vietnam_r	Romanized Standard script for the Vietnamese population.

To create the match configuration JSON file, use the following sample schema:

```
{
    "formatType": "MATCH_CONFIGURATION",
    "generationDate": "02/06/2026 09:41:37",
    "checksum": null,
    "category": "MATCH_CONFIG",
    "matchDefinitions": [
        {
            "entityName": "c360.person",
            "modelName": "Workflow",
            "modelId": null,
            "modelDescription": null,
            "modelObjective": "Resolve Duplicates",
            "defaultPopulation": "usa",
            "declarativeRules": [
                {
                    "rulePropertyThresholds": {
                        "matchStrategy": "FUZZY",
                        "mergeStrategy": "Automatic",
                        "matchCriterion": "Organization",
                        "matchLevel": "Typical",
                        "description": "",
                        "automatedMerge": 90
                    },
                    "requiredExactFields": [
                    ],
                    "requiredFuzzyFields": [
                        {
                            "fieldType": "Organization_Name",
                            "fieldName": [
                                "x_lastname_custom|String(255)"
                            ],
                            "sourceColumnName": [
                                "C_PARTY|DISPLAY_NAME"
                            ],
                            "matchColumnName": "Organization_Name",
                            "comparisonOutcome": "Identical"
                        }
                    ],
                    "optionalExactFields": [
                    ],
                    "optionalFuzzyFields": [
                    ]
                },
                {
                    "rulePropertyThresholds": {
                        "matchStrategy": "FUZZY",
                        "mergeStrategy": "Automatic",
                        "matchCriterion": "Person_Name",
                        "matchLevel": "Typical",
                        "description": "",
                        "automatedMerge": 90
                    },
                    "requiredExactFields": [
                    ],
                    "requiredFuzzyFields": [
                        {
                            "fieldType": "Person_Name",
                            "fieldName": [
                                "x_lastname_custom|String(255)"
```

```
                            ],
                            "sourceColumnName": [
                                "C_PARTY|DISPLAY_NAME"
                            ],
                            "matchColumnName": "Person_Name",
                            "comparisonOutcome": "Identical"
                        }
                    ],
                    "optionalExactFields": [
                    ],
                    "optionalFuzzyFields": [
                    ]
                }
            ],
            "name3InfoItem": null,
            "candidateSelectionCriteria": [
                {
                    "fieldType": "Organization_Name",
                    "fieldName": "x_lastname_custom|String(255)",
                    "keyGenerationalLevel": "Extended",
                    "candidateSearchLevel": "Typical"
                }
            ]
        }
    ]
}
```

Guidelines for creating the match configuration JSON file

Consider the following guidelines when you create the match configuration JSON file:

- Specify the formatType field value as MATCH_CONFIGURATION.
- Specify required values for all attributes within the matchDefinitions field.
- Ensure that the entityName field value in the Match Configuration file matches the targetGUID field value from the Migration Mapping Index file.
- Populate the defaultPopulation value for each match definition.
- Define at least one declarative rule with appropriate thresholds and field configurations.
- Validate JSON syntax and ensure all mandatory fields are present.
- Use MatchConversion.json as the file name.

Security configuration overwrites

Create the security configuration JSON file to define the field-level and record-level privileges of source entity fields that you want to migrate to target fields in MDM SaaS. In this file, specify which user roles have privileges to create, read, update, delete, merge, and execute operations on specific fields or records.

The following table describes the key parameters that you can define in the security configuration JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as ENTITY_SECURITY.
generationDate	Date and time when the file was created. Specify the date and time in MM/DD/YYYY HH:mm:ss format.
checksum	Optional. Checksum for file integrity.

Parameter Name	Description
category	Category of the mapping used in the file. Specify the category as SECURITY.
list	List of target business entities and their fields for which the field-level and record-level privileges are assigned.

The following table describes the key parameters that you can define within the list parameter:

Parameter Name	Description
entityName	Name of the target business entity associated with the user role. Ensure that the entityName attribute value matches the entityName field value specified in the migration mapping index file.
entityGuid	Internal identifier of the target business entity, such as c360.organization. The value must exactly match the targetGUID value in the migration mapping index file.
elements	Security privileges associated with target business entity fields.

The following table describes the key parameters that you can define within the elements parameter:

Parameter Name	Description
elementType	Type of the target object to which the security privileges is assigned. Specify the elementType parameter value as FIELD.
fieldSecurity	Optional. Security privileges assigned to the field. This attribute is required only if you specify the elementType as FIELD.

The following table describes the key parameters that you can define within the fieldSecurity parameter:

Parameter Name	Description
fieldName	Path to the target field. Specify the path to the target field in <targetEntity>.<targetElement> format. For example, specify the value as c360.organization.x_custom for a target field in the Organization business entity.
matrix	User role privileges associated with the field. If you specify the matrix attribute, then roleName attribute values must be present.

The following table describes the key parameters that you can define within the matrix parameter:

Parameter Name	Description
roleName	Unique name of the user role within each matrix attribute. Ensure that you don't use any special characters or trailing spaces.
create	Create privilege assigned to the user role. Specify either true or false.

Parameter Name	Description
read	Read privilege assigned to the user role. Specify either true or false.
update	Update privilege assigned to the user role. Specify either true or false.
delete	Delete privilege assigned to the user role. Specify either true or false.
merge	Merge privilege assigned to the user role. Specify either true or false.
execute	Execute privilege assigned to the user role. Specify either true or false.

To create the security configuration JSON file, use the following sample schema:

```
{
  "formatType": "ENTITY_SECURITY",
  "generationDate": "02/06/2026 09:41:36",
  "checksum": null,
  "category": "SECURITY",
  "list": [
    {
      "entityname": "Organization",
      "entityGuid": "c360.organization",
      "elements": [
        {
          "elementType": "FIELD",
          "fieldSecurity": {
            "fieldName": "c360.organization.x_custom",
            "matrix": [
              {
                "roleName": "DataSteward",
                "create": true,
                "read": true,
                "update": true,
                "delete": true,
                "merge": true,
                "execute": true
              },
              {
                "roleName": "SrManager",
                "create": true,
                "read": true,
                "update": true,
                "delete": true,
                "merge": true,
                "execute": true
              }
            ]
          }
        }
      ]
    },
    {
      "entityname": "Person",
      "entityGuid": "c360.person",
      "elements": [
        {
          "elementType": "FIELD",
          "fieldSecurity": {
            "fieldName": "c360.person.x_lastname_custom",
            "matrix": [
              {
                "roleName": "DataSteward",
                "create": true,
                "read": true,
```

```
                "update": true,
                "delete": true,
                "merge": true,
                "execute": true
              },
              {
                "roleName": "SrManager",
                "create": true,
                "read": true,
                "update": true,
                "delete": true,
                "merge": true,
                "execute": true
              }
            ]
          }
        }
      ]
    }
  ]
}
```

Guidelines for creating the security configuration JSON file

Consider the following guidelines when you create the security configuration JSON file:

- Specify the formatType field value as ENTITY_SECURITY.
- Validate whether the JSON file is correctly formatted and syntactically correct.
- Ensure that the entityname and entityGuid attribute values match with the corresponding values specified in the migration mapping files.
- Define security privileges for fields, entities, or lists of entities using the appropriate elementType attribute.
- Ensure that names don't contain special characters and are unique within each matrix attribute.
- Specify all security privileges, such as create, read, update, delete, merge, execute as boolean values.
- Ensure that fieldName attribute value includes the full path with the business entity name added as prefix.
- Use consistent date and time format for the generationDate field.
- Use Security.json as the file name.

Source system

Create the source system JSON file to define source systems that you want to migrate to MDM SaaS. In this file, specify a unique internal ID for each source system and include metadata, such as display name, description, and location.

The following table describes the key parameters that you can define in the source system JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as SOURCE_SYSTEM.
generationDate	Date and time when the file was created. Specify the date and time value in MM/DD/YYYY HH:mm:ss format.
checksum	Optional. Checksum for file integrity.

Parameter Name	Description
category	Category of the mapping used in the file. Specify the category as SOURCE_SYSTEMS.
entries	List of source systems that you want to migrate to MDM SaaS.

The following table describes the key parameters that you can define within the entries parameter:

Parameter Name	Description
displayName	User-defined name of the source system.
internalId	Internal identifier of the source system. The internalId attribute is referenced by fields within distinct source system JSON file. Additionally, the internalId attribute value must match with the sourceSystem attribute value in the Survivorship.json file.
description	Description of the source system.
location	Location of the source system.

To create the source system JSON file, use the following sample schema:

```
{
  "formatType": "SOURCE_SYSTEM",
  "generationDate": "02/06/2026 09:41:34",
  "checksum": null,
  "category": "SOURCE_SYSTEMS",
  "entries": [
    {
      "displayName": "Admin",
      "internalId": "sys0",
      "description": "Administrative System",
      "location": "MultipleBE"
    }
    {
      "displayName": "SAP",
      "internalId": "sys1",
      "description": "SAP source system",
      "location": "Default"
    }
  ]
}
```

Guidelines for creating the source system JSON file

Consider the following guidelines when you create the source system JSON file:

- Specify the formatType field value as SOURCE_SYSTEM.
- Ensure that entries field includes at least one source system.
- Assign a unique identifier to each source system.
- Specify all mandatory fields, such as displayName, internalId, and location.
- Use SourceSystem.json as the file name.

Distinct source systems

Create the distinct source systems JSON file to define distinct source systems that you want to migrate to MDM SaaS. When source systems are marked as distinct, the match process doesn't match records from the same source system.

The following table describes the key parameters that you can define in the distinct source systems JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as DISTINCT_SOURCE_SYSTEM.
category	Category of the mapping used in the file. Specify the category as DISTINCT_SOURCE_SYSTEM.
list	List of MDM SaaS business entities to which you want to migrate the distinct source systems.

The following table describes the key parameters that you can define within the list array:

Parameter Name	Description
targetEntityName	Name of the target business entity. Ensure that the targetEntityName attribute value matches the targetEntity attribute value in the migration mapping index file.
targetEntityGUID	Internal identifier of the target business entity. Ensure that the targetEntityGUID attribute value matches the targetGUID attribute value in the migration mapping index file.
distinctSourceSystems	Distinct source systems that you want to migrate to the target business entity.
sourceSystemName	Name of the distinct source system. Ensure that the sourceSystemName attribute value matches the internalId attribute value in the SourceSystem.json file.
autoMerge	Specifies whether automated merge is enabled. Specify either true or false.

To create the distinct source systems JSON file, use the following sample schema:

```
{
  "formatType": "DISTINCT_SOURCE_SYSTEM",
  "generationDate": "02/06/2026 09:41:37",
  "checksum": null,
  "category": "DISTINCT_SOURCE_SYSTEM",
  "list": [
    {
      "targetEntityName": "Person",
      "targetEntityGUID": "c360.person",
      "distinctSourceSystems": [
        {
          "sourceSystemName": "dnb",
          "autoMerge": false
        },
        {
          "sourceSystemName": "sfa",
          "autoMerge": true
        }
      ]
    }
  ]
}
```

Guidelines for creating the distinct source systems JSON file

Consider the following guidelines when you create the distinct source systems JSON file:

- Ensure that the list field includes all required attribute values, such as targetEntityName, targetEntityGUID, distinctSourceSystems, sourceSystemName, and autoMerge.
- Use DistinctSourceSystem.json as the file name.

Hierarchy relationship

Create the hierarchy relationship JSON file to define hierarchical relationships between business entities that you want to migrate to MDM SaaS. Specify the parent-child relationships, organizational structures, and other hierarchical associations that exist within or across business entities in this file.

The following table describes the key parameters that you can define in the hierarchy relationship JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as PROVISIONING_HIERARCHY.
category	Category of the mapping used in the file. Specify the category as PROVISIONING_HIERARCHY.
generationDate	Date and time when the file was created. Specify the date and time value in MM/DD/YYYY HH:mm:ss format.
checksum	Optional. Checksum for file integrity.
hierarchies	List of hierarchy relationships within a business entity.

The following table describes the key parameters that you can define in the hierarchies parameter:

Parameter Name	Description
name	Name of the hierarchy.
guid	Internal identifier of the hierarchy.
description	Description of the hierarchy.
location	Location of the hierarchy.
rootEntity	Name of the parent business entity in the hierarchy.
relationships	Relationship details of the hierarchy.

The following table describes the key parameters that you can define in the relationships parameter:

Parameter Name	Description
name	Name of the relationship.
description	Description of the relationship.

Parameter Name	Description
direction	Direction of the relationship. The direction parameter can contain one of the following values: - ENTITY_1_TO_ENTITY_2 - ENTITY_2_TO_ENTITY_1 - BIDIRECTIONAL
fromEntity	Source business entity in the relationship.
toEntity	Target business entity in the relationship.
biDirectional	Specifies whether the relationship is bidirectional. Specify the value as true if bidirectional relationship is enabled. Otherwise, specify the value as false.

To create the hierarchy relationship JSON file, use the following sample schema:

```
{
  "formatType": "PROVISIONING_HIERARCHY",
  "generationDate": "02/06/2026 09:41:38",
  "checksum": null,
  "category": "PROVISIONING_HIERARCHY",
  "hierarchies": [
    {
      "name": "ODI",
      "guid": null,
      "description": null,
      "location": "MultipleBE",
      "rootEntity": "Organization",
      "relationships": [
        {
          "name": "IsOdiParentOf",
          "description": "is ODI parent of",
          "direction": "ENTITY_1_TO_ENTITY_2",
          "fromEntity": "c360.organization",
          "toEntity": "c360.organization",
          "biDirectional": false
        }
      ]
    }
  ]
}
```

Guidelines for creating the hierarchy relationship JSON file

Consider the following guidelines when you create the hierarchy relationship JSON file:

- Specify the formatType field value as PROVISIONING_HIERARCHY.
- Specify at least one hierarchy relationship.
- Ensure that the fromEntity and toEntity field values reference corresponding targetGUID field value in the Migration Mapping Index file.
- Ensure that the rootEntity field value matches the corresponding business entity name in the migration mapping file.
- Use ProvisioningHierarchies.json as the file name.

Network relationship

Create the network relationship JSON file to define non-hierarchical relationships between business entities that you want to migrate to MDM SaaS. Specify non-hierarchical relationships, such as employment, partnerships, affiliations, or other non-hierarchical relationships between entities in this file.

The following table describes the key parameters that you can define in the network relationship JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as PROVISIONING_NETWORK.
category	Category of the mapping used in the file. Specify the category as PROVISIONING_NETWORK.
generationDate	Date and time when the file was created. Specify the date and time value in MM/DD/YYYY HH:mm:ss format.
checksum	Optional. Checksum for file integrity.
relationships	List of non-hierarchical relationships within a business entity.

The following table describes the key parameters that you can define in the relationships parameter:

Parameter Name	Description
name	Name of the relationship.
description	Optional. Description of the relationship.
direction	Direction of the relationship. The direction parameter can contain one of the following values: - ENTITY_1_TO_ENTITY_2 - ENTITY_2_TO_ENTITY_1 - BIDIRECTIONAL
fromEntity	Source business entity in the relationship.
toEntity	Target business entity in the relationship.
biDirectional	Specifies whether the relationship is bidirectional. Specify the value as true if bidirectional relationship is enabled. Otherwise, specify the value as false.

To create the network relationship JSON file, use the following sample schema:

```
{
  "formatType": "PROVISIONING_NETWORK",
  "generationDate": "02/06/2026 09:41:38",
  "checksum": null,
  "category": "PROVISIONING_NETWORK",
  "relationships": [
    {
      "name": "Employs",
      "description": "employs",
      "direction": "ENTITY_1_TO_ENTITY_2",
      "fromEntity": "c360.organization",
      "toEntity": "c360.person",
      "biDirectional": false
    }
```

```
    ]
}
```

Guidelines for creating the network relationship JSON file

Consider the following guidelines when you create the network relationship JSON file:

- Specify the formatType and category field values as PROVISIONING_NETWORK.
- Specify at least one non-hierarchical relationship.
- Ensure that the fromEntity and toEntity field values reference corresponding targetGUID field value in the migration mapping index file.
- Identify and include all non-hierarchical relationships between entities correctly in the JSON file.
- Define the direction of the relationships, such as unidirectional or bidirectional, clearly.
- Provide meaningful names to the relationships, such as Employs, SuppliesTo, or PartneredWith.
- Use ProvisioningNetworks.json as the file name.

Users

Create the users JSON file to define the user accounts that you want to migrate to MDM SaaS. In the file, specify essential user profile information, such as contact details, security role assignments, and account status. The modernization process requires this file to set up user access and privileges in MDM SaaS.

The following table describes the key parameters that you can define in the users JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as USER_SECURITY.
category	Category of the mapping used in the file. Specify the category as SECURITY.
userDetails	Details of the user accounts.

The following table describes the key parameters that you can define in the userDetails parameter:

Parameter Name	Description
USER_NAME	Unique user name associated with the user account. **Note:** Ensure that the names don't contain Unicode characters.
FIRST_NAME	First name of the user.
LAST_NAME	Last name of the user.
EMAIL	Email address of the user.
ROLES	List of user roles associated with each user. Specify a comma-separated list of role names. Ensure that you associate at least one role with each user and the role names must match user names defined in the security configuration JSON file.
USER_ENABLED_IND	Specifies whether the user is active. If the user is active, specify 1. If the user is inactive, specify 0.

Parameter Name	Description
ADMIN_IND	Specifies whether the user is an administrator. If the user is an administrator, specify 1. If the user is not an administrator, specify 0.
IS_EXTERNAL	Specifies whether the user is an external user. If the user is an external user, specify 1. If the user is not an external user, specify 0.

To create the users JSON file, use the following sample schema:

```
{
  "formatType": "USER_SECURITY",
  "generationDate": "02/06/2026 09:41:37",
  "checksum": null,
  "category": "SECURITY",
  "userDetails": [
    {
      "INITIALS": "",
      "SUFFIX": "",
      "LOGON_MESSAGE": "USR00000|Welcome to CMX!",
      "MOBILE_NUMBER": "",
      "JOB_TITLE": "",
      "TELEPHONE_NUMBER": "",
      "IS_EXTERNAL": "N",
      "LAST_NAME": "Steward",
      "EMAIL": "mspiegel@informatica.com",
      "FIRST_NAME": "Data",
      "FAX_NUMBER": "",
      "MOBILE_AREA_CODE": "",
      "ROLES": "DataSteward",
      "ADMIN_IND": "0",
      "TELEPHONE_AREA_CODE": "",
      "USER_NAME": "MUser1",
      "TITLE": "",
      "MIDDLE_NAME": "",
      "FAX_AREA_CODE": "",
      "USER_ENABLED_IND": "1",
      "FeedBack": null
    }
  ]
}
```

Guidelines for creating the users JSON file

Consider the following guidelines when you create the users JSON file:

- Ensure that user names have unique values and don't contain Unicode characters.
- Assign at least one user role to every user.
- Specify all required fields, such as USER_NAME, FIRST_NAME, LAST_NAME, EMAIL, ROLES, USER_ENABLED_IND, ADMIN_IND, and IS_EXTERNAL.
- Use Users.json as the file name.

Model configuration overwrites

Create the model configuration JSON file to configure field properties, such as searchable, facetable, and auto suggest, for fields that are mapped in the migration mapping JSON files.

The modernization process validates the field configurations of the mapped fields against MDM SaaS limits and thresholds. If the field configurations, such as searchable, facetable, and auto-suggest exceed the defined MDM SaaS limits and thresholds, you can't continue the modernization process until you meet the limits.

For more information about limits and thresholds on field properties in MDM SaaS, see *Search and reports properties*.

The following table describes the key parameters that you can define in the model configuration overwrites JSON file:

Parameter Name	Description
formatType	Type of the JSON file. Specify the type as BE_CONFIGURATION_OVERWRITES.
category	Category of the mapping used in the file. Specify the category as BUSINESS_ENTITY.
businessEntityName	Name of the target business entity. Ensure that the name matches the targetEntity field value defined in the migration mapping JSON file.
businessEntityGuid	Internal identifier of the target business entity. Ensure that the identifier matches the targetGUID field value defined in the migration mapping JSON file.
path	Full path of the target field in the business entity, such as c360.organization.PostalAddress.
name	Internal identifier of the target field.
label	Display name of the target field.
existingField	Boolean. Specify whether the target field is an existing field in the business entity.
configOptions	Field properties, such as searchable, facetable, or auto suggest enabled for the business entity fields.

To create the model configuration JSON file, use the following sample schema:

```
{
  "formatType": "BE_CONFIGURATION_OVERWRITES",
  "generationDate": "02/09/2026 03:59:07",
  "category": "BUSINESS_ENTITY",
  "businessEntityName": "Organization",
  "businessEntityGuid": "c360.organization",
  "existingBE": true,
  "fieldConfigs": [
    {
      "path": "c360.organization.PostalAddress",
      "name": "addressLine1",
      "label": Address1,
      "existingField": true,
      "configOptions": [
        {
          "key": "searchable",
          "value": true,
          "category": "sConfig"
        },
        {
          "key": "facetable",
          "value": true,
          "category": "sConfig"
        },
        {
          "key": "autosuggest",
          "value": true,
          "category": "sConfig"
        }
      ]
    }
```

```
    ]
}
```

Naming conventions for model configuration JSON file

The modernization APIs determine the type of each JSON file in the canonical archive based on its file name.

The following table describes the recommended file name format for the model configuration JSON file:

File Type	Format
Model configuration file	<mappingDocumentName>-ModelConfigOverwrites.json Replace <mappingDocumentName> with the mappingDocumentName attribute value in the migration mapping index file. For example, if the mappingDocumentName attribute value is Organization, then specify the file as Organization-ModelConfigOverwrites.json. Ensure that the file name uses the suffix -ModelConfigOverwrites.json. Additionally, ensure that the prefix in the file name matches the attribute value of the targetEntity and mappingDocumentName specified in the migration mapping index file.

Note: Use the recommended naming convention for the JSON files in the archive so that the modernization APIs can identify them correctly.

Generate canonical schema

Use the generate canonical schema API to retrieve the standardized schemas of the required and optional canonical JSON files. The API retrieves all schemas along with the data types of parameters used in the required and optional canonical JSON files.

The API supports the GET method.

GET request

To retrieve the canonical schemas of the required and optional JSON files, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/canonical/schemas
```

GET response

The response is in the JSON format and returns canonical schema of all the required and optional canonical JSON files. Use the metadata in the response to create the required and optional canonical JSON files.

GET example

To retrieve the canonical schemas of the required and optional JSON files, you might use the following request:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/canonical/schemas
Content-Type: application/json
Accept: application/json
```

The following sample response shows the retrieved canonical schemas of the required and optional JSON files:

```
{
  "MDMMigrationMappingIndex": {
    "canonicalFormat": "MIGRATION_MAPPING_INDEX",
    "clazzName": "MDMMigrationMappingIndex",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "MDMMigrationMappingIndexEntry": {
          "type": "object",
```

```
          "properties": {
            "baseObjectSource": {
              "type": "boolean"
            },
            "mappingDocumentName": {
              "type": "string"
            },
            "onPremOriginalBEName": {
              "type": "string"
            },
            "onPremRootBE": {
              "type": "string"
            },
            "sourceEntity": {
              "type": "string"
            },
            "sourceGUID": {
              "type": "string"
            },
            "targetEntity": {
              "type": "string"
            },
            "targetGUID": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "entries": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/MDMMigrationMappingIndexEntry"
          }
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743015981
    }
  },
  "MatchCanonicalFormat": {
    "canonicalFormat": "MATCH_CONFIGURATION",
    "clazzName": "MatchCanonicalFormat",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "ExactMatchField": {
          "type": "object",
          "properties": {
            "comparisonOutcome": {
              "type": "string"
            },
            "fieldName": {
```

```
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "matchColumnName": {
      "type": "string"
    },
    "matchSegmentDataWithOtherData": {
      "type": "boolean"
    },
    "nullMatchIndicator": {
      "type": "integer"
    },
    "segmentMatching": {
      "type": "boolean"
    },
    "segmentValues": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "sourceColumnName": {
      "type": "array",
      "items": {
        "type": "string"
      }
    }
  }
},
"FuzzyMatchField": {
  "type": "object",
  "properties": {
    "comparisonOutcome": {
      "type": "string"
    },
    "fieldName": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "fieldType": {
      "type": "string"
    },
    "matchColumnName": {
      "type": "string"
    },
    "sourceColumnName": {
      "type": "array",
      "items": {
        "type": "string"
      }
    }
  }
},
"MatchCandidateSelectionCriteria": {
  "type": "object",
  "properties": {
    "candidateSearchLevel": {
      "type": "string"
    },
    "fieldName": {
      "type": "string"
    },
    "fieldType": {
      "type": "string"
    },
    "keyGenerationalLevel": {
      "type": "string"
```

```
    }
  }
},
"MatchDeclarativeRule": {
  "type": "object",
  "properties": {
    "optionalExactFields": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/ExactMatchField"
      }
    },
    "optionalFuzzyFields": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/FuzzyMatchField"
      }
    },
    "requiredExactFields": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/ExactMatchField"
      }
    },
    "requiredFuzzyFields": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/FuzzyMatchField"
      }
    },
    "rulePropertyThresholds": {
      "$ref": "#/$defs/RulePropertyThresholds"
    }
  }
},
"MatchDefinitionEntry": {
  "type": "object",
  "properties": {
    "candidateSelectionCriteria": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/MatchCandidateSelectionCriteria"
      }
    },
    "declarativeRules": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/MatchDeclarativeRule"
      }
    },
    "defaultPopulation": {
      "type": "string"
    },
    "entityName": {
      "type": "string"
    },
    "modelDescription": {
      "type": "string"
    },
    "modelId": {
      "type": "string"
    },
    "modelName": {
      "type": "string"
    },
    "modelObjective": {
      "type": "string"
    },
    "name3InfoItem": {
      "$ref": "#/$defs/MatchName3InfoItem"
    }
```

```
    }
  },
  "MatchName3InfoItem": {
    "type": "object",
    "properties": {
      "keyLevel": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "matchFieldTypes": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "matchLevel": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "matchPurpose": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/Name3MatchPurpose"
        }
      },
      "population": {
        "type": "string"
      },
      "searchLevel": {
        "type": "array",
        "items": {
          "type": "string"
        }
      }
    }
  },
  "Name3MatchPurpose": {
    "type": "object",
    "properties": {
      "mandatoryFieldsTypes": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "minimumRequiredFieldCount": {
        "type": "integer"
      },
      "purposeFieldTypes": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "purposeName": {
        "type": "string"
      },
      "requiredFieldsTypes": {
        "type": "array",
        "items": {
          "type": "string"
        }
      }
    }
  },
  "RulePropertyThresholds": {
    "type": "object",
```

```
        "properties": {
          "automatedMerge": {
            "type": "integer"
          },
          "description": {
            "type": "string"
          },
          "matchCriterion": {
            "type": "string"
          },
          "matchLevel": {
            "type": "string"
          },
          "matchStrategy": {
            "type": "string"
          },
          "mergeStrategy": {
            "type": "string"
          }
        }
      }
    },
    "type": "object",
    "properties": {
      "category": {
        "type": "string"
      },
      "checksum": {
        "type": "string"
      },
      "fileName": {
        "type": "string"
      },
      "formatType": {
        "type": "string"
      },
      "generationDate": {
        "type": "string"
      },
      "matchDefinitions": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/MatchDefinitionEntry"
        }
      }
    }
  },
  "meta": {
    "version": "1.0.0",
    "generatedAt": 1773743015993
  }
},
"EntitySecurityCanonicalFormat": {
  "canonicalFormat": "ENTITY_SECURITY",
  "clazzName": "EntitySecurityCanonicalFormat",
  "data": {
    "$schema": "https://json-schema.org/draft/2020-12/schema",
    "$defs": {
      "EntitySecurity": {
        "type": "object",
        "properties": {
          "elements": {
            "type": "array",
            "items": {
              "$ref": "#/$defs/EntitySecurityElement"
            }
          },
          "entityGuid": {
            "type": "string"
          },
          "entityname": {
```

```
      "type": "string"
    }
  }
},
"EntitySecurityElement": {
  "type": "object",
  "properties": {
    "elementType": {
      "$ref": "#/$defs/EntitySecurityElementType"
    },
    "entitySecurity": {
      "$ref": "#/$defs/EntitySecurity"
    },
    "fieldSecurity": {
      "$ref": "#/$defs/FieldSecurity"
    },
    "listOfEntities": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/EntitySecurity"
      }
    }
  }
},
"EntitySecurityElementType": {
  "type": "string",
  "enum": [
    "FIELD",
    "LIST_OF_ENTITIES",
    "ENTITY"
  ]
},
"FieldSecurity": {
  "type": "object",
  "properties": {
    "fieldName": {
      "type": "string"
    },
    "matrix": {
      "type": "array",
      "items": {
        "$ref": "#/$defs/RoleMatrix"
      }
    }
  }
},
"RoleMatrix": {
  "type": "object",
  "properties": {
    "create": {
      "type": "boolean"
    },
    "delete": {
      "type": "boolean"
    },
    "execute": {
      "type": "boolean"
    },
    "merge": {
      "type": "boolean"
    },
    "read": {
      "type": "boolean"
    },
    "roleName": {
      "type": "string"
    },
    "update": {
      "type": "boolean"
    }
  }
```

```
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        },
        "list": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/EntitySecurity"
          }
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743015977
    }
  },
  "ModelConfigOverwriteCanonicalFormat": {
    "canonicalFormat": "BE_CONFIGURATION_OVERWRITES",
    "clazzName": "ModelConfigOverwriteCanonicalFormat",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "ConfigOptions": {
          "type": "object",
          "properties": {
            "category": {
              "type": "string"
            },
            "key": {
              "type": "string"
            },
            "value": {
              "type": "boolean"
            }
          }
        },
        "FieldConfig": {
          "type": "object",
          "properties": {
            "configOptions": {
              "type": "array",
              "items": {
                "$ref": "#/$defs/ConfigOptions"
              }
            },
            "existingField": {
              "type": "boolean"
            },
            "label": {
              "type": "string"
            },
            "name": {
              "type": "string"
            },
            "path": {
```

```
            "type": "string"
          }
        }
      }
    },
    "type": "object",
    "properties": {
      "businessEntityGuid": {
        "type": "string"
      },
      "businessEntityName": {
        "type": "string"
      },
      "category": {
        "type": "string"
      },
      "checksum": {
        "type": "string"
      },
      "existingBE": {
        "type": "boolean"
      },
      "fieldConfigs": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/FieldConfig"
        }
      },
      "fileName": {
        "type": "string"
      },
      "formatType": {
        "type": "string"
      },
      "generationDate": {
        "type": "string"
      }
    }
  },
  "meta": {
    "version": "1.0.0",
    "generatedAt": 1773743016011
  }
},
"ProvisioningHierarchyCanonicalFormat": {
  "canonicalFormat": "PROVISIONING_HIERARCHY",
  "clazzName": "ProvisioningHierarchyCanonicalFormat",
  "data": {
    "$schema": "https://json-schema.org/draft/2020-12/schema",
    "$defs": {
      "ProvisioningHierarchyEntity": {
        "type": "object",
        "properties": {
          "description": {
            "type": "string"
          },
          "guid": {
            "type": "string"
          },
          "location": {
            "type": "string"
          },
          "name": {
            "type": "string"
          },
          "relationships": {
            "type": "array",
            "items": {
              "$ref": "#/$defs/ProvisioningRelationshipEntity"
            }
          },
```

```
            "rootEntity": {
              "type": "string"
            }
          }
        },
        "ProvisioningRelationshipEntity": {
          "type": "object",
          "properties": {
            "biDirectional": {
              "type": "boolean"
            },
            "description": {
              "type": "string"
            },
            "direction": {
              "type": "string"
            },
            "fromEntity": {
              "type": "string"
            },
            "name": {
              "type": "string"
            },
            "toEntity": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        },
        "hierarchies": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/ProvisioningHierarchyEntity"
          }
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743016000
    }
  },
  "SurvivorshipCanonicalFormat": {
    "canonicalFormat": "TRUST_SURVIVORSHIP",
    "clazzName": "SurvivorshipCanonicalFormat",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "EntitySurvivorshipDefinition": {
          "type": "object",
          "properties": {
            "entityName": {
              "type": "string"
            },
```

```
      "fields": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/SurvivorshipElementDefinition"
        }
      },
      "ruleConfiguration": {
        "$ref": "#/$defs/SurvivorshipRuleConfiguration"
      }
    }
  },
  "SourceSystemRanking": {
    "type": "object",
    "properties": {
      "sourceSystem": {
        "type": "string"
      }
    }
  },
  "SurvivorshipDecayRule": {
    "type": "object",
    "properties": {
      "decayPattern": {
        "type": "string"
      },
      "decayPeriod": {
        "type": "string"
      },
      "decayUnit": {
        "type": "string"
      },
      "maxTrustScore": {
        "type": "string"
      },
      "minTrustScore": {
        "type": "string"
      }
    }
  },
  "SurvivorshipElementDefinition": {
    "type": "object",
    "properties": {
      "fieldName": {
        "type": "string"
      },
      "rules": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/SurvivorshipRuleConfiguration"
        }
      }
    }
  },
  "SurvivorshipRuleConfiguration": {
    "type": "object",
    "properties": {
      "decayRule": {
        "$ref": "#/$defs/SurvivorshipDecayRule"
      },
      "systemRanking": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/SourceSystemRanking"
        }
      }
    }
  }
},
"type": "object",
"properties": {
  "category": {
```

```
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "entities": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/EntitySurvivorshipDefinition"
          }
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743015996
    }
  },
  "BEDistinctSourceSystemCanonicalFormat": {
    "canonicalFormat": "DISTINCT_SOURCE_SYSTEM",
    "clazzName": "BEDistinctSourceSystemCanonicalFormat",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "BEDistinctSourceSystem": {
          "type": "object",
          "properties": {
            "distinctSourceSystems": {
              "type": "array",
              "items": {
                "$ref": "#/$defs/DistinctSourceSystem"
              }
            },
            "targetEntityGUID": {
              "type": "string"
            },
            "targetEntityName": {
              "type": "string"
            }
          }
        },
        "DistinctSourceSystem": {
          "type": "object",
          "properties": {
            "autoMerge": {
              "type": "boolean"
            },
            "sourceSystemName": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "fileName": {
```

```
        "type": "string"
      },
      "formatType": {
        "type": "string"
      },
      "generationDate": {
        "type": "string"
      },
      "list": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/BEDistinctSourceSystem"
        }
      }
    }
  },
  "meta": {
    "version": "1.0.0",
    "generatedAt": 1773743016009
  }
},
"ReferenceModelChangesCanonicalFormat": {
  "canonicalFormat": "REFERENCE_MODEL_CHANGE",
  "clazzName": "ReferenceModelChangesCanonicalFormat",
  "data": {
    "$schema": "https://json-schema.org/draft/2020-12/schema",
    "$defs": {
      "FieldDesignator": {
        "type": "object",
        "properties": {
          "allowMany": {
            "type": "boolean"
          },
          "autosuggest": {
            "type": "boolean"
          },
          "beReferenceEntity": {
            "type": "string"
          },
          "description": {
            "type": "string"
          },
          "facetable": {
            "type": "boolean"
          },
          "id": {
            "type": "integer"
          },
          "label": {
            "type": "string"
          },
          "length": {
            "type": "integer"
          },
          "lookupCodeList": {
            "type": "string"
          },
          "mandatory": {
            "type": "boolean"
          },
          "masterCodeList": {
            "type": "string"
          },
          "maxLength": {
            "type": "integer"
          },
          "minLength": {
            "type": "integer"
          },
          "name": {
            "type": "string"
```

```
            },
            "position": {
              "type": "integer"
            },
            "precision": {
              "type": "integer"
            },
            "reportable": {
              "type": "boolean"
            },
            "scale": {
              "type": "integer"
            },
            "searchable": {
              "type": "boolean"
            },
            "type": {
              "type": "string"
            },
            "unique": {
              "type": "boolean"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "changes": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/FieldDesignator"
          }
        },
        "checksum": {
          "type": "string"
        },
        "codelistName": {
          "type": "string"
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        },
        "name": {
          "type": "string"
        },
        "parentCodelistName": {
          "type": "string"
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743016004
    }
  },
  "SourceSystemCanonicalFormat": {
    "canonicalFormat": "SOURCE_SYSTEM",
    "clazzName": "SourceSystemCanonicalFormat",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "SourceSystemDefinition": {
```

```
        "type": "object",
        "properties": {
          "description": {
            "type": "string"
          },
          "displayName": {
            "type": "string"
          },
          "internalId": {
            "type": "string"
          },
          "location": {
            "type": "string"
          }
        }
      }
    },
    "type": "object",
    "properties": {
      "category": {
        "type": "string"
      },
      "checksum": {
        "type": "string"
      },
      "entries": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/SourceSystemDefinition"
        }
      },
      "fileName": {
        "type": "string"
      },
      "formatType": {
        "type": "string"
      },
      "generationDate": {
        "type": "string"
      }
    }
  },
  "meta": {
    "version": "1.0.0",
    "generatedAt": 1773743015997
  }
},
"ProvisioningNetworkCanonicalFormat": {
  "canonicalFormat": "PROVISIONING_NETWORK",
  "clazzName": "ProvisioningNetworkCanonicalFormat",
  "data": {
    "$schema": "https://json-schema.org/draft/2020-12/schema",
    "$defs": {
      "ProvisioningRelationshipEntity": {
        "type": "object",
        "properties": {
          "biDirectional": {
            "type": "boolean"
          },
          "description": {
            "type": "string"
          },
          "direction": {
            "type": "string"
          },
          "fromEntity": {
            "type": "string"
          },
          "name": {
            "type": "string"
          },
```

```
            "toEntity": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        },
        "relationships": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/ProvisioningRelationshipEntity"
          }
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743016001
    }
  },
  "UserCanonicalFormat": {
    "canonicalFormat": "USER_SECURITY",
    "clazzName": "UserCanonicalFormat",
    "data": {
      "$schema": "https://json-schema.org/draft/2020-12/schema",
      "$defs": {
        "UserDetails": {
          "type": "object",
          "properties": {
            "ADMIN_IND": {
              "type": "string"
            },
            "EMAIL": {
              "type": "string"
            },
            "FAX_AREA_CODE": {
              "type": "string"
            },
            "FAX_NUMBER": {
              "type": "string"
            },
            "FIRST_NAME": {
              "type": "string"
            },
            "FeedBack": {
              "type": "string"
            },
            "INITIALS": {
              "type": "string"
            },
            "IS_EXTERNAL": {
              "type": "string"
            },
            "JOB_TITLE": {
              "type": "string"
```

```
            },
            "LAST_NAME": {
              "type": "string"
            },
            "LOGON_MESSAGE": {
              "type": "string"
            },
            "MIDDLE_NAME": {
              "type": "string"
            },
            "MOBILE_AREA_CODE": {
              "type": "string"
            },
            "MOBILE_NUMBER": {
              "type": "string"
            },
            "ROLES": {
              "type": "string"
            },
            "SUFFIX": {
              "type": "string"
            },
            "TELEPHONE_AREA_CODE": {
              "type": "string"
            },
            "TELEPHONE_NUMBER": {
              "type": "string"
            },
            "TITLE": {
              "type": "string"
            },
            "USER_ENABLED_IND": {
              "type": "string"
            },
            "USER_NAME": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        },
        "userDetails": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/UserDetails"
          }
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743016007
    }
  },
  "DataModelChangesCanonicalFormat": {
```

```
"canonicalFormat": "DATA_MODEL_CHANGE",
"clazzName": "DataModelChangesCanonicalFormat",
"data": {
  "$schema": "https://json-schema.org/draft/2020-12/schema",
  "$defs": {
    "DataModelChange": {
      "type": "object",
      "properties": {
        "allowMany": {
          "type": "boolean"
        },
        "fieldDesignator": {
          "$ref": "#/$defs/FieldDesignator"
        },
        "fieldGroupName": {
          "type": "string"
        },
        "path": {
          "type": "string"
        },
        "smartFieldGroup": {
          "type": "boolean"
        }
      }
    },
    "FieldDesignator": {
      "type": "object",
      "properties": {
        "allowMany": {
          "type": "boolean"
        },
        "autosuggest": {
          "type": "boolean"
        },
        "beReferenceEntity": {
          "type": "string"
        },
        "description": {
          "type": "string"
        },
        "facetable": {
          "type": "boolean"
        },
        "id": {
          "type": "integer"
        },
        "label": {
          "type": "string"
        },
        "length": {
          "type": "integer"
        },
        "lookupCodeList": {
          "type": "string"
        },
        "mandatory": {
          "type": "boolean"
        },
        "masterCodeList": {
          "type": "string"
        },
        "maxLength": {
          "type": "integer"
        },
        "minLength": {
          "type": "integer"
        },
        "name": {
          "type": "string"
        },
        "position": {
```

```
            "type": "integer"
          },
          "precision": {
            "type": "integer"
          },
          "reportable": {
            "type": "boolean"
          },
          "scale": {
            "type": "integer"
          },
          "searchable": {
            "type": "boolean"
          },
          "type": {
            "type": "string"
          },
          "unique": {
            "type": "boolean"
          }
        }
      }
    },
    "type": "object",
    "properties": {
      "businessEntityGuid": {
        "type": "string"
      },
      "category": {
        "type": "string"
      },
      "changes": {
        "type": "array",
        "items": {
          "$ref": "#/$defs/DataModelChange"
        }
      },
      "checksum": {
        "type": "string"
      },
      "fileName": {
        "type": "string"
      },
      "formatType": {
        "type": "string"
      },
      "generationDate": {
        "type": "string"
      },
      "name": {
        "type": "string"
      },
      "uniqueName": {
        "type": "string"
      }
    }
  },
  "meta": {
    "version": "1.0.0",
    "generatedAt": 1773743015985
  }
},
"MigrationMappingCanonicalFormat": {
  "canonicalFormat": "MIGRATION_MAPPING",
  "clazzName": "MigrationMappingCanonicalFormat",
  "data": {
    "$schema": "https://json-schema.org/draft/2020-12/schema",
    "$defs": {
      "MigrationMapPair": {
        "type": "object",
        "properties": {
```

```
            "sourceElement": {
              "type": "string"
            },
            "sourceEntity": {
              "type": "string"
            },
            "targetElement": {
              "type": "string"
            },
            "targetElementType": {
              "type": "string"
            },
            "targetEntity": {
              "type": "string"
            },
            "targetFieldPath": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        },
        "guid": {
          "type": "string"
        },
        "mapping": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/MigrationMapPair"
          }
        },
        "name": {
          "type": "string"
        },
        "originalName": {
          "type": "string"
        },
        "uniqueName": {
          "type": "string"
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1773743015979
    }
  }
}
```

Create modernization project

Use the create modernization project API to define modernization projects for migrating third-party MDM objects from enterprise providers, such as IBM and Semarchy, to MDM SaaS.

The API supports the POST method.

POST request

To define a modernization project, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/create-mod-project
```

The following table describes the multipart form data parameters in the POST request:

Parameter	Type	Description
projectName	String	Name of the modernization project.
applicationId	String	MDM SaaS business application in MDM SaaS to which you want to add the modernized business entities. Use one of the following values: - c360.c360 - p360.p360 - s360.s360 - mde.mde
projectType	String	Type of modernization project. Specify the project type as THIRD_PARTY_MDM.
canonicalArchive	ZIP File	A ZIP file that contains the configuration details of third-party MDM objects you want to migrate. The ZIP file size limit is 99 MB.
userExport	CSV File	Optional. A CSV file that contains the list of users and their details you want to migrate to MDM SaaS. The CSV file size limit is 4 MB.
roleMapping	PROPERTIES File	Optional. A PROPERTIES file that contains the user role mappings between third-party MDM objects and MDM SaaS. The PROPERTIES file size limit is 4 MB.

POST response

The response is in the JSON format and returns the HTTP 200 OK response code along with the project name, status, and ID.

POST example

You might use the following sample request to define a modernization project:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/create-mod-project
Content-Type: multipart/form-data
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Body (form-data):
  projectName: Modernization_Demo_doc_test10
  applicationId: c360.c360
```

```
projectType: THIRD_PARTY_MDM
canonicalArchive: [file: canonical_files.zip]
```

The following sample response returns the HTTP 200 OK response code with the name, status, and ID of the project:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "projectName": "Modernization_Demo_doc_test10",
    "status": "CREATED",
    "message": "Project created successfully",
    "apiVersion": "v1",
    "requestId": "0ffcf541-b306-9423-9a3a-747a4b07b8e6",
    "timestamp": 1775487354282,
    "projectId": "69d3c97af7377b9a125d337a"
}
```

Generate data model

Use the generate data model API to generate a preview of third-party data model objects for migration.

The API supports the POST method.

POST request

To generate a preview of a third-party data model object, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-saas-tenantmodel?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of a third-party data model object:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/modernization/migration/generate-saas-tenantmodel?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 201 OK response code and the success message:

```
HTTP/1.1 201 OK
Content-Type: application/json
{
    "type": "TENANTMODEL",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
    "requestId": "6c5f76bb-ff24-431c-8b98-62fc3ac83302",
    "timestamp": 1776332279313,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate data model

Use the migrate data model API to migrate third-party data model objects that are ready for migration.

The API supports the POST method.

POST request

To migrate third-party data model objects, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenantmodel?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate a third-party data model object:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenantmodel?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 201 OK response code and the success message:

```
HTTP/1.1 201 OK
Content-Type: application/json
{
    "type": "TENANTMODEL",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
    "apiVersion": "v1",
    "requestId": "fe69af01-b4ff-4ebb-ac06-d98a49202de2",
    "timestamp": 1776865548172,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Generate match configurations

Use the generate match configurations API to generate a preview of third-party match configurations.

The API supports the POST method.

POST request

To generate a preview of third-party match configurations, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-saas-tenantmatch?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of third-party match configurations:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/generate-saas-tenantmatch?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTMATCH",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
    "requestId": "b6592f5e-b5f4-4ad6-93da-11e23201f6f6",
    "timestamp": 1776866188806,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate match configurations

Use the migrate match configurations API to migrate third-party match configurations that are ready for migration.

The API supports the POST method.

POST request

To migrate third-party match configurations, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-
saas-tenantmatch?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate third-party match configurations:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/migrate-saas-tenantmatch?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 201 OK response code and the success message:

```
HTTP/1.1 201 OK
Content-Type: application/json
{
    "type": "TENANTMATCH",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
    "apiVersion": "v1",
    "requestId": "7573dc6a-f2be-4113-a7cd-0653311fd6e9",
    "timestamp": 1776866854155,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Generate hierarchies

Use the generate hierarchies API to generate a preview of third-party hierarchies within data model objects.

The API supports the POST method.

POST request

To generate a preview of third-party hierarchies, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-
saas-tenanthierarchy?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of third-party hierarchies:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/generate-saas-tenanthierarchy?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTHIERARCHY",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
    "requestId": "e975bce4-a7e4-487b-85d2-dc755ac6cb27",
    "timestamp": 1777007253310,
```

```
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate hierarchies

Use the migrate hierarchies API to migrate third-party hierarchies that are ready for modernization.

The API supports the POST method.

POST request

To migrate third-party hierarchies, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenanthierarchy?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate third-party hierarchies:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenanthierarchy?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTHIERARCHY",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
    "apiVersion": "v1",
    "requestId": "070c52d8-bfc8-49d8-a90d-a53c87dbe41f",
    "timestamp": 1777007789757,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Generate hierarchical relationships

Use the generate hierarchical relationships API to generate a preview of third-party hierarchical relationships within data model objects.

The API supports the POST method.

POST request

To generate a preview of third-party hierarchical relationships, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-saas-tenanthierarchyrelationship?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of third-party hierarchical relationships:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/generate-saas-tenanthierarchyrelationship?
projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTHIERARCHYRELATIONSHIP",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
    "requestId": "0957f0f9-81e3-44a9-9e68-fe69ba58522d",
    "timestamp": 1777007992878,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate hierarchical relationships

Use the migrate hierarchical relationships API to migrate hierarchical relationships associated with third-party MDM objects that are ready for modernization.

The API supports the POST method.

POST request

To migrate third-party hierarchical relationships, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-
saas-tenanthierarchyrelationship?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate third-party hierarchical relationships:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/migrate-saas-tenanthierarchyrelationship?
projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTHIERARCHYRELATIONSHIP",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
    "apiVersion": "v1",
    "requestId": "ae8b76eb-c121-44f1-bcb8-4f9ac2f8a25c",
    "timestamp": 1777011581192,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Generate network relationships

Use the generate network relationships API to generate a preview of third-party network relationships within data model objects.

The API supports the POST method.

POST request

To generate a preview of network relationships, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-
saas-tenantnetwork?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of third-party network relationships:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/generate-saas-tenantnetwork?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTNETWORK",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
```

```
    "requestId": "18b94228-89d9-4619-a65a-299983b5e17f",
    "timestamp": 1777008271670,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate network relationships

Use the migrate network relationships API to migrate third-party network relationships that are ready for modernization.

The API supports the POST method.

POST request

To migrate third-party network relationships, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenantnetwork?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate third-party network relationships:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenantnetwork?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTNETWORK",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
    "apiVersion": "v1",
    "requestId": "d738d024-18c2-4bdd-97df-963347ea2abd",
    "timestamp": 1777008955587,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Generate user roles

Use the generate user roles API to generate a preview of user roles associated with third-party MDM objects.

The API supports the POST method.

POST request

To generate a preview of user roles associated with third-party MDM objects, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-saas-tenantroles?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of user roles associated with third-party MDM objects:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/modernization/migration/generate-saas-tenantroles?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTROLES",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
    "requestId": "21be9dd6-62de-451a-b537-25db67190773",
    "timestamp": 1777009389609,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate user roles

Use the migrate user roles API to migrate user roles associated with third-party MDM objects that are ready for modernization.

The API supports the POST method.

POST request

To migrate user roles associated with third-party MDM objects, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-saas-tenantroles?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate user roles associated with third-party MDM objects:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/migrate-saas-tenantroles?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTROLES",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
    "apiVersion": "v1",
    "requestId": "00b15a08-643f-4636-801f-d96720bd5cf0",
    "timestamp": 1777009975949,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Generate user accounts

Use the generate user accounts API to generate a preview of user accounts associated with third-party MDM objects.

The API supports the POST method.

POST request

To generate a preview of user accounts associated with third-party MDM objects, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/generate-
saas-tenantusers?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to generate a preview of user accounts associated with third-party MDM objects:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/generate-saas-tenantusers?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following response contains the HTTP 200 OK response code and the success message:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTUSERS",
    "status": "SUCCESS",
    "message": "Migration Asset generation initiated successfully",
    "apiVersion": "v1",
    "requestId": "0aac0c41-07ee-4f73-add0-828e61c84a9e",
    "timestamp": 1777010822789,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Migrate user accounts

Use the migrate user accounts API to migrate user accounts associated with third-party MDM objects that are ready for modernization.

The API supports the POST method.

POST request

To migrate user accounts associated with third-party MDM objects, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/migration/migrate-
saas-tenantusers?projectId=<projectId>
```

The following table describes the query parameter for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response is in the JSON format and returns a success message.

POST example

You might use the following sample request to migrate user accounts associated with third-party MDM objects:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/migration/migrate-saas-tenantusers?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

HTTP/1.1 200 OK
Content-Type: application/json
{
    "type": "TENANTUSERS",
    "status": "SUCCESS",
    "message": "Migration to SaaS initiated successfully",
```

```
    "apiVersion": "v1",
    "requestId": "a0533b5f-9534-4f83-984f-653cf610b076",
    "timestamp": 1777011150739,
    "projectId": "69e0addb2b3be5b13effbca9"
}
```

Download canonical file

Use the download canonical file API to download the canonical ZIP archive file that you can use for creating a third-party modernization project.

The API supports the POST method.

POST request

To download a canonical file, submit a POST request with the following URI:

```
POST <baseApiURL>/modernization-service/public/api/v1/modernization/download-canonical?
projectId=<projectId>
```

The following table describes the query parameters for the POST request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

POST response

The response body is a binary ZIP file. To view the contents of the file, save the response to a local drive and extract the archive using any standard ZIP utility.

POST example

You might use the following sample request to download a canonical file:

```
POST https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/download-canonical?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following sample response returns the HTTP 200 OK response code and the contents of the binary ZIP file:

```
HTTP/1.1 200 OK
Content-Type: application/zip
<Binary ZIP file content>
```

After you save and extract the ZIP file, you can view the canonical file formats, such as Migration Mapping Index, Migration Mapping, and Data Model, that are used in the project.

View modernization project status

Use the view modernization project status API to view the status of a third-party modernization project.

The API supports the GET method.

GET request

To view the status of a modernization project, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/projectstatus?
projectId=<projectId>
```

The following table describes the query parameters for the GET request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

GET response

The response is in the JSON format and returns the status of the modernization project.

The following table describes the response body parameters:

Parameter	Type	Description
projectStatusList	String	Status of the modernization projects.
skip	Boolean	Specifies whether the project status entry is skipped.
id	String	Unique identifier for the project status entry.
projectId	String	Unique identifier of the modernization project.
projectName	String	Name of the modernization project.
group	String	Group to which the project status belongs.
status	String	Status of the project. The status parameter can contain one of the following values: - SUCCESS - IN PROGRESS FAILED
step	String	Details of the step.
totalCount	Integer	Total number of modernization projects in an organization.

The following table describes the `step` parameters:

Parameter	Type	Description
id	String	Unique identifier for the step.
type	String	Type of the step. Returns null if not applicable.
name	String	Display name of the step.
status	String	Status of the step. Returns null if not applicable.

Parameter	Type	Description
errorStatus	Array	Error statuses associated with the step. Returns an empty array when the step has no metrics.
metrics	Array	Metrics associated with the step. Returns an empty array when the step has no metrics.

GET example

You might use the following sample request to view the status of a modernization project:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/projectstatus?projectId=69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following sample response contains the HTTP 200 OK response code and the status of the modernization project:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "apiVersion": "v1",
  "requestId": "88d3a345-744b-902b-82c6-d95815009f97",
  "timestamp": 1775556717099,
  "projectId": "69d4d7f2c1593500962e1cae",
  "projectStatusList": [
    {
      "skip": false,
      "id": "69d4d7f2c1593500962e1cad",
      "projectId": "69d4d7f2c1593500962e1cae",
      "projectName": "Modernization_Demo_doc_test10",
      "group": "Create Project",
      "status": "SUCCESS",
      "step": {
        "id": "PROJECT_CREATION",
        "type": null,
        "name": "Project Creation",
        "status": null,
        "errorStatus": [],
        "metrics": []
      }
    }
  ],
  "totalCount": 1
}
```

View Canonical Formats

Use the View Canonical Formats API to view the list of required and optional canonical file formats that you can use in third-party modernization projects.

The API supports the GET method.

GET request

To view the list of canonical file formats, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/canonical/formats
```

GET response

The response is in the JSON format and returns the list of required and optional canonical file formats.

GET example

You might use the following sample request to view the list of canonical file formats:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/canonical/formats
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
```

The following sample response returns the HTTP 200 OK response code and the canonical file formats:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "supportedFormats": [
    "ENTITY_SECURITY",
    "MIGRATION_MAPPING",
    "MIGRATION_MAPPING_INDEX",
    "DATA_MODEL_CHANGE",
    "MATCH_CONFIGURATION",
    "TRUST_SURVIVORSHIP",
    "SOURCE_SYSTEM",
    "PROVISIONING_HIERARCHY",
    "PROVISIONING_NETWORK",
    "REFERENCE_MODEL_CHANGE",
    "USER_SECURITY",
    "DISTINCT_SOURCE_SYSTEM",
    "BE_CONFIGURATION_OVERWRITES"
  ]
}
```

Generate canonical schema formats

Use the generate canonical schema formats API to retrieve the JSON schema of individual files.

The API supports the GET method.

GET request

To retrieve the schema of a canonical file format, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/canonical/schema/
<formatType>
```

The following table describes the path parameter for the GET request:

Parameter	Type	Description
formatType	String	Type of the canonical file format, such as migration mapping index and match configuration files. The formatType parameter can contain one of the following values: - ENTITY_SECURITY - MIGRATION_MAPPING - MIGRATION_MAPPING_INDEX - DATA_MODEL_CHANGE - MATCH_CONFIGURATION - TRUST_SURVIVORSHIP - SOURCE_SYSTEM - PROVISIONING_HIERARCHY - PROVISIONING_NETWORK - REFRENCE_MODEL_CHANGE - USER_SECURITY - DISTINCT_SOURCE_SYSTEM - BE_CONFIGURATION_OVERWRITES

GET response

The response is in the JSON format. The response body contains the canonical schema of the specified canonical file format.

Get examples

To retrieve the canonical schema of migration mapping index file, you might use the following request:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/canonical/schema/MIGRATION_MAPPING_INDEX
Content-Type: application/json
Accept: application/json
```

The following sample response shows the retrieved migration mapping index canonical schema file:

```
{
  "canonicalFormat": "MIGRATION_MAPPING_INDEX",
  "clazzName": "MDMMigrationMappingIndex",
  "data": {
    "$schema": "https://json-schema.org/draft/2020-12/schema",
    "$defs": {
      "MDMMigrationMappingIndexEntry": {
        "type": "object",
        "properties": {
          "baseObjectSource": {
            "type": "boolean"
          },
          "mappingDocumentName": {
            "type": "string"
          },
          "onPremOriginalBEName": {
            "type": "string"
          },
          "onPremRootBE": {
            "type": "string"
          },
          "sourceEntity": {
            "type": "string"
          },
          "sourceGUID": {
            "type": "string"
          },
```

```
            "targetEntity": {
              "type": "string"
            },
            "targetGUID": {
              "type": "string"
            }
          }
        }
      },
      "type": "object",
      "properties": {
        "category": {
          "type": "string"
        },
        "checksum": {
          "type": "string"
        },
        "entries": {
          "type": "array",
          "items": {
            "$ref": "#/$defs/MDMMigrationMappingIndexEntry"
          }
        },
        "fileName": {
          "type": "string"
        },
        "formatType": {
          "type": "string"
        },
        "generationDate": {
          "type": "string"
        }
      }
    },
    "meta": {
      "version": "1.0.0",
      "generatedAt": 1775557203890
    }
}
```


Download event logs

Use the download event logs API to download the event logs as a binary ZIP file. Use the event logs file to analyze important events or troubleshoot issues encountered during the modernization process.

The API supports the GET method.

GET request

To download an event logs file, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/download-events?
projectId=<projectId>
```

The following table describes the query parameter for the GET request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

GET response

The response body is a binary ZIP file. To view the contents of the file, save the response to a local drive and then use a standard ZIP utility to extract the archive.

GET example

You might use the following sample request to download an event logs file:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/download-events?projectId=69d4d7f2c1593500962e1cae
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
```

The following sample response contains the HTTP 200 OK response code and the contents of the binary ZIP file:

```
HTTP/1.1 200 OK
Content-Type: application/zip
<Binary ZIP file content>
```

The extracted files contain the event logs captured during the modernization process.

View modernization project details

Use the view modernization project details API to view the details of a third-party modernization project.

The API supports the GET method.

GET request

To view the details of a modernization project, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/project/<projectId>
```

The following table describes the query parameter for the GET request:

Parameter	Type	Description
projectId	String	Unique identifier of the modernization project.

GET response

The response is in the JSON format and contains the details of the modernization project.

The following table describes the response body parameters:

Parameter	Type	Description
canonicalArchiveFileName	String	Name of the canonical archive ZIP file used in the project.
projectType	String	Type of the modernization project. The project type parameter can contain one of the following values: - AUTO_BE_MAPPING. Projects that use automated or smart field mappings for migration. - BASIC. Projects that use manual field mappings for migration. - THIRD_PARTY_MDM. Projects that use third-party MDM objects for migration.

Parameter	Type	Description
projectName	String	Name of the modernization project.
applicationId	String	Unique identifier of the business application in MDM SaaS to which the third-party MDM objects are migrated.
currentStep	String	Current step in the project workflow. The currentStep parameter can contain one of the following steps: - PROJECT_CREATION - GENERATE_CANONICAL - GENERATE_TENANT_ASSET | TENANTMODEL - MIGRATE_TENANT_ASSET | TENANTMODEL - GENERATE_MAPPING | REFERENCE - MIGRATE_MAPPING | REFERENCE - GENERATE_MAPPING | BASE_OBJECT - MIGRATE_MAPPING | BASE_OBJECT - GENERATE_TENANT_ASSET | TENANTHIERARCHYRELATIONSHIP - MIGRATE_TENANT_ASSET | TENANTHIERARCHYRELATIONSHIP **Note:** In the step values the pipe (|) character separates the operation from the object type.
overallStatus	String	Overall status of the project. The overallStatus parameter can contain one of the following values: - Success - In Progress - Failed
stepStatus	String	Status of the current step. The stepStatus parameter can contain one of the following values: - SUCCESS - IN PROGRESS - FAILED

The GET response includes the following `_meta` parameters:

Parameter	Type	Description
createdDate	Number	Date on which the project was created.
createdBy	String	Name of the user who created the project.
type	String	Metadata type of the project. The value is always PROJECT.

Parameter	Type	Description
active	String	Specifies whether the project is active.
version	String	Version number of the project.

GET example

You might use the following sample request to view the details of a modernization project:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/project/69d49dd4f7377b9a125d33c9
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following sample response contains the HTTP 200 OK response code and the details of the modernization project:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "apiVersion": "v1",
  "requestId": "5e3ae54f-9928-9431-80f4-f6d303b12517",
  "timestamp": "2026-04-08T09:58:30.331596922Z",
  "type": "project",
  "project": {
    "id": "69d4d7f2c1593500962e1cae",
    "content": {
      "canonicalArchiveFileName": "Mod_basic_project_demo.zip",
      "projectType": "THIRD_PARTY_MDM",
      "projectName": "Modernization_Demo_doc_test10",
      "applicationId": "c360.c360",
      "currentStep": "PROJECT_CREATION",
      "overallStatus": "In Progress",
      "stepStatus": "SUCCESS"
    },
    "_meta": {
      "createdDate": 1775556594931,
      "createdBy": "mdm_mod_role_test7_rel",
      "type": "PROJECT",
      "active": "true",
      "version": "2"
    }
  }
}
```

View all modernization projects

Use the view all modernization projects API to view the details, such as project type, overall status, and current step, of all modernization projects.

The API supports the GET method.

GET request

To view the details of all modernization project, submit a GET request with the following URI:

```
GET <baseApiURL>/modernization-service/public/api/v1/modernization/project
```

GET response

The response is in the JSON format and contains the details of all modernization projects.

The following table describes the query parameters for the GET request:

Parameter	Type	Description
canonicalArchiveFileName	String	Name of the canonical archive ZIP file used in the project.
projectType	String	Type of the modernization project. The projectType parameter can contain one of the following values: - AUTO_BE_MAPPING. Projects that use automated or smart field mappings for migration. - BASIC. Projects that use manual field mappings for migration. - THIRD_PARTY_MDM. Projects that use third-party MDM objects for migration.
projectName	String	Name of the modernization project.
applicationId	String	Unique identifier of the business application in MDM SaaS to which the third-party MDM objects are migrated.
currentStep	String	Current step in the project workflow. The currentStep parameter can contain one of the following steps: - PROJECT_CREATION - GENERATE_CANONICAL - GENERATE_TENANT_ASSET | TENANTMODEL - MIGRATE_TENANT_ASSET | TENANTMODEL - GENERATE_MAPPING | REFERENCE - MIGRATE_MAPPING | REFERENCE - GENERATE_MAPPING | BASE_OBJECT - MIGRATE_MAPPING | BASE_OBJECT - GENERATE_TENANT_ASSET | TENANTHIERARCHYRELATIONSHIP - MIGRATE_TENANT_ASSET | TENANTHIERARCHYRELATIONSHIP **Note:** In the step values the pipe (|) character separates the operation from the object type.
overallStatus	String	Overall status of the project. Each project contains one of the following values: - Success - In Progress - Failed
stepStatus	String	Status of the current step. The stepStatus parameter can contain one of the following values: - SUCCESS - IN PROGRESS - FAILED

The GET response includes the following `_meta` parameters:

Parameter	Type	Description
createdDate	Number	Date on which the project was created.
createdBy	String	Name of the user who created the project.
type	String	Metadata type of the project. Set to PROJECT.
active	String	Specifies whether the project is active.
version	String	Version number of the project.

GET example

You might use the following sample request to view the details of all modernization projects:

```
GET https://use4-mdm.dm-us.informaticacloud.com/modernization-service/public/api/v1/
modernization/project
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

The following sample response contains the HTTP 200 OK response code and the details of the modernization project:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "type": "project",
  "projects": [
    {
      "id": "69d4d7f2c1593500962e1cae",
      "content": {
        "canonicalArchiveFileName": "Mod_basic_project_demo.zip",
        "projectType": "THIRD_PARTY_MDM",
        "projectName": "Modernization_Demo_doc_test10",
        "applicationId": "c360.c360",
        "currentStep": "PROJECT_CREATION",
        "overallStatus": "In Progress",
        "stepStatus": "SUCCESS"
      },
      "_meta": {
        "createdDate": 1775556594931,
        "createdBy": "mdm_mod_role_test7_rel",
        "type": "PROJECT",
        "active": "true",
        "version": "2"
      }
    },
    {
      "id": "6993fe1dc219fb7067669239",
      "content": {
        "hubExportFileName": "match_hierarchy_hierachy_relationship_network-demo.xml",
        "projectType": "AUTO_BE_MAPPING",
        "projectName": "testguatf",
        "applicationId": "c360.c360",
        "currentStep": "GENERATE_CANONICAL",
        "overallStatus": "In Progress",
        "stepStatus": "SUCCESS"
      },
      "_meta": {
        "createdDate": 1771306525642,
        "createdBy": "mdm_mod_role_test7_rel",
        "type": "PROJECT",
        "active": "true",
```

```
      "version": "49"
    }
  },
  {
    "id": "698471a62d1bc54e8d4acfa0",
    "content": {
      "canonicalArchiveFileName": "v1.zip",
      "projectType": "THIRD_PARTY_MDM",
      "projectName": "Modernization_Public_TP_001",
      "applicationId": "c360.c360",
      "currentStep": "GENERATE_TENANT_ASSET|TENANTMODEL",
      "overallStatus": "In Progress",
      "stepStatus": "FAILED"
    },
    "_meta": {
      "createdDate": 1770287526622,
      "createdBy": "mdm_mod_role_test7_rel",
      "type": "PROJECT",
      "active": "true",
      "version": "4"
    }
  },
  {
    "id": "6984478a3aae13192b3c6540",
    "content": {
      "canonicalArchiveFileName": "Canonical-Json-Files_689f9866c58a255dd491g298.zip",
      "projectType": "THIRD_PARTY_MDM",
      "projectName": "Modernization_TP_002",
      "applicationId": "c360.c360",
      "currentStep": "GENERATE_TENANT_ASSET|TENANTMODEL",
      "overallStatus": "In Progress",
      "stepStatus": "FAILED"
    },
    "_meta": {
      "createdDate": 1770276746261,
      "createdBy": "mdm_mod_role_test7_rel",
      "type": "PROJECT",
      "active": "true",
      "version": "7"
    }
  },
  {
    "id": "6983031a3637eb31b693ec60",
    "content": {
      "roleMappingFileName": "roles.properties",
      "hubExportFileName": "changelist_may_07.change.xml",
      "projectType": "BASIC",
      "projectName": "skipRdsFlag_true",
      "applicationId": "c360.c360",
      "userExportFileName": "users.csv",
      "currentStep": "GENERATE_MAPPING|REFERENCE",
      "overallStatus": "In Progress",
      "stepStatus": "SUCCESS"
    },
    "_meta": {
      "createdDate": 1770193690158,
      "createdBy": "mdm_mod_role_test7_rel",
      "type": "PROJECT",
      "active": "true",
      "version": "4"
    }
  },
  {
    "id": "6980de09f488f7a242c97b3b",
    "content": {
      "roleMappingFileName": "roles.properties",
      "hubExportFileName": "changelist_may_07.change.xml",
      "projectType": "BASIC",
      "projectName": "skipRdsFlag_test",
      "applicationId": "c360.c360",
      "userExportFileName": "users.csv",
```

```
    "currentStep": "GENERATE_MAPPING|REFERENCE",
    "overallStatus": "In Progress",
    "stepStatus": "SUCCESS"
  },
  "_meta": {
    "createdDate": 1770053129327,
    "createdBy": "mdm_mod_role_test7_rel",
    "type": "PROJECT",
    "active": "true",
    "version": "4"
  }
},
{
  "id": "696dea97636efd3c7a4130ad",
  "content": {
    "roleMappingFileName": "roles.properties",
    "hubExportFileName": "Changelist_20250507.xml",
    "projectType": "BASIC",
    "projectName": "Test_Dependent_001",
    "applicationId": "c360.c360",
    "userExportFileName": "users.csv",
    "currentStep": "GENERATE_MAPPING|REFERENCE",
    "overallStatus": "In Progress",
    "stepStatus": "SUCCESS"
  },
  "_meta": {
    "createdDate": 1768811159491,
    "createdBy": "mdm_mod_role_test7_rel",
    "type": "PROJECT",
    "active": "true",
    "version": "4"
  }
},
{
  "id": "69495480aabbc5b1865328ff",
  "content": {
    "roleMappingFileName": "roles.properties",
    "hubExportFileName": "MDM_on_prem_changeList -CHINA .xml",
    "projectType": "BASIC",
    "projectName": "ChienseTest",
    "applicationId": "c360.c360",
    "userExportFileName": "users.csv",
    "currentStep": "GENERATE_MAPPING|REFERENCE",
    "overallStatus": "In Progress",
    "stepStatus": "SUCCESS"
  },
  "_meta": {
    "createdDate": 1766413440664,
    "createdBy": "mdm_mod_role_test7_rel",
    "type": "PROJECT",
    "active": "true",
    "version": "11"
  }
},
{
  "id": "69300fefde09c77763057c59",
  "content": {
    "roleMappingFileName": "Roles (1).properties",
    "hubExportFileName": "Sample_ORS_Conifig_change_match (1).xml",
    "projectType": "BASIC",
    "projectName": "DemoProject ",
    "applicationId": "c360.c360",
    "userExportFileName": "Users (1).csv",
    "currentStep": "GENERATE_MAPPING|BASE_OBJECT",
    "overallStatus": "In Progress",
    "stepStatus": "SUCCESS"
  },
  "_meta": {
    "createdDate": 1764757487076,
    "createdBy": "mdm_mod_role_test7_rel",
    "type": "PROJECT",
```

```
        "active": "true",
        "version": "7"
      }
    },
    {
      "id": "690498f1ef7d170a47dce0be",
      "content": {
        "roleMappingFileName": "roles.properties",
        "hubExportFileName": "MDM_on_prem_changeList.xml",
        "projectType": "BASIC",
        "projectName": "DependentList",
        "applicationId": "c360.c360",
        "userExportFileName": "users.csv",
        "currentStep": "GENERATE_TENANT_ASSET|TENANTMODEL",
        "overallStatus": "In Progress",
        "stepStatus": "FAILED"
      },
      "_meta": {
        "createdDate": 1761908977167,
        "createdBy": "mdm_mod_role_test7_rel",
        "type": "PROJECT",
        "active": "true",
        "version": "39"
      }
    }
  ],
  "totalRecords": 10,
  "totalPages": 1,
  "currentPage": 0,
  "recordsPerPage": 25,
  "apiVersion": "v1",
  "requestId": "76ec2bf8-8e55-95c7-8b1e-878ca631080f",
  "timestamp": 1775645440201
}
```


Migrate API

Use the Migrate API to assign population data to master records, which is a one-time activity. A master record must have population data so that the Search Match API version 2 can match it by population.

The API triggers a job. After the job completes, the API assigns population data to the master records. You can monitor the status of the job in the My Jobs page.

The Migrate API assigns a population to a master record based on the following principles:

- If the master record has a single source record, it inherits the population of the source record.
- If the master record is formed by merging source records that have the same population, it inherits that population.
- If the master record is formed by merging source records that have different populations, MDM SaaS doesn't assign a population. For those records, the match process uses the default population of the match model.

For master records created before the April 2026 release, use the Migrate API to assign population data. For master records created after the April 2026 release, MDM SaaS automatically assigns population data to master records based on the populations of their source records.

To assign population data to master records, submit a POST request with the following URI:

```
POST {baseUrl}/match-ng-pair-gen/public/api/v1/migrate
```

The response is in JSON format.

Request body

The following table describes the parameters in the request body:

Parameter	Type	Description
`type`	String	Type of migration operation. Set to `POPULATE_MASTER_POPULATION`.
`beGuids`	Array of String	Unique identifier of the business entity that contains the master records to assign population data to. Enter a non-blank GUID value, such as `c360.person`. You can't enter an empty array or multiple values. To cover multiple business entities, submit a separate request for each business entity.

Request response

The response returns the job instance identifier as plain text. Use the job instance identifier to track the progress of the job on the **My Jobs** page.

For more information, see *Monitoring assign population jobs*.

Sample requests

The following sample request specifies the type of migration operation and the unique identifier of the business entity:

```
{
  "type": "POPULATE_MASTER_POPULATION",
  "beGuids": [
    "c360.person"
  ]
}
```

Note: The `beGuids` parameter only accepts a single GUID despite being an array type. To run the operation for multiple business entities, submit a separate request for each business entity.

Sample responses

When the request is accepted, the API returns an HTTP 202 status and the job instance identifier as plain text.

The following example shows the response:

```
myTenant:Populate Master Population:123456789
```

Hierarchy API

Use the hierarchy API to create hierarchies, add first-level nodes and child records, and move records within a hierarchy or across hierarchies. You can retrieve all hierarchies within a hierarchy model and all records in a

hierarchy. You can also update the name and description of existing hierarchies, and delete hierarchies from a hierarchy model or records from a hierarchy.

You can also retrieve the exact location of a specific record in a hierarchy by returning all paths from the parent record to the child record. Additionally, you can retrieve a list of hierarchies that a record is part of based on its business ID.

Create Hierarchy

Use the Create Hierarchy API to create a hierarchy based on a hierarchy model and add first-level nodes to the hierarchy. You can add up to 25 first-level nodes to a hierarchy.

The API uses the POST method.

POST request

To create a hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>?
sourceSystem=<sourceSystem>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Internal ID of the hierarchy model to which you want to add the hierarchy.
sourceSystem	String	Internal ID of the source system to assign to the hierarchy. For example, `c360.default.system`

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
name	String	Name of the hierarchy. **Note:** You can enter a maximum of 255 characters.
description	String	Optional. A short description to provide context about the purpose of the hierarchy. **Note:** You can enter a maximum of 255 characters.
roots	Array	Optional. An array of records to add as first-level nodes in the hierarchy. Each record is identified by its business ID and the business entity it belongs to. If you don't specify this array, the hierarchy is created without any nodes. If you want to add first-level nodes to an existing hierarchy, use the "Add Root Nodes to a Hierarchy" on page 228 API.
roots.businessId	String	Business ID of the record to add as the first-level node.
roots.businessEntity	String	Internal ID of the business entity the record belongs to.

POST response

The response shows the response code, business ID of the hierarchy that you created, and the first-level nodes that are added to the hierarchy. When you submit a request to create a hierarchy, MDM SaaS verifies your user role permissions and the approval workflow configuration. The response indicates whether the hierarchy that you create requires an approval.

The following table describes the parameters in the response:

Parameter	Type	Description
businessId	String	Business ID of the hierarchy that you created.
approvalRequired	Boolean	Identifies whether the request triggers an approval workflow. If the request requires an approval, the value is true. If the request doesn't require an approval, the value is false.
rootsSummary	Object	Includes the details of the first-level nodes in your request.
rootsSummary.succeeded	Array	An array of first-level nodes in the hierarchy.
rootsSummary.succeeded.relationshipIdentifier	Object	Identifies the relationship details between the first-level node and the hierarchy.
rootsSummary.succeeded.relationshipIdentifier.businessId	String	Business ID of the relationship between the first-level node and the hierarchy.
rootsSummary.succeeded.relationshipIdentifier.relationship	String	Internal ID of the type of relationship between the first-level node and the hierarchy.
rootsSummary.succeeded.businessId	String	Business ID of the record that's added as the first-level node in the hierarchy.
rootsSummary.succeeded.businessEntity	String	Internal ID of the business entity the record belongs to.
rootsSummary.failed	Array	An array of first-level nodes that weren't added to the hierarchy because of errors.

POST example

You can use the following request to create a hierarchy with first-level nodes:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy?
sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "name": "Apollo Hospitals Regional Structure",
    "description": "Hierarchy created for listing the structure of the hospital region-
wise.",
    "roots": [
        {
            "businessId": "MDM000000000JG",
            "businessEntity": "c360.organization"
        },
        {
            "businessId": "MDM000000000JQ",
            "businessEntity": "c360.organization"
        }
    ]
}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 201 Created
Content-Type: application/json
```

```
{
    "businessId": "MDM0000000000K",
    "approvalRequired": false,
    "rootsSummary": {
        "succeeded": [
            {
                "relationshipIdentifier": {
                    "businessId": "MDM00000000000",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000JG",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000A",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000JQ",
                "businessEntity": "c360.organization"
            }
        ],
        "failed": []
    }
}
```

If approval workflow is configured, you get the following response:

```
HTTP/1.1 201 Created
Content-Type: application/json

{
    "businessId": "MDM0000000000K",
    "approvalRequired": true,
    "rootsSummary": {
        "succeeded": [
            {
                "relationshipIdentifier": {
                    "businessId": "MDM00000000000",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000JG",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000A",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000JQ",
                "businessEntity": "c360.organization"
            }
        ],
        "failed": []
    }
}
```

Add Root Nodes to a Hierarchy

Use the Add Root Nodes to a Hierarchy API to add records as first-level nodes to an existing hierarchy based on a hierarchy model. You can add up to 25 first-level nodes to an existing hierarchy.

The API supports the POST method.

POST request

To add records as first-level nodes to an existing hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>/
roots?sourceSystem=<sourceSystem>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Internal ID of the hierarchy model that contains the hierarchy.
businessId	String	Business ID of the hierarchy in the hierarchy model.
sourceSystem	String	Internal ID of the source system to which the hierarchy belongs.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
businessEntity	String	Internal ID of the business entity the record that you want to add as a first-level node belongs to.
businessId	String	Business ID of the record to add as the first-level node.

POST response

The response shows the response code, details of the hierarchy, and details of the first-level nodes that you added to the hierarchy. When you submit a request to add first-level nodes to a hierarchy, MDM SaaS verifies your existing user role permissions and the approval workflow configuration. The response indicates whether you require approval to add records as first-level nodes to a hierarchy.

The following table describes the parameters in the response:

Parameter	Type	Description
businessId	String	Business ID of the hierarchy in the hierarchy model.
approvalRequired	Boolean	Identifies whether the request triggers an approval workflow. If the request requires an approval, the value is true. If the request doesn't require an approval, the value is false.
rootsSummary	Object	Includes the details of the records that are added as first-level nodes.
rootsSummary.succeeded	Array	An array of first-level nodes in the hierarchy.
rootsSummary.succeeded.relationshipIdentifier	Object	Identifies the relationship between the first-level node and the hierarchy.

Parameter	Type	Description
rootsSummary.succeeded.relationshipIdentifier.businessId	String	Business ID of the relationship that's created between the first-level node and the hierarchy.
rootsSummary.succeeded.relationshipIdentifier.relationship	String	Internal ID of the type of relationship created between the first-level node and the hierarchy.
rootsSummary.succeeded.businessId	String	Business ID of the record that's added as the first-level node in the hierarchy.
rootsSummary.succeeded.businessEntity	String	Internal ID of the business entity the record belongs to.
rootsSummary.failed	Array	An array of first-level nodes that weren't added to the hierarchy because of errors.

POST example

You can use the following request to add first-level nodes to a hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000028/roots?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

 [
     {
        "businessEntity": "c360.organization",
        "businessId": "MDM000000000NW"

    },
    {
        "businessEntity": "c360.organization",
        "businessId": "MDM000000000NM"

    },
     {
        "businessEntity": "c360.organization",
        "businessId": "MDM000000000NC"

    },
     {
        "businessEntity": "c360.organization",
        "businessId": "MDM00000000006"

    }

    ]
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "businessId": "MDM00000000014",
    "approvalRequired": false,
    "rootsSummary": {
        "succeeded": [
            {
                "relationshipIdentifier": {
                    "businessId": "MDM00000000014",
                    "relationship": "c360_organization_to_hospital"
                },
```

```
                "businessId": "MDM00000000006",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000K",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000NW",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000U",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000NC",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000L",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000NM",
                "businessEntity": "c360.organization"
            }
        ],
        "failed": []
    }
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "businessId": "MDM00000000014",
    "approvalRequired": true,
    "rootsSummary": {
        "succeeded": [
            {
                "relationshipIdentifier": {
                    "businessId": "MDM00000000014",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM00000000006",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000K",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000NW",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000U",
                    "relationship": "c360_organization_to_hospital"
                },
                "businessId": "MDM000000000NC",
                "businessEntity": "c360.organization"
            },
            {
                "relationshipIdentifier": {
                    "businessId": "MDM0000000000L",
                    "relationship": "c360_organization_to_hospital"
                },
```

```
                "businessId": "MDM000000000NM",
                "businessEntity": "c360.organization"
            }
        ],
        "failed": []
    }
}
```

Add Child Nodes to a Hierarchy

Use the Add Child Nodes to a Hierarchy API to add records under the first-level nodes and existing child nodes in an hierarchy. You can add up to 25 child records in a single request.

For example, if you have a first-level node named Amazon, you can use this API to add child records such as Amazon - Chennai and Amazon - Bangalore under the first-level node. After you add the records, you can use the API to add child records under these records by specifiying the parent relationship identifier for Amazon - Chennai and Amazon - Bangalore records in the request.

The API uses the POST method.

POST request

To add records under the first-level nodes and existing child nodes in an hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>/
nodes?sourceSystem=<sourceSystem>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Internal ID of the hierarchy model to which you want to add the hierarchy.
businessId	String	Business ID of the hierarchy in the hierarchy model.
sourceSystem	String	Internal ID of the source system to which the hierarchy belongs.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
parentRelationshipIdentifier	Object	Identifies the parent records to add child records to. If you want to add records to an existing first-level node in a hierarchy, use the "Fetch Root Nodes of a Hierarchy" on page 238 API to retrieve all the first-level nodes of a hierarchy. The response of the API contains the relationship identifier details of all the first-level nodes. You can use the relationship identifier details from the `content.relationshipIdentifier` parameter of the first-level node to add child records to. If you want to add records to an existing child node within the first-level node, retrieve the child records from the first-level node using the "Fetch Child Nodes" on page 243 API. You can use relationship identifier details from the `content.relationshipIdentifier` parameter.
parentRelationshipIdentifier.businessId	String	Business ID of the relationship between the parent record and the child record. If you add records to the first-level nodes, this parameter denotes the ID of the relationship between the first-level node and the hierarchy.
parentRelationshipIdentifier.relationship	String	Internal ID of the relationship between the parent record and the child record. If you add child records to the first-level nodes, this parameter denotes the internal ID of the relationship between the first-level node and the hierarchy.
relationType	String	Internal ID of the relationship to use to relate the parent record and the input record. If the parent record can participate in only one relationship, you can skip this parameter. If the parent record can participate in multiple relationships, specify which relationship to use to relate the child record. You can get the internal ID of the relationship from the hierarchy model in Business 360 Console.
children	Array	An array of child records to add to the parent record.
children.businessEntity	String	Internal ID of the business entity that the child record you want to add belongs to.
children.businessId	String	Business ID of the record to add as the child record.

POST response

The response shows the response code and the details of the child records that are added to the hierarchy. When you submit a request to add child records to multiple parent records in a hierarchy, MDM SaaS verifies your existing user role permissions and the approval workflow configuration. The response indicates whether you require approval to add child record to the parent records in a hierarchy.

The following table describes the parameters in the response:

Name	Type	Description
summary	Object	Contains aggregate counts of the total, succeeded, and failed records in the request.
summary.total	Integer	Total number of child records to add to the hierarchy.
summary.succeeded	Integer	Number of child records added to the hierarchy.
summary.failed	Integer	Number of child records that failed to be added to the parent record because of errors.
approvalRequired	Boolean	Identifies whether the request triggers an approval workflow. The value is true if the request requires approval, or false if it doesn't.
details	Array	Lists the details of the succeeded and failed child records.
details.parentRelationshipIdentifier	Object	Identifies the details of the parent record.
details.parentRelationshipIdentifier.businessId	String	Business ID of the relationship between the parent record and the child record. If you add child records to the first-level nodes, this parameter denotes the ID of the relationship between the first-level node and the hierarchy.
details.parentRelationshipIdentifier.relationship	String	Internal ID of the relationship between the parent record and the child record. If you add child records to the first-level node, this parameter denotes the internal ID of the relationship that's created between the first-level node and the hierarchy.
details.succeeded	Array	Lists the child records that are successfully added.
details.succeeded.relationshipIdentifier	Array	Lists the relationship details between the child record that you added and parent record.
details.succeeded.relationshipIdentifier.businessId	String	Business ID of the relationship between the child record that you added and parent record.
details.succeeded.relationshipIdentifier.relationship	String	Internal ID of the relationship between the child record that you added and parent record.
details.succeeded.businessId	String	Business ID of the record that's added as the child record.
details.succeeded.businessEntity	String	Internal ID of the business entity that the child record belongs to.
details.failed	Array	An array of child records that weren't added to the hierarchy because of errors.

POST example to add a child record to a parent record

You can use the following request to add a child record to a parent record in a hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000010/nodes?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

[
    {
        "parentRelationshipIdentifier": {
            "businessId": "MDM0000000000K",
            "relationship": "c360_organization_to_hospital"
        },
        "relationType":"c360_person_to_hospital_1789022271",
        "children": [
            {
                "businessEntity": "c360.person",
                "businessId": "MDM00000000GJA"
            }
        ]
    }
]
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "summary": {
        "total": 1,
        "succeeded": 1,
        "failed": 0
    },
    "approvalRequired": false,
    "details": [
        {
            "parentRelationshipIdentifier": {
                "businessId": "MDM0000000000K",
                "relationship": "c360_organization_to_hospital"
            },
            "succeeded": [
                {
                    "relationshipIdentifier": {
                        "businessId": "MDM00000000000",
                        "relationship": "c360_person_to_hospital"
                    },
                    "businessId": "MDM00000000GJA",
                    "businessEntity": "c360.person"
                }
            ],
            "failed": []
        }
    ]
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "summary": {
        "total": 1,
        "succeeded": 1,
        "failed": 0
    },
    "approvalRequired": true,
```

```
    "details": [
        {
            "parentRelationshipIdentifier": {
                "businessId": "MDM0000000000K",
                "relationship": "c360_organization_to_hospital"
            },
            "succeeded": [
                {
                    "relationshipIdentifier": {
                        "businessId": "MDM00000000000",
                        "relationship": "c360_person_to_hospital_1789022271"
                    },
                    "businessId": "MDM00000000GJA",
                    "businessEntity": "c360.person"
                }
            ],
            "failed": []
        }
    ]
}
```

POST example to add child records to multiple parent records

You can use the following request to add child records to multiple parent records in a hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000010/nodes?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

[
    {
        "parentRelationshipIdentifier": {
            "businessId": "MDM0000000001E",
            "relationship": "c360_organization_to_hospital_1789022677"
        },
    "children": [
            {
                "businessEntity": "c360.organization",
                "businessId": "MDM000000000RI"
            }

        ]
    },
    {
        "parentRelationshipIdentifier": {
            "businessId": "MDM00000000014",
            "relationship": "c360_organization_to_hospital_1789022677"
        },
    "children": [
            {
                "businessEntity": "c360.organization",
                "businessId": "MDM000000000S3"
            },
            {
                "businessEntity": "c360.organization",
                "businessId": "MDM000000000SC"
            }
        ]
    }
]
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "summary": {
        "total": 3,
        "succeeded": 3,
```

```
            "failed": 0
        },
        "approvalRequired": false,
        "details": [
            {
                "parentRelationshipIdentifier": {
                    "businessId": "MDM0000000001E",
                    "relationship": "c360_organization_to_hospital_1789022677"
                },
                "succeeded": [
                    {
                        "relationshipIdentifier": {
                            "businessId": "MDM0000000001Y",
                            "relationship": "c360_organization_to_hospital_1789022677"
                        },
                        "businessId": "MDM000000000RI",
                        "businessEntity": "c360.organization"
                    }
                ],
                "failed": []
            },
            {
                "parentRelationshipIdentifier": {
                    "businessId": "MDM00000000014",
                    "relationship": "c360_organization_to_hospital_1789022677"
                },
                "succeeded": [
                    {
                        "relationshipIdentifier": {
                            "businessId": "MDM00000000028",
                            "relationship": "c360_organization_to_hospital_1789022677"
                        },
                        "businessId": "MDM000000000S3",
                        "businessEntity": "c360.organization"
                    },
                    {
                        "relationshipIdentifier": {
                            "businessId": "MDM00000000001Z",
                            "relationship": "c360_organization_to_hospital_1789022677"
                        },
                        "businessId": "MDM000000000SC",
                        "businessEntity": "c360.organization"
                    }
                ],
                "failed": []
            }
        ]
    }
```


If the approval workflow is configured, you get the following response:


```
    HTTP/1.1 200 OK
    Content-Type: application/json

    {
        "summary": {
            "total": 3,
            "succeeded": 3,
            "failed": 0
        },
        "approvalRequired": true,
        "details": [
            {
                "parentRelationshipIdentifier": {
                    "businessId": "MDM0000000001E",
                    "relationship": "c360_organization_to_hospital_1789022677"
                },
                "succeeded": [
                    {
                        "relationshipIdentifier": {
                            "businessId": "MDM0000000001Y",
```

```
                        "relationship": "c360_organization_to_hospital_1789022677"
                    },
                    "businessId": "MDM000000000RI",
                    "businessEntity": "c360.organization"
                }
            ],
            "failed": []
        },
        {
            "parentRelationshipIdentifier": {
                "businessId": "MDM00000000014",
                "relationship": "c360_organization_to_hospital_1789022677"
            },
            "succeeded": [
                {
                    "relationshipIdentifier": {
                        "businessId": "MDM00000000028",
                        "relationship": "c360_organization_to_hospital_1789022677"
                    },
                    "businessId": "MDM000000000S3",
                    "businessEntity": "c360.organization"
                },
                {
                    "relationshipIdentifier": {
                        "businessId": "MDM00000000001Z",
                        "relationship": "c360_organization_to_hospital_1789022677"
                    },
                    "businessId": "MDM000000000SC",
                    "businessEntity": "c360.organization"
                }
            ],
            "failed": []
        }
    ]
}
```


Fetch Root Nodes of a Hierarchy

Use the Fetch Root Nodes of a Hierarchy API to retrieve the first-level nodes in a hierarchy.

The API uses the POST method.

POST request

To retrieve the first-level nodes in a hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>/
roots/paged?appNamespace=<BusinessApplicationName>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchy.
businessId	String	Business ID of the hierarchy in the hierarchy model.
appNamespace	String	Optional. Identifies the application that the record belongs to, such as `c360` for the Customer 360 SaaS business application, `s360` for the Supplier 360 SaaS business application, and `p360` for the Product 360 SaaS business application. When you provide this parameter, the response includes only the fields defined for the business entities of the application.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
pageOffset	Integer	Number of pages to skip. For example, to skip the first two pages of the search results, set pageOffset to 2. Minimum is 0.
pageSize	Integer	Number of search results to display on each page. Default is 10. Maximum is 25.
sortBy	Array	A list of fields based on which the records are sorted. To sort results in ascending order, specify `+<Field Name>`. To sort in descending order, specify `-<FieldName>`.

POST response

The response shows the response code and the details of the first-level nodes in the hierarchy.

The following table describes the parameters in the response:

Parameter	Type	Description
first	Boolean	Indicates whether the current page is the first page.
last	Boolean	Indicates whether the current page is the last page.

Parameter	Type	Description
page	Integer	Indicates the current page number.
size	Integer	Indicates the requested page size.
numberOfElements	Integer	Actual number of elements on the current page.
content	Array	Indicates the details of the first-level nodes returned.
content.relationshipIdentifier	Object	Identifies the relationship details between the first-level node and the hierarchy.
content.relationshipIdentifier.businessId	String	Business ID of the relationship between the first-level node and the hierarchy.
content.relationshipIdentifier.relationship	String	Internal ID of the type of relationship created between the first-level node and the hierarchy.
content.leaf	Boolean	Indicates whether the first-level node represents an end position within the hierarchy. If the first-level node is at the end of the hierarchy, the value is true. If there are more first-level nodes, the value is false.
content.entity	Object	Displays the fields and meta details of the first-level node.
content.entity.fields	Array	An array of display fields of the record in the business entity.
content.entity.fields.name	String	Name of the record.

The following table describes the `meta` parameters in the response:

Parameter	Type	Description
businessId	String	Business ID of the first-level node in the hierarchy model.
businessEntity	String	Business entity associated with the first-level node.
state	String	Indicates the state of the first-level node. For example, ACTIVE indicates whether the first-level node is active.
createdBy	String	Name of the user who created the first-level node.
creationDate	String	Date when the first-level node was created.

Parameter	Type	Description
updatedBy	String	Name of the user who updated the first-level node.
lastUpdateDate	String	Date when the first-level node was last updated.

POST example

You can use the following request to retrieve first-level nodes in a hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000014/roots/paged?appNamespace=c360
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "pageSize": 10,
    "pageOffset": 0,
    "sortBy": [
        "+name"
    ]

}
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

 {
    "first": true,
    "last": true,
    "page": 0,
    "size": 10,
    "numberOfElements": 5,
    "content": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM00000000032",
                "relationship": "c360_organization_to_hospital"
            },
            "leaf": false,
            "entity": {
                "fields": {
                    "name": "Apollo Hospitals - India"
                },
                "meta": {
                    "businessEntity": "c360.organization",
                    "businessId": "MDM000000000P0",
                    "state": "ACTIVE",
                    "createdBy": "Voyagers_AutoRel1Pod",
                    "creationDate": 1789463541337,
                    "updatedBy": "Voyagers_AutoRel1Pod",
                    "lastUpdateDate": 1789463542395
                }
            }
        },
        {
            "relationshipIdentifier": {
                "businessId": "MDM0000000000L",
                "relationship": "c360_organization_to_hospital"
            },
            "leaf": false,
            "entity": {
                "fields": {
                    "name": "Diagnostics & Laboratory"
```

```
        },
        "meta": {
            "businessEntity": "c360.organization",
            "businessId": "MDM000000000NM",
            "state": "ACTIVE",
            "createdBy": "Voyagers_AutoRel1Pod",
            "creationDate": 1789106329362,
            "updatedBy": "Voyagers_AutoRel1Pod",
            "lastUpdateDate": 1789106330055
        }
    }
},
{
    "relationshipIdentifier": {
        "businessId": "MDM0000000000K",
        "relationship": "c360_organization_to_hospital"
    },
    "leaf": false,
    "entity": {
        "fields": {
            "name": "Hospital Administration"
        },
        "meta": {
            "businessEntity": "c360.organization",
            "businessId": "MDM000000000NW",
            "state": "ACTIVE",
            "createdBy": "Voyagers_AutoRel1Pod",
            "creationDate": 1789106346036,
            "updatedBy": "Voyagers_AutoRel1Pod",
            "lastUpdateDate": 1789106347005
        }
    }
},
{
    "relationshipIdentifier": {
        "businessId": "MDM00000000014",
        "relationship": "c360_organization_to_hospital"
    },
    "leaf": true,
    "entity": {
        "fields": {
            "name": "Human Resources"
        },
        "meta": {
            "businessEntity": "c360.organization",
            "businessId": "MDM00000000O6",
            "state": "ACTIVE",
            "createdBy": "Voyagers_AutoRel1Pod",
            "creationDate": 1789106372305,
            "updatedBy": "Voyagers_AutoRel1Pod",
            "lastUpdateDate": 1789106372450
        }
    }
},
{
    "relationshipIdentifier": {
        "businessId": "MDM0000000000U",
        "relationship": "c360_organization_to_hospital"
    },
    "leaf": true,
    "entity": {
        "fields": {
            "name": "Medical Services"
        },
        "meta": {
            "businessEntity": "c360.organization",
            "businessId": "MDM000000000NC",
            "state": "ACTIVE",
            "createdBy": "Voyagers_AutoRel1Pod",
            "creationDate": 1789106310374,
            "updatedBy": "Voyagers_AutoRel1Pod",
```

```
                    "lastUpdateDate": 1789106311381
                }
            }
        }
    ]
}
```

Fetch Child Nodes

Use the Fetch Child Nodes API to retrieve the child records of a parent record in a hierarchy.

The API uses the POST method.

POST request

To retrieve the child records of a parent record in a hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>/
nodes/paged?appNamespace=<BusinessApplicationName>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchy.
businessId	String	Business ID of the hierarchy in the hierarchy model.
appNamespace	String	Optional. Identifies the application that the record belongs to, such as `c360` for the Customer 360 SaaS business application, `s360` for the Supplier 360 SaaS business application, and `p360` for the Product 360 SaaS business application. When you provide this parameter, the response includes only the fields defined for the business entities of the application.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
parentNode	Object	Lists the details of the parent record from which you want to retrieve the child records.
parentNode.businessId	String	Business ID of the parent record.
parentNode.relationship	String	Internal ID of the relationship created between the parent record and the child record.

Parameter	Type	Description
pageOffset	Integer	Number of pages to skip. For example, to skip the first two pages of the search results, set pageOffset to 2. Minimum is 0.
pageSize	Integer	Number of search results to display on each page. Default is 10. Maximum is 25.
sortBy	Array	A list of fields based on which the records are sorted. To sort results in ascending order, specify `+<Field Name`. To sort in descending order, specify `-<FieldName>`.

POST response

The response shows the response code and the details of the child records in the hierarchy.

The following table describes the parameters in the response:

Parameter	Type	Description
first	Boolean	Indicates whether the current page is the first page.
last	Boolean	Indicates whether the current page is the last page.
page	Integer	Indicates the current page number.
size	Integer	Indicates the requested page size.
numberOfElements	Integer	Actual number of elements on the current page.
content	Array	Lists the details of the child records returned.
content.relationshipIdentifier	Object	Lists the relationship details between the parent record and the child record.
content.relationshipIdentifier.businessId	String	Business ID of the relationship between the parent record and child record.
content.relationshipIdentifier.relationship	String	Internal ID of the relationship between the parent record and child record.

Parameter	Type	Description
content.leaf	Boolean	Indicates whether the child record represents an end position within the hierarchy. It returns true if the record has no child records and false if the record has one or more child records.
content.entity	Object	Displays the meta details of the child record.

The following table describes the `meta` parameters in the response:

Parameter	Type	Description
businessId	String	Business ID of the child record.
businessEntity	String	Business entity associated with the child record.
state	String	Indicates the state of the child record. For example, ACTIVE indicates whether the record is active.
createdBy	String	Name of the user who created the child record.
creationDate	String	Date when the child record was created.
updatedBy	String	Name of the user who updated the child record.
lastUpdateDate	String	Date when the child record was last updated.

POST example

You can use the following request to retrieve child records of a parent record in a hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000010/nodes/paged?appNamespace=c360
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
    "parentNode": {
        "businessId": "MDM0000000000K",
        "relationship": "c360_organization_to_hospital_1789022677"
    },
    "pageOffset": 0,
    "pageSize": 5,
    "sortBy": [
        "+name"
    ]
}
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json
```

```
{
    "first": true,
    "last": true,
    "page": 0,
    "size": 5,
    "numberOfElements": 2,
    "content": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM0000000001E",
                "relationship": "c360_organization_to_hospital_1789022677"
            },
            "leaf": true,
            "entity": {
                "fields": {
                    "name": "Apollo - Chennai"
                },
                "meta": {
                    "businessEntity": "c360.organization",
                    "businessId": "MDM000000000QE",
                    "state": "ACTIVE",
                    "createdBy": "Voyagers_AutoRel1Pod",
                    "creationDate": 1789971094176,
                    "updatedBy": "Voyagers_AutoRel1Pod",
                    "lastUpdateDate": 1789971095250
                }
            }
        },
        {
            "relationshipIdentifier": {
                "businessId": "MDM00000000014",
                "relationship": "c360_organization_to_hospital_1789022677"
            },
            "leaf": true,
            "entity": {
                "fields": {
                    "name": "Apollo - Madurai"
                },
                "meta": {
                    "businessEntity": "c360.organization",
                    "businessId": "MDM000000000QO",
                    "state": "ACTIVE",
                    "createdBy": "Voyagers_AutoRel1Pod",
                    "creationDate": 1789971137767,
                    "updatedBy": "Voyagers_AutoRel1Pod",
                    "lastUpdateDate": 1789971690674
                }
            }
        }
    ]
}
```


Move Nodes Within or Across Hierarchies

Use the Move Nodes Within or Across Hierarchies API to move records within the same hierarchy or to a different hierarchy in a hierarchy model. Additionally, you can move a record as a first-level node to a different hierarchy. You can move only one record in a single request.

The API uses the POST method.

POST request

To move records within the same hierarchy or to a different hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>/
nodes/move?sourceSystem=<sourceSystem>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchy.
businessId	String	Business ID of the hierarchy.
sourceSystem	String	Internal ID of the source system that contains the hierarchy.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
relationshipIdentifier	Object	Indicates the relationship details of the record that you want to move within or across a hierarchy.
relationshipIdentifier.businessId	String	Business ID of the relationship between the record that you want to move and the hierarchy.
relationshipIdentifier.relationship	String	Internal ID of the relationship between the record that you want to move and the hierarchy.
destination	Object	Indicates the details of the destination record where you want to move the record.
destination.relationshipIdentifier	Object	Indicates the relationship details of the destination record.
destination.relationshipIdentifier.businessId	String	Business ID of the relationship between the target record and the hierarchy.
destination.relationshipIdentifier.relationship	String	Internal ID of the relationship between the target record and the hierarchy.
destination.hierarchyBusinessId	String	Business ID of the hierarchy. **Note:** You must specify this parameter only when you want to move records to a different hierarchy.

POST response

The response shows the response code and the details of the records that are moved within the same hierarchy or to a different hierarchy.

The following table describes the parameters in the response:

Parameter	Type	Description
approvalRequired	Boolean	Identifies whether the request triggers an approval workflow. If the request requires an approval, the value is true. If the request doesn't require an approval, the value is false.
succeeded	Array	An array of records that are moved successfully.
succeeded.relationshipIdentifier	Object	Indicates the relationship details of the records that are moved.
succeeded.relationshipIdentifier.businessId	String	Business ID of the relationship between the record that's moved and the hierarchy.
succeeded.relationshipIdentifier.relationship	String	Internal ID of the relationship between the record that's moved and the hierarchy.
failed	Array	An array of records that weren't moved because of errors.

POST example to move records within the same hierarchy

You can use the following request to move records within the same hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM0000000000K/nodes?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX

{
        "relationshipIdentifier": {
             "businessId": "MDM0000000001Y",
                "relationship": "c360_organization_to_hospital"
        },
        "destination": {
            "relationshipIdentifier": {
               "businessId": "MDM00000000028",
                "relationship": "c360_organization_to_hospital"
            }
        }
    }
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM0000000001Y",
                "relationship": "c360_organization_to_hospital"
            }
        }
    ],
```

```
    "failed": []
}
```

If approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM00000000001Y",
                "relationship": "c360_organization_to_hospital"
            }
        }
    ],
    "failed": []
}
```

POST example to move records to a different hierarchy

You can use the following request to move parent and child records to a different hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000001O/nodes/move?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
{
        "relationshipIdentifier": {
             "businessId": "MDM0000000000U",
                "relationship": "c360_organization_to_hospital_1789022677"
        },
        "destination": {
            "hierarchyBusinessId":"MDM0000000000K"
        }
}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM00000000000U",
                "relationship": "c360_organization_to_hospital_1789022677"
            }
        }
    ],
    "failed": []
}
```

If approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM00000000000U",
                "relationship": "c360_organization_to_hospital_1789022677"
            }
        }
```

```
    ],
    "failed": []
}
```

POST example to move a record as a first-level node to a hierarchy

You can use the following request to move records within the same hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM000000000014/nodes?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

{
        "relationshipIdentifier": {
             "businessId": "MDM0000000001Y",
                "relationship": "c360_organization_to_hospital"
        },
        "destination": {
            "hierarchyBusinessId": "MDM0000000000K"
            }
        }
}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false,
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM0000000001Y",
                "relationship": "c360_organization_to_hospital"
            }
        }
    ],
    "failed": []
}
```

If approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true,
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM0000000001Y",
                "relationship": "c360_organization_to_hospital"
            }
        }
    ],
    "failed": []
}
```

Delete Nodes from a Hierarchy

Use the Delete Nodes from a Hierarchy API to delete one or more records from a hierarchy. When you delete records from a hierarchy, the API deletes only the relationship between the record and the hierarchy. You can pass only one record in a single request for deletion. If the record has a subtree, the subtree can contain up to 50 child records for a single delete request.

The API uses the DELETE method.

DELETE request

To delete records from a hierarchy, submit a DELETE request with the following URI:

```
DELETE <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>/
nodes?sourceSystem=<sourceSystem>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model.
businessId	String	Business ID of the hierarchy in the hierarchy model.
sourceSystem	String	Internal ID of the source system to which the hierarchy belongs.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
relationshipIdentifier	Object	Indicates the relationship details of the record that you want to delete from the hierarchy. To delete the first-level nodes from a hierarchy, you can get the relationship identifier details from the response of the Fetch Root Nodeson page 240API. To delete child records from a hierarchy, you can get the relationship identifier details from the response of the Fetch Child Nodeson page 244 API.
relationshipIdentifier.businessId	String	Business ID of the relationship between the record that you want to delete and the hierarchy.
relationshipIdentifier.relationship	String	Internal ID of the relationship between the record that you want to delete and the hierarchy.

DELETE response

The response shows the response code and the details of the records that are deleted from the hierarchy.

The following table describes the parameters in the response:

Parameter	Type	Description
summary	Object	Indicates the details of the records that are processed, succeeded, and failed.
summary.total	Integer	Total number of records that are submitted for deletion.
summary.succeeded	Integer	Number of records successfully deleted.

Parameter	Type	Description
summary.failed	Integer	Number of records that failed the deletion process.
succeeded	Array	Identifies the records that are successfully deleted.
succeeded.relationshipIdentifier	Object	Indicates the relationship details of the deleted records.
succeeded.relationshipIdentifier.businessId	String	Business ID of the relationship between the deleted record and the hierarchy.
succeeded.relationshipIdentifier.relationship	String	Internal ID of the relationship between the deleted record and the hierarchy.
failed	Array	Details of the records that failed the deletion process.

DELETE example

You can use the following request to delete records from a hierarchy:

```
DELETE <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM00000000010/nodes?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

[
    {
        "relationshipIdentifier": {
            "businessId": "MDM00000000000",
            "relationship": "c360_organization_to_hospital"
        }
    }

]
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "summary": {
        "total": 1,
        "succeeded": 1,
        "failed": 0
    },
    "succeeded": [
        {
            "relationshipIdentifier": {
                "businessId": "MDM00000000000",
                "relationship": "c360_organization_to_hospital"
            }
        }
    ],
    "failed": []
}
```

Filter Hierarchy

Use the Filter Hierarchy API to retrieve a list of hierarchies in a hierarchy model.

The API uses the POST method.

POST request

To filter a hierarchy, submit a POST request with the following URI:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/filter
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchies.

The following table describes the parameters that you can use in the request body:

Parameter	Type	Description
pageOffset	Integer	Number of pages to skip. For example, to skip the first two pages of the search results, set pageOffset to 2. Minimum is 0.
pageSize	Integer	Number of search results to display on each page. Default is 10. Maximum is 25.
sortBy	Array	A list of fields based on which the records are sorted. To sort results in ascending order, specify `+<Field Name`. To sort in descending order, specify `-<FieldName>`.
filters	Object	A list of fields that's used to filter the hierarchies in the hierarchy model.
filters._<operator>	Array	Use this parameter to set the filter condition. You can use filters._or to filter hierarchies that matches one of the conditions. You can use filters._and to filter hierarchies that match all the conditions.

Parameter	Type	Description
filters.name	String	Name of the field.
filters.meta.businessId	String	Business ID of the record. When you use meta fields to filter hierarchies in a hierarchy model, ensure that you use the keyword `meta` before to the meta field name. For example, `meta.businessId`.

POST response

The response shows the response code and the list of hierarchies based on the hierarchy model.

The following table describes the parameters in the response:

Parameter	Type	Description
first	Boolean	Indicates whether the current page is the first page.
last	Boolean	Indicates whether the current page is the last page.
page	Integer	Indicates the page number.
size	Integer	Indicates the requested page size.
numberOfElements	Integer	Actual number of elements on the current page.
content	Array	Indicates the details of the hierarchy and the first-level nodes that are returned.
content.name	String	Name of the hierarchy.
content.description	String	Description of the hierarchy.
content.leaf	Boolean	Indicates whether the hierarchy represents an end position within the hierarchy model.

The following table describes the `meta` parameters in the response:

Parameter	Type	Description
businessId	String	Business ID of the hierarchy in the hierarchy model.
businessEntity	String	Internal ID of the business entity associated with the hierarchy.

Parameter	Type	Description
state	String	Indicates the state of the hierarchy. For example, ACTIVE indicates whether the hierarchy is active.
validation	String	Indicates the validation status of the hierarchy. You can view one of the following validation statuses: - PENDING. Indicates that the hierarchy isn't yet validated. - PASSED. Indicates that the hierarchy is validated and has no errors. - FAILED. Indicates that the hierarchy is validated and has validation errors.
consolidation	String	Indicates the match and merge status of the hierarchy. You can view one of the following match and merge statuses: - MATCH_DIRTY. Indicates that the hierarchy hasn't undergone the match process. - MATCH_INDEXED. Indicates that match keys are generated for the hierarchy. - MATCHED. Indicates that the hierarchy matched other hierarchies based on the match configuration, and is ready for merging. - CONSOLIDATION PENDING. Indicates that the hierarchy hasn't undergone the match process. - CONSOLIDATION INDEXED. Indicates that match keys are generated for the hierarchy. - CONSOLIDATED. Indicates that the hierarchy is merged either manually or automatically. - NOT READY FOR MATCH. Indicates that you've excluded the hierarchy from participating in the match process.
searchIndex	String	Indicates whether the hierarchy is indexed for search. SEARCH_INDEXED denotes that the hierarchy is searchable.
createdBy	String	Name of the user who created the hierarchy.
creationDate	String	Date when the hierarchy was created.
updatedBy	String	Name of the user who updated the hierarchy.
lastUpdateDate	String	Date when the hierarchy was last updated.

POST example

You can use the following request to filter a hierarchy:

```
POST <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/filter
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

{
    "pageSize":10,
    "pageOffset":0,
    "sortBy": [
        "+name"
             ],
    "filters": {
        "_or": [
            {
                "name": "apollo"
            },
            {
                "meta.businessId": "MDM0000000000K"
            }
        ]
    }
}
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

 {
    "first": true,
    "last": true,
    "page": 0,
    "size": 10,
    "numberOfElements": 3,
    "content": [
        {
            "name": "Apollo Hospitals Region-wise Structure ",
            "description": "The hierarchy contains the region-wise location of the
Apollo hospital group.",
            "leaf": false,
            "meta": {
                "businessEntity": "hospital_hierarchy",
                "businessId": "MDM0000000000K",
                "state": "ACTIVE",
                "validation": "PASSED",
                "consolidation": "MATCH_DIRTY",
                "searchIndex": "SEARCH_INDEXED",
                "createdBy": "Voyagers_AutoRel1Pod",
                "creationDate": 1789024484374,
                "updatedBy": "Voyagers_AutoRel1Pod",
                "lastUpdateDate": 1789104808383
            }
        },
        {
            "name": "Apollo Hospitals Department ",
            "description": "",
            "leaf": true,
            "meta": {
                "businessEntity": "hospital_hierarchy",
                "businessId": "MDM000000000014",
                "state": "ACTIVE",
                "validation": "PASSED",
                "consolidation": "MATCH_DIRTY",
                "searchIndex": "SEARCH_INDEXED",
                "createdBy": "Voyagers_AutoRel1Pod",
                "creationDate": 1789105378422,
                "updatedBy": "Voyagers_AutoRel1Pod",
                "lastUpdateDate": 1789105401406
```

```
            }
        },
        {
            "name": "Apollo Hospitals ICU ",
            "description": "",
            "leaf": true,
            "meta": {
                "businessEntity": "hospital_hierarchy",
                "businessId": "MDM000000000lE",
                "state": "ACTIVE",
                "validation": "PASSED",
                "consolidation": "MATCH_DIRTY",
                "searchIndex": "SEARCH_INDEXED",
                "createdBy": "Voyagers_AutoRel1Pod",
                "creationDate": 1789105451578,
                "updatedBy": "Voyagers_AutoRel1Pod",
                "lastUpdateDate": 1789105454090
            }
        }
    ]
}
```


Update Hierarchy

Use the Update Hierarchy API to update the name and description of a hierarchy in a hierarchy model. You can update only one hierarchy in a single request.

The API uses the PUT method.

PUT request

To update the name and description of a hierarchy, submit a PUT request with the following URI:

```
PUT <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>?
sourceSystem=<sourceSystem
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
Hierarchy Model	String	Name of the hierarchy model that contains the hierarchy.
businessId	String	Business ID of the hierarchy that you want to update.
sourceSystem	String	Internal ID of the source system that contains the hierarchy.

The following table describes the parameters that you can use in the request body:

Note: You can specify the parameter that you want to update in the request body.

Parameter	Type	Description
name	String	Optional. Updated name of the hierarchy.
description	String	Optional. Updated description that explains the purpose of the hierarchy.

PUT response

The response shows the response code and approval workflow. When you submit a REST API request to update a hierarchy, MDM SaaS verifies your existing user role permissions and the approval workflow configuration. The response indicates whether you require an approval to update the hierarchy. The `approvalRequired` response parameter identifies whether the request triggers an approval workflow. If the request requires an approval, the response returns the value as true. If the request doesn't require an approval, the response returns the value as false.

PUT example

You can use the following request to update a hierarchy:

```
PUT <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/MDM0000000000K?
sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX

{
      "name": "Apollo Hospitals Region-wise Structure",
      "description": "The hierarchy contains the region-wise location of the Apollo
hospital group."
}
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true
}
```

Delete Hierarchy

Use the Delete Hierarchy API to delete a hierarchy from the hierarchy model. When you delete a hierarchy, the API doesn't delete the records in the hierarchy. It deletes only the relationship between the hierarchy and the records in the hierarchy. You can delete only one hierarchy in a single request.

The API uses the DELETE method.

DELETE request

To delete a hierarchy, submit a DELETE request with the following URI:

```
DELETE <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/<businessId>?
sourceSystem=<sourceSystem>
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchy.
businessId	String	Business ID of the hierarchy in the hierarchy model.
sourceSystem	String	Internal ID of the source system to which the hierarchy belongs.

DELETE response

The response shows the response code and approval workflow. When you submit a REST API request to delete a hierarchy, MDM SaaS verifies your existing user role permissions and the approval workflow configuration. The response indicates whether you require an approval to delete the hierarchy. The `approvalRequired` response parameter identifies whether the request triggers an approval workflow. If the request requires an approval, the response returns the value as true. If the request doesn't require an approval, the response returns the value as false.

DELETE example

You can use the following request to delete the hierarchy from the hierarchy model:

```
DELETE <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/
MDM000000000000?sourceSystem=c360.default.system
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

If no approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": false
}
```

If the approval workflow is configured, you get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "approvalRequired": true
}
```

Find Hierarchies by Business ID of a Record

Use the Find Hierarchies by Business ID of a Record API to find hierarchies that a record is part of based on its business ID.

The API uses the GET method.

GET request

To find hierarchies that a record is part of based on its business ID, submit a GET request with the following URI:

```
GET <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/nodes/
<businessEntity>/<businessId>/instances
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchy.
businessEntity	String	Internal ID of the business entity associated with the record for which you want to find hierarchies.
businessId	String	Business ID of the record for which you want to find hierarchies.

The API doesn't contain any parameters in the request body.

GET response

The response shows the response code and hierarchies that the record is part of based on its business ID.

The following table describes the parameters in the response:

Name	Type	Description
record	Object	Details of the record for which you retrieved all hierarchies.
record.businessId	String	Business ID of the record in the hierarchy.
record.businessEntity	String	Internal ID of the business entity that's associated with the record.
instances	Array	List of hierarchies in which the record participates.
instances.name	String	Display name of the hierarchy.
instances.description	String	A short description that provides the context about the purpose of the hierarchy.
instances.leaf	Boolean	Indicates whether the hierarchy represents the end position. The value is `true` if the hierarchy is the last hierarchy in the branch, or `false` if it has more hierarchies.
instances.meta	Object	Displays the meta details of the hierarchy.

The following table describes the `meta` parameters in the response:

Parameter	Type	Description
businessId	String	Business ID of the hierarchy.
createdBy	String	Name of the user who created the hierarchy.
creationDate	String	Date when the hierarchy was created.

Parameter	Type	Description
updatedBy	String	Name of the user who updated the hierarchy.
lastUpdateDate	String	Date when the hierarchy was last updated.

GET example

You can use the following request to find all hierarchies that a record is part of based on its business ID:

```
GET <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/nodes/
c360.organization/MDM000000000P0/instances
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "record": {
        "businessId": "MDM000000000P0",
        "businessEntity": "c360.organization"
    },
    "instances": [
        {
            "name": "Apollo Hospitals Department",
            "description": "",
            "leaf": false,
            "meta": {
                "businessId": "MDM00000000014",
                "createdBy": "Voyagers_AutoRel1Pod",
                "creationDate": 1789105378422,
                "updatedBy": "Voyagers_AutoRel1Pod",
                "lastUpdateDate": 1789105401406
            }
        },
        {
            "name": "Apollo Hospitals Region-wise Structure",
            "description": "The hierarchy contains the region-wise location of the
Apollo hospital group.",
            "leaf": false,
            "meta": {
                "businessId": "MDM0000000000K",
                "createdBy": "Voyagers_AutoRel1Pod",
                "creationDate": 1789024484374,
                "updatedBy": "Voyagers_AutoRel1Pod",
                "lastUpdateDate": 1789104808383
            }
        }
    ]
}
```

Location of a Record in a Hierarchy

Use the Location of a Record in a Hierarchy API to retrieve the exact location of a specific record in a hierarchy. It returns the path from the first-level node to the child records. It also retrieves the depth of the

child record within the hierarchy. The API returns a maximum hierarchy depth of up to 9 levels. At depth level 3, a record can have up to 100,000 child records.

The API uses the GET method.

```
GET <baseApiURL>/shm-service/public/api/v1/hierarchies/<HierarchyModel>/
<HierarchybusinessId>/nodes/<businessEntity>/<RecordbusinessId>/location
```

The following table describes the parameters that you can use in the request:

Parameter	Type	Description
HierarchyModel	String	Name of the hierarchy model that contains the hierarchy.
HierarchybusinessId	String	Business ID of the hierarchy in the hierarchy model.
businessEntity	String	Internal ID of the business entity that's associated with the record for which you want to retrieve its location.
Recordbusiness ID	String	Business ID of the record for which you want to retrieve its location.

The API doesn't contain any parameters in the request body.

GET response

The response shows the response code and the details of the record and its path.

The following table describes the parameters in the response:

Name	Type	Description
record	Object	Details of the record for which you retrieved the location.
record.businessId	String	Business ID of the record in the hierarchy.
record.businessEntity	String	Internal ID of the business entity that's associated with the record.
paths	Array	An array of path objects that are linked to the record.
paths.path	Array	The ordered sequence of records traversed from the first-level node to the child record. Each entry includes the business ID, business entity, and the relationship details of the record that connects to the parent record.
paths.path.businessId	String	Business ID of the record in the path.
paths.path.businessEntity	String	Internal ID of the business entity that's associated with the record in the path.

Name	Type	Description
paths.path.relationshipFromParent	String	Specifies the exact relationship that connects the record to its immediate parent in the hierarchy. The value is `null` for the first-level node in the path because it has no parent record.
paths.depth	Integer	The depth of the record within the hierarchy. It represents the number of levels between the first-level node and the record. For example, if the requested record is the direct child of the first-level node, the response returns the value as `1`.

GET example

You can use the following request to retrieve the exact location of a specific record in a hierarchy :

```
GET <baseApiURL>/shm-service/public/api/v1/hierarchies/hospital_hierarchy/MDM00000000014/
nodes/c360.organization/MDM000000000NE/location
Content-Type: application/json
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

You get the following response:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
    "record": {
        "businessId": "MDM000000000NE",
        "businessEntity": "c360.organization"
    },
    "paths": [
        {
            "path": [
                {
                    "businessId": "MDM000000000NM",
                    "businessEntity": "c360.organization",
                    "relationshipFromParent": null
                },
                {
                    "businessId": "MDM000000000NE",
                    "businessEntity": "c360.organization",
                    "relationshipFromParent": "c360_organization_to_hospital_1789022677"
                }
            ],
            "depth": 1
        }
    ]
}
```

INDEX

A

adding
  record 51
API
  business entity record 51
  hierarchy 226
  merge 107
  search 20, 112, 120, 121
  source record 81

H

hierarchy API 226

I

Informatica Global Customer Support
  contact information 8
Informatica Intelligent Data Management Cloud
  web site 7

M

maintenance outages 8
merge API 107

R

resources
  search 108

S

search API 20
Search Match API version 1 112
search match API_v2 120, 121
source record API 81
status
  IDMC 8
system status 8

T

trust site
  description 8

U

upgrade notifications 8

W

web site 7