Informatica® Business 360 Console
October 2026

Define the Data Model

Informatica Business 360 Console Define the Data Model
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-30

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- Intelligent Data Management Cloud Communities 5
- IDMC Marketplace 5
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: Defining the data model 7

Prerequisites for defining your data model 7

Chapter 2: Defining business entities 8

Custom business entity configuration process 9

Defining custom business entities 10

Configuring predefined business entities 10

Business entity properties 10

- Error remediation 11
- Business ID format 12
- Subscribed record type 12
- Data domain tags 14

Review the predefined business entities 14

Create a custom business entity 15

Business entity field types 15

- Integer field 16
- Date and Time field 16
- Field group 16
- Dynamic fields 16
- URL fields 21
- System fields 22

Add fields to a business entity 22

- Add a picklist 23
- Add a dependent picklist 24
- Add business entity record fields 26
- Add dynamic fields 26

Configure the field properties 28

- Configure general properties for a field 28
- Default values for business entity field types 30
- Rich text formatting for text fields 31

Configure data quality properties for a field. . . . 32
Configure search and reports properties for a field. . . . 32
Limits on search and reports properties. . . . 33
Calculated fields. . . . 34
Enable last updated dates for source records. . . . 36
Forcefully ingress source records. . . . 37
Unprocessed source records. . . . 37
Example: Ingress data with source last updated date. . . . 37
Source record with an old last updated date. . . . 38
Source record with a newer last updated date. . . . 38
Edit a business entity. . . . 39

Chapter 3: Defining reference data. . . . 41

Rules and guidelines for using reference data. . . . 42
Create reference data. . . . 42

Chapter 4: Defining dynamic pools. . . . 44

Create a dynamic pool. . . . 44
Using keyboard shortcuts for dynamic pools. . . . 45
Finding dynamic fields in dynamic pools. . . . 47
Edit a dynamic pool. . . . 48

Chapter 5: Defining relationships. . . . 49

Relationship types. . . . 49
Hierarchical relationships. . . . 49
Examples of hierarchical relationships. . . . 49
Relationship asset. . . . 50
Examples of relationship assets. . . . 51
Business entity record attribute. . . . 51
Examples of business entity record attribute relationships 51
Guidelines to create relationship objects. . . . 52
Create a relationship. . . . 55
Define relationship attributes (Optional). . . . 55

Chapter 6: Defining hierarchy models. . . . 57

Step 1. Create a hierarchy model. . . . 58
Step 2. Configure the top-level node. . . . 59
Step 3. Add a node. . . . 59
Step 4. Define relationship attributes (Optional). . . . 60

Index. . . . 61

Preface

Follow the instructions in *Define the Data Model* to build data models and configure data quality, matching, and survivorship rules. Learn how to define business entities, and the hierarchical and network of relationships between business entities in the model.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Defining the data model

You can use the predefined data model and customize it to suit your business needs or define a custom data model.

To define your data model, perform the following tasks:

- Customize predefined business entities, or define custom business entities and configure data quality, match model, and survivorship.
- Define reference data, which is a set of values, to use in picklists that you include in business entities.
- Define relationships between business entities.

Prerequisites for defining your data model

To define a data model, you need to analyze, strategize, and define your business and data requirements by collaborating with various stakeholders.

Before you define a data model, perform the following steps:

- Understand the business objectives and requirements for your data management project.
- Provide insights into what various stakeholders want and need from the data management project.
- Identify the source systems that contribute to the master data.
- Analyze the attributes and quality of the data that you want to consolidate into master data.
- Identify the business entities and the relationships between business entities that are critical to your data model.
- Identify reference data, such as lists of countries, currencies, products, gender, and salutations, that your organization uses.

CHAPTER 2

Defining business entities

A business entity is an entity of importance to your organization and consists of fields that support your data needs. To define a business entity, decide on the fields based on the data that your source systems will contribute to the master data.

For example, a company that manufactures cars might define business entities for some or all of the following entities: customers, employees, suppliers, factories, materials, and products. A charitable organization might define donors, households, and projects. A health care provider might define doctors, care sites, and insured services.

When you use the predefined data model, edit the business entity properties and fields to match the needs of your organization. For example, you can change the name of the business entity, change field names or remove fields that are not relevant to your organization. You can also create custom configurations around data quality, search, and survivorship.

To define a business entity, you often use an iterative process. You can come back later to add more fields and to modify or add configurations, such as data quality, search, and survivorship.

After you modify or add configurations, instruct users of business applications to refresh their browsers to apply the change. For example, when you add a field to a business entity, the field appears in the records of the business entity after users refresh their browsers. If users don't refresh their browsers, the fields don't appear.

Before you define a business entity, determine the type of business entity that you want to use.


You can define and use the following types of business entities:

- Predefined business entities
- Custom business entities

Custom business entity configuration process

To be able to define and use a custom business entity, ensure that you follow the steps in the configuration process.

The following image walks you through the steps in the custom business entity configuration process:

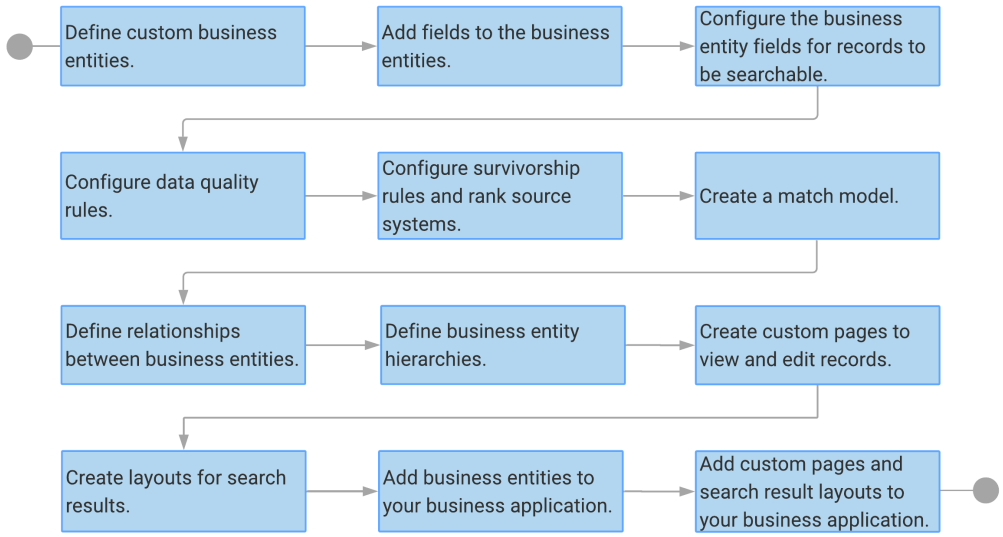

The following table lists the steps in the custom business entity configuration process and their reference content:

Configuration Step	Reference Content
Step 1. Define custom business entities	"Defining custom business entities" on page 10
Step 2. Add fields to the business entities	"Add fields to a business entity" on page 22
Step 3. Configure the business entity fields for records to be searchable	"Configure search and reports properties for a field" on page 32
Step 4. Configure data quality rules	Configuring data quality
Step 5. Configure survivorship rules and rank source systems	Configuring survivorship for business entity
Step 6. Create a match model	Creating a match model from scratch
Step 7. Define relationships between business entities	"Create a relationship" on page 55
Step 8. Define business entity hierarchies	Chapter 6, "Defining hierarchy models" on page 57
Step 9. Create custom pages to view and edit records	Creating a custom page
Step 10. Create layouts for search results	Configure a search result layout component

Configuration Step	Reference Content
Step 11. Add business entities to your business application	Add business entities to an application
Step 12. Add custom pages and search result layouts to your business application	Configure search for an application

Defining custom business entities

To define a custom business entity, perform the following tasks:

1. "Create a custom business entity" on page 15
2. "Add fields to a business entity" on page 22
3. "Configure the field properties" on page 28

Configuring predefined business entities

To configure a predefined business entity, perform the following tasks:

1. "Review the predefined business entities" on page 14
2. "Add fields to a business entity" on page 22
3. "Configure the field properties" on page 28

Business entity properties

You can configure business entity properties that suit your business requirements.

The following table describes the business entity properties:

Property	Description
Display Name	Required. Name of the business entity. **Note:** Ensure that you don't use the name of the predefined business entities or the reserved keyword `xrefLinks` in the display name.
Internal ID	Required. A unique business entity identifier, which is generated based on the display name that you enter. You can't change the internal ID after you create the business entity. **Note:** Ensure that you don't use the name of the predefined business entities or the reserved keyword `xrefLinks` in the internal ID.
Description	Optional. A description of the business entity.

Property	Description
Location	Required. Project or folder within which you want to save the business entity.
Icon	Optional. Icon to represent the business entity for easy identification.
Subscribed Record Type	Required. Indicates the record type that your organization is licensed to use for managing master data. MDM SaaS uses the record types to track and report data consumption. For more information about subscribed record type, see "Subscribed record type" on page 12.
Data Domain Tags	Optional. Tags that identify the business data domain of your subscribed record types. You can use predefined or enter custom tags. For more information about data domain tags, see "Data domain tags" on page 14.
Error Remediation	Optional. Indicates whether you can save records with validation errors in real time through REST APIs or the user interface. For more information about error remediation, see "Error remediation" on page 11.
Allow product experience agent to share data with external LLMs	Optional. Indicates whether the product experience agent in CLAIRE Copilot can share the metadata and data of a business entity with external LLMs to improve recommendations for data enrichment and classification. Use this property to enable or disable the product experience agent for a business entity. **Preview Notice:** Effective in the April 2026 release, the product experience agent is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.
Business ID Format	Required. Format for business IDs that MDM SaaS generates for records. For more information about the business ID format, see "Business ID format" on page 12.

Error remediation

Enable error remediation to save records with validation errors in real time through REST APIs or the user interface. MDM SaaS tags records with validation statuses and provides filters for validation status after you enable remediation. MDM SaaS doesn't automatically validate records that were created before you enabled error remediation. To validate those records, you must edit records.

After you enable error remediation and save records, MDM SaaS tags records with validation statuses. Also, the search results page includes the validation status filter to filter search results by validation status, errors, and error types.

If you don't enable error remediation, you can't save records with validation errors in real time. However, you can ingress records with errors through batch jobs and file import. These records aren't tagged with validation statuses, and the search results page doesn't include the validation status filter.

When you disable error remediation for a business entity, you can't view charts in reports generated based on records with validation errors for the business entity.

Note: By default, the user interface displays the field group associated with error remediation for business entities irrespective of whether error remediation is enabled. When you enable error remediation, the field group displays the validation errors of fields. When you disable error remediation, the field group doesn't display any validation errors.

When you import a business entity with error remediation enabled, the imported business entity includes the error remediation settings only if the business entity is new to the target organization. If the business entity

already exists in the target organization without error remediation enabled, the imported business entity doesn't reflect the updated error remediation setting.

Business ID format

Business IDs are unique identifiers of records that belong to a business entity. When a record is created, MDM SaaS assigns a business ID to the record in the specified format.

You can select one of the following formats:


- Alphanumeric. Use 14 to 24 characters, starting with a prefix that consists of three characters. The prefix can contain uppercase letters and numbers. For example, P8X4AB78YU2WE2.
- Numeric. Use 15 to 24 numbers including a prefix of three numbers. For example, 999456789222123. You can enter an offset value. The business ID of records created starts at the offset value, excluding the prefix. For example, with an offset value of 100000 and a prefix of 999, the starting business ID is 999000000100000. Records with the prefix 999 are ingressed if their business IDs are below the offset value and rejected if they are equal to or above it.

Business IDs are generated in a non-linear sequential order. For example, if you have configured the format of the business ID as numeric, length as 15 numbers, and a prefix as 999, 999000000000001 is the business ID generated for a record. MDM SaaS might assign the next business ID as 999000000000012.

Before you set the business ID format for a business entity that contains records, you must purge all of its records. After a data purge, you can reuse the business IDs of the purged records. Ensure that the business IDs are lower than the last generated business ID. For example, if 999000000008899 was the last generated business ID before the data purge, you can ingress records with business IDs lower than the last sequence number 8899, such as 999000000007755.

When you set the business ID format for a business entity, you can now preview it to understand how a business ID appears.

The following image shows the business ID configuration of a business entity:

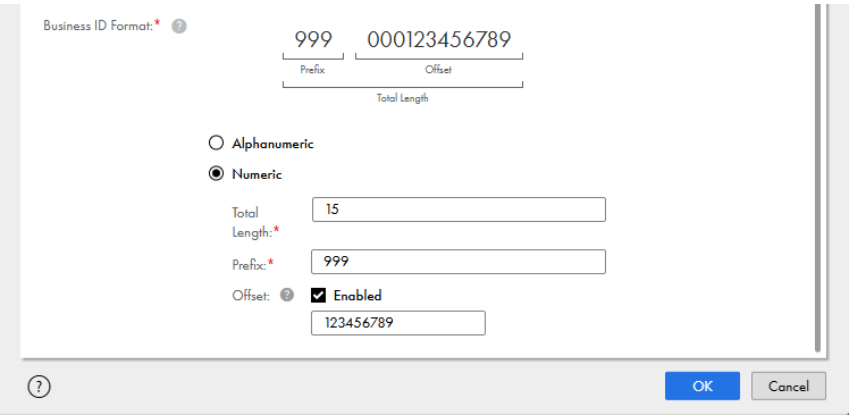

Note: When you specify a custom business ID for records that you create through an ingress job or API, ensure that its length doesn't match the length that the business entity uses for the business ID format. For example, if you specified 111 as the prefix and 15 as the length in the business ID format for a business entity, ensure that you don't use 111560000800000 as a custom business ID. However, you can use a custom business ID with a prefix of 111 but with a different length.

Subscribed record type

A subscribed record type is the record type that your organization is licensed to use in MDM SaaS. You can specify the subscribed record type as a business entity property. For example, to manage retail customer

master data, specify Customer B2C as the subscribed record type. MDM SaaS uses the subscribed record type to track and report data consumption based on your license.

The following table describes the subscribed record types available in MDM SaaS:

Subscribed Record Type	Description
Customer B2B	Records pertaining to any legal entity, such as commercial, healthcare, or governmental. It excludes any entity that's already an existing predefined subscribed record type, such as Supplier or Vendor.
Customer B2C	Records pertaining to any natural person, such as a customer or employee. It excludes any entity that's already an existing predefined person data domain, such as Healthcare Professionals.
Healthcare Professional	Records pertaining to any individual employed by, affiliated with, or otherwise associated with a healthcare organization.
Product 360	Records pertaining to finished products, parts, product structures, product types, product hierarchies, and associated attributes.
Supplier/Vendor	Records of anyone who provides goods or services to a company. A supplier might be an individual or an organization, such as, a vendor, distributor, or external alliance partner.
Custom Domain	Record types that aren't listed and have no built-in data domain-specific application features in the platform, such as locations or assets.
Supporting Entity	Supporting entity records aren't meant to generate a master record, consolidate data, manage data quality, or support reporting.

By default, MDM SaaS assigns the following subscribed record types to predefined business entities:

- Supplier/Vendor for Supplier and Contact business entities
- Product 360 for Item and Category business entities

You can assign an appropriate subscribed record type based on your use case to the predefined Person and Organization business entities, and custom business entities.

To accurately track data consumption, provide the correct subscribed record type for each business entity. If you are unsure about the subscribed record type, select **Assign Later**. After you verify the definitions of the subscribed record type against your license contract, update the value. Since MDM SaaS uses the subscribed record type to track data consumption, any inaccurate or arbitrary value affects historical records.

Note: After you add records to the business entity, MDM SaaS doesn't allow you to update the subscribed record type. If you want to update the subscribed record type, contact Informatica Global Customer Support. Informatica Global Customer Support reviews your request and allows you to update the subscribed record type for the business entity.

Additionally, to update the subscribed record type of a business entity, you can purge the records. However, to avoid inaccurate data consumption tracking, don't update the subscribed record type after you add records to the business entity.

For more information about subscribed record types, see Informatica Legacy Cloud Product Description Schedule Knowledge article.

Data domain tags

Data domain tags identify the business data domain for the subscribed record type. After you specify the subscribed record type, MDM SaaS displays the predefined data domain tags that are relevant to the subscribed record type. You can use predefined or custom tags to describe your data domain. You can update the data domain tags at any time. Additionally, you can enter more than one custom data domain tag for a subscribed record type. You can also remove custom tags.

Note: Data domain tags are for information only. MDM SaaS doesn't use the data domain tags to track data consumption.

The following table lists subscribed record types and their predefined data domain tags:

Subscribed Record Type	Data Domain Tags
Customer B2B	Health Care Organization, Legal Entity, and Organization
Customer B2C	Employee, Patient, Person, and Student
Healthcare Professional	Physician and Provider
Product 360	Finished Products, Parts, Product Hierarchies, Product Structures, Product Types
Supplier/Vendor	Supplier and Vendor
Custom Domain	Contracts and Location

You can enter custom data domain tags for the Supporting Entity subscribed record type.

After you enter custom data domain tags for a subscribed record type and save the business entity, MDM SaaS adds the tags to the available list of tags for the subscribed record type.

Review the predefined business entities

Review the predefined business entities to determine whether these consists of fields that support your business requirements.

1. Open a business entity from the **Explore** page.

   All the fields that the business entity includes appear on the canvas.
2. Review the business entity properties such as the display name to align it with your business requirements.
   a. Click the **Actions** icon, and then click **Properties**.
   b. In the **Business Entity** dialog box, edit the property values, and click **OK**.
3. Review the predefined fields to determine whether they meet your business requirements.
   - If a predefined field does not meet business requirements, determine the edits to the field to match your requirements.
   - If the predefined business entity does not include some fields that your business needs, note the missing fields so you can add the fields later.

4. Review the field properties such as data quality, survivorship, and search for each field to determine any changes that you might require.

Create a custom business entity

You can define a custom business entity and configure at least the required properties, such as display name and location.

1. Click **New**.

   The **New Asset** dialog box appears.
2. Click **Model** > **Business Entity**.
3. Click **Create**.

   The **Business Entity** dialog box appears.
4. Specify the business entity properties. For more information about business entity properties, see "Business entity properties" on page 10.
5. Click **OK**.

   The business entity is created and a blank canvas appears.
6. **Next step**: Add fields to the business entity.

Business entity field types

Your application includes predefined business entity basic, smart, and system fields. If the predefined fields don't meet the needs of your organization, edit the predefined field and add basic or smart fields that you need. These fields can appear in the business user interface as fields of records, such as the fields of master records and source records. Each field contains a single data item. For example, you can add a field to contain the full name and another field to contain the date of birth.

You can add the following types fields to business entities:

- Boolean
- Business Entity Record
- Date
- Date and Time
- Decimal
- Dependent Picklist
- Double
- Dynamic Field Definitions
- Dynamic Field Values
- Email Address
- Field Group
- Integer

- Picklist
- Postal Address
- Phone Number
- Text
- URL

You can also view system fields in business entities. System fields are predefined fields in each business entity.

For more information about system fields, see "System fields" on page 22.

Integer field

Use an integer field to store whole numbers.

In business applications, users can specify an integer value with a maximum of 16 digits. The maximum value that a user can specify is 9007199254740991. If the specified value exceeds the maximum length, the value is rounded to 16 digits.

Date and Time field

Use a date and time field to store date and time values, such as subscription timestamps and incorporation dates.

When you add the date and time field to a custom page, you can specify the date and time format. You can enter dates up to December 31, 9999, 23:59:59 UTC. MDM SaaS business applications display the date and time based on the time zone settings of your device.

When you specify values in data and time fields, ensure that you don't specify dates earlier than 1910. If you specify a date earlier than 1910, MDM SaaS applies an offset of 8 minutes and 50 seconds to the time value. For example, the value 04/06/1901 5:21:10 PM appears as 04/06/1901 5:30:00 PM.

Field group

Use a field group to group multiple related fields and store multiple entries of field values.

For example, an education field group can include the qualification type, qualification name, institution name, and student number fields. A record can have multiple entries for education.

Note: To optimize the performance of custom pages in business applications, ensure that you include up to 15 picklists in a field group. For nested field groups, include up to 15 picklists in each nesting level.

Dynamic fields

When you want a set of fields to vary across records of a business entity, configure dynamic fields. Dynamic fields aren't fixed and can be added or removed as needed for specific records.

When you use dynamic fields, a business user can add suitable dynamic fields for different records. Records related through a hierarchy or a graph relationship receive the dynamic fields, and the business users can add values to the dynamic fields.


For example, consider the Grocery and Electronics records that belong to a business entity, such as Category. Fields, such as Allergens and Ingredients, might be suitable for records related to Grocery records. Fields, such as Display and Camera, might be suitable for records related to Electronics records.

Consider the Borges Penne and Teddy 5G Mobile records that belong to another business entity, such as Item. Assign the Borges Penne record to the Grocery record and the Teddy 5G Mobile record to the Electronics record in a hierarchy.

The Borges Penne record gets the Allergens and Ingredients fields from the Grocery record, and you can add values for them in the Borges Penne record. Similarly, the Teddy 5G Mobile record gets the Display and Camera fields from the Electronics record, and you can add values for them in the Teddy 5G Mobile record.

To configure dynamic fields, you require a dynamic pool asset, dynamic field definitions attributes in a provider business entity, and dynamic field values attributes in a consumer business entity. Dynamic fields are contained in an asset called the dynamic pool. Dynamic fields are basic fields and field groups and a collection of these is a dynamic pool. You can create multiple dynamic pools to address different use cases. For example, create a dynamic pool for Products and another dynamic pool for Suppliers. As fields are not shared between dynamic pools the recommendation is to use multiple dynamic pools only for distinct use cases.

The following image shows an example of a dynamic pool, dynamic field definitions attributes, and dynamic field values attributes:

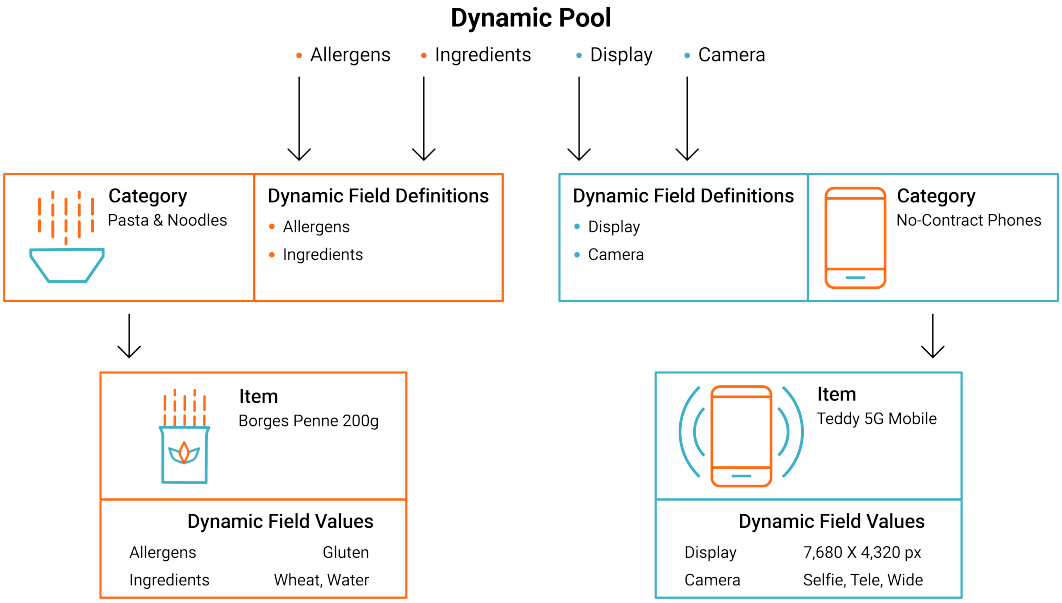


Dynamic fields attributes

When you configure dynamic fields, you need to define dynamic field definitions and dynamic field values attributes.

Dynamic field definitions

Dynamic field definitions are associated with a dynamic pool and acts as a container for the fields and field groups in the pool that users can select in business applications. Add a dynamic field definitions attribute to a provider business entity. Business users can select the fields and field groups that are relevant to a record that they create. You can also configure inheritance settings to determine how the records in a hierarchy can inherit these definitions. For more information on inheritance of dynamic field definitions, see "Inheritance of dynamic field definitions" on page 19.


The following image shows the dynamic field definitions, Pasta Shape and Pasta Style, selected for the Pasta & Noodles record:

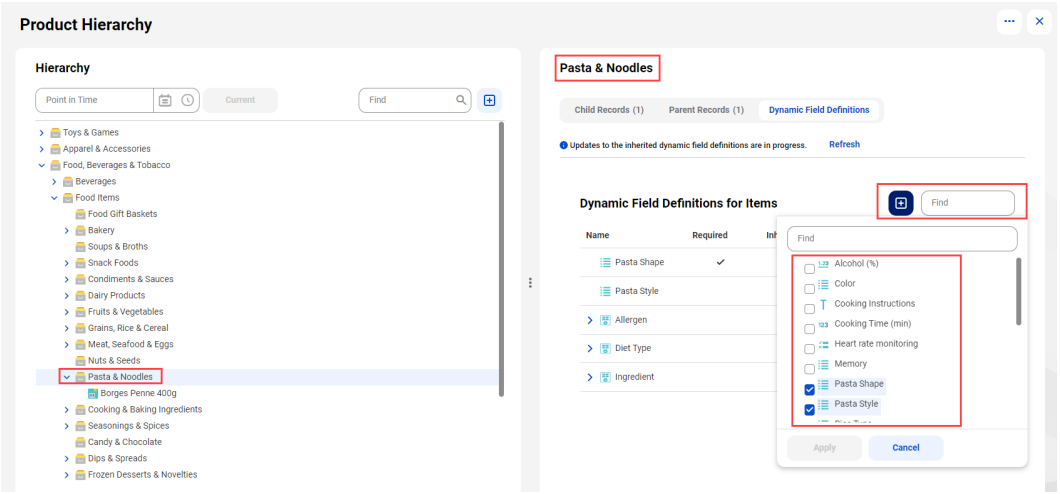


Dynamic field values

Dynamic field values are associated with a dynamic field definitions attribute that you added to a provider business entity. The dynamic field values attribute displays all the fields that are selected through the dynamic field definitions attribute. Add a dynamic field values attribute to a consumer business entity. Business users can enter values for the fields and field groups in records after they add these records to a hierarchy or relate through a graph relationship.

The following image shows the Borges Penne 400g record with the dynamic fields, Ingredient, Diet Type, and Allergen that are assigned to the Pasta & Noodles record:

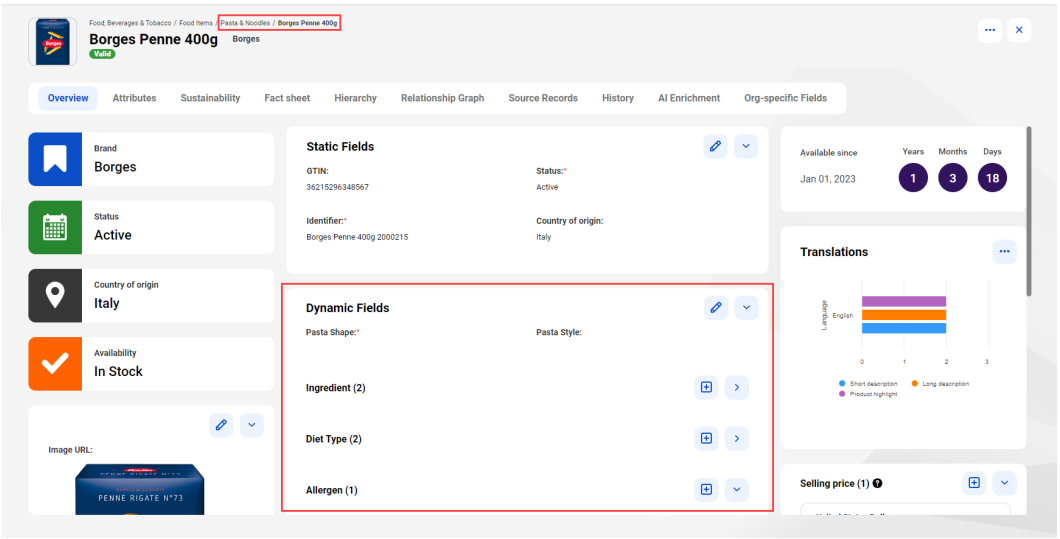

The following image shows how a dynamic pool, a dynamic field definitions attributes, and a dynamic field values attributes are related:

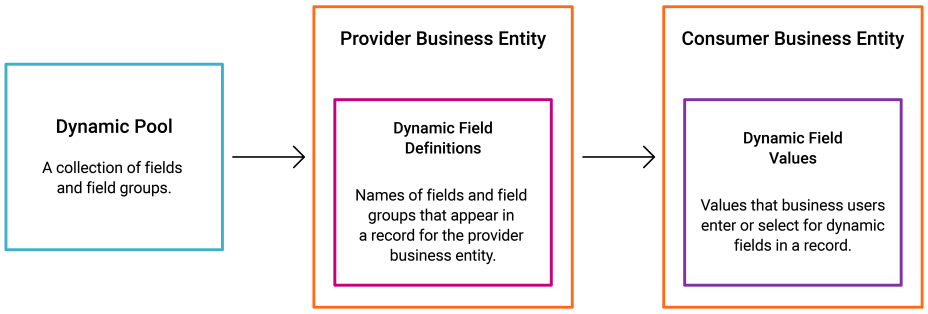

For more information about configuring dynamic fields, see "Add dynamic fields" on page 26.


Inheritance of dynamic field definitions

Records in a hierarchy can inherit dynamic field definitions from their parent records.

When you configure a dynamic field definitions attribute, you can specify how the attribute can inherit dynamic fields definitions from the same or another dynamic fields definitions attribute. The inheritance depends on a hierarchical relationship between the business entities that contain the dynamic field definitions attributes and the direction of the relationship. The hierarchy that contains the hierarchical relationship must be set to be searchable. When you assign a record to another record in a hierarchy, the child record inherits the dynamic field definitions from the parent record based on the relationship between them.

For example, add a record named Food & Beverages and set the dynamic field definitions to include Allergens and Ingredients. When you add a child record named Pasta & Noodles to the Food & Beverages record, the Pasta & Noodles record inherits the dynamic field definitions, such as Allergens and Ingredients, from the Food & Beverages record.

The following image shows the Pasta & Noodles record and the Borges Penne 400g record that inherits dynamic field definitions from their parent records within a hierarchy such as, Pasta Shape, Pasta Style, and Ingredient Name, from the Pasta and Noodles record:

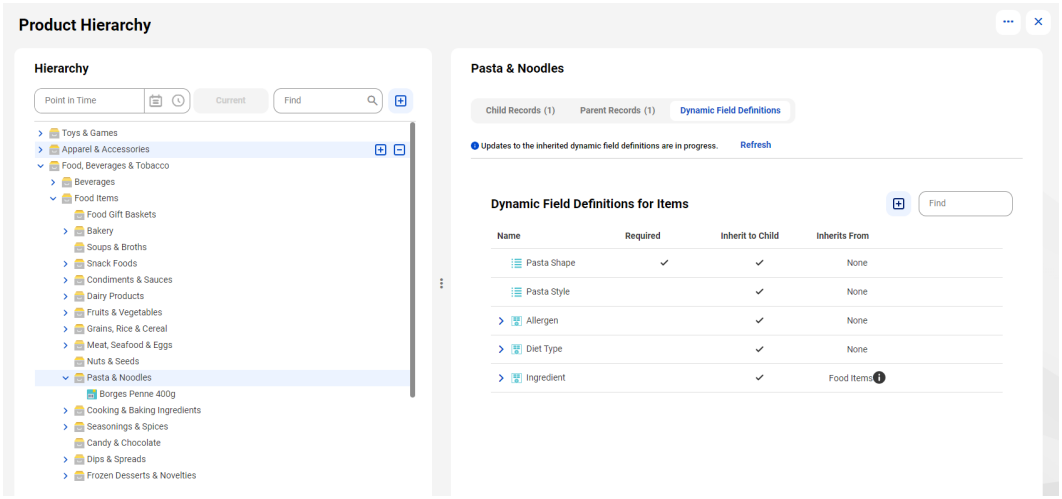

Note: To update the dynamic field definitions that the related records inherit, run the process hierarchies jobs. For more information about defining and running the process hierarchies job, see *Define and run a process hierarchies job*.

Features applicable to dynamic fields

Before you use dynamic fields, ensure that you understand the features applicable to dynamic fields.

- You can configure survivorship for dynamic fields. Each field group within a dynamic field values attribute is considered a block.
- You can ingress and egress dynamic field values and dynamic field definitions by using Business 360 FEP Connector. You can also egress data from dynamic field values or dynamic field definitions by using Business 360 Connector. However, you can't import data into dynamic fields through file import.
- You can configure permissions for user roles to access dynamic field definitions and dynamic field values attributes, but not to the specific fields and field groups in a dynamic pool. However, you can't configure data access rules for dynamic fields.
- You can edit dynamic field values attributes when you edit a record. However, you can't edit dynamic field values attributes when you create a record.
- You can view the history of updates to dynamic fields. When you create, update, or delete dynamic fields, the corresponding change events now appear on the History page.
- You can search for dynamic field values and filter search results based on dynamic fields.
- When you export search results, the exported data includes dynamic fields.
- You can't configure declarative match rules for dynamic fields.
- You can't define basic and advanced data quality rule associations for dynamic fields.
- You can create business events for changes to dynamic field values. Reviewers can review and edit dynamic field values in the edit mode of tasks. Reviewers can also compare changes to dynamic field values with the existing ones. However, you can't create business events for changes to dynamic field definitions, so reviewers can't compare or make changes to dynamic field definitions.
- You can't create reports based on dynamic fields.

You need to understand the limits and thresholds of dynamic field configuration before you design your data model. For more information about these limits and thresholds, see *Limits and thresholds*.

URL fields

Use a URL field to access digital assets, such as images, documents, and videos, that are hosted in third-party services. You can configure URL fields to show a preview of digital assets that are images or display URLs for downloading or accessing the content from third-party services.

Business users can specify URLs of digital assets when they create or update records.

You can set the purpose of URL fields when you configure their properties:

Preview content

Set to preview the URL content in the user interface. Business users can specify publicly accessible URLs to display thumbnail images, such as those of a person, product, or company logo.

Download content

Set to download digital assets when users access URLs from the user interface. For example, users can download a regulatory document through a URL. Ensure that business users have access to the digital assets in the third-party services.

Open content from source

Set to open the digital assets in the source service when business users access URLs from the user interface. Ensure that business users have access to the digital assets in the third-party services.

To safeguard data security, Informatica renders images from cloud services that are approved after evaluating them for security and compliance standards. For more information about the list of allowed cloud services, see *Design the User Interface*.

Guidelines for using URL fields

Consider the following guidelines before using URL fields:

- You can add a URL field to a business entity and dynamic pool. However, you can’t add URL fields as relationship attributes.
- You can configure rule associations for data enrichment for input mappings but can't configure for output mappings.
- You can use URL fields for exact match, but not for fuzzy match.
- You can't create reports based on URL fields.
- You can't define basic and advanced data quality rule associations for URL fields.
- You can't use DaaS rule associations for URL fields.
- You can't add URL fields to candidate selection criteria of a declarative rule.

Note: In this release, business applications display only images when you view records and search results.

System fields

System fields are predefined, read-only fields that are automatically populated at runtime for every business entity. Unlike custom fields, you can't add or update the values of system fields.

The following table describes the system fields that a business entity contains:

System Field	Description
Business ID	Business ID of the master records.
Created By	Name of the user who created the master records.
Created On	Date when the master record was created.
Last Updated By	Name of the user who last updated the master records.
Last Updated Date	Date when the master record was last updated.
Record State	State of the master record, such as active, pending, or inactive.
Source Record Details	A field group that stores metadata details of source records that contribute to the master record. The source record details field group includes fields such as, Source Business ID, Source Primary Key, and Source System.
Source Business ID	Business ID of the source records that contribute to the master record.
Source Primary Key	Unique identifier of source records that contribute to master records.
Source System	Source systems to which the source records belong.

Add fields to a business entity

To quickly define a business entity, start by adding smart fields. Smart fields are context-aware fields that have predefined properties, such as validation and match rules. The smart fields are building blocks for common fields, such as address, email, and phone. After you define smart fields, add basic fields for other types of data.

When you configure a field or a field group, ensure that you don't use the following reserved keywords in display names or internal IDs: `Message Type`, `_ingress`, `fieldGroup_State`, `sourcePKey`, and `parentId`.

1. Open the business entity from the **Explore** page.
2. In the fields panel, expand the **Smart Fields** and **Basic Fields** sections, and review the fields in each section.

   Note: You can't disable the fields that are part of the default search layout.
3. Double-click a field to add the field to the canvas, and then specify the general field properties, such as display name and internal ID.

   You can later configure field properties such as data quality, survivorship, and search.

4. If you added a smart field, click the down arrow to open and review the associated fields.

   Note: You cannot add or delete fields from a smart field.

   a. Click each field that is associated with the smart field and review the field properties.

   b. If required, edit the properties of the associated fields.

   c. To close the smart field, click the up arrow on the smart field.

5. If you add a picklist or a dependent picklist, select the reference data asset for the picklist field.

   For more information, see "Add a picklist" on page 23 and "Add a dependent picklist" on page 24.

6. If you add a dynamic field definitions attribute, select a dynamic pool to associate it with the dynamic field definitions attribute.

   For more information about adding a dynamic field definitions attribute, see " Add a dynamic field definitions attribute" on page 26.

7. If you add a dynamic field values attribute, select a dynamic field definitions attribute to associate it with the dynamic field values attribute.

   For more information about adding a dynamic field values attribute, see "Add a dynamic field values attribute" on page 27.

8. If you added a field group, click the down arrow to open the group and add fields.

   a. Double-click fields to add the fields to the canvas, and then specify the field properties.

   b. To close the field group, click the up arrow on the field group.

   Within a field group, you can nest up to six levels of field groups. You can't add smart fields to the nested field group at the last level.

9. If you added a URL field, select a URL purpose.

10. Define additional fields for the business entity.

11. Save the fields that you added to the business entity.

    a. Click **Save**.

       The validation process checks the field properties. If there are no errors, the fields are saved.

    b. If there are validation errors, correct the errors, and click **Save**.

12. To close the canvas, click the **Close** icon.

    The saved business entity appears in the **Explore** page.

Add a picklist

To provide a list of values for users to select from, you can add a picklist to a business entity. A picklist uses a list of values contained in a reference data asset. A maximum of 1000 picklist values that are sorted in alphabetical order can appear in business applications.

Preview Notice: Effective in the April 2025 release, when a picklist contains more than 200 values, the option to view the picklist values in a dialog box is now available for preview. A picklist can contain up to 10,000 values.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

When you configure a picklist, you can select existing reference data or add new reference data. Reference data sets created in Reference 360 appear along with reference data that you create in Business 360 Console. If you select a reference data that's created in Reference 360, Business 360 Console publishes the reference data with the default code list to Business 360 Console but excludes publishing any custom code lists.

For example, if the country reference data contains the enterprise country code list and a custom country code list in Reference 360, Business 360 Console publishes the country reference data with the enterprise country code list and excludes publishing the custom country code list.

Note: When you publish a reference data set in Business 360 Console, you can't delete the default code list of the reference data set in Reference 360.

1. In the fields panel, expand the **Basic Fields** section, and double-click the **Picklist** field to add it to the canvas.
2. Specify a display name and an internal ID.
3. Optionally, specify a description for the picklist field.
4. To select existing reference data, perform the following steps:
   a. Click the asset picker.
   b. In the **Select Reference Data** dialog box, select the reference data asset for the picklist field, and click **Select**.

      The selected reference data asset appears as a link in the **Reference Data** field. You can click the link to open the reference data in Reference 360.
5. To add new reference data, perform the following steps:
   a. Click **New**.
   b. In the **Reference data** dialog box, add the reference data properties, such as display name and location, and click **OK**.
   c. View the summary of the reference data, and click **Save**.

      You can view the reference data that you created in the **Default** folder on the **Explore** page.
6. If the reference data isn't multilingual, select one of the following cache options:

Option	Description
Display cached values	Lists the cached values in the business application.
Always read from Reference 360	Lists the latest values from Reference 360.

Add a dependent picklist

When the list of values that users select from has a dependency on a value that users select in another list, use a dependent picklist. For example, a list of states is dependent on the country selected from a countries list. When you add a dependent picklist, you must first add a parent picklist.

In a dependent picklist field, you use a list of values that a dependent reference data asset contains. Before you add parent and dependent picklist fields to a business entity, ensure that the parent and the dependent reference data assets to use in the picklists are configured. Also, ensure that both the dependent and parent picklists are root fields or belong to the same field group.

Note: Ensure that the root section or a field group entry in a record contains up to 50 picklists, including parent and dependent picklists.

1. Add a parent picklist, such as Country.
    a. In the fields panel, expand the **Basic Fields** section, and double-click the **Picklist** field to add it to the canvas.
    b. Specify a display name, such as Country, and an internal ID.
    c. Optionally, specify a description for the picklist field.
    d. To select existing reference data, perform the following steps:
        1. Click the asset picker.
        2. In the **Select Reference Data** dialog box, select the reference data asset for the picklist field, and click **Select**.
        The selected reference data asset appears as a link in the **Reference Data** field. You can click the link to open the reference data in Reference 360.
    e. To add new reference data, perform the following steps:
        1. Click **New**.
        2. In the **Reference data** dialog box, add the reference data properties, such as display name and location, and click **OK**.
        3. View the summary of the reference data, and click **Save**.
        You can view the reference data that you created in the **Default** folder on the **Explore** page.
    f. If the reference data isn't multilingual, select one of the following cache options:

Option	Description
Display cached values	Lists the cached values in the business application.
Always read from Reference 360	Lists the latest values from Reference 360.

2. Add a dependent picklist, such as State.
    a. In the fields panel, expand the **Smart Fields** section, and double-click the **Dependent Picklist** field to add it to the canvas.
    b. Specify a display name, such as State, and an internal ID.
    c. Optionally, specify a description for the picklist field.
    d. To select existing reference data, perform the following steps:
        1. Click the asset picker.
        2. In the **Select Reference Data** dialog box, select the reference data asset for the picklist field, and click **Select**.
        The selected reference data asset appears as a link in the **Reference Data** field. You can click the link to open the reference data in Reference 360.
    e. To add new reference data, perform the following steps:
        1. Click **New**.
        2. In the **Reference data** dialog box, add the reference data properties, such as display name and location, and click **OK**.

3. View the summary of the reference data, and click **Save**.
   You can view the reference data that you created in the **Default** folder on the **Explore** page.

f. If the reference data isn't multilingual, select one of the following cache options:

Option	Description
Display cached values	Lists the cached values in the business application.
Always read from Reference 360	Lists the latest values from Reference 360.

g. From the **Parent Picklist**, select a picklist.

   Note: The list contains only the parent picklists that are added to the canvas.

3. Optionally, add additional dependent picklists.

Add business entity record fields

Add business entity record fields to relate records. The users search for business entity records and select a record to relate by using this field. You can add up to 15 business entity record fields to a business entity.

1. In the fields panel, expand the **Basic Fields** section, and double-click **Business Entity Record**.
2. Specify a display name and an internal ID for the field.
3. Optionally, specify a description for the field.
4. In the **Business Entity** field, click the asset picker.

   The **Business Entity** dialog box appears.
5. Find and select a business entity for the field.
6. Click **Select**.

   The canvas appears with the selected asset in the **Business Entity Record** field.
7. To add more business entity record fields, repeat steps 1 through 6.
8. Save the business entity.

Add dynamic fields

Before you add dynamic fields, create a dynamic pool. You can then add a dynamic field definitions attribute to one business entity and a dynamic field values attribute to another related business entity.

For more information about creating dynamic pools, see “Create a dynamic pool” on page 44.

Add a dynamic field definitions attribute

Associate a dynamic field definitions attribute to a dynamic pool, and the attribute acts as a container for the fields and field groups in the dynamic pool. Users can select the relevant fields in business applications.

1. Open a business entity from the **Explore** page.
2. In the fields panel, expand the **Dynamic Fields** section.
3. Double-click **Dynamic Field Definitions** to add it to the canvas, and then specify the general field properties, such as display name and internal ID.
4. Select the dynamic pool to which you want to associate the dynamic field definitions attribute.

5. In the **Properties** section, click **Inheritance**.
6. Select a business entity that you want to participate in the inheritance of dynamic field definitions.

   A list of dynamic field definitions attributes that belong to the same dynamic pool appear.
7. Select a dynamic field definitions attribute from which you want to inherit the dynamic field definitions.
8. Select a hierarchical relationship that indicates the direction of inheritance for the dynamic field definitions.

   You can view the relationships that belong to searchable hierarchies and the selected business entities participate.
9. Click **Save**.
10. To close the canvas, click the **Close** icon.

Add a dynamic field values attribute

Associate a dynamic field values attribute in a consumer business entity to a dynamic field definition attribute from a provider business entity. The dynamic field values attribute displays all the fields that are selected through the dynamic field definitions attribute.

1. Open a business entity from the **Explore** page.
2. In the fields panel, expand the **Dynamic Fields** section.
3. Double-click **Dynamic Field Values** to add it to the canvas, and then specify the general field properties, such as display name and internal ID.
4. Select a business entity that contains the dynamic field definitions attributes.

   All the dynamic field definitions that you added to the selected business entity appear.
5. Select the dynamic field definitions attribute from which you want to get the dynamic field definitions for the child records in a hierarchy.

   Note: In a business entity, ensure that you don't add more than one dynamic field values attribute that uses the same dynamic pool through different dynamic field definitions attributes that refer to the same dynamic pool. Otherwise, the reindex job for the business entity fails.
6. Select a relationship between the provider and consumer business entities.

   You can view only the relationships that have the consumer business entity configured as Business Entity 1. When users assign records based on the selected relationship in a hierarchy or a graph, the child records get the dynamic field definitions from the parent records. For more information about creating a relationship, see “Create a relationship” on page 55.
7. Click **Save**.

Configure the field properties

After you review or add fields to the business entity, configure the field properties, such as general, data quality, search, and survivorship properties.

Configure general properties for a field

You can configure the general properties for a business entity field. Based on the type of field, the properties vary.

1. From the **Explore** page, find and open a business entity.
2. Select a field from the canvas.
3. Configure the general properties for the field.

   The following table lists the properties that you can configure for a field:

General property	Description
Status	Specifies whether to use the field in the business entity. To disable a field, select **Disabled**. **Note:** You can disable an optional basic field, smart field, and field group that do not have any dependencies. You cannot disable the fields that are part of the default search layout.
Display Name	Name of the business entity field. Ensure that you don't configure display names that are identical to the following system field names: - Error Message - Severity - Business ID - Created By - Created On - Last Updated By - Last Updated Date - Record State - Source Business ID - Source Primary Key - Source System When you export search results related to these business entities from your business application, the exported search results file includes information in an incorrect format.
Internal ID	Unique identifier of the business entity field.
Description	Description of the business entity field.
Maximum Length	Length of the string the field can contain. Applies to text fields.

General property	Description
Default Value	Value that you assign to the field, which automatically populates when users create records. For more information about default values, see "Default values for business entity field types" on page 30. **Preview Notice:** Effective in the October 2026 release, the ability to configure default values is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.
URL Purpose	Defines the purposes of URL fields. You can configure URL fields to preview content, download content, and open content from a source. For more information about URL fields, see "URL fields" on page 21.
Multiline field	Specifies whether the field can contain multiple lines of text separated by paragraph breaks or line breaks. For example, a multiline text field can contain an address with multiple lines.
Rich text field	Specifies whether to enable rich text formatting for a multiline text field. Use rich text formatting to style and enhance text by applying formatting options, such as bold, italics, underline, different fonts and colors, bullet points, and hyperlinks. For example, a rich text field can contain a product description with bold or colored text. If you disable this property for fields that already contain rich text, the content is retained as plain text. After you enable or disable the property for searchable fields, regenerate the search indexes to ensure accurate search results. If you skip regenerating search indexes, formatting tags and attributes might appear on various pages, including the search results page. For more information about rich text formatting, see "Rich text formatting for text fields" on page 31.
Calculated field	Specifies whether the field contains a value that's calculated based on a calculated field rule. The calculated field rule is based on the values of attributes of a business entity or relationship. You can configure integer, double, decimal, date, or date and time attributes to be calculated fields. For more information about calculated fields, see *Calculated fields*. **Preview Notice:** Effective in the November 2023 release, the ability to configure attributes to be calculated fields is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.
Precision	The total number of digits, including the decimal places. For example, 123.45 has a precision of 5. Applies to decimal fields.
Scale	The number of digits after the decimal place. For example, 123.45 has a scale of 2. Applies to decimal fields.

General property	Description
Reference Data	Name of reference data asset that contains the list of values for the field. Applies to the following field types: - Picklist - Dependent Picklist
Parent Picklist	Name of reference data that you want set as a parent reference data. Applies to dependent picklists.
Required	Specifies whether the field is a required field. Applies to all the field types except field groups.
Source Last Updated Date	Enables the ability to capture the last updated date for source records. You can enable the source last updated date for field groups. By default, the source last updated date field is enabled for root fields. You can map the source last updated date field to the root fields and field groups using Business 360 Connector or Business 360 FEP connector. You can map the source last updated date field to the dynamic field groups using Business 360 FEP connector. A dynamic field definitions attribute lists all the fields and field groups in a dynamic pool. When you map the source last updated date to dynamic field groups during ingress, the source last updated date field is automatically enabled. The source last updated check box doesn't appear in the general properties for dynamic field groups but is enabled for dynamic field groups. For more information about mappings, see the Target transformation mapping example in the *Business 360 Connector* or *Business 360 FEP Connector* help.

4. Click **Save**.

Default values for business entity field types

You can define default values for basic fields, smart fields, and dynamic fields. The default values are populated in fields when you create records through the user interface. When you ingress, import records, or create records through the REST APIs, fields without values are updated with their default values. You can override default values by updating them.

You can define default values for dynamic fields from the dynamic pool. You can add default values to fields within a field group but not to root dynamic fields.

When you edit existing records, default values aren't updated. However, when you add a new field group entry to an existing record, the fields within the field group are updated with default values.

The following table lists the default values that you can configure for different types of fields:

Field Type	Value
Boolean	- None. Indicates that no default value is set. - True. - False.
Date	- None. Indicates that no default value is set. - Current Date. Uses the date when the record is created. - Custom Date. Allows you to set a date in the MM/DD/YYYY format.

Field Type	Value
Date and Time	- None. Indicates that no default value is set. - Current Date. Uses the date when the record is created. - Custom Date. Allows you to set a date in the MM/DD/YYYY format.
Double	Numeric value.
Decimal	Numeric value.
Integer	Numeric value.
Text	String value. If multiline property is enabled, then the default value can contain multiple lines of text.
Picklist	- None. Indicates that no default value is set. - Value from Reference Data. Allows you to select a value from reference data.
Business Entity Record	Business ID of the record. If the business ID is invalid, MDM SaaS doesn't apply default values to the business entity record field or to any other field with a configured default value in the record until you correct the business ID.
URL	URL link.

Rich text formatting for text fields

When you configure a multiline text field, you can also configure rich text formatting. Use rich text formatting to style and enhance text with options, such as bold, italics, underline, fonts, colors, bullet points, and hyperlinks.

For example, users can format and highlight key specifications, such as display resolution, processing capabilities, storage capacity, and camera quality, for a phone.

Users can add HTML tags and attributes directly to text values or use the rich text editor to format text values.

Note: When users save a record, MDM SaaS removes unsupported tags and attributes for security reasons.

When you enable the rich text property for existing fields, unsupported tags and attributes are removed from the fields in business applications. These tags and attributes remain in MDM SaaS and appear in the fields again if you disable the property. However, if users modify the fields after the property is enabled, these tags and attributes are permanently removed from MDM SaaS.

Users can view text values in rich text format or as plain text based on the page type.

Text values can appear in the following formats:

- Rich text format. Appears on pages where users create, view, or edit records.
- Plain text without HTML tags and attributes. Appears on pages where users view the record details, such as history, source records, workflows, and relationships. Users can hover over the text values to view them in rich text format.
- Plain text with HTML tags and attributes. Appears on pages where you use the Equals condition, such as pages where users edit data in bulk. When users use the Equals condition in find and replace operations, they must include the tags and attributes in the text.

If you add plain text and rich text to a column header, the plain text value appears as unformatted text and the rich text value appears as formatted text.

Tags and attributes for rich text values

The following table lists the HTML tags and attributes that users can add to style and enhance text values:

Category	Tags	Attributes
Font	`<b>`, `<strong>`, `<i>`, `<u>`, `<em>`, `<s>`, `<del>`, `<strike>`, `<sub>`, `<sup>`, `<small>`, `<big>`	Not applicable
Paragraph	`<p>`, `<div>`, `<center>`, ` `, `<h1>`, `<h2>`, `<h3>`, `<h4>`, `<h5>`, `<h6>`, `<ul>`, `<ol>`, `<li>`	For `<p>` and `<div>`, you can use `align="left|center|right|justify"`.
Link	`<a>`	For `<a>`, you can use `href` and `target`.
Code	`<code>`, `<pre>`	Not applicable
Style	`<font>`, `<span>`	For `<font>`, you can use `color`, `face`, and `size`. For `<span>` for colors, you can use `style`.

When you enable the rich text property for existing fields, unsupported tags and attributes are removed from the fields in business applications. However, these tags and attributes remain in MDM SaaS and appear in the fields again if you disable the property. If users modify the fields after the property is enabled, these tags and attributes are removed from MDM SaaS.

Configure data quality properties for a field

You can associate data quality rules to the business entity fields to cleanse, standardize, or validate the field values.

1. From the **Explore** page, find and open a business entity.
2. Select a field from the canvas, and click **Data Quality** in the properties section.

   You can add basic, advanced, or DaaS rule associations based on the field you select. For more information about adding rule associations, see *Configure Data Quality*.

Configure search and reports properties for a field

You can configure the search and reports properties for business entity fields.

You can include the fields that you enable as searchable and facetable in the search results layout component. When you disable searchable and facetable properties for a field in a business entity, ensure that the search results layout component doesn't include those fields.

Note: When you create or update a field or a field group for which search and reports properties are configured, ensure that you reindex the records.

1. From the **Explore** page, find and open a business entity.
2. Select a field from the canvas, and click **Search** in the properties section.
3. Configure the following search properties:
   - Searchable. Enables the field for search requests. You can enable up to 30 static or smart fields as searchable in a business entity and up to 5,000 dynamic fields as searchable across all dynamic pools. To enable system fields as searchable, you must set at least one basic or smart field in a business entity as searchable.

- Multilingual Search. Enables a text field to be searchable in languages other than English. Based on the languages configured in the Localization settings, business users can search for records in the configured language within business applications. You can search for records in English and Japanese.
  To view the Multilingual Search property for a business entity field, add the search languages in the Localization settings, and then enable the Searchable property for the business entity field. If you don't enable the field to be searchable, MDM SaaS doesn't display the Multilingual Search property.

  For more information about configuring searchable languages, see *Manage Localization*.

  Note: After you enable or disable multilingual search for a business entity field, ensure that you reindex the records. If you don't reindex the records, search requests, ingress jobs, and file import jobs use outdated search indexes, and they might not work as expected.
- Auto Suggest. Enables suggestions based on the field values for the search string. You can enable up to 5 fields for auto suggestions in a business entity. To enable fields for auto-suggestions, you must set the field as searchable. If existing fields in business entities are enabled for auto-suggestions, ensure that you also set them as searchable.

  Note: You can't enable auto-suggestions for system fields.
- Facetable. Enables the field to appear in the Filters panel of the search results page. Users can narrow down the search results using the field values. You can enable up to 25 static and smart fields as facetable in a business entity and up to 5,000 dynamic fields as facetable across all dynamic pools.
  If you select a numeric or date field, you can select one of the following options:
  - Simple. Filters search results based on individual field values. By default, this option is selected.

    Note: If you add a date and time field as a filter for search results, redundant filter values appear when multiple records contain identical date and time. This issue occurs only when the records share date and time values that differ only in milliseconds.
  - Range. Allows users to specify a range for the selected field.

  When you enable picklists associated with code lists from Reference 360 that contain multiple code values with similar but differently cased codes as facetable, the search results in business applications isn't case sensitive.

  For example, a code list contains code values India and Bharat with similar codes, such as `IN` for `India` and `In` for `Bharat`. When you select `India` for the country picklist in the Filters panel, the search results display records for both India and Bharat.
- Reportable. Enables the field to appear as dimensions and measures when users create reports. You can enable up to 30 fields as reportable in a business entity.

  Note: After you enable the reportable property for a field in a predefined report, you can't disable the reportable property for the field in the business entity nor delete the predefined report.

4. Click **Save**.

Limits on search and reports properties

When you reach the field limit for a property, you can't enable the property for another field in the business entity. To enable another field, disable one of the currently enabled fields.

In a business entity, you can enable up to 30 reportable fields, 30 searchable fields, and 25 facetable fields. You can also enable auto suggestions for up to 5 static and smart fields. To extend the field limits for search and reports properties, contact Informatica Global Customer Support.

Across all dynamic pools, you can enable up to 5,000 searchable and 5,000 facetable dynamic fields. When you enable fields up to the maximum limit, the reindex job might take longer to complete.

If you have any existing business entities that exceed these limits, Informatica has adjusted the limits for those business entities, and you can continue to use your current setting. You can export these business entities without any issues. To import business entities that exceed the limits, ensure that you extend the field limits of the search and report properties.

Calculated fields

Calculated fields indicate that the field values are calculated based on the values of attributes of a business entity or relationship.

For example, Client Site and Location are two related business entities. Opening Date is a field of the Client Site business entity. If you want the earliest opening date of a client site in a location, create a calculated attribute in the Location business entity.

The following table describes field types that can be configured as calculated attributes and the field types that they support:

Field Type	Supported Field Types
Integer	Integer
Double	- Integer - Double
Decimal	- Integer - Double
Date	- Date - Date and Time
Date and Time	Date and Time

Note: You can't use a calculated field in a declarative rule, survivorship configuration, a user-triggered event, and a business application as a display field. You can't assign create, update, and delete privileges to a custom user role for the calculated fields.

Configure attributes to be calculated fields

You can configure integer, double, decimal, date, or date and time attributes to be calculated fields.

Note: Effective in the November 2023 release, the ability to configure attributes to be calculated fields is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.


1. In the fields panel, expand the **Basic Fields** section, and double-click the field that you want to configure as a calculated attribute to add it to the canvas.
2. Specify a display name and an internal ID.
3. Optionally, specify a description for the field.
4. Select **Calculated field**.

   The **Calculated Field Rule** section opens.

5. Click **Add**.
6. Select one of the following options:
   - A field value from a record related through a business entity record attribute. Indicates that the attribute value is based on records related through a business entity record field.
   - A field value from a record related through a relationship. Indicates that the attribute value is based on the records related through a relationship type in which the current business entity participates.
7. If you select **A field value from a record related through a business entity record attribute**, perform the following steps:
   a. Select a business entity.

      You can view a list of primary business entities that include at least one attribute of supporting field type and one business entity record field related to the current business entity. For each primary business entity, you can also view a list of secondary business entities based on the other business entity record fields that the primary business entity contains. The secondary business entities also contain at least one attribute of supporting field type.

      The following image shows a list of business entities as related business entities:

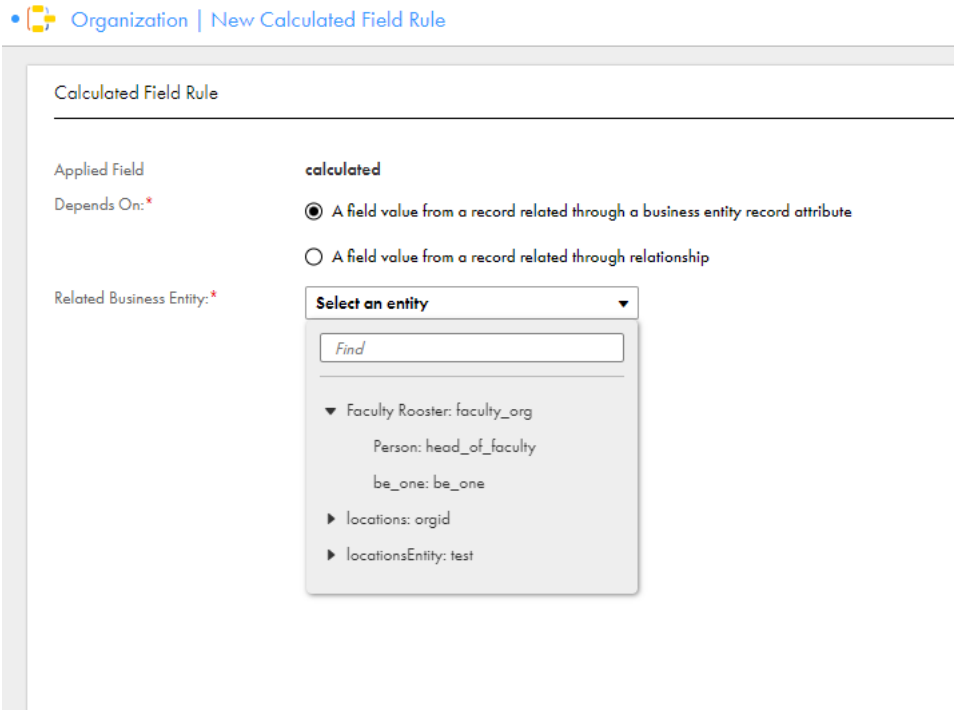

      In the preceding sample, an integer field in the Organization business entity is set to be a calculated field. Faculty Rooster is a primary business entity because it contains an integer field and the faculty_org business entity record field that is related to the Organization business entity. Person is a secondary business entity because it contains a double field, and the Faculty Rooster business entity contains the head_of_faculty business entity record field that is related to the Person business entity.

   b. Select the field that you want to use to calculate values.
   c. Select a function to calculate values.

The following table describes the functions:

Function	Description
Maximum	Calculates the maximum value of the fields.
Minimum	Calculates the minimum value of the fields.
Average	Calculates the average value of the fields. Applies only to integer, double, and decimal fields.
Sum	Calculates the total sum of the fields. Applies only to integer, double, and decimal fields.
Count	Calculates the number of records that contain valid values.

8. If you select **A field value from a record related through a relationship**, perform the following steps:
   a. Select a relationship type.

      You can view a list of all the relationship types in which the current business entity participates.
   b. Select one of the following options:

Option	Description
Business entity attribute	Indicates that you want to use a business entity attribute to calculate values.
Relationship attribute	Indicates that you want to use a relationship attribute to calculate values.

   c. Select a field that you want to use to calculate values.

      You can view all the fields of supporting field types from the other business entity that participates in the relationship type.
   d. Select a function to calculate values.
9. Click **Save**.

Enable last updated dates for source records

You can enable the last updated dates of source records to ensure that you get the latest data during ingress.

You can map the last updated date from a source record to a target record. For each field, you can capture the last updated date from a source system.

You can enable the source last updated date to prevent the override of the latest data during ingress. When you ingress incremental changes to records from source systems, the source records are updated only when the last updated date is the latest date.

A dynamic field definitions attribute lists all the fields and field groups in a dynamic pool. When you map the source last updated date to dynamic field groups during ingress, the source last updated date field is automatically enabled. The source last updated check box doesn't appear in the general properties for dynamic field groups but is enabled for dynamic field groups.

Forcefully ingress source records

You can forcefully ingress incremental records irrespective of the source last updated dates in the source system.

For example, you can ingress incremental records with older or same last updated dates as compared to the existing record.

To force ingress source records, select the **Force Record Update** option when you create an ingress job or use the `_forceUpdate` parameter in the Source Record API.

Unprocessed source records

When you enable the source last updated date for a field group, the ingress job doesn't process some records based on the source last updated dates of the root fields or field groups.

When you ingress incremental changes to a record, the changes to the root fields or the field groups succeed or fail based on their source last updated date. If the last updated date is a future date, an earlier date, or the same date when compared to the last updated date in the Business 360 data store, the ingress job doesn't process the incremental changes.

You can view the number of records that the ingress job didn't process from the **Load** step of an ingress job. For more information about ingress jobs, see Monitor MDM SaaS.

Example: Ingress data with source last updated date

For example, you want to ingress records from Savings and Loan source systems.

The following table lists records from the Savings and Loan source systems:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Savings	John	Smith	M	123456789	30/03/2021
Loan	Johnson	Smith	M	987654321	28/03/2021

The records from Savings and Loan source systems are merged to create a master record. The master record was created on 30/03/2021. When you ingress data from the Savings and Loan source systems the Savings record has the latest source last updated date. The master record is updated with the data from the Savings record.

The following table lists the updated data of the master record:

Record	First Name	Last Name	Gender	Phone	Last Updated Date
Master	John	Smith	M	123456789	30/03/2021

Source record with an old last updated date

When you ingress a source record with an older last updated date, the source record changes if you enable the **Force Record Update** option.

The following table lists the new data from the Loan source system to ingress:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Loan	Johnson	Smith	M	332244556	27/03/2021

When Force Record Update isn't enabled

For example, if you don't enable **Force Record Update** and ingress new data from the Loan source system, the master record remains unchanged and the source record isn't updated with the old last updated date.

The following table lists the Savings, Loan, and Master records after you ingress new data:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Savings	John	Smith	M	123456789	30/03/2021
Loan	Johnson	Smith	M	987654321	28/03/2021
Master	John	Smith	M	123456789	Not applicable

When Force Record Update is enabled

However, if you enable **Force Record Update** and ingress new data from the Loan source system, based on the last updated date of the Loan record, the source record changes. However, the master record isn't updated because the source last updated date of the Load record is not greater than the existing last updated date.

The following table lists the Savings, Loan, and Master records after you ingress new data:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Savings	John	Smith	M	123456789	30/03/2021
Loan	Johnson	Smith	M	332244556	27/03/2021
Master	John	Smith	M	123456789	Not applicable

Source record with a newer last updated date

When you ingress a source record with a newer source last updated date, the master record is updated.

For example, you want to ingress a new record from the Loan source system.

The following table lists the data in the new record from the Loan source system:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Loan	John	S	M	976597654	01/04/2022

When you ingress the new record from Loan source system, the master record changes. The master record is updated because the source last updated date of the new record from the Loan source system is 01/04/2021, which is newer than the source last updated date of the existing record from the same source system.

The following table lists the Savings, Loan, and Master records before you ingress records from the Loan source system:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Savings	John	Smith	M	123456789	30/03/2021
Loan	Johnson	Smith	M	332244556	27/03/2021
Master Record	John	Smith	M	123456789	Not applicable

The following table lists the Savings, Loan, and Master records after you ingress the new record from the Loan source system:

Source System	First Name	Last Name	Gender	Phone	Source Last Updated Date
Savings	John	Smith	M	123456789	30/03/2021
Loan	John	S	M	976597654	01/04/2022
Master Record	John	S	M	976597654	Not applicable

Edit a business entity

When you edit a business entity, you can add and edit business entity fields, and change data quality and survivorship configurations. Your user role must have the privileges required to edit the business entity.

Note: You can't delete business entity fields.

1. From the **Explore** page, find and open the business entity.
2. Click the **Actions** icon, and then click **Properties**.

   The **Business Entity** dialog box appears.
3. Edit the property values, and click **OK**.
4. Optionally, edit fields.
   a. To show the fields that you want to edit on the canvas, select one of the following values from the **Show** list:
      - All Fields. Displays all the fields.
      - Enabled Fields. Displays only the enabled fields. Default is **Enabled Fields**.
      - System Fields. Displays only the system fields, which are automatically added to a record by MDM SaaS. Some examples of system fields include Business ID, Record State, or Created By.

   b. Select a field if you want to edit the field properties.

c. To edit field properties, edit the values in the **Properties** panel.

   For example, to disable a field, select **Disabled**.

5. Optionally, add fields.
   a. Double-click a field to add the field to the canvas.
   b. Define the properties.
6. Save the business entity.

   A confirmation dialog box appears.
   a. To generate indexes for the records immediately, click **Save and Index**.
   b. To generate indexes for the records at a later point in time, click **Save without Indexing**.

      If you choose to index the records later, the records continue to use the outdated indexes.

CHAPTER 3

Defining reference data

Reference data is a set of values that you can use in a business entity picklist field. Use reference data, such as countries, currency codes, and cost centers, to standardize the use of values. You can manually create reference data, import a reference data from a file, or use reference data created in Reference 360.

For example, a Country reference data might contain a list of all the countries in the world. If you need a Country field in a business entity, add a Country picklist field that has values sourced from the Country reference data.

You can use reference data that's dependent on other reference data to provide context for values that are not unique, such as the names of cities. For example, to uniquely identify a city, you need the state and country of the city. Dependent reference data narrows down a large set of values. For example, when the City reference data is dependent on the Country and State reference data, only the cities within the selected state of a country are listed.

Reference data includes code values, which are unique values, such as business terms, codes, and lookup values. When you use the predefined data model, reference data such as gender, countries, and currencies are available by default.

Note: You can't open a reference data and add code values and crosswalks in Business 360 Console. Use Reference 360 to open a reference data and add code values and crosswalks for reference data.

Reference data can be multilingual. Multilingual reference data includes the values of string attributes, such as Name and Description, in multiple languages. To localize reference data, add the languages to the Localization Languages code list in Reference 360. The Localization Languages code list defines the languages that your organization uses, identifies each language with a BCP 47 language code, and sets the default language.

When you create reference data in Business 360 Console, you can set the Name or Description attribute as multilingual. In Reference 360, enter the reference data set or code list attribute values for each language. In business applications, multilingual picklist field values appear in the language of your browser locale. If the picklist values aren't localized for the browser locale, the values appear in the default language that you configure in Reference 360.

Preview Notice: Effective in the October 2026 release, the ability to manage multilingual reference data is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

For more information about localizing reference data, see *Manage localized assets* in Reference 360 help.

Rules and guidelines for using reference data

Consider the following guidelines when you use reference data in Business 360 Console:

- You can't edit reference data in Business 360 Console. To add or edit code values and crosswalks to reference data, use Reference 360. You require the Reference 360 Business Steward user role.
- When you select reference data created in Reference 360, Business 360 Console publishes the reference data. You can view the published reference data on the **Explore** page.
- You can't publish a reference data configured with workflow approval process from Reference 360 to Business 360 Console.
  To publish the reference data and use it in Business 360 Console, the reference data must be published in Reference 360.
- When you create a reference data in Business 360 Console, ensure that you update its description in Business 360 Console.
  If you create the reference data in Business 360 Console and update its description in Reference 360, the updated description doesn't appear in the Reference360 project folder in Business 360 Console.
- You can't publish a hierarchical code list from Reference 360 to Business 360 Console.
  When you delete a default code list and create a hierarchical code list for the reference data set in Reference 360, Business 360 Console considers the hierarchical code list as the predefined code list. If you select a hierarchical code list from Reference 360, Business 360 Console can't publish and use the reference data. Ensure that you don't delete the predefined code list in Reference 360.
- You can't delete a default code list in Reference 360 if you publish the reference data in Business 360 Console.
- You can't enable cache data for a multilingual picklist. Business applications always read multilingual picklist values directly from Reference 360.
- When you create a reference data asset, specify a unique internal ID for a reference data asset.
  Effective in the April 2025 release, a predefined asset has an internal ID that starts with an underscore.

  For more information about internal ID for reference data assets, see *Internal IDs and aliases*.

Create reference data

Create reference data and configure the properties, such as display name, internal ID and location. Before you create dependent reference data, create the parent reference data.

1. Click **New**.

   The **New Asset** dialog box appears.
2. Select **Model** as the asset type that you want to create.
3. Click **Reference Data**, and then click **Create**.

   The **Reference Data** dialog box appears.

4. Specify the reference data properties.

Property	Description
Display Name	Required. Name of the reference data that you want to appear in the Business 360 applications. **Note:** You can view the reference data in Reference 360. You can't change the display name from Reference 360.
Internal ID	Required. Unique identifier of the reference data, limited to a maximum of 45 characters. You can use alphanumeric characters and underscores. After you save an asset, you can't edit the internal ID. **Note:** You can't specify internal IDs for existing reference data.
Description	Optional. A description of the reference data.
Location	Required. Project or folder within which you want to save the reference data.

5. Click **OK**.

   The reference data is created and the **Summary** page appears.

6. Optionally, define a dependent reference data structure that depends on code values in another reference data.
   a. Select **Dependent**.
   b. In the **Parent Reference Data** field, click the asset picker.

      The **Select an Asset** dialog box appears.

   c. Select a parent reference data asset, and click **Select**.

7. To display the Name or Description attribute in multiple languages, select **Multi-Language** for the attribute.

   After you enable the **Multi-Language** property and save the asset, you can't disable the property or add rule associations to the attribute. After you localize the reference data, reindex the records in each business entity that uses the reference data so that you can search for records by using the localized data in picklist fields.

8. Click **Save**.

You can use the reference data when you configure picklists in business entities.
For more information about adding reference data to a picklist field, see "Add a picklist" on page 23.

CHAPTER 4

Defining dynamic pools

A dynamic pool is a collection of fields and field groups that you can use as dynamic fields. You can create multiple dynamic pools based on your requirements and add relevant fields and field groups to each pool.

You can create two dynamic pools for consumer business entities, such as product data and supplier data. You can add basic fields to a dynamic pool, but you can't add smart fields or share fields between dynamic pools. To use the fields in a pool as dynamic fields, you can add a dynamic field definitions attribute that refers to the dynamic pool. For more information about the dynamic field definitions attribute, see “ Add a dynamic field definitions attribute” on page 26.

To manage large dynamic pools, you can create folders and add fields and field groups to each folder to organize them by topic or purpose. When you configure custom pages, you can choose to add these folders to different tabs or different field components in a page. For example, within a dynamic pool, you can create one folder for regulatory dynamic fields and another folder for marketing dynamic fields. When you add the fields component to a custom page, you can select regulatory dynamic fields in one tab and marketing dynamic fields in another tab.

Create a dynamic pool


Understand your data model so that you can add appropriate fields and field groups to the dynamic pool.

1. Click **New**.
2. In the **New Asset** dialog box, click **Model** > **Dynamic Pool**.
3. Click **Create**.
4. In the **Dynamic Pool** dialog box, specify the dynamic pool properties, and click **OK**.

   The dynamic pool opens on a blank canvas.
5. To add fields, field groups, or folders to the dynamic pool, select one of the following options:
   - In the fields panel, double-click a field, field group, or folder to add it to the canvas.
   - Right-click the dynamic pool, select **Add child**, and then select a field type or folder.
6. To add fields, field groups, or folders nested within a selected folder, right-click the folder, select **Add child**, and then select a field type or folder.
7. To add fields, field groups, or folders at the same level as the selected field or folder, right-click the field or folder, select **Add sibling**, and then select a field type or folder.

   Note: You can't add folders to a field group.
8. To add fields and field groups nested within a field group, right-click the field group, select **Add child**, and then select a field type.

The following image shows how to add fields to the Flavor additives field group:

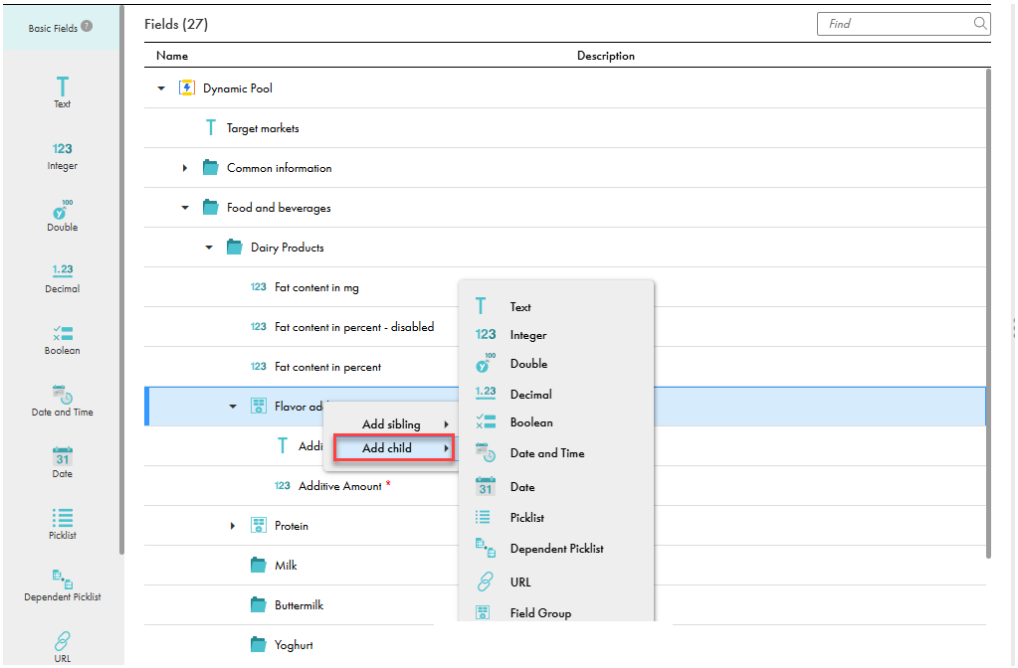

9. Specify the general field properties.

   For more information about configuring general field properties, see "Configure general properties for a field" on page 28.

   Note: You can specify whether the field is a required field and whether it can use multiline and rich text format. When you specify a field as a required field in a dynamic pool, the dynamic field definitions attribute related to the dynamic pool appears as a required field when selected in business applications. A business user needs to enter values into the dynamic field definitions while editing a record.

10. On the **Search** tab, configure the dynamic field to be searchable or facetable.

    When you enable a dynamic field to be searchable or facetable, you can enable up to two levels of its child nodes to be searchable or facetable.

11. To rearrange a field, field group, or folder within a dynamic pool, drag it to the location you want.

    When you move a folder, its fields and field groups move with it.

12. To undo or redo your last action, click **Undo** or **Redo**.


13. To delete a folder that doesn't have any fields or field groups, select the folder, and click **Delete**.

Using keyboard shortcuts for dynamic pools

You can use keyboard shortcuts when you configure dynamic pools.

When you right-click a dynamic pool canvas, the Action menu appears. Use keyboard shortcuts to add or select a field using the Action menu.

The following image shows the Action menu that appears when you right-click the Media Assets field group:

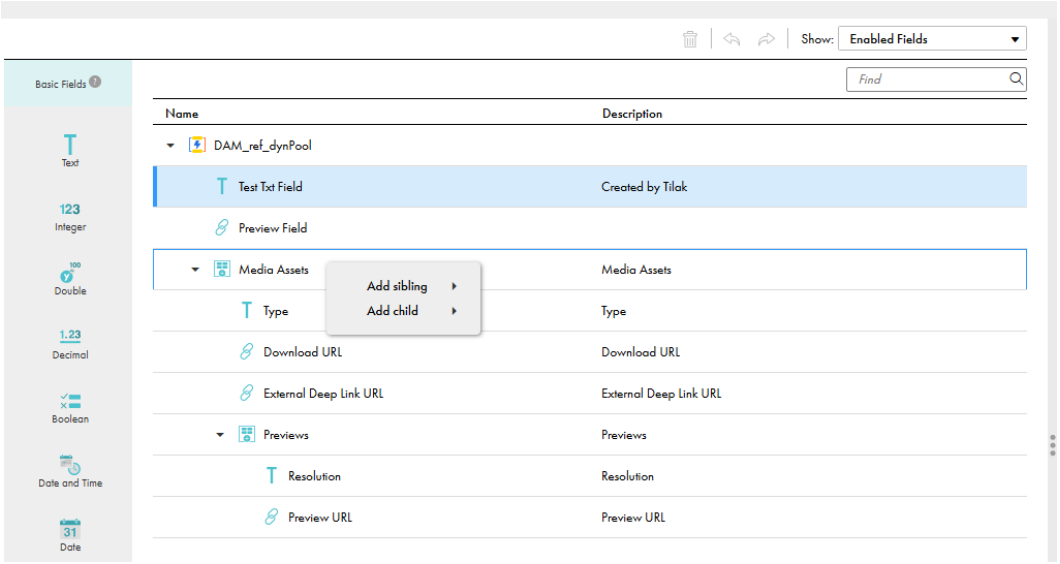

The following table lists the actions that you can perform on dynamic pools by using keyboard shortcuts:


Action	Shortcut Key
On the dynamic pool canvas, move through the fields.	Up arrow or Down arrow
On the dynamic pool canvas, display the properties of a selected field.	Space
On the dynamic pool canvas, expand or collapse a field group.	Enter
On the dynamic pool canvas, navigate to the start of the dynamic pool.	Page Up or Home
On the dynamic pool canvas, move to the last field in a dynamic pool.	Page Down or End
From the Action menu, select **Add sibling** or **Add child**.	Up arrow or Down arrow
From the Action menu, open the submenu.	Space or Enter or Right arrow

Action	Shortcut Key
From the submenu of the Action menu, select a field.	Left arrow or Down arrow
From the submenu of the Action menu, return to the Action menu.	Left arrow
From the submenu of the Action menu, add a field.	Space or Enter

Finding dynamic fields in dynamic pools

When you have more fields, you can search for dynamic fields in a dynamic pool. The search isn't case sensitive.

The following image shows a dynamic pool with the search box for finding dynamic fields.

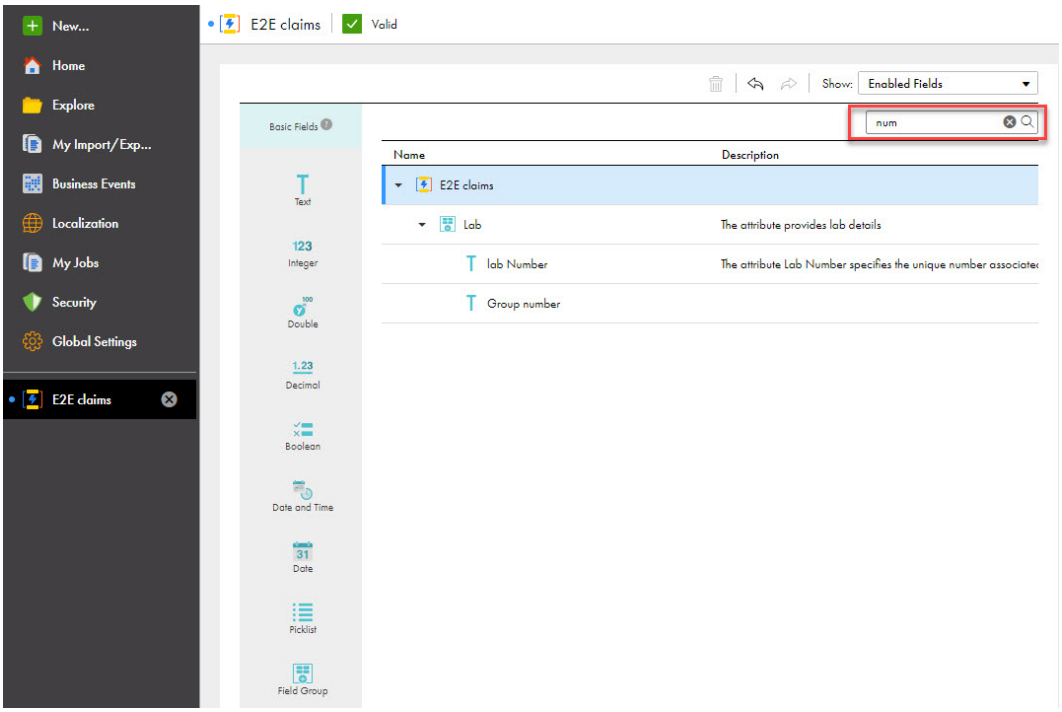

Edit a dynamic pool

When you edit a dynamic pool, you can add and edit dynamic fields and their properties.

1. From the **Explore** page, find and open the dynamic pool.
2. To show the fields that you want to edit on the canvas, select one of the following values from the **Show** list:
   - All Fields. Displays all the fields.
   - Enabled Fields. Displays only the enabled fields. Default is **Enabled Fields**.
3. Select a field if you want to edit the field properties.
4. On the **General** tab of the **Properties** panel, edit the field properties.

   For example, to disable a field, select **Disabled**.
5. On the **Search** tab, edit the dynamic field properties to be searchable or facetable.
6. Optionally, to add fields, field groups, or folders to the dynamic pool, select one of the following options:
   - In the fields panel, double-click a field, field group, or folder to add it to the canvas.
   - Right-click the dynamic pool, select **Add child**, and then select a field type or folder.

   For more information about adding fields, field groups, or folders to the dynamic pool, see "Create a dynamic pool" on page 44.
7. Define the properties.
8. Save the dynamic pool.

   If the dynamic pool is associated with a dynamic field definitions attribute of a business entity, the **Confirm Save** dialog box appears.

   a. To generate indexes for the records immediately, click **Save and Index**.

      A reindex job runs to reindex records in business entities that use the dynamic pool.
      If the reindex job fails, you can't view the searchable attributes of the dynamic pool as facets and in search results within business applications. To identify the business entities for which the job failed to index records, verify the runtime parameters of the job instance.

      You can then index records of these business entities by running the Generate Search Indexes and Match Keys job.

      If you reindex a dynamic pool that's associated with seven business entities, the records are partially reindexed and the search results appear inaccurate in business applications.

      For more information about generating search indexes and match keys job, see *Define Jobs*.

      Additionally, if you have more than 50,000 nested dynamic fields in a record, the search results don't display the record. MDM SaaS indexes only the static fields. If you want to index the 50,000 nested dynamic fields, ensure that you edit some fields in the record.

   b. To generate indexes for the records at a later point in time, click **Save without Indexing**.

      If you choose to index the records later, the records continue to use the outdated indexes.

CHAPTER 5

Defining relationships

You can define relationships between business entities that have some type of association.

The users of Business 360 applications, such as Customer 360 SaaS, can then define and visualize the relationships between business entity records.

You can define multiple relationships for a business entity. A business entity can have a relationship with other business entities or with itself. For example, you can define a relationship between the Organization and Person business entities to indicate that an organization employs person. You can also define a relationship from the Person business entity to the Person business entity to indicate a spouse relationship.

Relationship types

You can relate records based on hierarchical relationships, relationship asset, and business entity record attributes.

MDM SaaS supports one-to-one, one-to-many, and many-to-many relationships between business entities. Configure one-to-one and one-to-many relationships using hierarchical relationships or relationship assets. Configure one-to-one, one-to-many, and many-to-many relationships using business entity record attributes. If a user has the necessary permissions, they can view, add, edit, and manage relationships.

Hierarchical relationships


Hierarchical relationships connect two business entity records in a hierarchy. When you need to represent relationships in a tree-like structure, use hierarchical relationships. You can relate records that belong to the same or different business entities.

For example, the Informatica record is the parent of the John Smith record. You can view these relationships in a hierarchy or a relationship graph.


Examples of hierarchical relationships

To view product categories and their materials, you can create hierarchical relationships between the Category and Material business entities.

The following image shows the Material Classification hierarchy model that relates the Category and Material business entities:

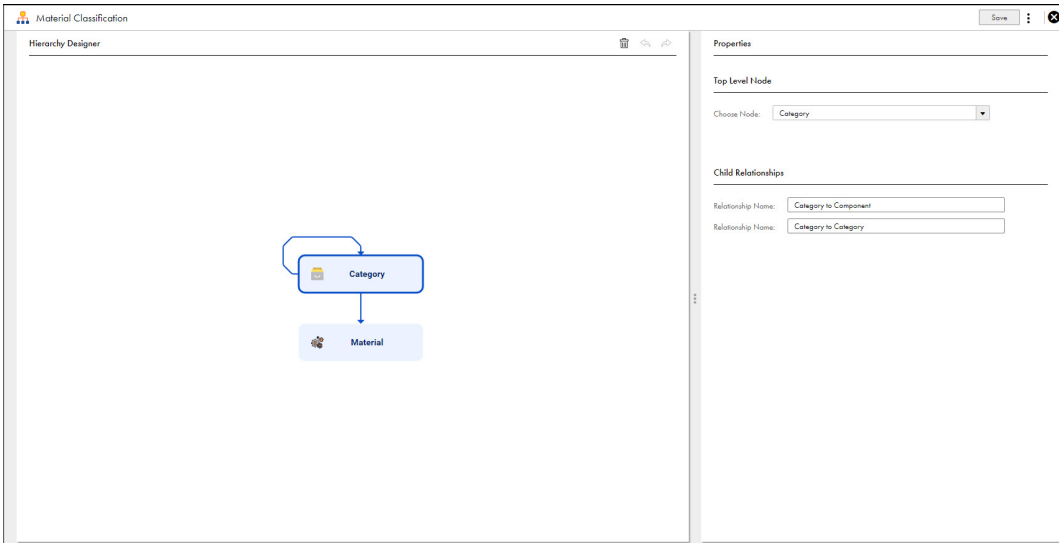

The following image shows the Material Classification hierarchy created based on the Material Classification hierarchy model:

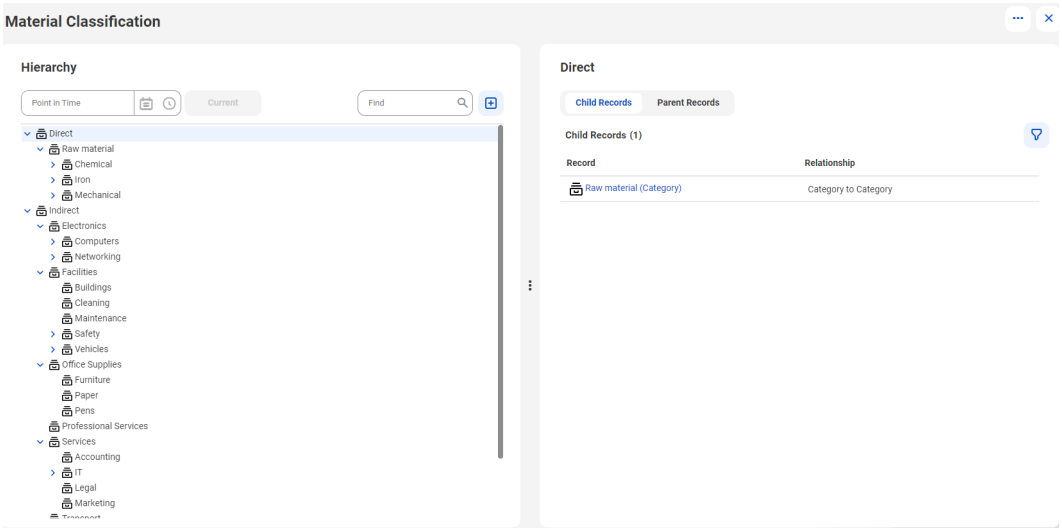

Relationship asset

Relationship assets connect records that belong to the same or different business entities. If you want to relate two records without requiring them to be in a hierarchy, use the relationship asset. You can relate records that belong to the same or different business entities.

The relationship can be unidirectional or bidirectional.

For example, the John Smith record is related to the PX100 Keyboard record through the Person to Object relationship.

You can view these relationships in a relationship graph or related records component.

Examples of relationship assets

The predefined business entities include some predefined relationship assets.

The following table describes some predefined relationships and their related business entities:

Relationship Name	Description	Business Entity 1	Business Entity 2	Direction
Employee	Relates Person and Organization records.	Person	Organization	Person → Organization
Guardian	Relates two Person records.	Person	Person	Person → Person
Sibling	Relates two Person records.	Person	Person	Bi-directional
Competitor products	Relates two Item records.	Item	Item	Bi-directional
Product manufacturer	Relates Item and Organization records.	Item	Organization	Item ← Organization

Business entity record attribute

Business entity record attribute is a field that relates two business entity records. If you want to relate a record with multiple records without requiring them to be in a hierarchy, use the business entity record attribute of a business entity. Business users can search for records and set them as field values.

For example, you can add the following business entity record attributes to the Person business entity:

- Professor
- Course
- Classroom

When a user creates a Person record named John Smith, the user can select a Person record as a professor name, a Course record as a course name, and a Classroom record as a classroom name.

You can view these relationships in the related records component. You can't view these relationships in a relationship graph.

Examples of business entity record attribute relationships

You can relate records that belong to different business entities.

For example, add a business entity record attribute named CEO to the Organization business entity. If you relate the attribute to the Person business entity, you can set any person record as a value for the CEO field.

You can also create a business entity and add multiple business entity record attributes that relate to multiple business entities to create one-to-many relationships.

For example, if you want to process healthcare claims, you need the names of doctors, the insurance details of payees, and the address of the healthcare office. You can relate the business entities that are used in your organization, such as Doctor, Insurance, and Office, and add them to the Claims business entity as business entity record attributes.

The following table lists the business entity, its fields, and the business entity record attributes:

Business entity	Text field	Date field	Business entity record attribute 1	Business entity record attribute 2	Business entity record attribute 3
Claims	Patient Name	Claim Submission Date	Doctor	Insurance	Office

For example, if you want to create boarding passes for an airline, you need an airplane name, airline name, passenger details, and the airport. You can relate the business entities that are used in your organization, such as Airline, Airplane, Passenger, and Airport, and add them to the Boarding Pass business entity as business entity record attributes.

The following table lists the business entity, its field, and the business entity record attributes:


Business entity	Text field	Business entity record attribute 1	Business entity record attribute 2	Business entity record attribute 3	Business entity record attribute 4
Boarding Pass	Boarding ID	Airplane	Airline	Passenger	Airport

Guidelines to create relationship objects

When you create relationship objects, consider the following guidelines:

- To view related records in a hierarchy tree, use hierarchical relationships. You can view these relationships in a hierarchy or a relationship graph.
  For example, to view suppliers that are available for each industry, you can create hierarchical relationships between the Industry and Supplier business entities.


  The following image shows a hierarchy model that relates the Industry and Supplier business entities:

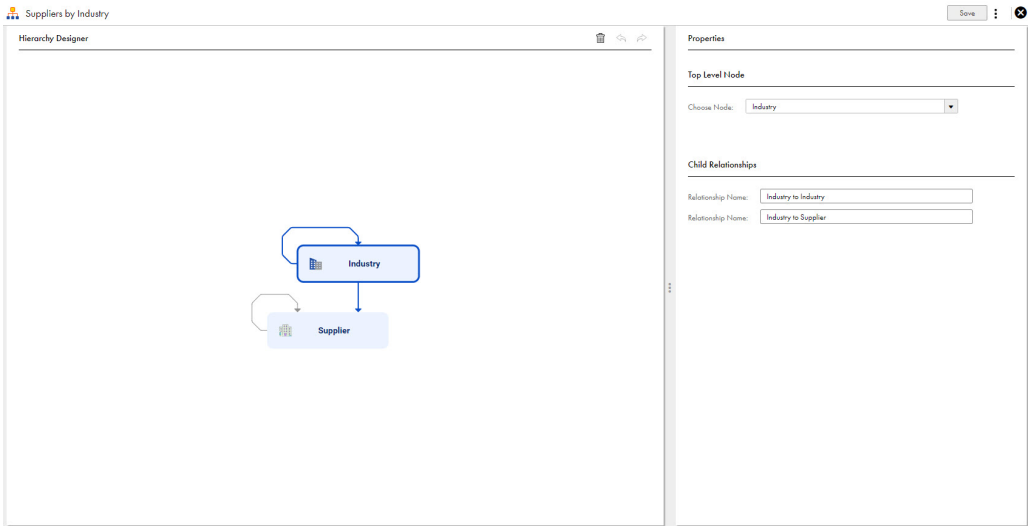

- To relate two records and create a one-to-one relationship, use the relationship asset. You can view these relationships in a relationship graph or related records component.

For example, you can create a one-to-one relationship between the Person and Organization records.

The following image shows the relationship between the Organization and Person business entities:

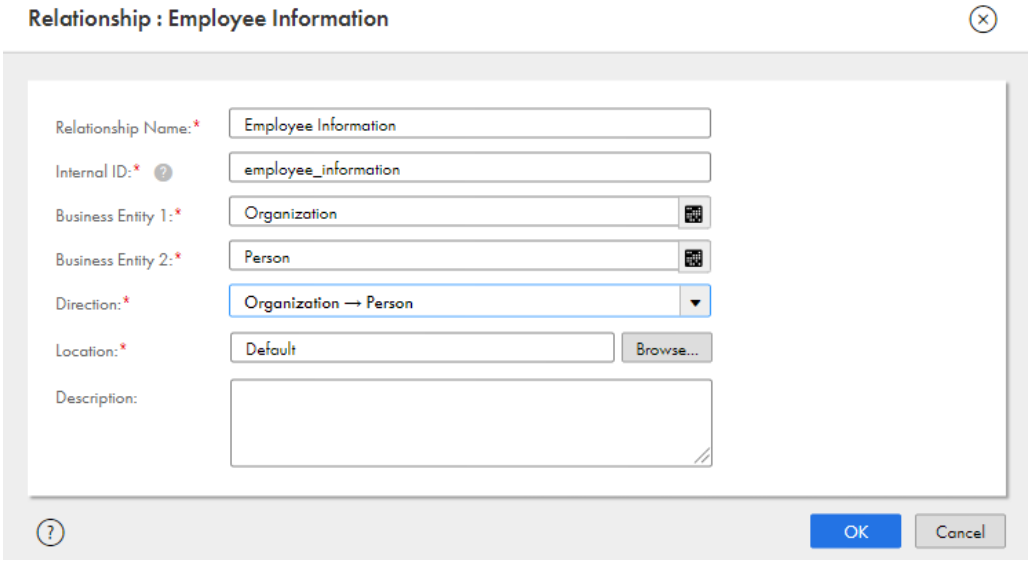


- To relate more than two records and create a one-to-many relationship, use the business entity record attributes. You can view these relationships in the related records component. You can't view these relationships in a relationship graph.

To manage one-to-many relationships, use one of the following approaches:


- Add the business entity record attributes to a business entity that you want to relate. For example, you can add the Founder and CEO business entity record attributes to the Organization business entity.

  The following image shows the Organization business entity and the business entity record attributes related to the Person business entity:

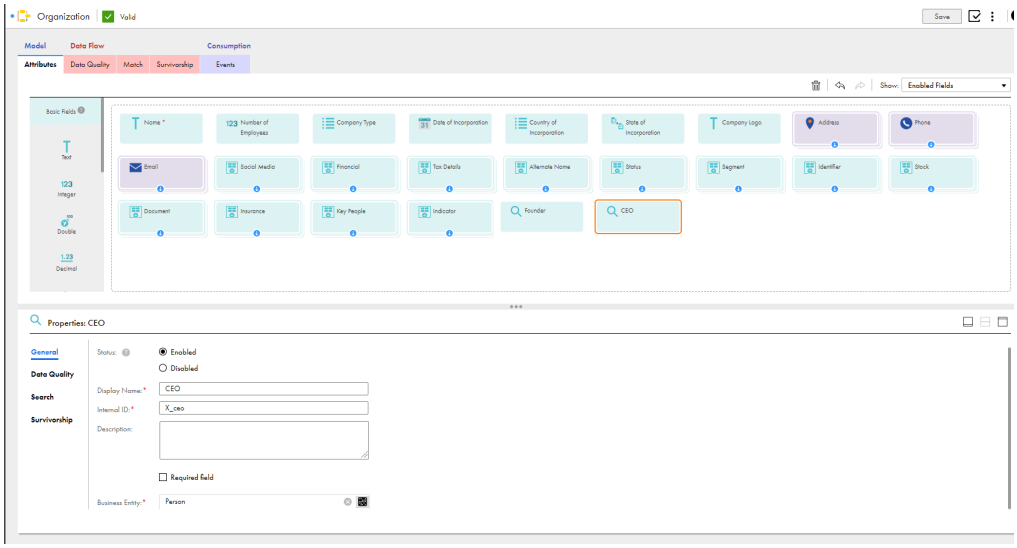

- Create a business entity and add business entity record attributes for all the business entities that you want to relate to. For example, create a business entity named Boarding Pass and then add business entity record attributes for all the business entities that you want to relate to.

  The following image shows the Boarding Pass business entity and the business entity record attributes related to the Airplane, Airline, Passenger, and Airport business entities:

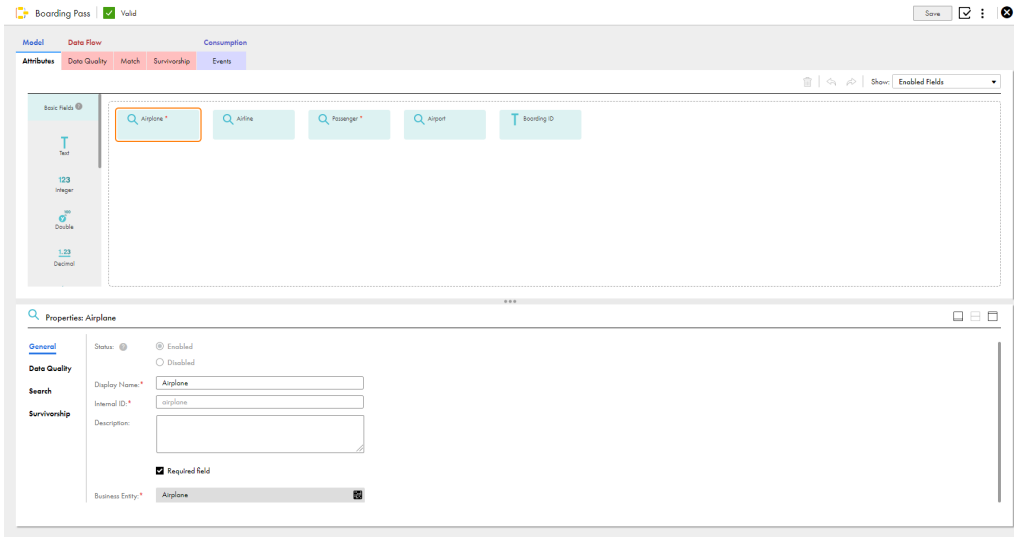

Create a relationship

Create a relationship and configure at least the required properties.

1. Click **New**.

   The **New Asset** dialog box appears.
2. Click **Model** > **Relationship**.
3. Click **Create**.

   The **Relationship** dialog box appears.
4. Specify the relationship properties.

Property	Description
Relationship Name	Required. Name of the relationship that you want to appear in Business 360 applications.
Internal ID	Required. A unique relationship identifier, which is generated based on the name that you enter. You cannot change the internal ID after you create the relationship.
Business Entity 1	Required. The first business entity from or to which you want to define a relationship.
Business Entity 2	Required. The second business entity from or to which you want to define a relationship.
Direction	Required. The direction of the relationship between the business entities. Select one of the following directions: - Business Entity 1 to Business Entity 2. One-directional relationship from business entity 1 to business entity 2. - Business Entity 2 to Business Entity 1. One-directional relationship from business entity 2 to business entity 1. - Bi-directional. Bi-directional relationship between the business entities.
Location	Required. Project or folder within which you want to save the relationship.
Description	Optional. A description of the relationship.

5. Click **OK**.

   The relationship appears on the **Properties** page.
6. Click **Save**.

   The relationship appears on the **Explore** page.

Define relationship attributes (Optional)

Define attributes for custom relationships so that users in Business 360 applications can provide additional information about relationships.

Note: You can't define attributes for predefined relationships.

For example, you might want to track the period for which customers stay connected with your organization. You define the Start Date and End Date attributes for the relationship between the Organization and

Customer business entities. Then users in Business 360 applications can specify the start date and the end date for the relationship between Informatica and John Smith.

1. From the Explore page, find and open the relationship.
2. In the **Attributes** section, click **Add Attribute**.

   The **Add Attribute** dialog box appears.
3. Specify the properties of the attribute.

Property	Description
Label	The attribute field label that you want to appear in business applications.
Internal ID	A unique identifier that can't be changed later. **Note:** Ensure that you don't use the reserved keyword, `id` as an internal ID.
Data Type	The data type of the attribute value that can't be changed later.
Attribute Type	Determines whether the attribute appears on user interface components that have space constraints. To ensure that an attribute appears on a user interface component, select **Primary**. A secondary attribute doesn't appear on components with space constraints. **Note:** You can configure up to two primary attributes for a relationship.

4. To reorder the attributes, click **Move up** or **Move down** beside the attribute that you want to move.
5. To define additional attributes for the relationship, repeat steps 2 and 3.
6. Click **Save**.

CHAPTER 6

Defining hierarchy models

A hierarchy model consists of a collection of hierarchy relationships between business entities. For example, an Organization hierarchy model shows the relationships from the Organization business entity to the Person business entity.

A hierarchy model consists of a top-level business entity, additional business entities, and hierarchy relationships that define parent-child relationships between business entities. Each business entity in a hierarchy model must be connected to the top-level business entity directly or through other business entities. You can create as many hierarchy relationships as you need to represent the hierarchy model.

You can also define attributes of relationships to allow users to provide additional information about relationships.


For example, your organization needs to track customers by households. You might create the following hierarchy model, hierarchy relationships, and attributes:

1. Create an Organization hierarchy model.
2. Add the Organization business entity as the top-level business entity.
3. Create a relationship from the Organization business entity to the Person business entity.
4. Define a Status attribute for the relationship between the Organization and Person business entities. Use this attribute to define whether the organization is actively engaging with the employee.

Then in Business 360 applications, users can create an Organization hierarchy based on the hierarchy model. Users can create a hierarchy relationship from the Informatica record to the John Smith record.

You can also create recursive relationships. For example, you can create a recursive relationship from the Person business entity to the Person business entity. Later, in Business 360 applications, you can create a relationship from a Person record to a Person record. For example, you might create a relationship from the John Smith record to the Jane Smith record. The relationship shows that John Smith is the spouse of Jane Smith.

The following image shows a sample hierarchy model in the Hierarchy Designer:

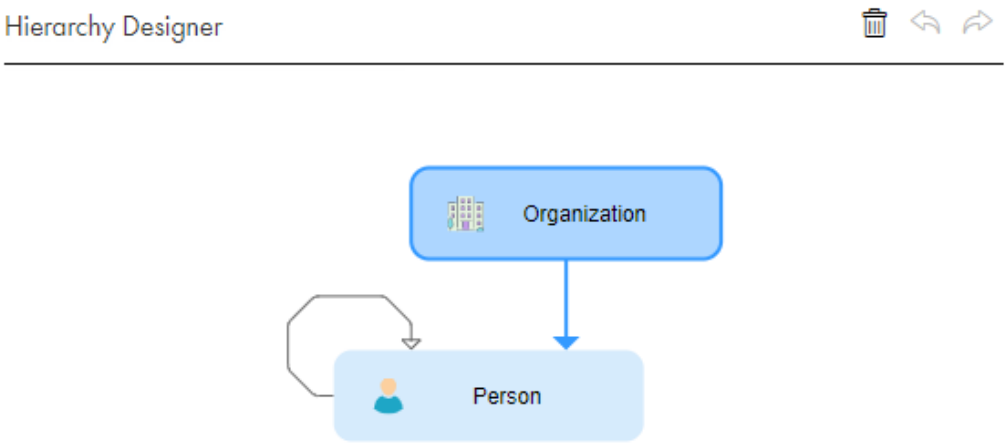

You can enable a hierarchy model for search. When you enable a hierarchy model for search, users can filter records from the search results of the business applications based on the hierarchy and its nodes and inherit the dynamic field definitions to the child records within a hierarchy. When users update a hierarchy or the dynamic field definitions, the search results page doesn't display the latest changes. To ensure the latest hierarchy updates appear in search results, run a process hierarchies job to index records and inherit dynamic field definitions belonging to the hierarchies. Real-time indexing occurs when users update less than 100 records in the last node of a hierarchy. In this case, users don't need to depend on the job to index the records.

Step 1. Create a hierarchy model

Create a hierarchy model and configure at least the required properties, such as display name, search and location. For example, create an Organization hierarchy model to define relationships in your organization.

1. Click **New**.

   The **New Asset** dialog box appears.
2. Click **Model** > **Hierarchy** > **Create**.

   The **Hierarchy** dialog box appears.

3. Specify the hierarchy model properties.

Property	Description
Display Name	Required. Name of the hierarchy that you want to appear in Business 360 applications, limited to a maximum of 70 characters.
Internal ID	Required. Unique identifier of the hierarchy. By default, the internal ID is based on the display name. However, you can edit the ID before the hierarchy is created. After you save the hierarchy, you can't edit the internal ID.
Description	Optional. A description of the hierarchy.
Search	Optional. You can enable the hierarchy to be searchable.
Location	Required. Project or folder within which you want to save the hierarchy.

4. Click **OK**.

   The hierarchy model is created, and the Hierarchy Designer appears.

Step 2. Configure the top-level node

Specify a business entity as the top-level node in the hierarchy model. For example, in the Organization hierarchy model, you define the Organization business entity as the top-level node.

- In the **Properties** panel, select a business entity.

  The selected business entity appears as the top-level node on the canvas.

Step 3. Add a node

Add a business entity node and relationship to a the top-level node. For example, add the Person business entity and create a hierarchy relationship from the Organization business entity to the Person business entity.

1. Hover over the node from which you want to create a relationship and click **Add Child**.

   An undefined node appears on the canvas.
2. In the **Properties** panel, select a business entity for the undefined node.

   The **Parent Relationships** field populates based on the business entity selected.
3. Optionally, add additional nodes to the hierarchy.
4. Optionally, to add a recursive relationship, hover over the node for which you want to create a recursive relationship, and click **Recursive**.

   A relationship arrow pointing from the selected node to the same node appears.
5. Click **Save**.

Step 4. Define relationship attributes (Optional)

Define attributes of a relationship so that users in Business 360 applications can provide additional information about relationships.

For example, you might want to track whether your organization is actively engaging with customers. You define a Status attribute for the relationship between the Organization to Person business entities. Then users in Business 360 applications can specify that the status of the Informatica to John Smith relationship is active.

1. In the **Hierarchy Designer** panel, select a relationship.
2. In the **Attributes** section, click **Add**.

   The **New Attribute** dialog box appears.
3. Enter a name for the attribute.
4. Select an attribute type.

   The following table describes the attribute types:

Attribute Type	Description
Primary	The attribute field appears wherever related records appear, such as the related records section of the **Record Details** tab or the **Hierarchy** tab of a record.
Secondary	The attribute field only appears on the **Hierarchy** tab of a record.

5. Select the data type allowed in the attribute field.
6. If you select the picklist value type, select the reference data set for the attribute field.
7. To define a default value for the attribute, select **Yes**.

   When you select **Yes**, the **Value** field appears. Enter a default value for the attribute.
8. To reorder the attributes, click **Up** or **Down** beside the attribute that you want to move.
9. To define additional attributes of the relationship, repeat steps 2 to 5.
10. Click **Save**.

INDEX

A

add field attributes
  dynamic field definitions 26
  dynamic field values 27
add fields
  dynamic fields 26
assets
  business entities 8
  hierarchies 15, 16, 44, 57
  reference data 41
  relationships 49

B

business entities
  defining 8
  editing 39
  reviewing 14
business entity
  creating 15
  customizing 10
  properties 10

C

custom business entity
  configuration process 9

D

data model
  defining 7, 17, 19
data modeling
  prerequisites 7
dependent
  picklists, adding 24
drop-down lists *See picklists*

F

field properties
  configuring 28
fields
  business entities, defining 22

H

hierarchy models
  about 15, 16, 44, 57
  creating 58
hierarchy models *(continued)*
  defining 15, 16, 44, 57

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6
master data
  modeling prerequisites 7
model *See business entity*

N

nodes
  hierarchies, defining 59

O

out-of-the-box business entities
  reviewing 14

P

picklists
  adding 23, 26
  adding dependent 24
  defining 23, 26
predefined business entities
  reviewing 14

R

reference data
  about 41
  creating 42
  defining 41
relationship
  creating 55
  defining 55
  defining attributes 55
relationships
  about 49
  defining 49
  hierarchies, defining 59

S

status
  IDMC 6
system status 6

T

top-level node
  hierarchy models, defining 59
trust site
  description 6

U

upgrade notifications 6

W

web site 5