Informatica® Cloud Business 360 Console
October 2026

Manage and Migrate Assets

Informatica Cloud Business 360 Console Manage and Migrate Assets
October 2026

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-30

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- Intelligent Data Management Cloud Communities 5
- IDMC Marketplace 5
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: Managing projects and assets 7

Copy projects, folders, and assets 7

- Copying projects, folders, and assets 8

Viewing asset dependencies 8

Move projects, folders, and assets 8

- Moving projects, folders, and assets 9

Renaming projects and folders 9

Delete projects and folders 9

- Guidelines for match models and match and merge jobs 9

Delete custom assets 10

- Delete custom reference data assets 10
- Deleting custom assets 10

Permissions 11

- Configuring permissions 12

Source Control 13

- Source control actions 14
- Configuring repository access 14
- Project-level repositories 15
- Source control pulls 15
- Commit tags 16
- Checking out and checking in objects 17
- Comparing asset versions 18
- Deleting an object 19
- Reverting to an older version 19
- Undoing a checkout 19
- Unlinking an object 20
- Working with multiple objects 20
- Viewing source control columns on the Explore page 21
- Source control best practices 22

Chapter 2: Migrating projects and assets. 24

Prerequisites for migrating assets. 25

Required roles and permissions to migrate assets. 26

Guidelines for migrating assets. 26

Migrating data enhancement rules with input field changes. 29

Supported assets. 29

Dependent assets. 30

Migrate Reference 360 assets. 30

- Guidelines to migrate Reference 360 assets. 31
- Migrating Reference 360 assets 32

Exporting assets 32

Importing assets. 33

Reindex job 34

Index. 35

Preface

Follow the instructions in *Manage and Migrate Assets* to copy, move, or migrate assets from a source organization to a target organization. Learn how to perform the export and import process.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

Managing projects and assets

You can manage projects and assets on the **Explore** page. The **Explore** page is an IDMC feature that is available for most services. If you use multiple services, you might see projects, folders, and assets for all of your services on the Explore page.

Before you migrate assets, ensure that you set up the business application.

Before you provision an organization, create projects for the additional assets, such as mappings, mapping tasks, taskflows, and other MDM SaaS assets, based on your requirement. Avoid using predefined projects, such as Business360, Reference360, and Customer360, for these assets.

You can manage your IDMC projects and assets in the following ways:

- Copy the contents of projects or folders to other locations.
- Move custom assets to custom folders or projects.
- Delete custom projects or folders.
- Rename custom projects or folders.
- Configure permissions for projects, folders, or assets.
- Migrate assets between organizations.

Copy projects, folders, and assets

You can copy projects, folders, predefined assets, and custom assets to other locations, so you don't have to create them from scratch. Copy to speed up and simplify the creation of assets.

You need the create, read, and update privileges for the asset types that you plan to copy.

You can copy assets from predefined or custom folders or projects to other custom folders or projects, but not to predefined folders or projects.

You can't copy some of the predefined assets, such as authorization, business application, report, reference data, and report set.

When you copy an asset into a different folder that contains an asset with the same name, you can overwrite the asset in the folder or keep both. If you choose to overwrite the asset, you can merge the asset tags. If you choose to keep both assets, MDM SaaS appends the new asset name with `Copy x` where x is the sequential copy number.

When you copy a business entity to a new location, all the published match models of the business entity appear as published rather than as drafts. To edit match models, you can copy the published versions, which will appear as drafts, and then update them. Also, when you copy a business event with its process to

another location, the copied business event continues to point to the process in the original location, not the new process.

Copying projects, folders, and assets

To copy the contents of projects or folders to other locations, you must have the create, read, and update privileges for the asset types that you plan to copy.

1. On the **Explore** page, navigate to the objects that you want to copy.
2. Select the objects.
3. Click the **Actions** icon, and then click **Copy To**.
4. Browse to a new location, and click **Select**.
5. If an asset with the same name exists in the new location, choose the action that you want to perform:
   - Replace. Replaces the asset with the copied asset. If you want to merge the asset tags, select **Merge Tags on Replace**.
   - Keep Both. Keeps both the assets, and MDM SaaS appends the new asset name with `Copy x`, where x is the sequential copy number.
   - Cancel. Cancels the copy operation.

Viewing asset dependencies

You can view asset dependencies before you perform certain actions, such as editing or exporting an asset.

1. Navigate to an asset on the **Explore** page.
2. Click the **Actions** icon and then click **Show Dependencies**.
3. On the asset dependencies page, view dependencies.
   - To view the assets that the selected asset depends on, click the **Uses** tab.
   - To view the assets that depend on the selected asset, click the **Used By** tab.

     Note: You can delete dependent assets from the **Used By** tab. Select the asset and choose **Delete** from the **Actions** menu.
4. To drill down to the lowest level dependency, continue to view dependencies for each asset that appears on the asset dependencies page.

Move projects, folders, and assets

You can move custom projects, folders, and assets from a custom or predefined project into any custom projects or folders. By moving, you can reorganize different assets and improve the usability of assets.

To move assets, ensure that you have the update privilege for the asset types that you plan to move.

When you move custom assets, all the dependencies associated with the assets are retained.

Note: You can't move predefined projects, folders, and assets. Additionally, you can't move an asset if the target location already contains an asset with the same name and type.

Moving projects, folders, and assets

To move the custom assets into other custom projects or folders, you must have the update privilege for the asset types that you plan to move.

1. On the **Explore** page, navigate to the objects that you want to move.
2. Select the objects.
3. Click the **Actions** icon, and then click **Move To**.
4. Browse to the new location, and click **Select**.

Note: You can't move predefined MDM SaaS assets.

Renaming projects and folders

You can rename projects and folders.

You can't use the following characters in projects, folders, or tag names:

? ' | { } " ^ & [ ] / \

1. On the **Explore** page, navigate to the project or folder that you want to rename.
2. To rename a project or folder, in the row that contains the project or folder, click **Actions** and select **Properties**.
3. Enter the new name and click **Save**.

You can't use special characters in a name or use the same name as another object that is in the same folder.

Delete projects and folders

You can delete a project or folder if you no longer need it. However, before you delete it, verify that no users in the organization plan to use it.

Guidelines for match models and match and merge jobs

You can delete the match models, and match and merge jobs that you don't need.

Consider the following guidelines when you delete match models and match and merge jobs:

- Don't delete match and merge jobs unless absolutely required.
- Delete a match and merge job after you remove its dependency on any match model that you might want to delete. Otherwise, you can't delete the match model. To remove the dependency, assign a different model to the job.
- If a match model was part of a deleted job, contact Informatica Global Customer Support.

Delete custom assets

You can now delete custom assets, such as business entities, hierarchies, mappings, and relationships. You must have the MDM Designer or Designer user role to delete custom assets. However, you can't delete predefined MDM SaaS assets. You can't restore the custom assets after you delete them.

Before you delete custom assets, you must remove the dependencies associated with the assets. An asset can have dependencies, such as associated data, saved searches and templates, user role permissions, custom pages, job definitions, job instances or schedules, relationships, hierarchies, and business events.

You can view and remove the dependencies associated with an asset from the **Explore** page. For more information about viewing dependencies, see "Viewing asset dependencies" on page 8.

Before you delete an asset that has associated data, you must purge the data. For more information about purging data, see *Purging Data*.

You can't delete assets that have cyclic dependency. For example, consider business entities named Account and Company and relate them through business entity record fields. When you try to delete the Account or Company business entity, a dependency is shown, but you can't remove the dependency.

Note: After you delete a custom asset, you can reuse the internal ID of the asset.

You can't delete the following asset types:

- Report Set
- Business Application
- Authorization
- Rule associations, data enhancement rules, and objective groups created before the April 2025 release

Delete custom reference data assets

You can delete custom reference data assets that you don't need. However, before you delete the reference data assets, you must remove the dependencies associated with the reference data assets.

When you delete the reference data assets in Business 360 Console, the status of the reference data assets changes to unpublished and the reference data assets are removed from the Explore page. You can identify an unpublished reference data asset by a red dot. When you use an unpublished reference data asset in a picklist, the reference data asset is automatically published and then it shows up on the Explore page. To permanently delete the reference data assets, delete them from Reference 360.

For more information about deleting assets, see "Deleting custom assets" on page 10.

Deleting custom assets

You can delete custom assets that you no longer need. Before you delete the assets, you must remove the dependencies associated with the assets.


1. On the **Explore** page, navigate to the assets that you want to delete.
2. Select the assets.
3. Click the **Actions** icon, and then select **Delete**.

4. Confirm the action.

   If the assets don't have any dependencies, they are deleted.

   If the assets have dependencies, you can see a list of dependent objects for each asset. For example, when you delete a business entity that is specified in a job definition, then MDM SaaS displays job definition as a dependency. After you delete the job definition, you can delete the business entity.

   The following image shows a dependent object for an asset that you try to delete:

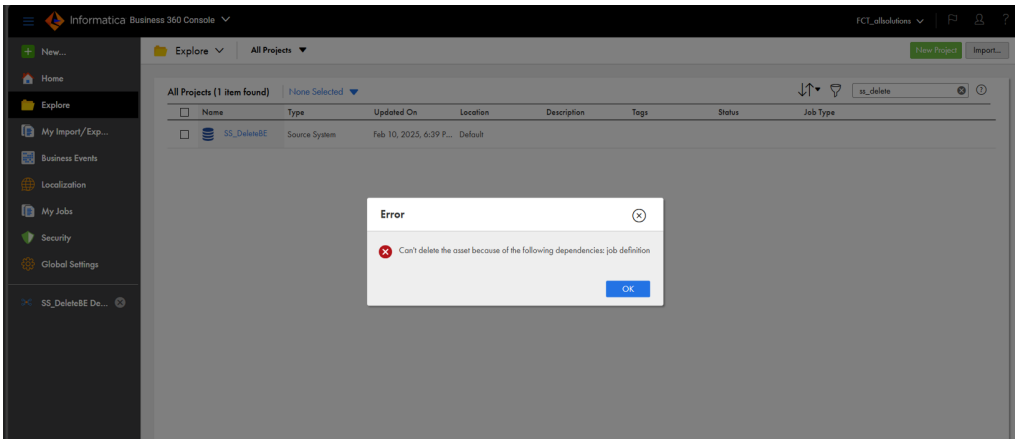

Permissions

Permissions determine the access rights that a user has for a project, folder, or asset. Permissions add additional or custom security for an object. Permissions define which users and groups can read, update, delete, execute, and change permissions on the object.

Before you set up a business application, don't add any permission to the predefined projects on the **Explore** page.

When you configure permissions on an object, verify that the user or group to which you grant permissions is assigned a role with the appropriate privileges for the object type.

To configure permissions on an object, you need the following licenses and privileges:

- To configure permissions at the project level for all assets in a project, your organization must have the Set/Unset Security Permissions at the Project Level license.
- To configure permissions at the folder level for all assets in a folder, your organization must have the Set/Unset Security Permissions at the Folder Level license.

To configure permissions on an object, navigate to the object and set the appropriate permissions. For example, you want only users in the Development Team user group to have access to assets in the Development Data folder. Navigate to the folder, edit the permissions, and grant the Development Team user group permissions on the folder.

Permissions apply to the objects for which you configure them but not to copies of the object. Therefore, when you copy or export an asset, the permissions are not copied or exported with the asset. For example, you export a report in which only user roles has the execute permission. When you import the report, the imported report has no permissions assigned to it. Therefore, any user with privileges to run reports can run the imported report.

You can configure the following permissions on an object:

Permission	Description
Read	Open and view the object. If you select a task, this permission also allows the user or group to use a connection or schedule in the task.
Update	Edit the object. Requires read permission, which is automatically granted.
Delete	Delete the object.
Execute	Run the object. Applies to mappings, tasks, taskflows, reports, and jobs. Monitor, stop, and restart instances of the mapping, task, or taskflow.
Change permissions	Change the permissions that are assigned to the object.

Note: These permissions control permissions within IDMC. They don't control operating system permissions, such as the ability to start, stop, or configure the Secure Agent on Windows or Linux.

Configuring permissions

You can configure permissions on an object if you are assigned a role with the Set Permission privilege for the object type. For example, to configure permissions on a folder, you must be assigned a role that has the Set Permission privilege for folders.

1. Navigate to the object for which you want to configure permissions.
2. In the row that contains the object, either click **Actions** and select **Permissions**, or click the **Change Permission** icon.

   The **Permissions** dialog box lists the users and groups that have permissions on the object.

   If the **Permissions** dialog box lists no users or groups, then no permissions are configured for the object. Any user with appropriate privileges for the object type can access the object.
3. To configure user permissions on the object:
   a. Select **Users**.
   b. If the user does not appear in the **Users** list, click **Add**, and select a user.
   c. Enable or disable the appropriate permissions on the user.

   Note: When you grant any user permissions on the object, IDMC also adds you as a user with permissions on the object. This prevents you from losing access to the object when you configure permissions.
4. To configure user group permissions on the object:
   a. Select **Groups**.
   b. If the group does not appear in the **Groups** list, click **Add**, and select a group.
   c. Enable or disable the appropriate permissions on the group.

   Note: When you grant any group permissions on the object, IDMC also adds you as a user with permissions on the object. This prevents you from losing access to the object when you configure permissions.

5. To remove all permissions for the object, remove all users and groups from the **Permissions** dialog box.

   When you remove all users and groups, any user with appropriate privileges for the object type can access the object.

6. Click **Save**.

Source Control

You can use a Git source control repository to manage and track changes made to objects such as projects, folders, and assets.

The following table lists the source control repositories that you can use:

Repository	Self-hosted	Cloud-hosted
Atlassian Bitbucket	Supported	Supported
GitHub	Supported	Supported
GitLab	Supported	Supported
Microsoft Azure DevOps	Supported	Supported

Note: You can't use cloud-hosted Bitbucket or cloud-hosted GitLab if the organization is subject to FedRAMP.

Note: If you use a GitLab repository, various source control actions such as pull and compare actions might show incorrect commit history.

You can use source control to enable version management for the IDMC objects that appear on the **Explore** page, except for Data Integration bundles. You cannot apply source control to objects that don't appear on the **Explore** page such as runtime environments or connections. The source control repository structure mirrors the structure in the organization. By default, **Explore** is the top-level directory.

Each time a user performs an action on an object that is source controlled, IDMC logs the action. You can view source control logs in the Monitor service. For more information, see *Monitoring source control logs* in the Monitor help.

To use source control, the following prerequisites must be met:

- The organization has the appropriate IDMC licenses to use source control.
- The organization administrator has configured a connection between the source control repository and the IDMC organization.
- Your user role has privileges to use the IDMC source control feature.
- You've entered your source control repository user credentials in IDMC.

For information about configuring a connection between a Git source control repository and IDMC, see the Administrator help.

Note: Informatica recommends that you include no more than 1000 objects in a container such as a project or folder when you use a source control repository with IDMC.

Source control actions

You can perform the following actions on source-controlled objects such as projects, folders, and assets:

Pull an object.

Pull an object to add it to the organization or update a project with the version in the source control repository.

Check out an object.

Check out an object that you want to work on. When you check out an object, the object locks so that other users cannot make changes to it.

Check in an object.

Check in an object to add it to the source control repository or update the source control repository with the latest version of the object. When you check in an object, the lock releases.

Delete an object.

Delete an object from the organization and the source control repository. Before you can delete an object, you must check it out.

Restore an object version.

Restore an object to a previous version.

Undo a checkout.

Undo a checkout if you don't want to save the changes you made to the object. When you undo a checkout, the object reverts to the last source control version.

Unlink an object.

Unlink an object if you no longer want the object in the organization to stay in sync with the object in the source control repository.

Note: Some organizations do not have permission to update the source control repository. If your organization cannot update the repository, you can perform a pull action to get a specified version of the IDMC objects. However, you cannot perform other source control actions such as checking out and checking in objects.

To check out, pull, unlink, or undo a checkout for an object, you must have update permissions on the object.

Configuring repository access

To work with source-controlled objects, specify your repository credentials in IDMC.

Your credentials can include a personal access token or API token, depending on the repository service that you use. If your organization's repository is configured for OAuth access, you can enable OAuth access instead of providing a personal access token or app password.

Personal access tokens and API tokens must be configured to enable full control of private repositories. For information about generating tokens, see the GitHub, GitLab, Azure DevOps Git, or Bitbucket help.

Perform the following steps to configure access to the repository:

1. Click the **User** icon on the toolbar and then select **Settings**.

   Note: Depending on which service you are in, the user settings page might appear different and show different names for the sections.

2. In the **Source Control Access** section, perform one of the following tasks:
   - Enter your repository credentials.
   - Enable OAuth access to the repository.
     If you haven't already authorized access, a Git access app appears for GitHub and Azure DevOps Git repositories. Select to authorize access for IDMC.
3. Click **Save**.

Project-level repositories

If you're assigned a role with the Configure Custom Repository Source Control privilege, you can specify a source control repository to use at the project level, instead of using the global source control repository that's set up for your organization.

By default, when you perform a source control action on a project or folder, the action uses the global source control repository that's set up by the organization administrator. If the organization administrator enables project-level repositories, you can link a project to a repository other than the global repository.

If you use project-level repositories, be sure to add the Repository URL and Repository Branch columns to the Explore page.

Note: Before you link a project to a custom repository, make sure that other users who need access to the project have access to the repository.

Linking a project to a source control repository

You can link a project to a source control repository other than the global repository.

1. On the **Explore** page, in the row that contains the project, click Actions and select **Source Control Properties**.
2. Enter the Git repository URL and branch name that you want to use, and then click **Save**.
3. Click **Save** again to confirm that you want to use a repository other than the global repository.


   After you click **Save**, only users who have access to the repository can check out and commit the project.

Source control pulls

Pull an object to add it to the organization or replace the version of the object in the organization with the version in the source control repository. You can pull a project, folder, or an individual object that isn't checked out by another user.

Before a pull takes place, you can review the potential results of the pull. You can cancel the action or select objects to exclude from the pull.

The following image shows a preview page with potential results in the **Status** column:

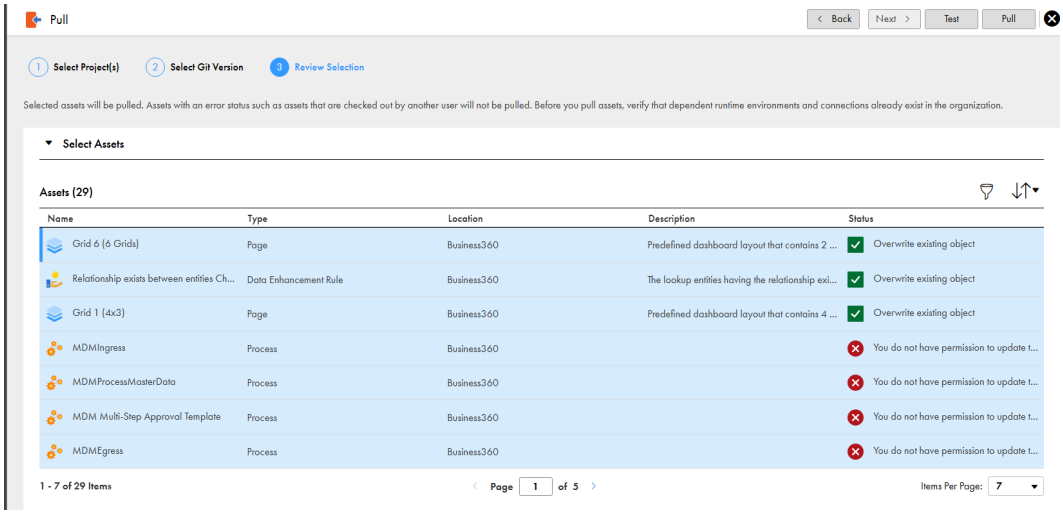

You can also test the pull to see if any errors might occur. If any errors appear, you can exclude the objects from the pull or close the page to cancel the pull.

A pull doesn't include dependent objects.

A pull doesn't change the state of pulled objects in the organization. For example, if an object was checked out before the pull, it remains checked out after the pull.

Consider the following rules and guidelines:

- If you want to pull an object that uses a connection or runtime environment, be sure that the organization includes a connection and runtime environment before you perform the pull. When you select an object that uses a connection or runtime environment, you can select a runtime environment and connection to use on the test page.
- IDMC doesn't consider capitalization in object names. As a result, you can't pull a project that contains multiple assets that have the same name with different capitalization. For example, if you try to pull a project that contains an asset named "sales" and an asset named "SALES", you receive an error because a project or folder can't contain multiple assets with the same name.
- You can pull objects regardless of whether your organization can or cannot update the source control repository.

Commit tags

When you check in assets to your source control repository, you can include a commit tag. The tag appears as an annotated tag in your Git repository.

You might want to include a commit tag to mark assets within a check-in that are ready for deployment. When you add a commit tag, the tag is applied to each asset in the commit. You can add one tag for each commit, and the tag must be unique.

When you pull assets, IDMC displays commit tags in the **Tag** column on the **Pull** page.

Note: The pull operation can take longer based on the number of commit tags you have in your repository.

Checking out and checking in objects

Check out an object so you can make changes to it. Check in the object when you want to update the source control repository with your changes. You can also check in objects to add them to the source control repository.

Note: After you upgrade a business application, check in all objects in the application. Otherwise, validation errors might occur when you pull the objects into a target organization that uses source control.

When you check out an object, the object locks so that other users can't make changes to it. When you check in an object, a new version of the object is created in the source control repository.

If you check in an object that's in a folder or project that isn't source controlled, the folder or project becomes source controlled. An asset can't reside in a source control repository unless it's in a container such as a project or folder.

If you import assets into an organization that uses source control, the assets must be checked out so that they can be overwritten.


Note: The size of a check-in cannot exceed 50 MB.

Checking out an object

When you check out an object, the object is locked so that other users can't update it while you are making your changes.

You can check out individual objects, multiple objects, or a project or folder to check out all of the objects within the project or folder.

The following image shows the Check Out action is selected for the Default folder:

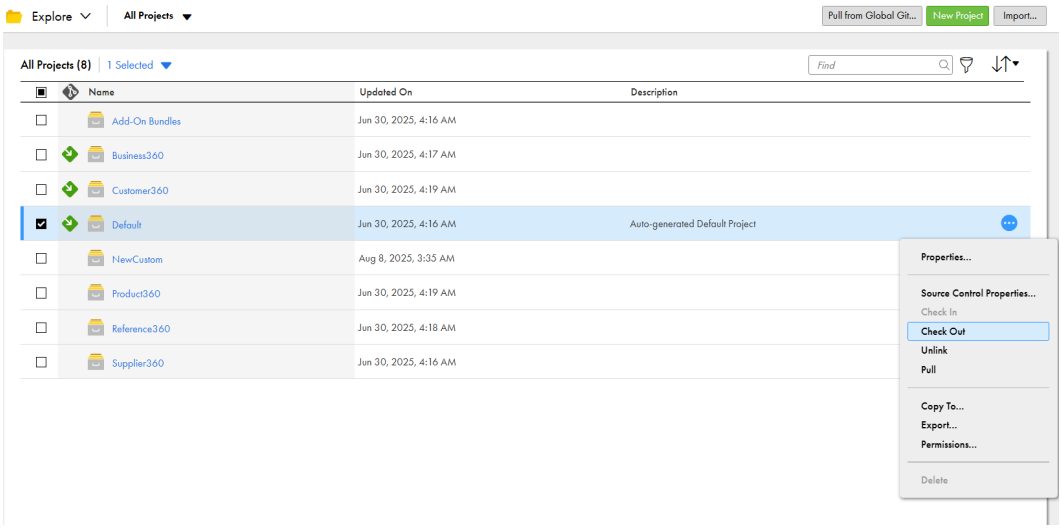

Before you check out an object, you might want to perform a pull to be sure you update the latest version of the object. For more information about the pull action, see "Source control pulls" on page 15

1. On the **Explore** page, navigate to the object you want to check out.
2. In the row that contains the object, click **Actions** and select **Check Out**.
3. If the checkout includes multiple objects, on the preview page, review the results in the **Status** column. If you want to exclude an object, clear the check box next to the object name.
4. Click **Check Out**.

Checking in an object

Check in an object to add the object to the source control repository or to update the source control repository with the latest version of the object in the organization.

If no changes were made to the object, the check-in isn't reflected in the source control history and a new version of the object isn't created in the source control repository.

Note: The size of a check-in can't exceed 50 MB.

1. On the **Explore** page, navigate to the object you want to check in.

   Note: If you use a cloud-hosted GitLab repository, a check-in action that includes more than 100 objects fails if GitLab doesn't process the check-in within around 30 minutes. We recommend that you check in fewer objects at once.
2. In the row that contains the object, click **Actions** and select **Check In**.
3. If the check-in includes multiple objects, on the preview page, review the results in the **Status** column. If you want to exclude an object, clear the check box next to the object name. If you want to cancel the action, close the page.
4. Add a summary and optionally, a description and commit tag.


   A summary is required and has a max length of 255 characters.
5. Click **OK**.

Comparing asset versions

You can compare two versions of a source-controlled asset to find out what's changed between the versions. You might want to do a comparison to troubleshoot an issue or share code changes for peer code reviews.

You can compare the current version of an asset that hasn't been committed to the repository yet to a version in the repository, or compare two versions that were committed to the repository.

The **Compare Asset Versions** page displays the selected versions in text format with highlights that indicate the differences as shown in the following image:

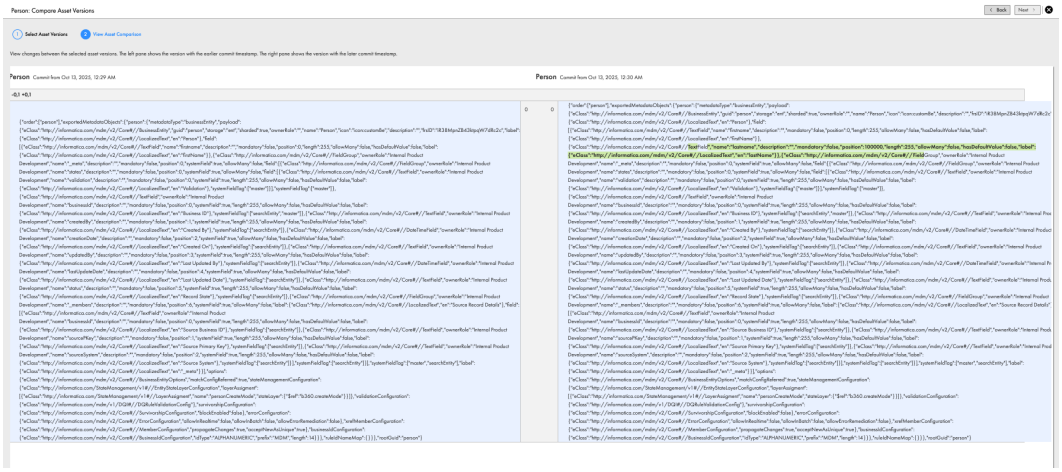

Git doesn't retain the commit hash history for assets that you rename or move. Consequently, you can't compare a renamed or moved asset to a version of the asset that uses its old name or location.

Note: If the result of the asset comparison includes 10,000 lines or more, an error message appears. To compare large assets, use the Git compare feature within the Git repository.

1. On the **Explore** page, navigate to the asset that you want to compare.

2. In the row that contains the asset, click **Actions** and then click **Compare Asset Version**.
3. To compare the current version to a version that's been committed to the repository, select **Compare the current asset version and a previous asset version**, and then select the previous asset version that you want to use.
4. To compare two previous versions, select **Compare two previous asset versions**, and then select the two versions that you want to compare.
5. Click **Next**.

Deleting an object

To delete a source controlled object, you delete it from the organization and from the source control repository.

You must check out an object before you can delete it.

You can't delete an object that's checked out by another user or delete a project or folder recursively.

1. On the **Explore** page, navigate to the object that you want to delete.
2. On the row that contains the object, click **Actions** and then click **Delete**.
3. To confirm that you want to delete the asset from the organization, click **Delete**.
4. Add a summary that describes the reason for the delete action and optionally, a description.

   A summary is required and has a max length of 255 characters.
5. To delete the object from the repository and complete the delete action, click **OK**.

Reverting to an older version

You might want to revert to a previous version of an object if you want to discard changes that were made to the object.

To revert to a previous version, perform a pull action and select the version that you want to restore in the organization.

If you revert the version of a project or folder and the project or folder in IDMC contains objects that are not in the repository's project or folder, the pull action deletes the additional objects if they are source controlled. If the objects are not source controlled, the action doesn't delete the additional objects.

For more information about the pull action, see “Source control pulls” on page 15.

Undoing a checkout


When you undo a checkout, the object reverts to the last version that was pulled. The object's version history will not include a record of the checkout and undo checkout actions. The undo checkout releases the lock so that the object is available for checkout.

You can undo the checkout of individual objects, multiple objects, or a project or folder in a single checkout action. If you undo the checkout of a project or folder, you can select which objects within the project or folder to include or exclude. By default, all of the objects are included.

You can undo the checkout of any object that you have checked out. You cannot undo the checkout of an object that has been checked out by another user unless you have the Admin role or your user role has the Force Undo Checkout feature privilege for the Administrator service.

When you undo the checkout of an asset that uses connections and runtime environments, you can use the current connection and runtime environment values or select a different connection or runtime environment to use.

The following image shows the Default folder selected during the Undo Check Out action:

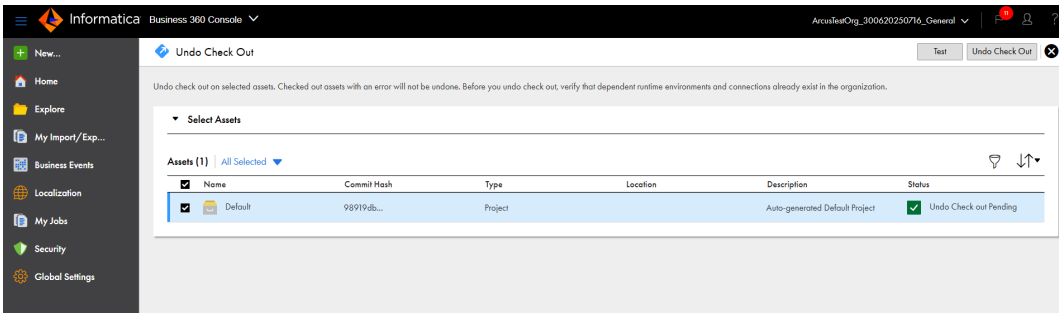

Note: If an object was moved or renamed after it was checked out, undoing the checkout restores the object's name and location to its name and location before it was checked out.

1. On the **Explore** page, navigate to the object.
2. In the row that contains the object, click **Actions** and select **Undo Check Out**.
3. If the undo checkout includes a project or folder, on the preview page, select the objects within the project or folder to exclude from the undo checkout action.
4. Click **Undo Check Out**.

Unlinking an object

You can unlink an object so that it's no longer source controlled.

Unlinking an object doesn't delete the object from the source control repository or the organization, but you can no longer update the repository for any changes you make to the object in the organization. If you decide to link the object in the future, you can check in the object to reestablish the link. If the name of the object or the path to the object has not changed, the checked in object becomes a new version of the object in the source control repository.

The object must be checked in before you can unlink it. You can unlink an object that's checked out by another user if you have the Admin role or your user role has the Force Undo Checkout feature privilege for the Administrator service.

You can't unlink a project or folder that contains source controlled objects. To unlink a project or folder, unlink each object within the project or folder first.

1. On the **Explore** page, navigate to the object that you want to unlink.
2. On the row that contains the object, click **Actions** and select **Unlink**.

Working with multiple objects


You can select multiple objects to check in, check out, undo a checkout, pull, or unlink.

The total size of the selected objects cannot exceed 50 MB.

You can select a project or folder or select multiple objects within a project or folder. When you include multiple objects in a source control action, a preview page appears that shows you the expected results of the action if you proceed. If an object listed on the preview page is not source controlled, it will be ignored. If an object is checked out by another user or you do not have permission to update the object, the status on

the preview page shows that the action will fail. You can opt to remove any of the objects before you continue.

The following image shows the preview page where you can review the potential results of the pull for the selected assets:

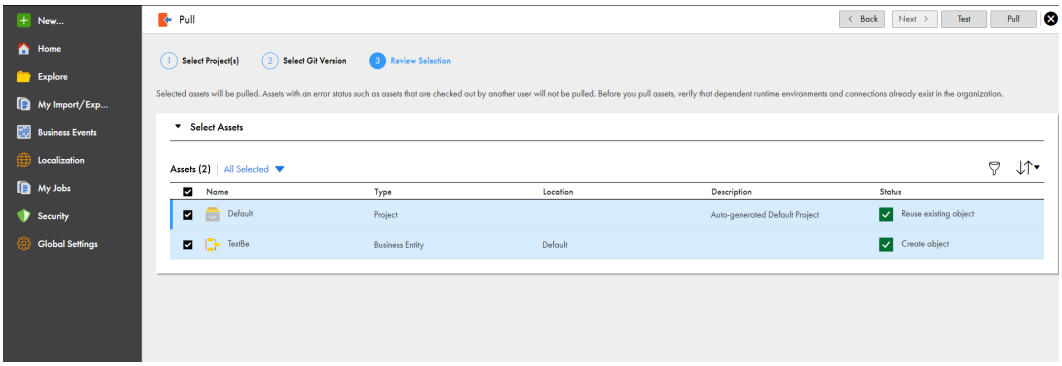


If you select multiple objects for a pull, the preview page lists all of the versions in the repository.

Note: You can't delete multiple objects in one transaction.

Viewing source control columns on the Explore page

If your organization has any objects that are source controlled, the **Explore** page displays an additional column that indicates whether an object is checked in, checked out, or is not source controlled.

In the following image, the blue and red icon indicates that the Default folder is checked out:

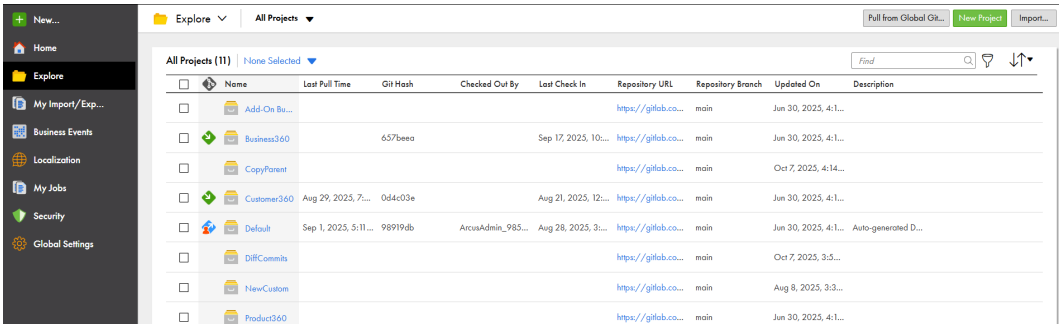


Additional source control columns are available but are not displayed by default. You might want to customize the **Explore** page to show all of the source control-related columns. This way you can easily identify source controlled objects, and you can use the columns to filter and sort source controlled objects on the page.

You can add the following source control-related columns to the **Explore** page:

- Last Pull Time
- Checked Out By
- Last Check In
- Git Hash
- Repository URL
- Repository Branch

To display these columns, right-click a column heading and select the columns that you want to add, as shown in the following image:

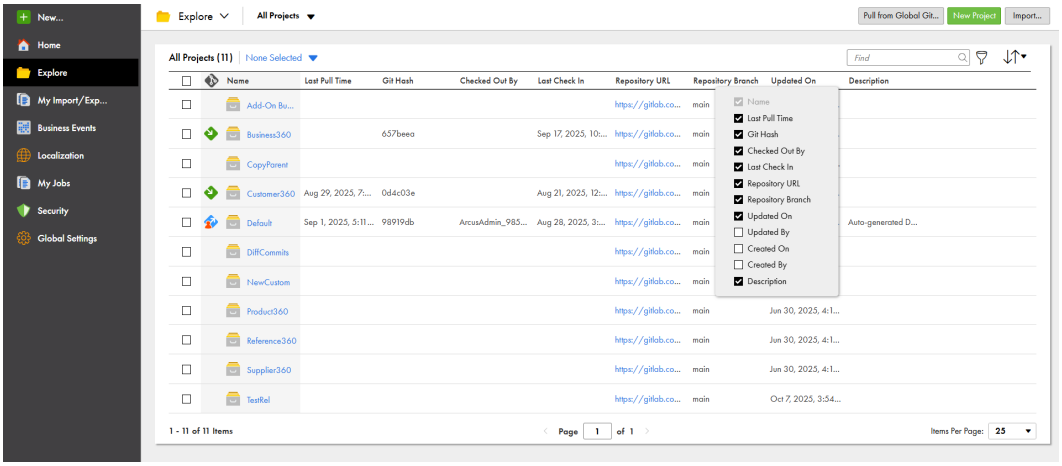

Source control best practices

To use source control effectively, use the following guidelines as best practices.

Adhere to the following guidelines as you develop and work with assets:

Guidelines for managing dependencies

Use the following guidelines to manage assets with dependencies:

- Create connections and runtime environments before you pull assets from the repository.

  When required connections and runtime environments exist in the target organization, you can run tasks immediately after you pull them from the repository.
- Ensure that reusable assets such as mappings and components are present in the repository before you use them.

  IDMC does not allow you to save an asset such as a mapping task when the dependent mapping does not exist in the organization.

Guidelines for checking in and checking out assets

Use the following guidelines when you check in and check out assets:

- When you check in an asset, ensure that all dependencies associated with the asset are checked in.
- When you check out an asset, ensure that all relevant dependencies are checked out.
  For example, when you check out a business entity and add attributes, ensure that the custom pages associated with the business entity are also checked out to add these attributes. After the updates, check in both the business entity and the custom pages.
- When you perform an action on a source-controlled asset, check the status of the action in the source control logs of the Monitor service.
- Have only one development organization with a source-controlled repository to avoid any conflicts between organizations.
- Before you import assets, ensure that they are checked out.
- When you pull MDM SaaS assets from the repository, ensure that they meet the asset migration prerequisites.
  For more information on the prerequisites for migrating MDM SaaS assets, see "Prerequisites for migrating assets" on page 25.

- When you rename or move an asset, check out the asset's first-level dependent assets and include them in the same check-in.

  For example, if you want to rename a mapping that a mapping task uses, and the mapping task is used in a taskflow, check out the mapping and the mapping task. You don't need to check out the taskflow. After you rename the mapping, check in the mapping and the mapping task in one check-in action.

- Enter comments when you check in assets.

  When you check in assets, you might enter a release tag name in the **Summary** field and enter more descriptive comments in the **Description** field. When you do this, the **Git Summary** field in IDMC shows the release tag that is associated with the asset.

- When you check in multiple assets at one time, limit the number of assets to 800 or fewer.

  Checking in more than 800 assets at one time can degrade performance between IDMC and the Git repository service.

CHAPTER 2

Migrating projects and assets

You can migrate IDMC projects and assets from one organization to another organization. To migrate projects or assets, you export the projects or assets from the source organization and then import the projects or assets into the target organization.

You can export a single project or asset, groups of projects or assets, or export all the assets in a project. When you export all the assets in a project, the export fails for the unsupported assets. If you export a project or folder, the file structure remains intact so that when you perform the import in the target organization, you can duplicate the original structure.

To export or import projects or assets in a sub-organization, log in to the sub-organization.

You can migrate projects and assets on the **Explore** page. The **Explore** page is an IDMC feature that is available for most services. If you use multiple services, you might see projects, folders, and assets for all of your services on the **Explore** page. You can manage your IDMC projects and assets in the following ways:

- Apply tags so you can filter for related assets on the Explore page.
- Configure permissions for projects, folders, or assets.
- Migrate assets between organizations.

Prerequisites for migrating assets


Before you migrate MDM SaaS assets between organizations, ensure that the target organization meets the prerequisites.

Complete the following prerequisite tasks:

- To import predefined assets, ensure that you set up the corresponding licensed business applications. Also, ensure that the org versions of the business applications in the import file and the target organization match.

  Note: To determine the org versions of the business applications in the import file, extract the import file and open the exportMetadata.v2.json file. The exportMetadata.v2.json file contains the org versions of business applications.

  The following image shows the org version of an organization:

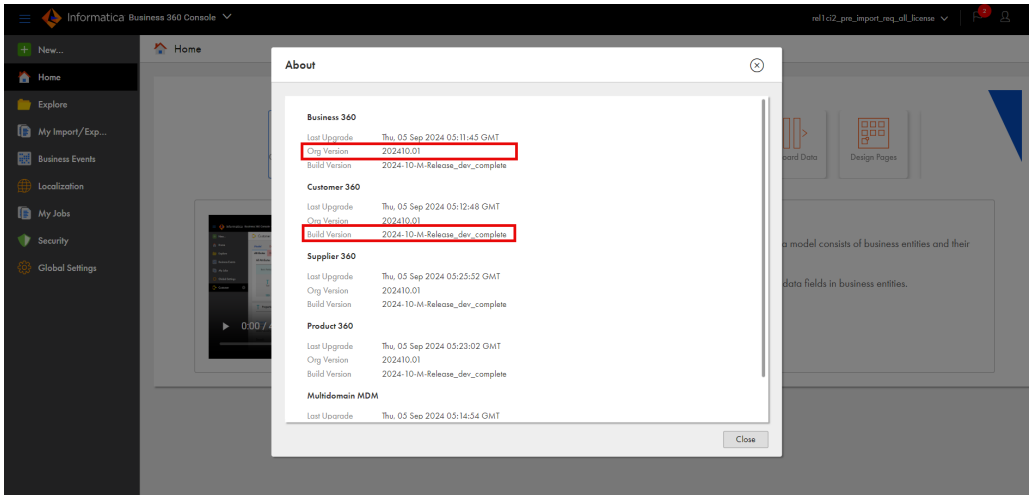

- To import custom assets, ensure that you set up at least one licensed business application that matches the business application in the source organization. Also, ensure that at least one business application org version in the target organization matches the version in the import file.
- If the source and target organizations are on different PODs, ensure that you migrate assets after both the PODs are upgraded to the same build version.
- You have user accounts in the source and target organizations with roles that have export and import privileges, such as the Administrator role or a combination of Designer, MDM Designer user roles.
- You have the required permissions to migrate the assets and folders from the source to the target organization.
- Before you migrate authorization configurations to a target organization, ensure that you first migrate the business entities and relationships.
- If you back up MDM SaaS assets periodically, back up all the assets after the organization is upgraded to the latest build version. The assets that you backed up before the October 2024 release are no longer valid.

Required roles and permissions to migrate assets

To import an asset, you need the following roles and permissions:

- User with the Admin role or a combination of Designer and MDM Designer roles.
- To import new assets to the target organization, you need create permission.
- To overwrite the existing assets in the target organization, you need the metadata permission for the assets.

Guidelines for migrating assets

To migrate assets between organizations, consider the following rules and guidelines:

- To import assets related to other services, ensure that you import them without any MDM SaaS assets.
- To import and export the asset types, such as authorization configuration, you need administrator privileges.
  For example, when a user with the Admin role migrates assets to a target organization for the first time, the user can migrate all the assets, including the authorization and business event assets. When a user with the Designer or MDM Designer role migrates assets to a target organization for the first time, the user can migrate all the assets except authorization and business event assets. A user with the Admin role can then migrate the authorization asset first and then the business event assets.
- After you migrate an asset, if you update the asset in the source organization, you must export and import the modified asset to the target organization. Ensure that you don't modify the assets manually in the target organization.
- The user role that updates the assets must migrate the assets.
  For example, if a user with the MDM Designer role updates an asset in a source organization, the same user must migrate the asset to a target organization. Otherwise, the migration fails.
- Ensure that you create connections in a target organization before you migrate taskflows to the target organization.
- Before you migrate assets to a target organization, ensure that you don't set any permission to assets, folders, or projects.
- During migration, the licenses aren't verified. Ensure that you migrate the assets that are licensed in the target organization.
- When you export a business entity, the assets related to the rule associations for DaaS real-time address verification and data enrichment aren't included in the exported file. To export all the assets related to these rule associations, export the objective group assets separately.
- When you migrate a data enhancement rule that uses an Application Integration process, ensure that the value of the Process Name property in the rule matches the API name of the process.

  Note: When you create a process by copying an existing process, Application Integration adds a version number to the API name of the process. For example, when you copy a process with the findAddresses API name, the API name of the copied process becomes findAddresses-1. After you migrate a data enhancement rule with the copied process, the version number is removed from the API name if no process with the same API name exists in the organization. However, the version number remains in the Process Name property of the data enhancement rule. To prevent data enrichment from failing, manually remove the version number from the process name in the data enhancement rule.

- When you import a business entity that has its business ID format configured, the business ID format configuration isn't imported. After the import, ensure that you configure the business ID format for the imported business entity.
- When you migrate authorization configurations, ensure that the data access rules contain unique names in the source and target organizations. If the data access rules contain the same name but are associated with different business entities in the source and target organizations, MDM SaaS overwrites the data access rule in the target organization.
  For example, you have a data access rule with the name `Test Rule 1` to protect the Person business entity in the source organization and a data access rule with the same name `Test Rule 1` to protect the Organization business entity in the target organization. If you migrate the authorization configurations, MDM SaaS overwrites the data access rule in the target organization to protect the Person business entity.

  Note: Before you migrate authorization configurations, ensure that you first configure all data access rules in the source organization and then import them to the target organization.
- When you migrate authorization configurations that include draft data access rules in the source organization, ensure that the target organization doesn't contain any active data access rule with the same name.
  If the target organization contains an active data access rule with the same name, you can't publish the draft data access rule that's imported. After you import the draft data access rule, MDM SaaS removes the active data access rule but internally stores it. When you delete the imported draft data access rule, MDM SaaS deletes the draft data access rule and displays the active data access rule.
- When you import the authorization asset, if the data access rule names in the asset from the source organization match the rule names in the target organization, MDM SaaS ignores the maximum limit and overwrites the existing data access rules in the target organization.
  If the asset that you import contains new data access rules, MDM SaaS checks the maximum limit for each business entity in the target organization. If the maximum limit exceeds, the import of the asset fails.
- When you import a business entity with error remediation enabled, the imported business entity includes the error remediation settings only if the business entity is new to the target organization. If the business entity already exists in the target organization without error remediation enabled, the imported business entity doesn't reflect the updated error remediation setting.
- MDM SaaS doesn't automatically generate objectives and rule associations to use Enrichment and Validation Orchestrator when you perform migration in organizations after the April 2026 release. When you export and import assets from your source organization to the target organization, ensure that you manually export the predefined objective group.
- When you export assets from organizations already migrated to use Enrichment and Validation Orchestrator and organizations created after the October 2025 release, ensure that you manually select the predefined objective group of business entities from the **Explore** page.
  If you don't manually select the predefined objective group during export, MDM SaaS doesn't apply the updated rule associations from the source organization into the target organization.
- MDM SaaS restricts asset migration from organizations that haven't migrated their basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator into organizations that have. However, if you have already migrated these rule associations in your source organization, you can import assets into the target organization even if it hasn't migrated to use Enrichment and Validation Orchestrator.
- MDM SaaS doesn't support migration of assets between organizations containing basic, advanced, and DaaS rule associations that are partially migrated to use Enrichment and Validation Orchestrator.

For example, if some rule associations fail to migrate, the organization might end up with a partial migration. Rerun the job to resolve the issue. If the issue persists, contact Informatica Global Customer Support.

- Additionally, ensure that you don't migrate assets and run the migrate rule associations job simultaneously.
  For example, if you export assets while the migrate rule associations job is in progress, the exported file doesn't contain rule associations that are created as part of the migration process. If you import the exported file into a target organization that's migrated to use Enrichment and Validation Orchestrator, the import fails. When you import assets into an organization, if you simultaneously run the migrate rule associations job, the migration process doesn't consider the rule associations that are being imported.

  If you export assets from a source organization that hasn't migrated to use Enrichment and Validation Orchestrator and import them into a target organization that has successfully migrated, has failed to migrate, or was created after the October 2025 release, the import fails. Additionally, the import also fails if the source organization failed to migrate rule associations to use Enrichment and Validation Orchestrator and the target organization has successfully migrated, has failed to migrate, or was created after the October 2025 release.
- Before you migrate business events and native workflows, ensure that JSON Web Token (JWT) authorization is enabled in the source and target organizations.
- Before you export native workflows, publish them. You can't export native workflows that aren't published. When you try to export a draft native workflow that was previously published, the last published version of the workflow is exported.

  By default, imported native workflows have the published status in the target organization.
- You can only import native workflows to target organizations that have the Active, Upgrade Available, or Upgrade Queued status.
- Before you import business events or native workflows, ensure that the user roles used by the business events are available in the target organization with identical casing. If the user roles don't match, the import operation fails.

  For example, if a user role in the source organization is Datasteward and a user role in the target organization is DataSteward, the import operation fails.
- Before you use imported native workflows that contain Application Integration Process service tasks, ensure that you publish the associated Application Integration processes and their related business events. By default, Application Integration processes and their dependent assets have the draft status in the target organization.

: Effective in the April 2026 release, the ability to create native workflows and use them in business events is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Migrating data enhancement rules with input field changes

When you update a data enhancement rule that you already migrated to another organization, migrate the updated rule association first, and then migrate the updated data enhancement rule.

If you rename or delete fields, or change field data types in a process or a Data Quality rule specification, the data enhancement rules that use them don't automatically reflect those changes. You must manually remove the outdated field mappings from the associated rule associations and then save the data enhancement rule with the updated process or rule specification.

When you migrate the updated data enhancement rule and rule associations together to an organization where the same assets with the outdated mappings exist, the rule associations fail to load. This issue occurs because the rule associations still contain outdated field mappings. To avoid this issue, migrate the changes in two stages.

1. Migrate the affected rule associations.
    a. In the source organization, remove the outdated field mappings from each affected rule association.
    b. Export the rule associations and then import them into the target organization.
    c. Verify that the rule associations in both organizations are free of references to fields that no longer exist.
2. Migrate the affected data enhancement rule.
    a. In the source organization, refresh the data enhancement rule and save it with the updated process or rule specification.

       For more information about refreshing data enhancement rules, see *Refreshing data enhancement rules*.
    b. Export the rule and then import it into the target organization.

Supported assets

You can export and import the following types of assets:

- Authorization configuration
- Predefined and custom source systems
- Predefined and custom business entities with their configuration, such as fields, field groups, smart fields, match models, and objective groups
- Business events
- Customer 360 business application with custom pages
- Custom processes
- Reference data asset, cross walks, enterprise and custom code lists
- Hierarchies
- Job definitions, such as match and merge, generate merge tasks, and recover a failed job
- Rule specifications, such as advanced data quality
- Custom and predefined reports

- Report set that contains a collection of custom and predefined reports
- Mappings
- Mapping tasks
- Taskflows
- Survivorship and search configurations
- Relationships

You cannot export and import the following assets:

- Predefined processes
- Code values in reference data set
- Job schedules
- Job definitions that use the RDMEgressFlow process.
- Dashboards, saved searches, and search templates

Dependent assets

Dependent objects are assets that other assets require.

For example, a business entity uses a source system in its configuration. A source system is a dependent object for the business entity.

When you set up an export, you can include or exclude dependent objects in the export file. The dependent objects must exist either in the export file or in the target organization, else the import fails.

Note: When you export a reference data, only the code list definitions are exported. Code values aren't exported. For more information about exporting reference data, see the *Manage code values* chapter in the *Informatica MDM - Reference 360* help.

You can include dependent assets if they do not exist in the target organization. Also, you can include dependent assets if you want to replace the dependent assets in the target organization with updated versions from the source organization. If you include dependent assets, the export file includes dependent assets for all the assets that you include in the export job. When you configure the import job, you can choose the dependent assets to import.

You can exclude dependent assets of an asset if the assets exist in the target organization and you do not want to replace them.

Migrate Reference 360 assets

When you migrate reference data assets, MDM SaaS uses internal IDs, aliases, and names to identify Reference 360 assets.

Guidelines to migrate Reference 360 assets

To migrate reference data assets between organizations, consider the following rules and guidelines:

- When you create reference data assets in Business 360 Console, you can't delete them from MDM - Reference 360.
- When you migrate reference data assets containing custom attributes, workflow configuration, and stakeholders from the source organization, the assets display only their default configuration in the target organization. However, when you migrate an existing asset that already contains custom attributes, workflow configuration, and stakeholders in the target organization, the asset retains its customized configuration in the target organization post-migration.
- After you migrate reference data assets containing reordered code list attributes in the source organization, the code list attributes appear in the default order in the target organization. To retain the reordered attributes, use the export and import model version 3 REST APIs of Reference 360 to import the reference data assets.
- When you migrate Reference 360 assets, MDM SaaS uses internal ID, aliases, and names to identify Reference 360 assets.
- When you import an existing asset, ensure that you consider the following guidelines:
  - Ensure that the internal IDs of the imported and existing assets are the same. If they aren't same, Reference 360 creates a new asset.
  - If the imported asset doesn't have an internal ID but has an alias, the alias must be the same as the internal ID or alias of the existing asset.
  - If the imported asset doesn't have an internal ID or an alias, then the name of imported asset must be the same as the name of the existing asset.
  - If an identifier of the imported reference data set is the same as the identifier of an existing reference data set, their default code lists must also match.
  - If an identifier of the imported code lists is the same as the identifier of an existing code list, their reference data sets must also match.
  - If an identifier of the imported crosswalk is the same as the identifier of an existing crosswalk, their source and target code lists must also match.

  For more information about migrating Reference 360 assets, see *Getting started with Reference 360* chapter in the *Informatica MDM - Reference 360 help*.
- Before you migrate reference data assets that use multilingual attributes, ensure that the multilingual settings for the corresponding reference data set or code list match in both the source and target organizations. If a code list already exists in the target organization, you must enable the same multilingual settings in the source and target organizations for the export to occur. If the multilingual settings don't match, the migration fails.
  Effective in the October 2026 release, the ability to configure reference data assets in multiple languages in Reference 360 is available for preview. Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Migrating Reference 360 assets

When you migrate assets, MDM SaaS uses internal IDs, aliases, and names to identify Reference 360 assets.

When you import an asset, Reference 360 first compares the internal ID of the asset that you import with the internal ID of existing assets. If the internal ID of the asset you import and the internal ID of any existing asset aren't null and they match, the existing asset is successfully updated.

If the internal IDs don't match and neither is null, Reference 360 compares the internal ID of the asset that you import with the alias of the existing asset, alias with alias, and then name with name. If any of these comparisons result in a match while internal IDs mismatch, the import fails.

If the internal IDs don't match but either one of the internal ID is null, Reference 360 compares the internal ID of the asset that you import with the alias of the existing asset. If they match, the existing asset is successfully updated.

If they don't match, Reference 360 compares the alias of the asset that you import with the internal ID and alias of the existing asset. If any of these values match, the existing asset is successfully updated.

If they don't match, Reference 360 compares the name of the asset that you import with the name of the existing asset. If they match, the existing asset is successfully updated. If they don't match, a new asset is created.

The asset migration fails if the names match but meet the following criteria:

- The assets have different aliases and no internal IDs.
- The assets have different internal IDs.

If no matches are detected, then Reference 360 considers the asset as a new asset and creates the asset.

For example, if the source asset is Cost Center with internal ID `int_ccenter` and the target asset is Cost Center Category with the same internal ID `int_ccenter`, Reference 360 compares internal IDs and updates the Alias and Name fields in the target system.

If the source asset is Cost Center with an internal ID `int_ccenter` and alias `ccenter` and the target asset is Cost Center Category with no internal ID and alias `int_ccenter`, Reference 360 compares internal ID and alias and updates the Name field in the target system.

If an asset with the same name but different IDs exists in both source and target, the import fails. Reference 360 considers to create the asset in the target, but a duplication error occurs and the import fails because an asset with the same name exists.

For more information about using the identifiers of assets to import the assets, see *Internal IDs and aliases* in the *Informatica MDM - Reference 360* help.

Exporting assets


You can select a single asset, multiple assets, or a project to export.

To include multiple assets, you can either select each asset within a folder or select a project or folder to export all its assets. After you export a project, you can import the entire project or import only the assets that you select.

1. Log in to the source organization.
2. On the **Explore** page, navigate to the assets that you want to export.

3. If you want to export a single asset or project, perform the following steps:
   a. Select the asset or project.
   b. Click **Actions** and then select **Export**.
4. If you want to export multiple assets, perform the following steps:
   a. Select the check box to the left of each asset. Or, select the check box for each project or folder that contains the assets.
   b. Click **Actions** and then select **Export**.

   The following image shows the selection menu with multiple assets selected:

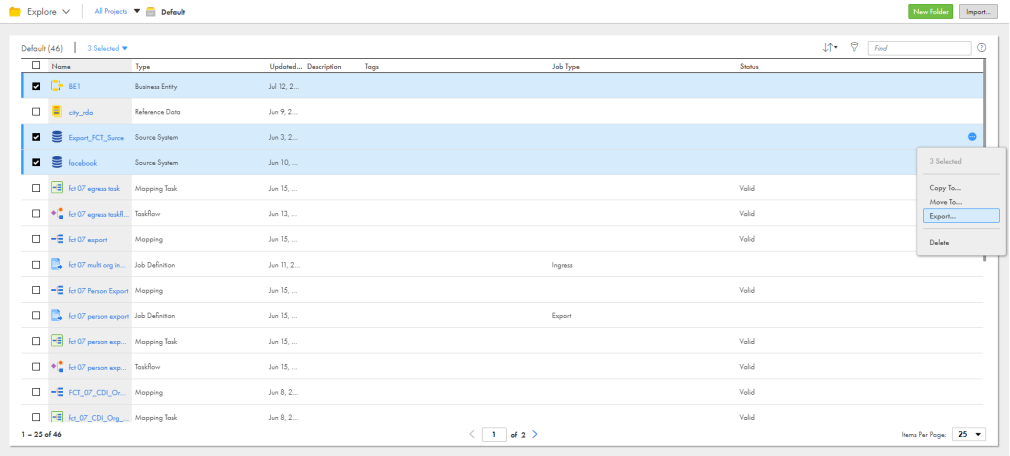

5. On the **Export Assets** page, specify the job name.
6. Select whether to include dependent objects for the assets.
7. Click **Export**.
8. To view the progress of the job, perform the following steps:
   a. Click **My Import/Export Logs** in the navigation bar.
   b. Select **Export** menu at the top of the page.
   c. Click the name of the log file to open the log details page.
9. To download the export file, click the **Download** icon next to the export job on the **My Import/Export Logs** page.

Importing assets

Import assets from the export file.

1. Log in to the target organization.
2. On the **Explore** page, navigate to **All Projects** and click **Import**.
3. On the **Import Assets** page, navigate to the export file and click **Open**, or drag the ZIP file from the Downloads folder in Windows.

   The **Import Assets** page lists the assets in the file.
4. Optionally, change the import job name.

5. Choose to overwrite the existing assets with the assets in the import file.

   If you choose to overwrite existing assets, when an asset has the same name and internal ID as an asset in the target project, the asset replaces the existing asset in the target project.

6. Select the assets that you want to import.

   If the export file contains a project and you want to import the entire project, select all the assets. IDMC creates the project in the source organization.

7. Select the target project or accept the default.

8. To see the potential results of the import, click **Test**.

   In the **Select Assets** section, you can see the potential outcome of import for each asset.

9. Click **Import**.

   You can view the progress of the import on the **Import** tab of the **My Import/Export Logs** page. When the import process completes, a notification appears. Click the link in the notification to open the log details page and view the results of the import.

Reindex job

After you import an existing business entity with updated search settings that make some non-searchable fields to be searchable, a reindex job is automatically created in the target organization. The job reindexes the business entity records to reflect the updated search settings.


You can find the reindex job in the `Business360` project.

However, if you import an existing business entity with updated search settings that make some searchable fields to be non-searchable, a reindex job isn't automatically created.

The reindex job is created in the following format:

```
Reindex Records: <Business Entity Name>
```

The following image shows the details of the reindex job:

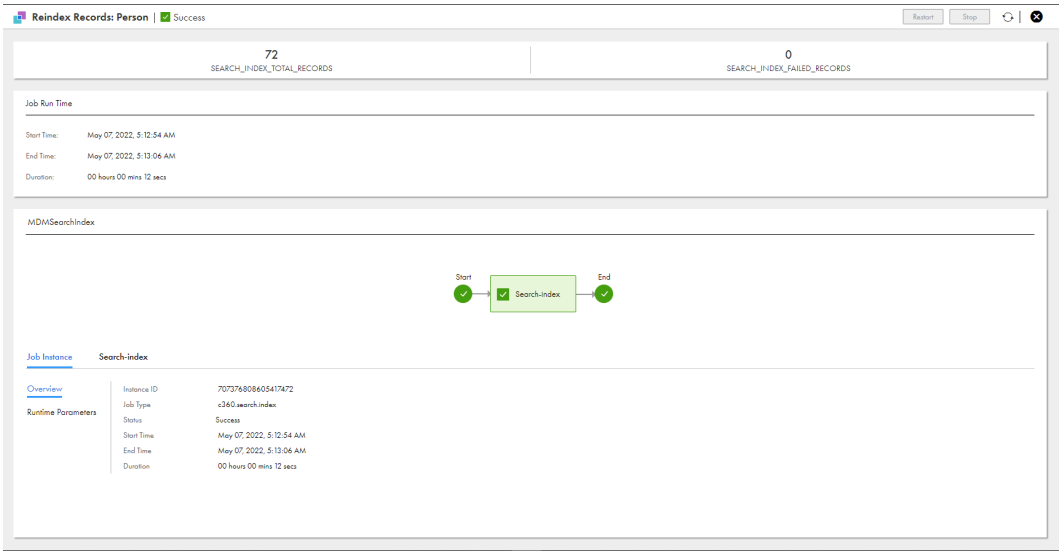

INDEX

A

assets
  exporting 32
  importing 33
  migrating between organizations 7, 24
Azure DevOps user credentials 14

B

Bitbucket user credentials 14

D

dependent objects
  in export files 30

E

exporting
  assets 32
  dependent objects 30
  overview 7, 24
  projects 32

F

folders
  importing 33

G

GitHub user credentials 14

I

importing
  dependent assets 30
  overview 7, 24
importing assets 33
Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6
migrating
  assets 32
migration
  assets 33
  of assets between organizations 7, 24

O

object migration 7, 24

P

projects
  exporting 32
  importing 33

S

source control
  actions 14
  checking in and checking out objects 17
  checking in objects 18
  configuring access to the repository 14
  deleting objects 19
  project-level repositories 15
  unlinking objects 20
status
  IDMC 6
system status 6

T

trust site
  description 6

U

upgrade notifications 6

W

web site 5