Informatica® Business 360 Console
October 2026

# Manage User Roles and Privileges

Informatica Business 360 Console Manage User Roles and Privileges
October 2026
November 2025

© Copyright Informatica LLC 2020, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-10-30

# Table of Contents


**Preface** . . . . . 6

Informatica Resources . . . . . 6

- Informatica Documentation . . . . . 6
- IDMC web site . . . . . 6
- Intelligent Data Management Cloud Communities . . . . . 6
- IDMC Marketplace . . . . . 6
- Informatica Knowledge Base . . . . . 7
- IDMC Trust Center . . . . . 7
- Informatica Global Customer Support . . . . . 7

**Chapter 1: Managing user roles** . . . . . 8

User and user roles . . . . . 8

Predefined user roles . . . . . 9

- Predefined Business 360 Console user roles . . . . . 9
- Predefined Customer 360 user roles . . . . . 10
- Predefined Product 360 user roles . . . . . 11
- Predefined Supplier 360 user roles . . . . . 11

Creating a user . . . . . 12

Editing your user profile . . . . . 13

**Chapter 2: Managing privileges for custom user roles** . . . . . 14

Prerequisites . . . . . 15

Rules and guidelines for managing privileges for custom user roles . . . . . 17

Configure privileges for user roles in Business 360 Console . . . . . 18

- Configure privileges for a business entity . . . . . 19
- Configure privileges for a relationship . . . . . 20
- Configure privileges for a hierarchy . . . . . 21
- Configuring privileges for downloading match output . . . . . 22
- Configuring privileges for managing shared objects . . . . . 22
- Configuring privileges for training Adaptive AI match models . . . . . 23

Configure metadata privileges for Business 360 Console user roles . . . . . 23

- Attributes . . . . . 24
- Data Quality . . . . . 24
- Search . . . . . 25
- Match . . . . . 26
- Survivorship . . . . . 26

Segregation and validation of record and field privileges . . . . . 26

- Guidelines to configure record and field privileges . . . . . 27

Configure record privileges for business application user roles . . . . . 29

- Records . . . . . 29

File Import. . . . 31
Search Export. . . . 32
External match. . . . 32
Source Records. . . . 33
Hierarchy. . . . 34
Match Analysis and Explainability Dashboard. . . . 35
Configure field privileges for business application user roles. . . . 36
View data access rules. . . . 37
Configure workflow privileges for business application user roles. . . . 38
Configure privileges for the workflow inbox. . . . 39
Configure privileges for the task inbox. . . . 41
Revoke workflow privileges. . . . 42
Configure related records privileges for business application users. . . . 43
Related Records. . . . 43
File Import . . . . 44
Configure hierarchy privileges for business application users. . . . 45
Hierarchies. . . . 45
First-level Nodes. . . . 47
Relationships. . . . 47
File Import. . . . 48
Configure privileges for multiple assets. . . . 50

**Chapter 3: Managing data access rules. . . . 52**

Prerequisites. . . . 52
Supported assets and attributes. . . . 52
Data access rules based on record states. . . . 53
Types of data access rules. . . . 53
Record-level data access rule. . . . 53
Attribute-level data access rules. . . . 54
Setting permissions in data access rules. . . . 54
Rules and guidelines for setting permissions in data access rules. . . . 55
Defining data access rules. . . . 56
Step 1: Select the asset to protect. . . . 56
Step 2: Configure the rule conditions. . . . 57
Reviewing and publishing data access rules. . . . 61
Deleting a data access rule. . . . 62
Limits on data access rules. . . . 62
Data access rules example. . . . 63
Creating multiple data access rules. . . . 64
Data access rules on search results in business applications. . . . 66
Data access rules with conditions on related business entity and relationship attributes. . . . 67
Records with validation errors. . . . 67
Data access rules on business application reports. . . . 68

Data access rules on workflow approval tasks in business applications. . . . . 68
Data access rules on Adaptive AI match models. . . . . 69

**Index. . . . . 70**

# Preface

Follow the instructions in *Manage User Roles and Privileges* to create users and edit user profiles. Learn about Business 360 Console and Customer 360 users and user roles.

# Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

## Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

## IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

## Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

## IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

## Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

## IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

## Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

# Managing user roles

You can create and assign user roles to users and user groups in your organization. A user is an individual account that allows secure access to an organization. A user group is a group of user accounts in which all members of the group can perform the same tasks and have the same access rights for different types of assets. Users and groups can perform tasks and access assets based on the roles that you assign to them.

You can configure and fine-tune privileges for custom user roles and assign them to users and user groups.

## User and user roles

A user is an individual account in IDMC. Customer 360 and Business 360 Console users must have IDMC user accounts. You can create and manage users in Administrator.

A user role is a collection of privileges that you assign to users to allow access to Customer 360 and Business 360 Console.

Assign the following types of roles to provide privileges for Business 360 Console, Customer 360, Product 360, and Supplier 360 users:

**Business 360 Console Roles**

Business 360 Console roles are pre-defined roles that provide asset-specific privileges in Business 360 Console.

For more information, see "Predefined Business 360 Console user roles" on page 9.

**Customer 360 Roles**

Customer 360 roles are pre-defined IDMC roles that provide service-specific access to Customer 360 and global privileges in Customer 360. Use Administrator to assign Customer 360 roles.

For more information, see "Predefined user roles" on page 9.

**Product 360 Roles**

Product 360 roles are pre-defined Informatica IDMC that provide service-specific access to Product 360 and global privileges in Product 360. Use Administrator to assign Product 360 roles.

For more information, see "Predefined Product 360 user roles" on page 11.

**Supplier 360 Roles**

Supplier 360 roles are pre-defined IDMC roles that provide service-specific access to Supplier 360 and global privileges in Supplier 360. Use Administrator to assign Supplier 360 roles.

For more information, see "Predefined Supplier 360 user roles" on page 11.

For more about IDMC users and roles, see the *Administrator* help.

# Predefined user roles

Predefined user roles are a collection of predefined privileges that you can assign to users. The predefined user roles define the privileges for different types of assets and service features. You cannot edit, rename, delete, or customize predefined user roles.

## Predefined Business 360 Console user roles

You can use the following predefined user roles for Business 360 Console users:

**Admin**

Provides full access to Business 360 Console. Allows users to perform solution upgrades.

**Note:** To provide users full access to Business 360 Console, assign users the Admin, Designer, and MDM Designer user roles. To allow users to perform only the configuration tasks in Business 360 Console, you can assign users the Admin role or both the Designer and MDM Designer roles.

Allows users to create reports in business applications.

**Designer**

Allows users to perform tasks in Business 360 Console that require integration with other services such as Data Integration and Data Quality.

Allows users to perform the following tasks in Business 360 Console:

- Create MDM SaaS assets except reference data assets.
- Define a data model and source systems.
- Define and monitor jobs, such as ingress and egress.
- Configure data quality, match and merge, survivorship, business events, workflows, and global settings.
- Export and import assets when the user also has the MDM Designer role.
- Delete custom assets.

Allows users to perform the following tasks in other services:

- Create data quality rules which can be used to add advanced rule associations in Business 360 Console.
- Create mappings, connections, and Secure Agents in Data Integration. These mappings can be used in taskflows associated with ingress and egress jobs in Business 360 Console.
- Create reports.

**MDM Designer**

Allows users to perform the following tasks in Business 360 Console:

- Create MDM SaaS assets.
- Delete custom assets.
- Define a data model and source systems.
- Define and monitor jobs, such as ingress and egress.
- Configure data quality, match and merge, survivorship, business events, workflows, and global settings.
- Export and import assets when the user also has the Designer role.

**Business 360 Process Executor**

Required role for users with custom user roles to perform tasks in Business 360 Console and business applications. Allows users to update business entities in Business 360 Console.

Allows users to perform the following tasks in business applications:

- Save records and custom reports.
- View, create, update, and delete hierarchies.
- Import records, related records, and hierarchy data.
- Access the workflow inbox or task inbox.

To import records and access workflow inbox or task inbox in Multidomain MDM SaaS, ensure that users are assigned to the Admin or the Business 360 Process Executor user role.

**Job Executor**

Allows users to run ingress and egress jobs in Business 360 Console.

**Note:** This role is not required to run jobs that business applications run when users perform tasks, such as file import.

**Note:** Before you provision an organization, ensure that you assign the Admin user role and a user group to users.

## Predefined Customer 360 user roles

You can use the following predefined user role for the Customer 360 users:

**Customer 360 Analyst**

Users with the Customer 360 Analyst role can perform the following tasks in Customer 360:

- Create, edit, and delete records. When a Customer 360 Analyst creates or edits a record, the changes trigger a review process that requires approval from a Customer 360 Manager.
- Create reports.

**Customer 360 Manager**

Users with the Customer 360 Manager role can perform the following tasks in Customer 360:

- Review and approve or reject customer records.
- Assign unclaimed review tasks to a user or user group if you use the task inbox.
- Create, edit, and delete records without approval.
- Create reports.

**Customer 360 Data Steward**

Users with the Customer 360 Data Steward role can perform the following tasks in Customer 360:

- Create, edit, and delete records without approval.
- Run jobs.
- Review and approve customer records.
- Create reports.

**MDM Business User**

Users with the MDM Business User role can perform the following tasks in Customer 360:

- View records in Customer 360. They can't create or edit records in Customer 360.

- Create reports.

## Predefined Product 360 user roles

You can use the following predefined user roles for the Product 360 users:

**Product 360 Read-Only**

Users with the Product 360 Read-Only role can view records in Product 360. They can't create or edit records in Product 360.

**Product 360 Manager**

Users with the Product 360 Manager role can perform the following tasks in Product 360:

- Review and approve records.
- Assign unclaimed review tasks to a user or user group if you use the task inbox.
- Create, edit, and delete records without approval.
- Create reports.

## Predefined Supplier 360 user roles

You can use the following predefined user roles for the Supplier 360 users:

**Supplier 360 Read Only**

Users with the Supplier 360 Read Only role can view records in Supplier 360. They can't create or edit records in Supplier 360.

**Supplier 360 Analyst**

Users with the Supplier 360 Analyst role can perform the following tasks in Supplier 360:

- Create, edit, and delete records in Supplier 360. When a Supplier 360 Analyst creates or edits a record, the changes trigger a review process that requires approval from a Supplier 360 manager.
- Create reports.

**Supplier 360 Data Steward**

Users with the Supplier 360 Data Steward role can perform the following tasks in Supplier 360:

- Create, edit, and delete records without approval.
- Run jobs.
- Review and approve records.
- Match, merge, and unmerge records
- Assign unclaimed review tasks to a user or user group if you use the task inbox.
- Create reports.

**Supplier 360 Task Admin**

Users with the Supplier 360 Task Admin role can claim, release, and act on evaluation tasks based on business event configurations. They can create, read, edit, and delete records. They have the originator and approver privileges.

**Supplier 360 Risk Manager**

Users with the Supplier 360 Risk Manager role can claim, release, and act on risk evaluation tasks based on business event configurations. They can create, read, edit, and delete records. They have the originator and approver privileges.

**Supplier 360 Contract Manager**

Users with the Supplier 360 Contract Manager role can claim, release, and act on contract evaluation tasks based on business event configurations. They can create, read, edit, and delete records. They have the originator and approver privileges.

**Supplier 360 Credit Manager**

Users with the Supplier 360 Credit Manager role can claim, release, and act on credit evaluation tasks based on business event configurations. They can create, read, edit, and delete records. They have the originator and approver privileges.

**Supplier 360 Commodity Manager**

Users with the Supplier 360 Commodity Manager role can claim, release, and act on commodity evaluation tasks based on business event configurations. They can create, read, edit, and delete records. They have the originator and approver privileges.

If you create an organization, ensure that the users are assigned to the **Admin**, **Supplier 360 Analyst**, **Supplier 360 Commodity Manager**, **Supplier 360 Contract Manager**, **Supplier 360 Risk Manager**, **Supplier 360 Credit Manager**, **Supplier 360 Data Steward**, **Supplier 360 Task Admin**, or **Business 360 Process Executor** user role to import records and access the **Workflow Inbox** page in Supplier 360 SaaS.

**Note:** By default, the predefined user roles don't have privileges to create or edit reports. You need to provide the necessary asset privileges for these user roles in the Administrator service to create or edit reports.

For more information about asset privileges, see *Role asset and feature privileges* in the Administrator help.

# Creating a user

All Business 360 Console and Customer 360 users must have an IDMC user account. You use Administrator to create user accounts and assign Business 360 Console and Customer 360 roles to users.

For more information about Administrator, see the *Administrator* help.

1. In Administrator, click **Users**.
2. Click **Add User**.
3. Enter the user information and login settings.
4. In the **Assigned User Groups and Roles** section, select the user roles that you want to assign to the user.

   Assign Business 360 Console roles or Customer 360 roles to users to provide access privileges to Business 360 Console or Customer 360.
   For more information, see "Predefined user roles" on page 9 and "Predefined Business 360 Console user roles" on page 9.
5. Click **Save**.

# Editing your user profile

Your user profile contains the details of your IDMC user account.

1. Click the **User** icon in the right upper corner of the Informatica Intelligent Cloud Services page and then select **Profile**.

   The **Profile** page appears.
2. Add or edit personal information, such as your name, job title, phone number, email address, password, security question, and time zone.
3. Optionally, change your password or security question.
4. Click **Save**.

CHAPTER 2

# Managing privileges for custom user roles

You can create custom user roles and configure privileges for them in your organization. You can control access to assets, attributes, and features of business applications for each custom user role in your organization. For example, you can control a custom user role to view records but not edit or delete the records.

The system-defined roles include predefined access privileges in the Administrator and you can't change them. The custom user roles aren't predefined and you can create them based on specific requirements of your organization. You can also control specific tasks that a custom user role can perform in your organization. For example, you can authorize a custom user role to import data into Customer 360.

You can use the Administrator to create custom user role and assign permissions at the asset level. You can then fine-tune the permissions on the **Security** page of Business 360 Console. The authorizations that you configure in Administrator works in conjunction with the authorizations that you configure on the **Security** page.

You can clone a predefined user role in Administrator to create a custom user role.

# Prerequisites

Ensure that you have the license to create custom user roles in Administrator. Before you configure privileges for custom user roles in Business 360 Console, ensure that you assign relevant privileges for those custom user roles in Administrator.

The following table lists the privileges that you can configure for custom user roles in Administrator:

| Service | Assets/Features | Set to Enabled |
|---|---|---|
| MDM Configuration | Features | Assign required permissions for a custom user role:<br>- **Execute Business 360 Flows**. Indicates whether a user can execute tasks in your business applications. For example, you can create records and import data into Customer 360.<br>- **Manage Authorization Configuration**. Indicates whether the user role can configure privileges for the custom user roles in Business 360 Console. |
| MDM Configuration | Assets | Assign required permissions at the asset level and then fine-tune the permissions on the **Security** page of Business 360 Console. The following assets are available on the **Security** page:<br>- **Business Entities**. Indicates whether the user role can create, read, update, and delete business entities in Business 360 Console.<br>- **Relationships**. Indicates whether the user role can create, read, update, and delete relationships in Business 360 Console.<br>- **Workflows**. Indicates whether the user role can create, read, and update workflows in Business 360 Console. |
| Application Integration | Assets | **Application Integration Assets**. Indicates whether the user role can execute tasks in your business 360 applications and in the Business 360 Console. For example, you can create records and import data into Customer 360.<br>Ensure that you set the **Run** privilege for **Application Integration Assets** if you want the users to perform the following tasks:<br>- Create, update, and delete metadata of the business entities in the Business 360 Console.<br>- Create, update, and delete records in Customer 360. Import data into Customer 360. |


| Service | Assets/Features | Set to Enabled |
|---|---|---|
| Data Quality | Assets | **Rule Specification**. Indicates whether the user role can create, view, update, and delete advanced rule associations in Business 360 Console.<br>You can configure privileges for the following import scenarios:<br>- To allow users to import data for use in data models with data quality rule associations, set the read privilege for the **Rule Specification** asset.<br>- To allow users to import data to an asset that uses DaaS rule associations for address values, set the read and run privilege for the **Verifier** asset.<br>- To allow users to import dictionary assets configured with data quality rule associations, set create, read, update, and run privileges for the **Dictionary** asset. |
| MDM Business Application | Features | Assign required permissions for a custom user role:<br>- **View Business Applications**. Indicates whether the user can access MDM business applications, such as Customer 360.<br>- **Manage Workflow Tasks**. Indicates whether the user role can assign unclaimed review tasks to users or user groups in the task inbox. Configuring this privilege has no effect on the workflow inbox. |
| Reference 360 | Features | Reference Data Management. Displays all the reference data assets available in Reference 360 on the **Security** page of Business 360 Console. You can then assign permissions for these assets on the **Security** page of Business 360 Console. |
| Human Tasks | Features | **View Tasks**. Indicates whether the user can access the assigned tasks in the **Workflow Inbox** page of the Business 360 applications.<br>**Note:** The **View Tasks** privilege is enabled by default for the Customer 360 analyst, manager, and data steward user roles as they require access to the **Workflow Inbox** or **Task Inbox** page in Customer 360. It is not enabled for the **MDM Business User** role. |

For more information about user roles and assigning user roles to users, see the *User roles* topic in the *Administrator* help.

Configure privileges for custom user roles in Administrator. You can assign privileges to a custom user role after you create it.

1. In Administrator, click **User Roles**.
2. Select the custom user role for which you want to configure privileges.

   The role details page appears.
   The following image shows role details page in Administrator:

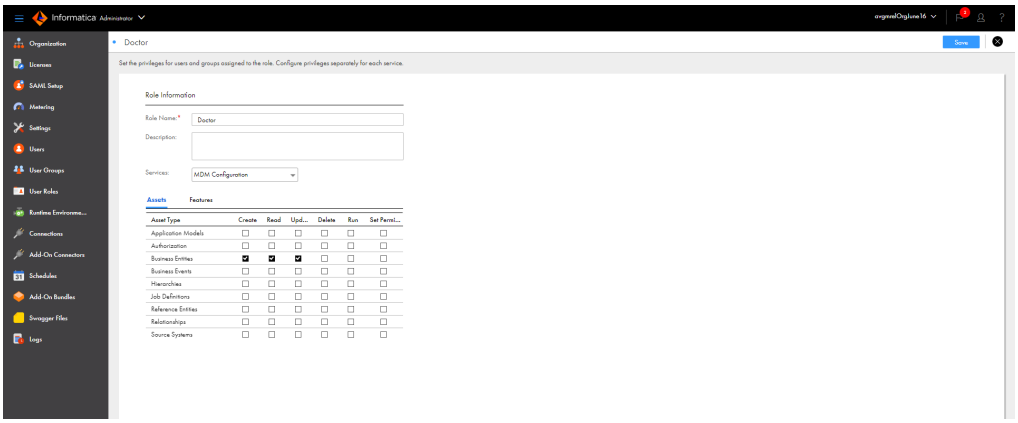


3. Select required service and assign relevant privileges for the custom user role on the **Assets** and **Features** tabs.
4. Click **Save**.

# Rules and guidelines for managing privileges for custom user roles

Consider the following rules and guidelines to manage privileges for custom user roles in your organization:

- You can't delete system-defined roles but you can delete custom roles.
- If you modify the permissions at the asset level in Administrator, the system automatically synchronizes the modifications on the **Security** page of Business 360 Console on an hourly basis.
- If you manually assign all the privileges of predefined user roles to custom user roles, the custom user roles can't perform all the tasks that the predefined user roles can perform.
  To enable a user to perform a specific task, ensure that you assign the custom user role and other required user roles to the user along with the required privileges to perform the task. For example, to enable a user to perform file import, assign the custom user role and the **Business360ProcessExecutor** user role along with the required privileges on the **Security** page and Administrator.

  For more information about the required user roles and privileges for a user to perform file import, see "File Import" on page 31.
- After you configure privileges for custom user roles on the **Security** page, ensure that you don't rename user roles in Administrator. If you rename user roles, MDM SaaS removes all the configured privileges.
- To perform actions in Business 360 Console, assign the user to the **Admin** or **Designer** and **MDM Designer** user roles.
- After you edit record and field privileges or data access rules for a business entity, users with custom user roles must wait at least 10 minutes before they perform the following actions:

  - Search for records in the user interface or by using the Search REST API.

  - View dashboards that include reports based on records of the business entity.

  If users search for records or view dashboards immediately after the changes, business applications display inaccurate results.

- Ensure that you don't clone predefined user roles in Administrator and assign the cloned user roles to users in Business 360 Console. Users assigned to the cloned custom user roles can't perform all the tasks that a predefined user role can perform in your organization.

  For example, users with **Designer** or **MDM Designer** user roles can configure business applications. However, if you clone the **Designer** or **MDM Designer** user role to create a custom user role, users assigned to the cloned custom user role can't configure business applications.
- Only users that are assigned to predefined user roles can run all jobs in Business 360 Console. For example, a user with an **MDM Designer** user role can run all jobs but a user with a custom user role can't run any jobs in Business 360 Console.
- Custom user role names are case-sensitive in MDM SaaS.
- If you don't have the license to a MDM SaaS business application and create a custom user role in Administrator with a name identical to any predefined user role of the business application, Business 360 Console doesn't display the custom user role on the **Security** page.

  For more information about predefined user roles in MDM SaaS, see "Predefined user roles" on page 9

# Configure privileges for user roles in Business 360 Console


You can configure privileges and create data access rules for custom user roles on the **Security** page of Business 360 Console.

The **User Roles** tab on the **Security** page lists all the custom user roles that you create in Administrator. You can select the custom user roles to configure privileges. The **Data Access Rules** tab on the **Security** page lists the existing data access rules for custom user roles. For more information about data access rules, see *Managing data access rules*.

**Note:** Any changes that you make to roles and their privileges in the Administrator module are effective after an hour of synchronization.

You can configure permissions for user roles to access dynamic field definitions and dynamic field values attributes, but not for specific fields and field groups in dynamic pools.

The following image shows the list of data access rules on the **Security** page:

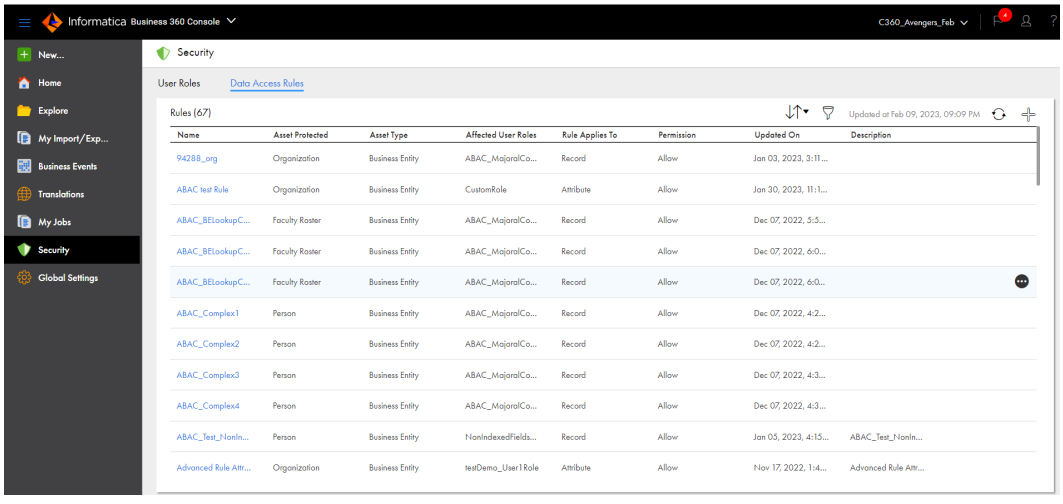

You can use filters to find specific data access rules. To filter data access rules, click the **Filter** icon. To specify a filter, click **Add Field**, and select the property to filter by.

**Note:** To ensure that you view the list of up-to-date custom user roles and data access rules, refresh the **Security** page.

After you assign privileges on the **Security** page, don't rename the custom user role in Administrator. If you rename the custom user role, the following errors occur:

- The existing privileges on the **Records** tab of business entities, relationships, and hierarchies are cleared.
- The workflow privileges assigned on the **Features** tab are cleared.
- The asset-level privileges for business entities assigned for the custom user role in Administrator override the existing privileges on the **Metadata** tab of the business entity.


## Configure privileges for a business entity

You can configure privileges related to a single business entity or multiple business entities for a custom user role. The configured privileges are your basis to configure data access rules for selected business entities.

Ensure you configure appropriate base privileges for the business entities to all the roles that you intend to configure data access rules.

1. In Business 360 Console, on the **Security** page, click the custom user role for which you want to configure privileges.

   The user role details page appears and lists the business entities for which the user role has access permissions. The following image shows the user role details page:

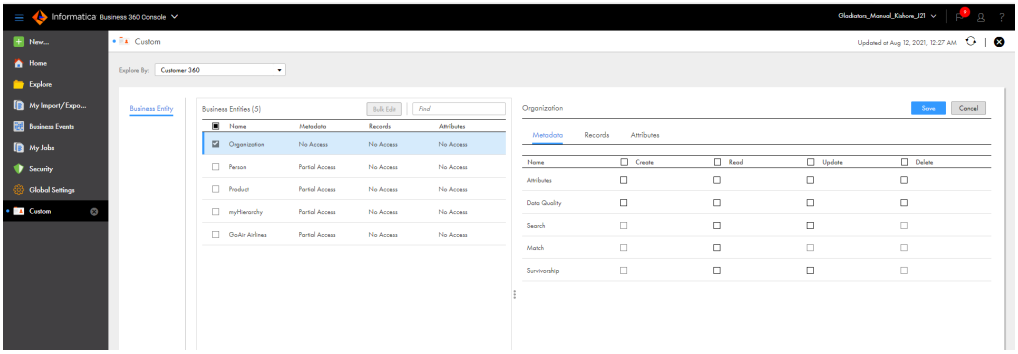


2. Select the business entity for which you want to configure privileges.
3. On the following tabs, select required permissions:
   - Metadata. Lists privileges related to field properties of the business entity. This tab is available only for the Business 360 Console custom user roles. For more information, see "Configure metadata privileges for Business 360 Console user roles" on page 23.
   - Records. Lists privileges that allow users to create, read, update, delete, and unmerge records in the business applications. You can specify whether users can perform tasks that triggers jobs. You can also specify whether users can access some components in the business applications. For more information, see Configure privileges for business application user roles on page 29.
   - Attributes. Lists privileges that allow users to create, read, update, and delete values for every field and field group in the selected business entity. For more information, see Configure field privileges for business application user roles on page 36.


   You can also configure privileges for multiple business entities. For more information, see Configure privileges for multiple business entitieson page 50.

# Configure privileges for a relationship

You can configure privileges related to a single relationship or multiple relationships for a custom user role.

Assign required permission for relationships on the **Assets** tab of the **MDM Configuration** service in Administrator for a custom user role.

The following image shows the user role details page in Administrator with relationship privileges assigned for a custom user role:

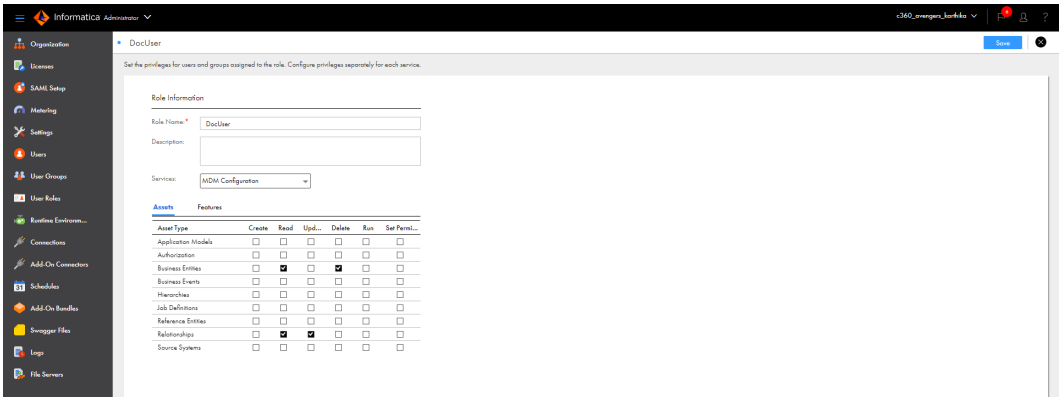



1. In Business 360 Console, on the **Security** page, click the custom user role for which you want to configure privileges.

   The user role details page appears.

2. On the **Relationship** tab, select the relationship for which you want to configure privileges.

   The following image shows the **Relationship** tab with the list of predefined and custom relationships:

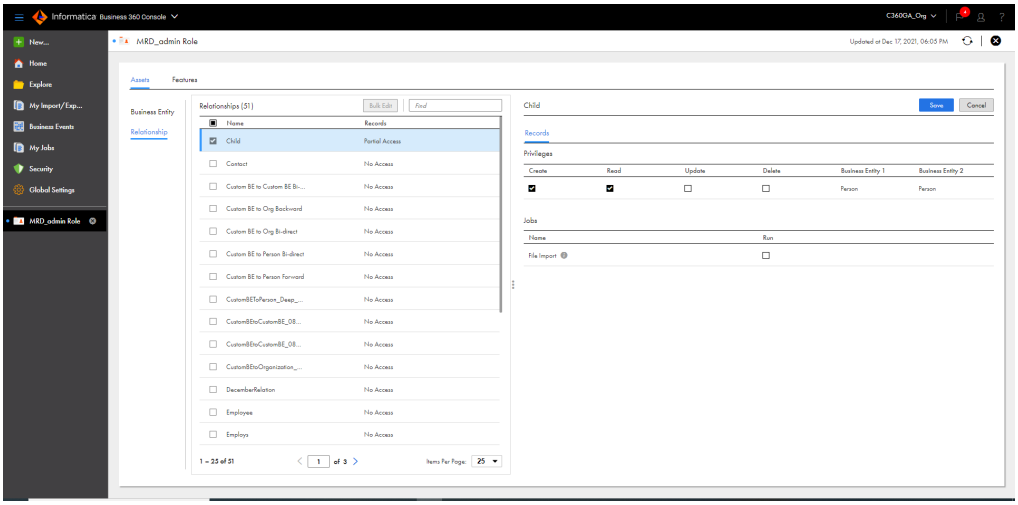



3. On the **Records** tab, select create, read, update, and delete privileges pertaining to related records in the business applications. You can also specify whether users can import relationship data. For more information, see "Configure related records privileges for business application users" on page 43.

# Configure privileges for a hierarchy

You can configure privileges related to hierarchies for a custom user role.

Before you assign privileges for hierarchies on the **Security** page, you can assign privileges for hierarchy models on the **Assets** tab of the **MDM Configuration** service in Administrator for a custom user role if required.

The following image shows the user role details page in Administrator with the hierarchy privileges assigned for a custom user role:

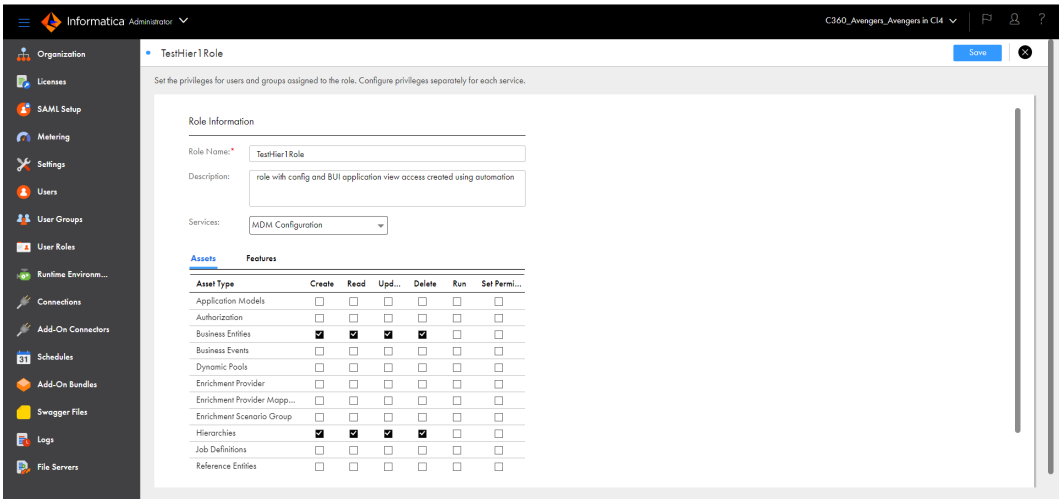


1. In Business 360 Console, on the **Security** page, click the custom user role for which you want to configure privileges.


   The user role details page appears.

2. On the **Assets** tab, select **Hierarchy** from the **Show:** list.

   The list of hierarchy models appears on the left pane.

3. Select the required hierarchy model.

   The privileges for the hierarchies based on the selected hierarchy model appear on the right pane. The following image shows the list of hierarchy models on the left pane and the corresponding hierarchies and their privileges on the right pane:

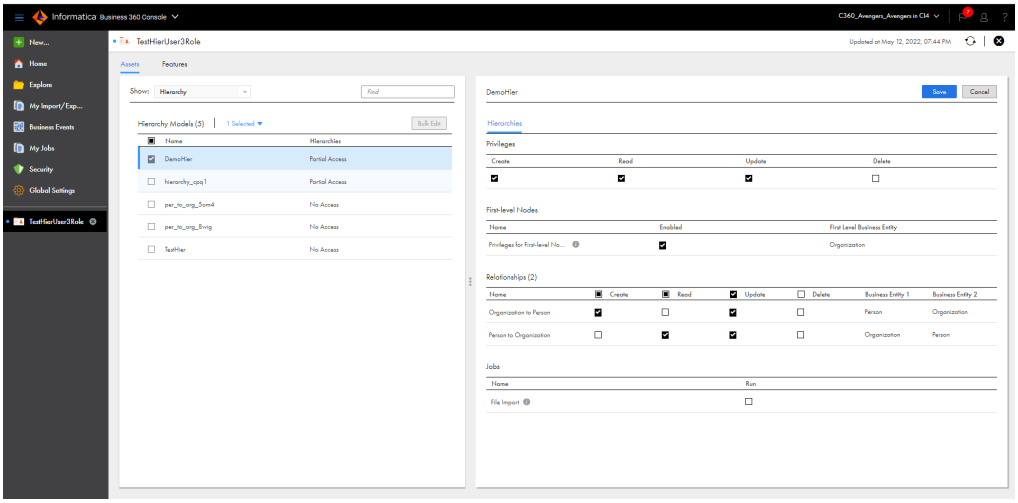

4. On the right pane, configure privileges to control access to hierarchies, first-level nodes, and relationships within hierarchies. You can also specify whether users can import hierarchy data. For more information, see "Configure hierarchy privileges for business application users" on page 45.

## Configuring privileges for downloading match output

You can control custom user roles that can download match output reports from the match and merge job details page and export match pair details of source records in business applications. For predefined user roles, assign them a custom user role that includes the privilege to download match output reports.

1. In Business 360 Console, on the **Security** page, click the custom user role for which you want to configure the privilege.
2. On the **Features** tab of the user role details page, enable **Download Match Output**.
3. Click **Save**.

   **Note:** The data in the match output report might not be based on the data access rules that are assigned to custom user roles.

For more information about configuring privileges for downloading match output reports from the match and merge job details page and exporting match pair details of source records in business applications, watch the Download Match Output video.

## Configuring privileges for managing shared objects

You can enable the Manage Shared Objects privilege to allow a custom user role to edit or delete shared objects, such as dashboards, saved searches, and search templates, or change their sharing settings.

Additionally, when you enable this privilege, the user role can add or remove a dashboard from everyone's Home page in business applications.

By default, predefined user roles, such as Admin, Customer 360 Manager, Product 360 Manager, and Supplier 360 Data Steward, have this privilege enabled.

For example, consider that your organization has two custom user roles, such as Analyst and Coordinator, and the predefined user role Customer 360 Manager. If a user with the Analyst user role creates a saved search and shares it with everyone, users with the Coordinator and Customer 360 Manager user roles can access the shared saved search. They can run the shared saved search and view the records. However, only users with the Customer 360 Manager user role can rename or delete the shared saved search, or update the sharing settings of the shared saved search. If you want users with the Coordinator user role to manage the shared objects similar to a Customer 360 Manager user role, you must assign the Manage Shared Objects privilege.

1. In Business 360 Console, on the **Security** page, click the custom user role for which you want to configure the privilege.
2. On the **Features** tab of the user role details page, select **Manage Shared Objects**.
3. Click **Save**.


## Configuring privileges for training Adaptive AI match models

You can provide access to custom user roles for training Adaptive AI match models. By default, user roles don't have access to the Adaptive AI match model page within a match model configuration.

For predefined user roles, you can assign a custom user role that includes the privilege to train Adaptive AI match models.

1. In Business 360 Console, on the **Security** page, click the custom user role for which you want to configure the privilege.
2. On the **Features** tab of the user role details page, select **Adaptive AI Match Model**.

   The following image shows the **Adaptive AI Match Model** privilege enabled for a custom user role:

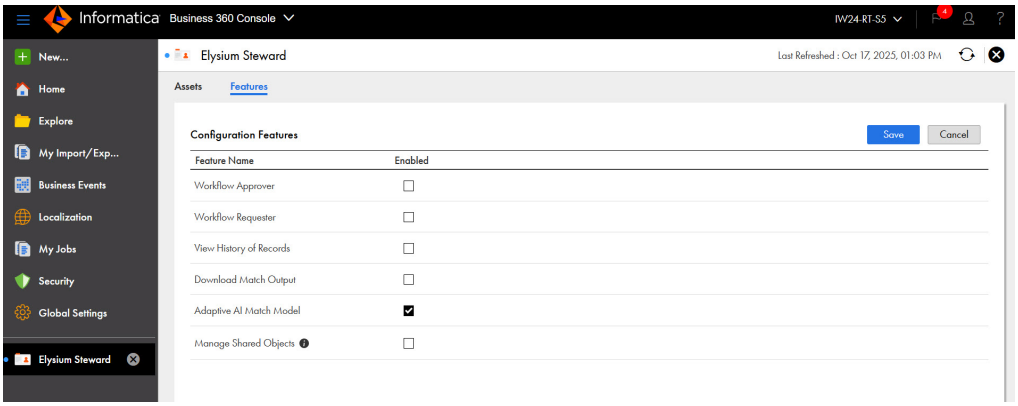



3. Click **Save**.

# Configure metadata privileges for Business 360 Console user roles

The metadata privileges specify whether users can model data and configure data quality rules, search, match model, and survivorship for the business entity.

The following image shows the metadata privileges for a custom user role:

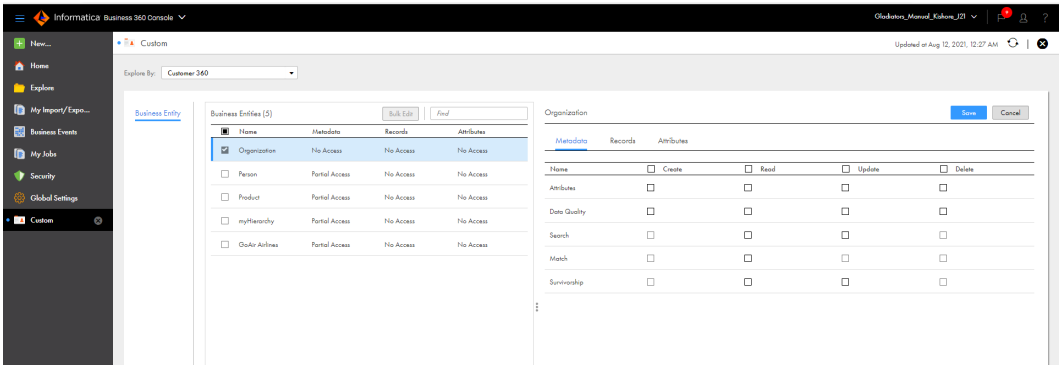


You can assign one or more privileges for the following metadata and field properties:

- Attributes on page 24

- Data Quality on page 24
- Search on page 25
- Match on page 26
- Survivorship on page 26

**Note:** Ensure that you assign read privilege in the metadata tabs for the custom user role if you want to assign multiple privileges. Other privileges might not behave as expected without the read privileges.

## Attributes

The privileges specify whether users can create, read, update, and delete business entity attributes. Based on the privileges you assign, the custom user role gets complete access, partial access, or no access to the **Attributes** tab of the business entity.

The following table describes the behavior of attributes privileges:

| Privilege | Set to Enabled | Set to Disabled |
|---|---|---|
| Create | Create field and field groups for the business entity. | The fields panel from which you can add fields is not visible. |
| Read | View the fields and field groups of the business entity.<br>If you enable only the read privilege, the user interface displays the following details:<br>- **Attributes** tab is visible.<br>- Fields panel is not visible.<br>- Delete and cut icons are disabled.<br>- Fields within the **General** tab of Properties panel are not editable. | Attributes tab is not visible. |
| Update | Edit the field or field group properties, such as display name and description. You can also enable or disable fields and field groups. | - The **Display Name** and **Description** fields are disabled in the **General** tab of the **Properties** panel.<br>- **Enable** and **Disable** radio buttons are disabled for each field and field group of the business entity. |
| Delete | Delete the custom fields of the business entity. | Delete icon is disabled for the custom fields in the **Attributes** tab of the selected business entity. |

## Data Quality

The privileges specify whether users can create, read, update, and delete data quality rule associations for a field.

Based on the privileges you assign, the user gets complete, partial, or no access to the **Data Quality** tab. It also specifies which tasks the user can perform pertaining to data quality rule associations.

### Prerequisites

- Before you assign privileges for data quality, ensure that you assign the required privileges for the custom user role in Administrator. For more information about data quality privileges, see Prerequisiteson page 15.

- Ensure that you assign at least read privileges for attributes. The user cannot view the **Data Quality** tab without the read privilege for attributes.

The following table describes the behavior of data quality privileges:

| Privilege | Set to Enabled | Set to Disabled |
|---|---|---|
| Create | Create basic and advanced data quality rule associations. | The add button is disabled on the **Data Quality** tab. |
| Read | View the **Data Quality** tabs of business entity and field. View existing rule associations if any. | Can open the existing rule associations but **Enable Rule Association** check box is disabled. |
| Update | - Edit the basic and advanced data quality rule associations.<br>- Enable or disable DaaS for smart fields and update the DaaS properties.<br>- Change the order of execution of basic rule associations for a field. | - Edit button for each data quality rule association is disabled.<br>- Enable rule association check box is disabled for both basic and advanced rule associations.<br>- Enable icon and other fields related to DaaS for smart fields are disabled.<br>- **Change Order** button is disabled. |
| Delete | Delete basic rule associations.<br>**Note:** You can disable the advanced and DaaS data quality rule associations but you cannot delete them. To delete advanced data quality rule associations, ensure that you set the delete privilege for **Data Quality** in the Administrator. For more information about the data quality privileges in Administrator, see Prerequisiteson page 15. | The delete icon is disabled for data quality rule associations. |

# Search

The privileges specify whether users can configure search properties for business entity fields.

Based on the privileges you assign, the user gets complete, partial, or no access to the **Search** tab in field properties panel of the business entity. You can assign read and update privileges for **Search**. The create and delete privileges are disabled by default.

## Prerequisites

Ensure that you assign at least read privileges for attributes. The user cannot view the **Search** tab without the read privilege for attributes.

The following table describes the behavior of search privileges:

| Privilege | Set to Enabled | Set to Disabled |
|---|---|---|
| Read | View the **Search** tab and the search properties associated with each business entity field. | The **Search** tab is not visible. |
| Update | Update the search properties of fields. After you update the search properties, when you save the changes, an index job triggers.<br>**Note:** Ensure that you also set the read privilege. Without the read privilege, the **Search** tab is not available for you to update the search properties. | All the search properties are disabled. |

## Match

You can assign only read privileges for match. The create, update, and delete privileges are disabled by default. The read privilege indicates whether users can access match models and declarative rules on the **Match** tab.

The privileges specify whether users can create, read, update, and delete match model and declarative rules. In the current release, you can assign only the read privileges, and other privileges are disabled. You can perform all the task related to match with the read permission.

## Survivorship

The privileges specify whether users can read and update the survivorship configuration of the business entity and fields. Based on the privileges you assign, the custom user role gets complete, partial, or no access to the **Survivorship** tab of the business entity. You can assign read and update privileges for **Survivorship**. The create and delete privileges are disabled by default.

### Prerequisites

Ensure that you assign at least the read privilege for attributes. Users can't view the **Survivorship** tab without the read privilege for attributes.

The following table describes the survivorship privileges when enabled and disabled:

| Privilege | Enabled | Disabled |
|---|---|---|
| Read | View the **Survivorship** tabs of business entities and fields. If you enable the read privilege, the user interface displays the following details:<br>- Displays all the fields, but users can't select them.<br>- Displays ranks of source and survivorship rules. | The **Survivorship** tabs are not visible. |
| Update | Edit the survivorship configuration of the business entity and fields.<br>**Note:** Ensure that you also set the read privilege. Without the read privilege, the **Survivorship** tab is not available for you to edit the survivorship configuration. | All the fields are disabled. |

# Segregation and validation of record and field privileges

The privileges that you assign on the **Records** and **Attributes** tabs of the user role details page are independent of each other.

The privileges that you assign on the **Records** tab aren't automatically assigned to all fields on the **Attributes** tab. If you fine-tune the privileges on the **Attributes** tab, the changes aren't automatically updated on the **Records** tab.

To ensure that the privileges are valid and to minimize the validation messages, you need to manually assign the right combination of privileges on the **Records** and **Attributes** tabs.

### Validation of privileges

If the record and field privileges that you configure for custom user roles on the user role details page aren't valid, validation messages appear.

Before you save the privileges, you need to fix the validation errors. These validation messages provide additional information about dependent privileges that enable you to configure a valid set of privileges.

The validation messages are grouped based on the record-level and attribute-level privileges that are missing and they appear separately within the **Records** and **Attributes** tabs. You can view the list of field groups that miss dependent privileges in the attribute-level validation messages. Clicking these field groups directs you to the missing privileges that are highlighted. Ensure that you assign these required privileges before you save the configuration of privileges. The validation messages disappear after you click **Save** or after you remove the assigned privileges that aren't valid.

For more information about assigning a valid set of privileges, see "Guidelines to configure record and field privileges" on page 27.

## Guidelines to configure record and field privileges

When you assign privileges on the **Records** and **Attributes** tabs, you need to ensure that you assign a valid set of privileges.

Consider the following guidelines when you configure privileges on the **Records** and **Attributes** tabs:

- The read privilege is the basic requirement for all the other privileges. Without read privilege, the fields, field groups, or the record is not available for the users to edit or delete.
- When you assign privileges to records, assign the required privileges to at least one field.
- When you assign privileges to fields, assign the required privileges to records.
- When you assign privileges to child fields or nested field groups, ensure that you assign the required privileges to all the parent field groups.
- When you assign privileges to a field group or nested field group, assign the required privileges to at least one child field.
- When you assign privileges to multiple business entities using the **Bulk Edit** button, the following guidelines apply:
  - When you assign privileges to records, the privileges are automatically enabled on the **Attributes** tab. Ensure that you don't remove the privileges on the **Attributes** tab if you want to retain the privileges assigned to records.
  - If you assign privileges on the **Attributes** tab, you need to manually assign the required privileges to records.

For more information about assigning privileges for multiple business entities, see "Configure privileges for multiple assets" on page 50.

The following table contains the list of dependent privileges for record-level privileges:

| Type of Privilege | Privilege | Requires |
|---|---|---|
| Record-level | Create or read | Create or read for attributes. |
| Record-level | Update | Create, update, or delete for attributes. |
| Record-level | Delete | Read privilege to records. |

The following table contains the list of dependent privileges for attribute-level privileges:

| Type of Privilege | Privilege | Requires |
|---|---|---|
| Attribute-level | Create | Create or update to records. |
| Attribute-level | Read or update | Read or update to records. |
| Attribute-level | Delete | Update to records. |
| Attribute-level | Read or update to child fields or nested field groups. | Read or update to parent field groups and to records. |
| Attribute-level | Create to child fields or nested field groups. | Create and update to parent field groups and records.<br>**Note:** Update enables the users to edit a newly created child field's value. |
| Attribute-level | Delete to child fields or nested field groups. | Update to parent field groups and records. |
| Attribute-level | Read to a field group. | Read to at least one attribute in the field group and to records. |
| Attribute-level | Create to a field group. | Create to at least one attribute in the field group and create and update to records.<br>**Note:** Update to records enables the users to update the value of a newly created field in the field group. |
| Attribute-level | Update to a field group. | Create, update, or delete to at least one attribute in the field group and update to record. |
| Attribute-level | Delete to a field group. | Update to record. |

The following table contains the list of dependent privileges when you use bulk edit to assign privileges to multiple business entities:

| Type of Privilege | Privilege | Requires |
|---|---|---|
| Record-level in bulk edit. | Read or create. | Read or create to attributes in bulk edit. |
| Record-level in bulk edit. | Update | Update to attributes and optionally create or delete to attributes in bulk edit. |
| Attribute-level in bulk edit. | Read or update. | Read or update to records in bulk edit. |
| Attribute-level in bulk edit. | Create | Create or update to records bulk edit. |
| Attribute-level in bulk edit. | Delete | Update to records in bulk edit. |

**Note:** If you assign a privilege to a field group, the privileges are automatically assigned to all fields within the field group. You can't fine-tune or disable the privileges assigned to these fields within the field groups. As a workaround, to disable a privilege assigned to fields within a field group, select the header-level checkbox for each privilege on the **Attributes** tab. This disables the privileges for all field groups and their fields.

# Configure record privileges for business application user roles

You can configure privileges that specify whether users can create, read, update, delete, and unmerge records. You can specify whether the users can access all fields, certain fields, or none. You can also specify whether the users can import data without matching, export search results, or import or export data after matching.

## Records

You can configure privileges that specify whether users can create, read, update, and delete fields within a record in your business application.

The read privileges that you assign for a user role impact the reports in the following ways:

- If a user role doesn't have the read privileges for the records in a business entity, the users can't create reports for the business entity.
- If a user role doesn't have read privileges for the attributes in a business entity, the users can create reports for the business entity. But they can't view the affected attributes when they create reports for the business entity.
- If a user role doesn't have read privileges for the records or attributes in a business entity, the users can't view reports or charts related to the business entity.

The following table describes the behaviour of record privileges:


| Privileges | Set to Enabled |
|---|---|
| Create | Create business entity records. |
| Read | Search and view records that belong to the business entity. |
| Update | Update the existing field values of all records that belong to the business entity.<br>**Note:** Ensure that you also set the read privilege. Without the read privilege, the record is not visible for the user to update it. |
| Delete | Delete records, field group values, and field values.<br>**Note:** Ensure that you also set the read privilege. Without the read privilege, the record is not visible for the user to delete it. |
| Merge | Merge source and master records. |

| Privileges | Set to Enabled |
|---|---|
| Unmerge | Unmerge source records. |
| Bulk Edit | Edit business entity records in bulk.<br>Before you assign the bulk edit privilege, ensure that you assign the read and update privileges to the user role on the **Records** tab or the **Attributes** tab.<br>**Note:** Users with Admin and Customer 360 Manager roles can also edit the records in bulk.<br>**Note:** Effective in the May 2023 release, the option to assign the bulk edit privilege for custom user roles is available for preview.Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support. |

The privileges that you assign on the **Records** tab aren't automatically assigned to all fields on the **Attributes** tab. You can fine-tune the privilege for each field within the **Attributes** tab without dependance on the record-level privileges. For more information on assigning privileges for each field within a record, see Configure field privileges for business application user roles on page 36.

1. On the **Security** page, open the user role for which you want to assign privileges pertaining to records in your business application.

   The user role details page appears. The following image shows the **Records** tab:

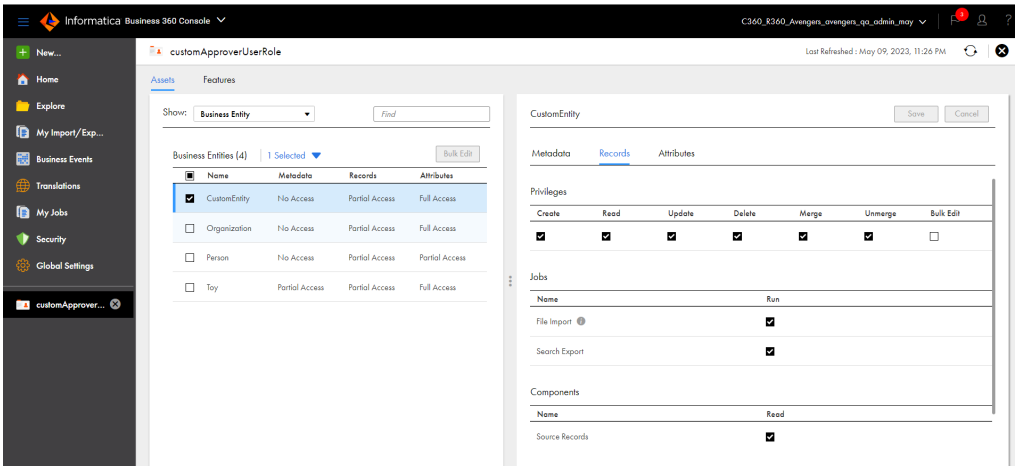


   **Note:** The **Hierarchy** check box in the **Components** section is not configurable in the current release.

2. Select the required privileges.
3. Click **Save**.

   **Note:** To configure workflow privileges for the create, update, delete, and unmerge of records by a custom user role, follow the steps described in "Configure workflow privileges for business application user roles" on page 38.

# File Import

You can specify whether a user with a custom user role can import all data without matching into MDM SaaS. To authorize a user to import all data into MDM SaaS, assign privileges in Administrator and on the **Security** page of Business 360 Console.

**Note:** To access file import in MDM SaaS, ensure that you assign the Admin and Business360ProcessExecutor user roles.

1. In Administrator, click **User Roles**.

   The user roles page with a list of pre-defined and custom user roles appears.

2. Select the custom user role for which you want to configure privileges.

   The user role details page appears.

3. Configure appropriate permissions for the **Data Quality** and **MDM Business Application** services.

   For more information on these privileges, see "Prerequisites" on page 15.


4. Click **Save**.

5. Click **Users**.

   The list of available users appears.

6. Select the user for which you want to configure privileges.

   The user details page appears:

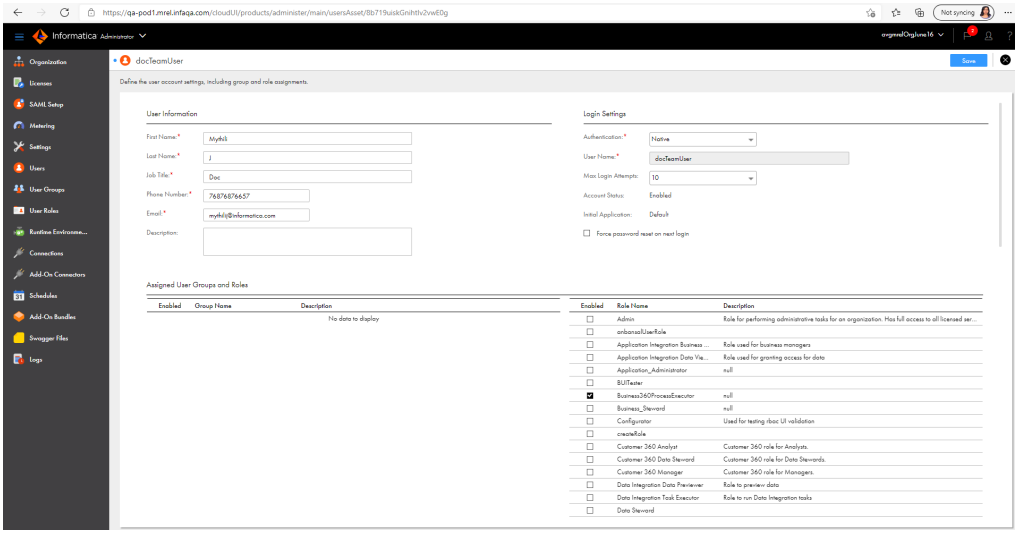


7. Assign a custom user role and the Business360ProcessExecutor role to enable a user to import all data without matching.

8. Click **Save**.

9. In Business 360 Console, click **Security**. Click the custom user role for which you want to assign privileges for importing data into your business application.

   The user role details page appears.

10. Ensure that you select the required business entity for which you want to assign the privileges.

11. On the **Records** tab, select **Create** and **Update**.

    The create and update privileges are selected for all the fields on the **Attributes** tab.

12. In the **Jobs** section, select **Run** for the file import job.

13. Optionally, on the **Attributes** tab, modify the privileges for specific fields.

During import, the job excludes the fields for which the user doesn't have create and update privileges. These fields don't appear on the **Map Fields** page of the **File Import** wizard.


14. Click **Save**.

## Search Export

You can specify whether a user with custom user role can search for records in your business application and export all the records found using the search box or the filtered search option. You can also assign partial access for searching and exporting specific fields within a record.

1. In Business 360 Console, click **Security**. Click the custom user role for which you want to assign privileges for executing search and export job in your business application.

   The user role details page appears. The following image shows the **Records** tab:

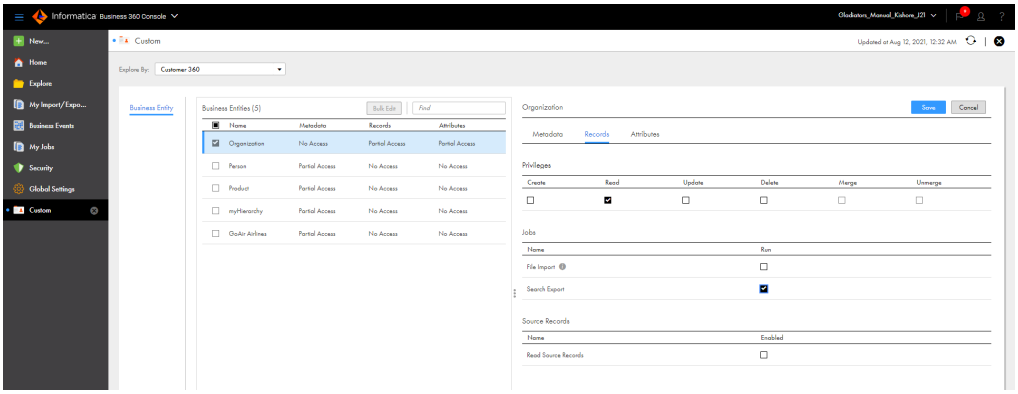


2. Ensure that you choose required business entity.
3. On the **Records** tab, select **Read** in **Privileges** section and **Run** for **Search Export** job in **Jobs** section.

   Without the read privilege for records, the user cannot search and view the records.

   The read privilege is selected for all fields in the **Attributes** tab.
4. Optionally, on the **Attributes** tab, modify read privileges for specific fields if required.

   During export of search results, the job excludes the fields for which the user does not have read privilege.
5. Click **Save**.

## External match

You can specify whether a user with a custom user role can match external data with source or master records and then import or export data. To authorize a user to match external data with source or master records, assign privileges in Administrator and on the **Security** page of Business 360 Console.

1. In Administrator, click **User Roles**.

   The user roles page with a list of pre-defined and custom user roles appears.
2. Select the custom user role for which you want to configure privileges.

   The user role details page appears.
3. Configure appropriate permissions for the **Data Quality** and **MDM Business Application** services.

   For more information on these privileges, see "Prerequisites" on page 15.
4. Click **Save**.

5. Click **Users**.

   The list of available users appears.

6. Select the user for which you want to configure privileges.

   The user details page appears.

7. Assign the custom user role that you configured in 3 and the Business360ProcessExecutor role.
8. Click **Save**.
9. In Business 360 Console, click **Security**.
10. Click the custom user role that you assigned to the user.

    The user role details page appears.

11. Ensure that you select the required business entity for which you want to assign the privileges.
12. On the **Records** tab, perform the following tasks:

    a. If you want the user to match external data with master records and then export data, select **Read**.

    b. If you want the user to match external data with source records and then import data, select **Create** and **Update**.

    The read, create, and update privileges are selected for all the fields on the **Attributes** tab based on the privileges assigned to the user.


13. In the **Jobs** section, select **Run** for external match.
14. Optionally, on the **Attributes** tab, modify the privileges for specific fields.

## Source Records

The privilege specifies whether users get the source records details when they open a record. The users must also have the read privilege for records to view the source records.

When the user searches for a record within your business application, the **Source Records** tab is not visible if you do not assign read privilege for source records. If you do not assign the read privilege, the **Source Records** tab is hidden for all records pertaining to the selected business entity.

The following image shows the Source Record tab of a record:

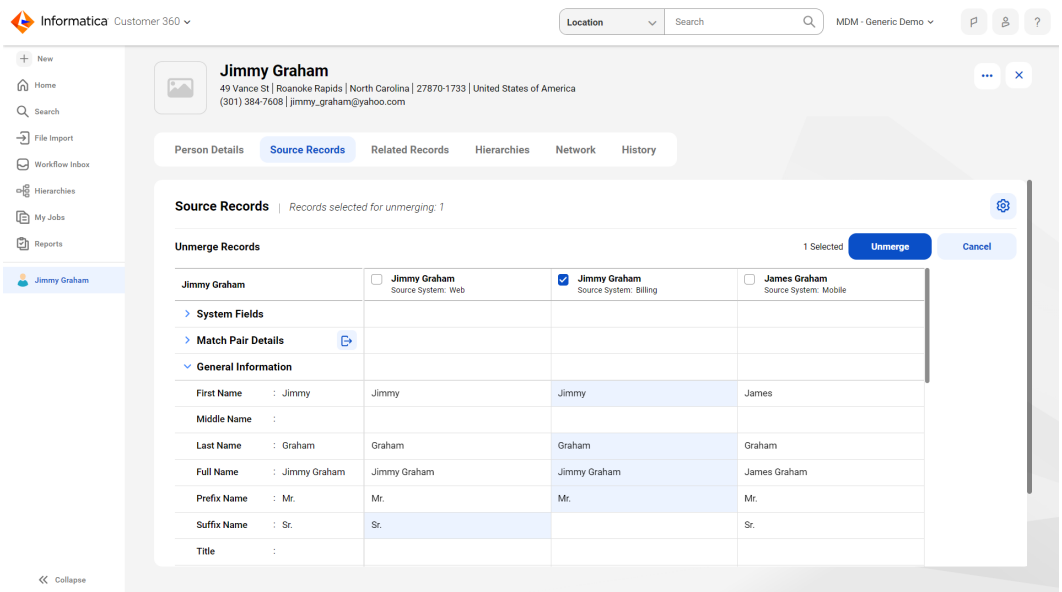

If you fine-tune the privileges for each field within a record on the Attributes tab, the Source Records tab will exclude the fields for which the user does not have read privilege.

## Hierarchy


The privilege specifies whether users get the hierarchy details when they open a record.

When the user searches for a record within your business application, the **Hierarchy** tab is not visible if you do not assign read privilege for the hierarchy component. If you do not assign the read privilege, the **Hierarchy** tab is hidden for all records pertaining to the selected business entity.


**Note:** By default, the **Hierarchy** tab is visible only for the predefined user roles, such as Admin, Customer 360 Analyst, Customer 360 Data Steward, Product 360 Manager, and Supplier 360 Data Steward.

To enable the Hierarchy tab for the other predefined user roles, you can create a custom user role with read-only privilege for the **Hierarchy** Component and assign the custom user role to users.

The following image shows the read privilege selected for the **Hierarchy** component in the **Records** tab of the selected business entity:

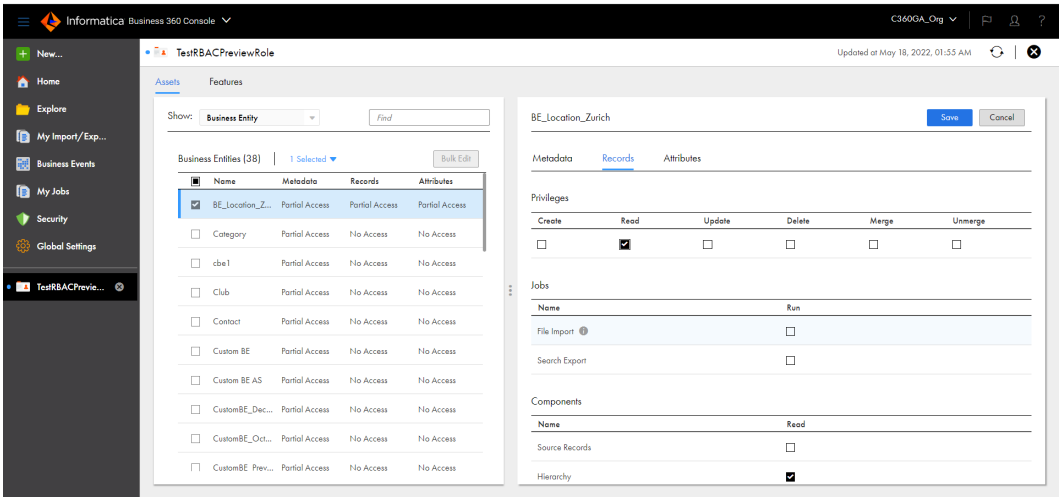


The following image shows the Hierarchy tab of a record:

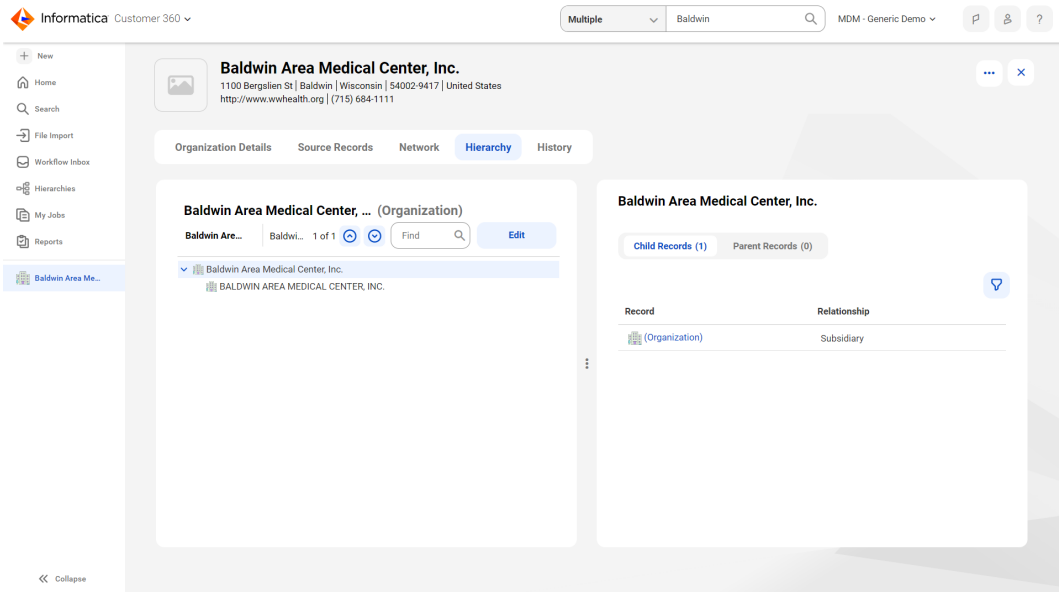


**Note:** The hierarchy details that the user can view on the Hierarchy tab is based on the privileges that you assign for the hierarchy. For more information on hierarchy privileges, see "Configure hierarchy privileges for business application users" on page 45.

# Match Analysis and Explainability Dashboard

The privilege specifies whether users with custom user roles can access data on the Match Analysis and Explainability dashboard related to a specific business entity.


To allow users with custom user roles to access data on the dashboard, ensure that you assign the following privileges:

- Assign the **Match Analysis and Explainability Dashboard** privilege on the **Security** page.
- Assign read privileges for the records and attributes related to the selected business entity.


Users assigned to a customer user role without these privileges can't view any metrics related to match analysis and explainability for the selected business entity.

**Note:** By default, users with Admin user role can access data on the Match Analysis and Explainability dashboard.

The following image shows the read permission assigned for accessing the Match Analysis and Explainability Dashboard related to the Person business entity:

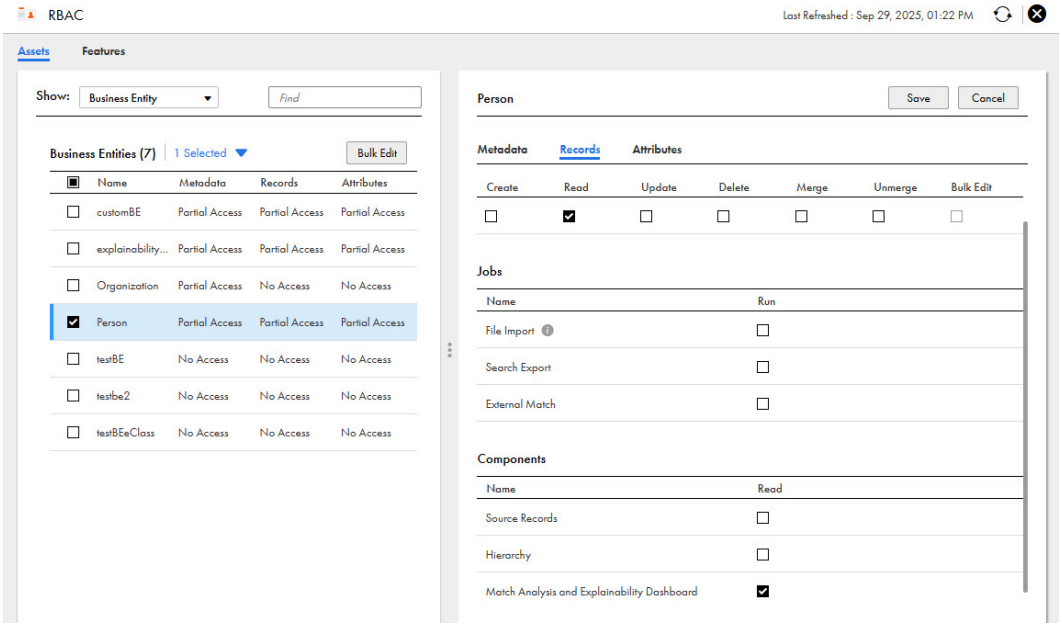


The following image shows the Match Analysis and Explainability dashboard:

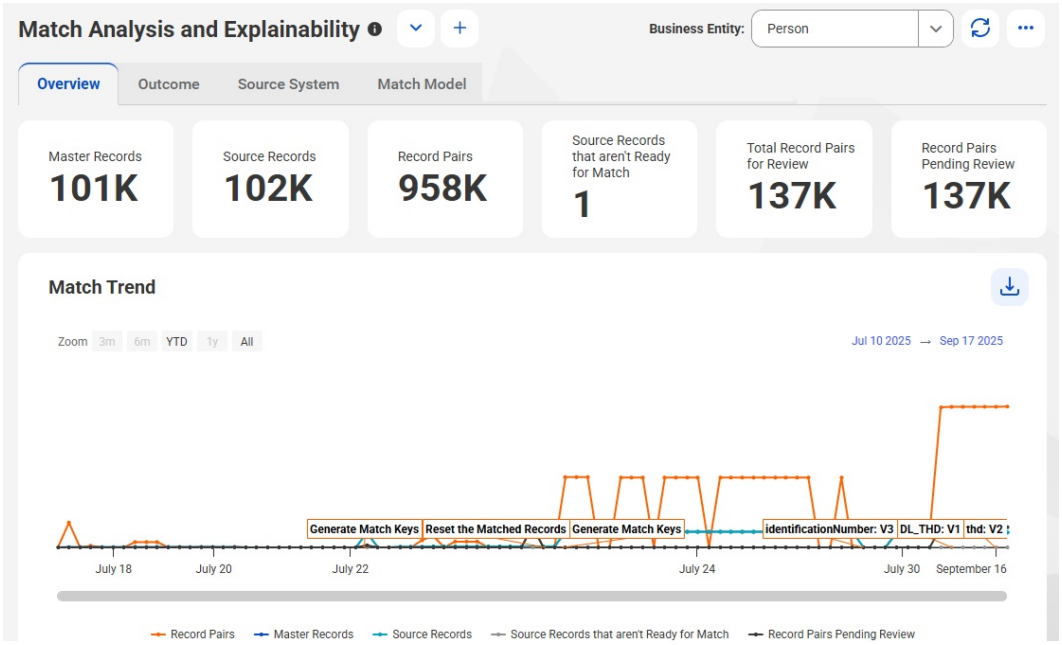


# Configure field privileges for business application user roles

The privileges specify whether you can create, read, update, and delete each field of a record in your business application. The create, read, update, and delete privileges that you configure within the **Records** tab aren't

automatically assigned to all the fields within the **Attributes** tab. You can fine-tune the privileges on the **Attributes** tab without dependance on the record-level privileges.

Using this tab, you can provide partial access to fields within records pertaining to the business entity. For example, you can choose not to assign read privileges for certain fields within a record. This will enable you to hide specific set of fields for a user with that custom user role.

The following table describes the behaviour of field privileges:

| Privilege | Set to Enabled |
|---|---|
| Create | - Create records based on the fields for which the users have the create privilege.<br>- Enter values in empty fields of existing records. |
| Read | View the fields for which users have the read privilege. You can view fields when you open a record, view source records, and create filtered search.<br>**Note:** If you don't have the read privilege for a field, you can view the field but not its value. |
| Update | Update the existing values of fields and fields in field groups for which users have update privilege. |
| Delete | Delete field group entries or values of fields for which users have the delete privilege.<br>**Note:** Ensure that you also set the read privilege. Without the read privilege, the field or field group is not available for the users to delete the values. |

1. In Business 360 Console, click **Security**. Click the custom user role for which you want to assign individual field privileges.

   The user role details page appears.
2. Ensure that you select the required business entity.
3. On the **Attributes** tab, select required privileges for each field or field group.

   If you assign a privilege to a field group, the privileges aren't automatically assigned to all fields within the field group. The check boxes for these privileges are disabled on the user role details page. As a workaround, to assign a privilege to field groups and their fields, select the header-level checkbox for each privilege on the **Attributes** tab. This enables the privileges for all field groups and their fields, but you can't fine-tune these privileges.
4. Click **Save**.


# View data access rules

You can view data access rules for custom user roles on the user role details page. The data access rules appear as hyperlinks.

You can view the data access rules on the following tabs of the user role details page:

**Records**. Lists record-level and attribute-level data access rules associated with the business entity and the user role that you select.

The following image shows the list of data access rules as hyperlinks:

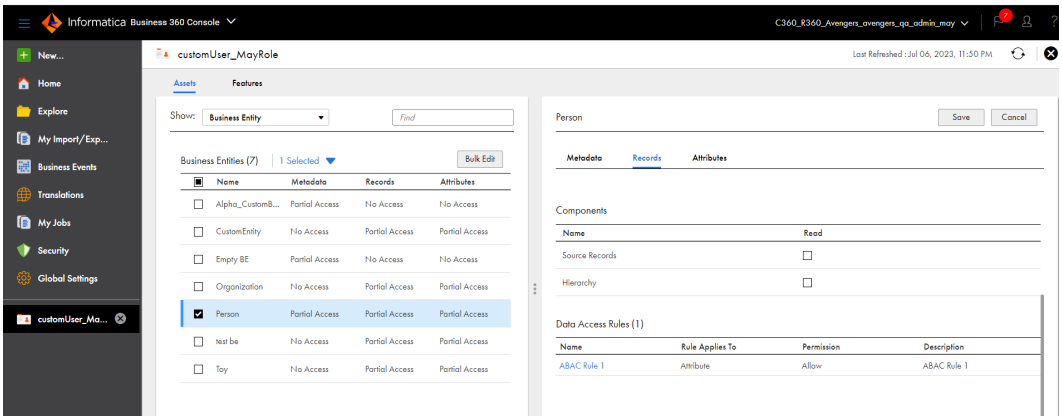



You can click the links to open the data access rule.

**Note:** If the business entity and the user role that you select doesn't have any associated data access rule, the **Data Access Rules** table doesn't appear.

**Attributes**. Lists data access rules associated with each attribute.

The following image shows the data access rule associated with the attribute as a **View** link in the **Data Access Rule** column:

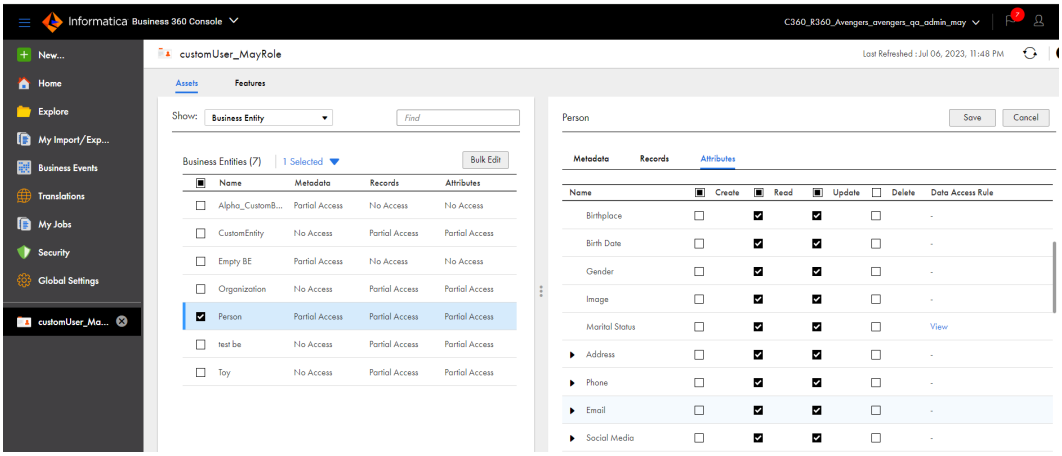


For more information about data access rules, see *Managing data access rules*.

# Configure workflow privileges for business application user roles

You can configure requestor and approver workflow privileges for custom user roles.

Requesters can perform tasks that trigger workflows in business applications. Approvers can review and approve data before it becomes master data in business applications.

To configure workflow privileges, use Administrator and the Security page. To enable users with workflow privileges to perform tasks, create user-triggered or a system-generated business events for the respective custom user role. In addition to the workflow privileges enabled on the **Security** page, assign the **View Tasks** privilege to approvers in the **Human Tasks** service in Administrator.

The View Tasks privilege and workflow privileges enable the following changes for custom user roles:

- Custom user roles with the workflow requester privilege appear in the **Affected User Roles** list when you create business events.
- Custom user roles with the workflow approver privilege appear in the **Approvers** list when you create business events.

  For more information about business events, see *Defining business events*.

If you use the workflow inbox, the View Tasks privilege enables approvers to view their assigned tasks in the workflow inbox.

For more information about configuring privileges for the workflow inbox, see "Configure privileges for the workflow inbox" on page 39.

If you use the task inbox, the View Tasks privilege enables approvers to view their assigned tasks in the task inbox.

For more information about configuring privileges for the task inbox, see "Configure privileges for the task inbox" on page 41.

**:** Effective in the April 2026 release, the ability to view tasks in the task inbox is available for preview.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

## Configure privileges for the workflow inbox

You can configure requestor and approver workflow privileges for custom user roles. You can also configure specific access privileges for approvers in the workflow inbox.

Ensure that you assign the **View Tasks** privilege in the **Human Tasks** service in **Administrator** in addition to the workflow privileges enabled on the **Security** page.


The View Tasks privilege and workflow privileges enable the **Claim**, **Approve**, **Reject**, **Send Back**, and **Release** buttons in the workflow inbox of business applications.

The **Workflow Approver** privilege is also applicable for two-step approval process in the workflow. It enables a user to approve, reject, or send the tasks back to the requester or intermediate approver based on the configuration of workflow tasks for business events. For more information about reviewing data by approvers, see *Review Tasks*.

1. In Administrator, click **Users**.

   The list of available users appears.
2. Select the user for which you want to assign the custom user role and other roles.

   The user details page appears:

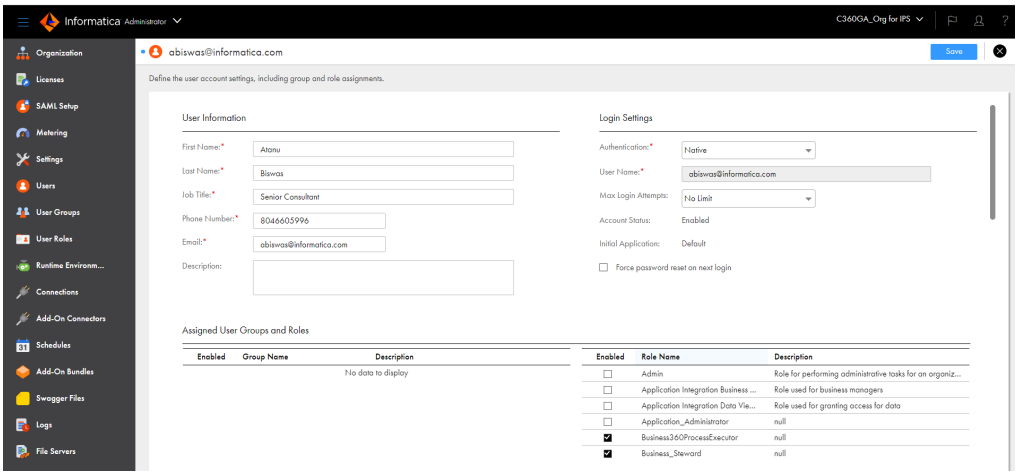


3. For the user to view the workflow inbox of business applications, assign the custom user role and the **Business360ProcessExecutor** role.
4. Click **Save**.
5. Click **User Roles**.

   The user roles page with the list of pre-defined and custom user roles appears.
6. Select the custom user role that you assigned to the user in 2.


   The user role details page appears.
7. Select **Human Tasks** in the **Services** list and assign the **View Tasks** privilege on the **Features** tab.

   For more information about the **View Tasks** privilege, see "Prerequisites" on page 15.
8. Click **Save**.
9. In Business 360 Console, click **Security**, and click the custom user role that you assigned to the user in 2.

   The user role details page appears.
10. To assign workflow privileges for business entity, select the required business entity.
11. On the **Records** tab, select the required privileges.
    a. To trigger a workflow when a user creates a record in business applications, select **Create** and **Read** in addition to the **Workflow Requester** privilege.
    b. To enable the user to view their task details in the workflow inbox, assign the **Read** privilege.
    c. To enable the **Edit** button on the task details page in the workflow inbox, assign the **Read** and **Update** privileges.
    d. To enable the user to approve system-generated events such as match and merge tasks, assign the **Read** and **Source Records** privileges in addition to the **Workflow Approver** privilege.
12. To assign workflow privileges for hierarchies, select the **Hierarchy** from the **Show:** list.

    The list of hierarchy models appear on the left pane.
13. Select the required hierarchy model for which you want to assign the workflow privileges.
    a. To trigger a workflow when a user modifies hierarchies in your business application, select **Create**, **Read**, **Update**, and **Delete** in addition to the **Workflow Requester** privilege.
    b. To enable the user to view their task details in the workflow inbox, assign the **Read** privilege.
14. On the **Features** tab, select **Workflow Requester** or **Workflow Approver**.

The following image shows the **Features** tab on the user role details page:

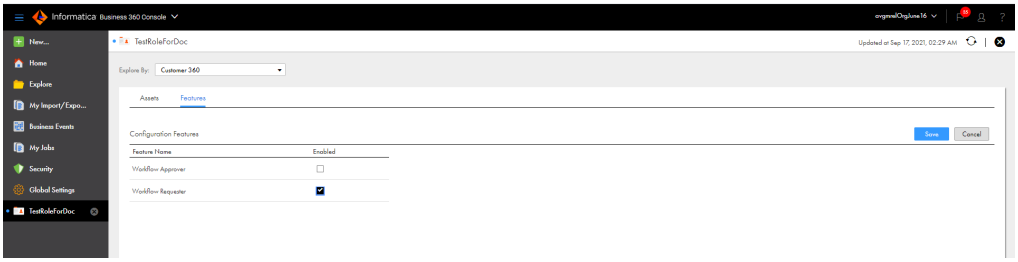


15. Click **Save**.

# Configure privileges for the task inbox

You can configure requestor and approver workflow privileges for custom user roles.

Configure specific privileges for approvers in the task inbox. You can also enable required users to assign unclaimed tasks to a user or user group. In addition to the workflow privileges enabled on the **Security** page, ensure that you assign the **View Tasks** privilege to approvers in the **Human Tasks** service in Administrator.

The View Tasks privilege and workflow privileges enable the **Claim** button and the actions configured in the respective workflows in the task inbox of business applications.


**Note:** The **Manage Workflow Tasks** privilege enables the **Assign** button in the task inbox.

1. In Administrator, click **Users**.

   The list of available users appears.

2. Select the user to whom you want to assign the custom user role and other roles.

   The user details page appears:

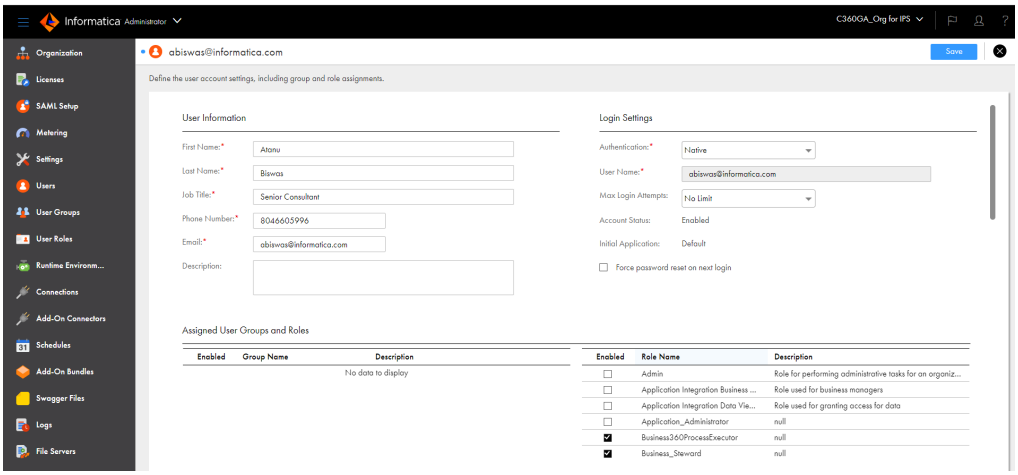


3. For the user to view the task inbox page in business applications, assign the custom user role and the **Business360ProcessExecutor** role.
4. Click **Save**.
5. Click **User Roles**.

   The user roles page with the list of pre-defined and custom user roles appears.

6. Select the custom user role that you assigned to the user in 2.

   The user role details page appears.

7. Select **Human Tasks** from the **Services** list and assign the **View Tasks** privilege on the **Features** tab.

   For more information about the **View Tasks** privilege, see "Prerequisites" on page 15.

8. For the user to assign tasks to a user or user group, select **MDM Business Applications** from the **Services** list and assign the **Manage Workflow Tasks** privilege on the **Features** tab.
9. Click **Save**.
10. In Business 360 Console, click **Security**, and click the custom user role that you assigned to the user in 2.

    The user role details page appears.

11. To assign workflow privileges for a business entity, select the required business entity.
12. On the **Records** tab, select the required privileges.
    a. To trigger a workflow when the user creates a record in business applications, select **Create** and **Read** in addition to the **Workflow Requester** privilege.
    b. To enable the user to view task details in the task inbox, assign the **Read** privilege.
    c. To enable the **Edit** button on the task details page in the task inbox, assign the **Read** and **Update** privileges.
    d. To enable the user to approve system-generated events such as match and merge tasks, assign the **Read** and **Source Records** privileges in addition to the **Workflow Approver** privilege.
13. To assign workflow privileges for hierarchies, select the **Hierarchy** from the **Show:** list.

    The list of hierarchy models appear on the left pane.

14. Select the required hierarchy model for which you want to assign the workflow privileges.
    a. To trigger a workflow when the user modifies hierarchies in business applications, select **Create**, **Read**, **Update**, and **Delete** in addition to the **Workflow Requester** privilege.
    b. To enable the user to view task details in the task inbox, assign the **Read** privilege.
15. On the **Features** tab, select **Workflow Requester** or **Workflow Approver**.

    The following image shows the **Features** tab on the user role details page:




16. Click **Save**.

## Revoke workflow privileges

You can revoke workflow privileges for custom user roles from the **Security** page.

If you want to revoke the **Workflow Requester** or **Workflow Approver** privilege for a custom user role, ensure that the user does not have any tasks assigned. You can check if any tasks are assigned to the user in the workflow inbox or task inbox of business applications.

If you assigned the approver privilege for a custom user role in previous releases and retain it in the current release for approving hierarchy data, ensure that you deselect and select the Workflow Approver privilege once to enable the user to edit hierarchy tasks from the workflow inbox or task inbox.

# Configure related records privileges for business application users

You can configure privileges that specify whether users can create, read, update, and delete related records within a record. You can also specify whether users can import relationship data.

## Related Records

You can configure privileges that specify whether users can create, read, update, and delete related records within a record in your business application.

The following table describes the behaviour of related record privileges:

| Privileges | Set to Enabled |
|---|---|
| Create | Add related records to a record. When a user with custom user role adds related records, the user can view only those relationships for which you have assigned the create privilege. If the user does not have the create privilege for any of the relationships, then the user cannot view the **Related Records** section in the record details page. |
| Read | View the relationship in the related records section of a record and the **Relationship Graphs** tab of a record. |
| Update | Update the related records of a record. |
| Delete | Delete related records of a record. If you do not assign this privilege for a relationship, the delete icon adjacent to the related record does not appear in the related records section. |


1. On the **Security** page, open the user role for which you want to assign privileges pertaining to related records in your business application.

   The user role details page appears.
2. Select **Relationship**.

   The list of predefined and custom relationships appear.
3. Select the required relationship for which you want to assign related records privileges for the custom user role.
4. On the **Records** tab, select the required privileges.

   **Note:** On the **Records** tab, you can also view the business entities associated with the selected relationship. You must assign read privilege for the business entities associated with the relationship. You can view a warning message adjacent to the business entity if you have not assigned the read privilege.

   The following image shows the shows the details of a relationship with a warning icon indicating that the user role does not have read privilege for the business entity:

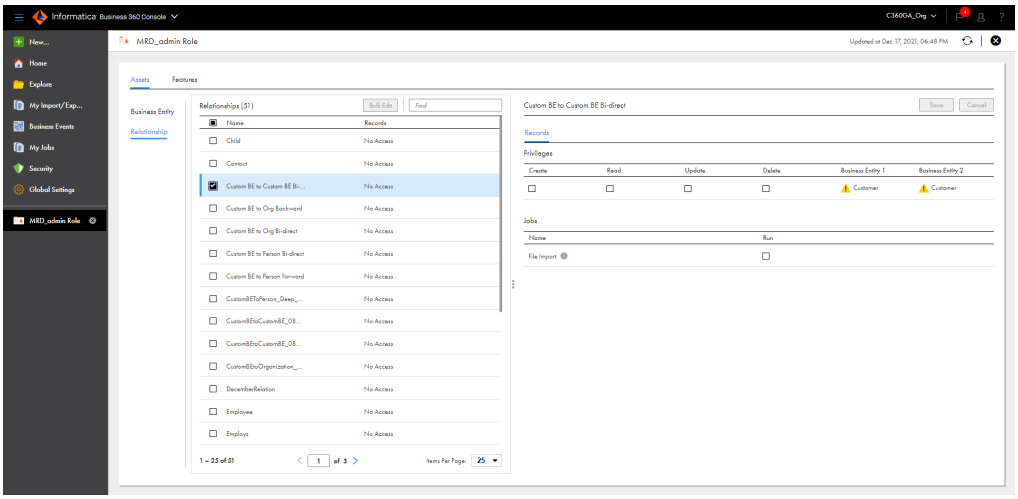

5. Click **Save**.

# File Import


You can specify whether a user with custom user role can import relationship data into your business application. To authorize a user to import relationship data into your business applications, you need to assign privileges in Administrator and on the **Security** page of Business 360 Console.

1. In Administrator, click **Users**.

   The list of available users appears.

2. Select the user for which you want to configure privileges.

   The user details page appears:

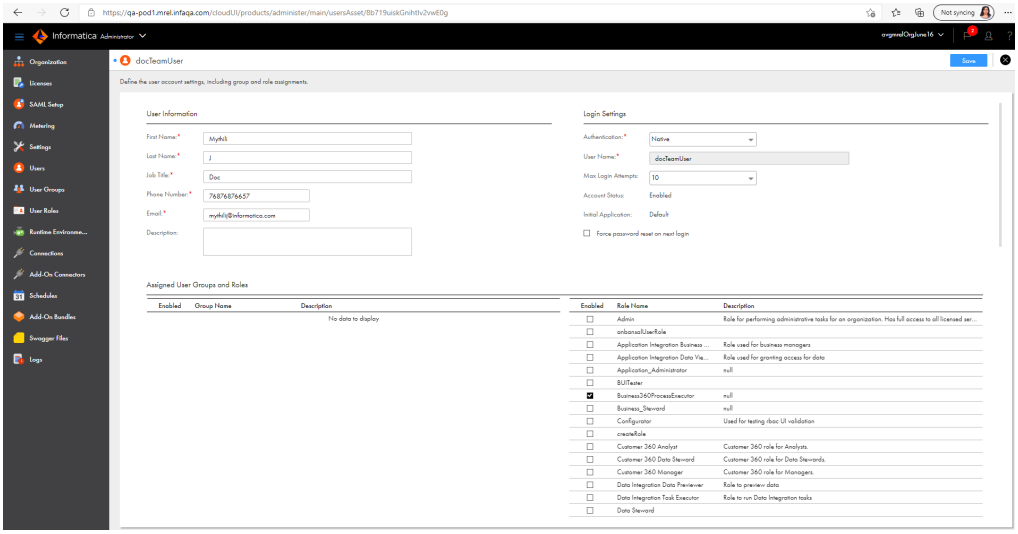

3. Assign a custom user role and the Business360ProcessExecutor role to enable a user to import data.
4. Click **Save**.
5. Click **User Roles**.

   The user roles page with list of pre-defined and custom user roles appears.

6. Select the custom user role for which you want to configure privileges.

   The user role details page appears.

7. Configure appropriate permissions for the **MDM Business Application** service.

   For more information on the privileges of the **MDM Business Application** service, see "Prerequisites" on page 15.

8. Click **Save**.
9. In Business 360 Console, click **Security** and click the custom user role for which you want to assign privileges for importing relationship data.

   The user role details page appears.

10. On the **Relationship** tab, ensure that you select the required relationship for which you want to assign the privileges.
11. On the **Records** tab, select **Create** and **Update**.
12. In the **Jobs** section, select **Run** for the file import job.
13. Click **Save**.

    The relationships for which you assign the privileges for file import appear in the **Target Relationship** section when the user with custom user role imports relationship data in your business application.

# Configure hierarchy privileges for business application users


You can configure privileges for custom user roles to import hierarchy data and to create, read, update, and delete hierarchies, first-level nodes, and relationships within hierarchies. You can also configure requester and approver privileges for custom user roles to trigger workflow when they modify or approve hierarchy data.

## Hierarchies

You can specify whether users with custom user roles can create, view, update, or delete hierarchies related to the selected hierarchy model. You can also specify whether users can assign records to hierarchy nodes.

Ensure that you assign the Business360ProcessExecutor role in Administrator to users with a custom user role. The Business360ProcessExecutor role enables users with a custom user role to create, update, and delete hierarchies and to access the **Hierarchy** page in your business application.

The following image shows the user details page in Administrator with the Business360ProcessExecutor role assigned:

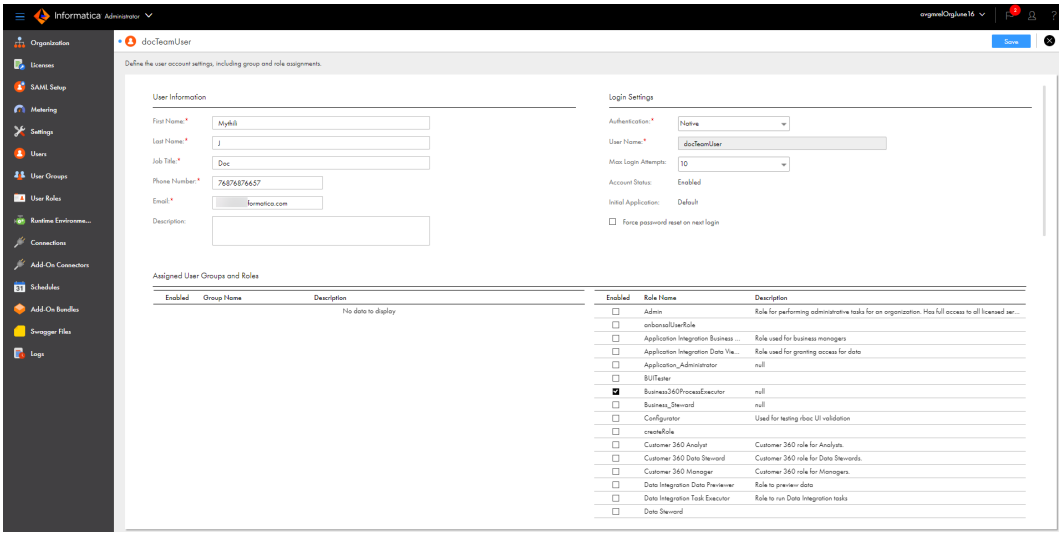


The following table describes the hierarchy privileges that you can enable:

| Privileges | Description |
|---|---|
| Create | Create hierarchies based on the hierarchy model and assign record to hierarchy nodes. |
| Read | View the hierarchies associated with the hierarchy model. Enables the read privilege for root record of the hierarchy. |
| Update | Update the hierarchies based on the hierarchy model. Enables you to add root and child records for hierarchies and add attribute values for relationships associated with the hierarchies. |
| Delete | Delete hierarchies within the hierarchy model and unassign records from hierarchy nodes. |

1. To configure hierarchy privileges, on the **Security** page, open the user role for which you want to assign privileges related to hierarchies.

   The user role details page appears.

2. On the **Assets** tab, select **Hierarchy** from the **Show:** list.

   The list of hierarchy models appears on the left pane.

3. To enable users with custom user role to create, view, update or delete hierarchies based on a hierarchy model, select required hierarchy model on the left pane and assign required privileges in the **Privileges** table on the right pane.

   **Note:** Ensure that you assign at least the read privilege for the hierarchies. The user with the custom user role cannot view the hierarchies in the business application without the read privilege.

4. If you use custom pages, configure the hierarchy settings for the Hierarchy component of the custom pages.

   For more information about configuring hierarchy settings, see *Creating a Hierarchy tab*.


5. Click **Save**.

## First-level Nodes

The privilege specifies whether a user with custom user role can view the **Add First Level Node** button in a hierarchy of your business application.

When you select **Privileges for First-level Nodes**, the user can view the **Add First Level Nodes** button when creating a hierarchy based on a hierarchy model in your business application. To use the **Add First Level Nodes** button and add root records to a hierarchy, ensure that you also select the **Create**, **Read**, and **Update** privileges in the **Privileges** table.

**Note:** If you do not assign the read privilege for the business entity associated with the first-level node, a warning icon appears. The following image shows the warning icon for the business entities to which the user does not have the read privilege:

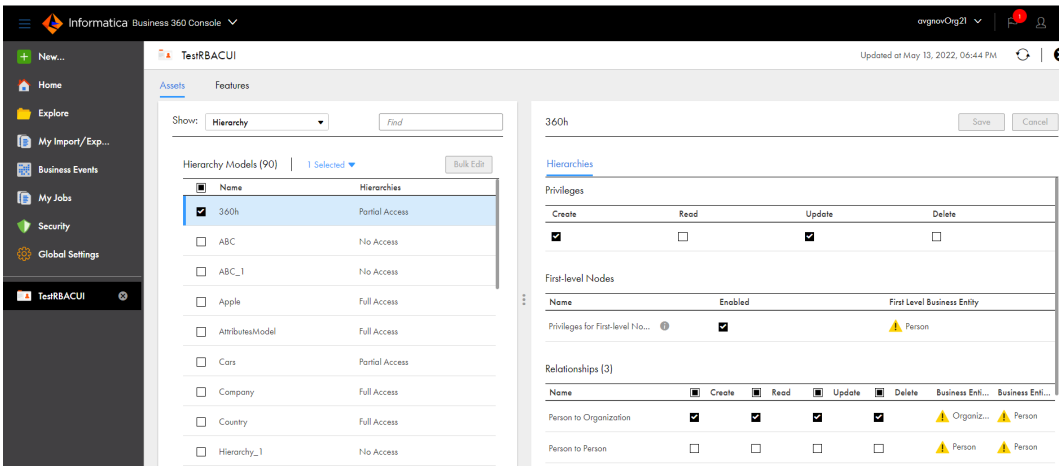


## Relationships

The relationships table lists all the relationships associated with the hierarchy model selected in the left pane and the corresponding privileges for each relationship. These privileges specify the record type and the relationship type based on which the user with custom user role can add and manage child records for hierarchies in your business application.


The following table describes the behavior of search privileges:

| Privilege | Set to Enabled |
|---|---|
| Create | Add child records to a hierarchy based on the relationship type. |
| Read | View child records of a hierarchy based on the relationship type. |
| Update | Update the attribute values for relationships within hierarchies. |
| Delete | Delete child records of a hierarchy based on the relationship type. |

**Note:** If you use a searchable hierarchy as a hierarchy filter, ensure that you provide read access to all the relationships within the hierarchy. If you only provide read access to some relationships, the hierarchy doesn't appear in the filter criteria.

If you do not assign the read privilege for each business entity associated with a relationship, a warning icon appears.

The following image shows the warning icon for the business entities to which the user does not have the read privilege:

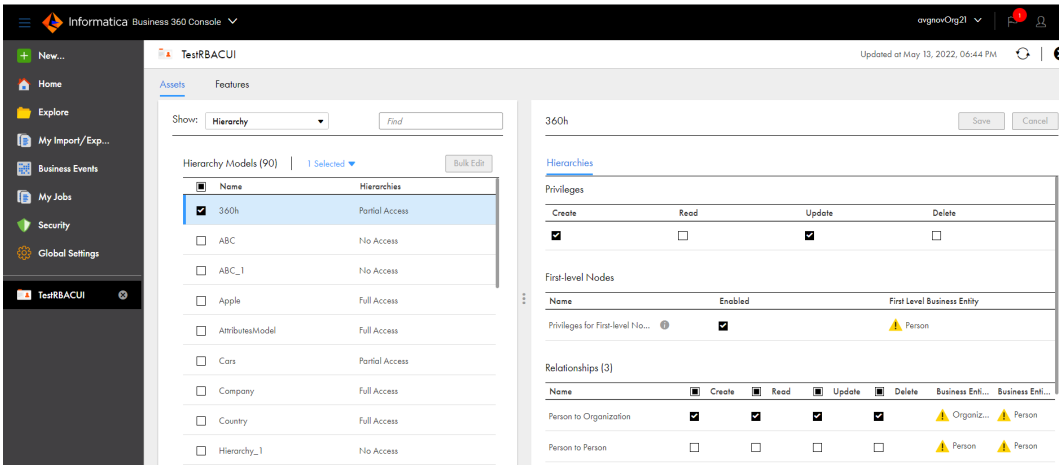


# File Import


You can specify whether a user with custom user role can import hierarchy data into your business application. To authorize a user to import hierarchy data into your business applications, you need to assign privileges in Administrator and on the **Security** page of Business 360 Console.

1. In Administrator, click **Users**.

   The list of available users appears.

2. Select the user for which you want to configure privileges.

   The user details page appears:

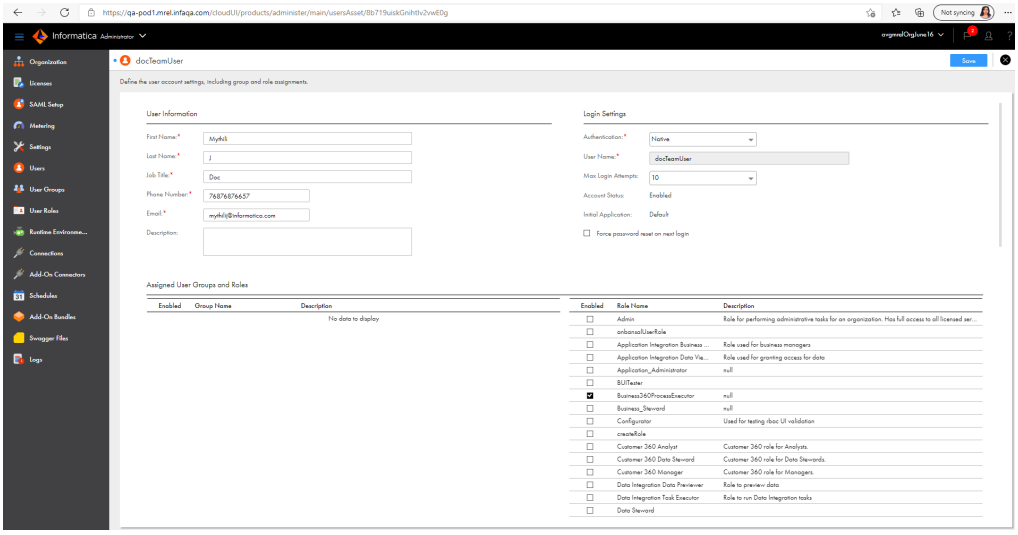


3. Assign a custom user role and the Business360ProcessExecutor role to enable a user to import data.
4. Click **Save**.
5. Click **User Roles**.

   The user roles page with list of pre-defined and custom user roles appears.

6. Select the custom user role for which you want to configure privileges.

The user role details page appears.

7. Configure appropriate permissions for the **MDM Business Application** service.

   For more information on the privileges of the **MDM Business Application** service, see "Prerequisites" on page 15.

8. Click **Save**.

9. In Business 360 Console, click **Security** and click the custom user role for which you want to assign privileges for importing hierarchy data.

   The user role details page appears.

10. On the **Assets** tab, select **Hierarchy** from the **Show:** list.

    The list of hierarchy models appears on the left pane.

11. Select the required hierarchy model for which you want to assign the privileges.

12. In the **Privileges** table, select **Create** and **Update**.


13. In the **First-level Nodes** table, select **Enabled**.

    **Note:** If you do not select this check box, you cannot import the root record of the hierarchy during file import. The file import job imports an empty hierarchy instance to your business application.

14. In the **Relationships** table, select **Create** and **Update** for the relationships associated with the hierarchies that you want to import.

15. In the **Jobs** section, select **Run** for the file import job.

    The following image shows the privileges selected to import complete hierarchy data including root records and all the relationships within the hierarchy:

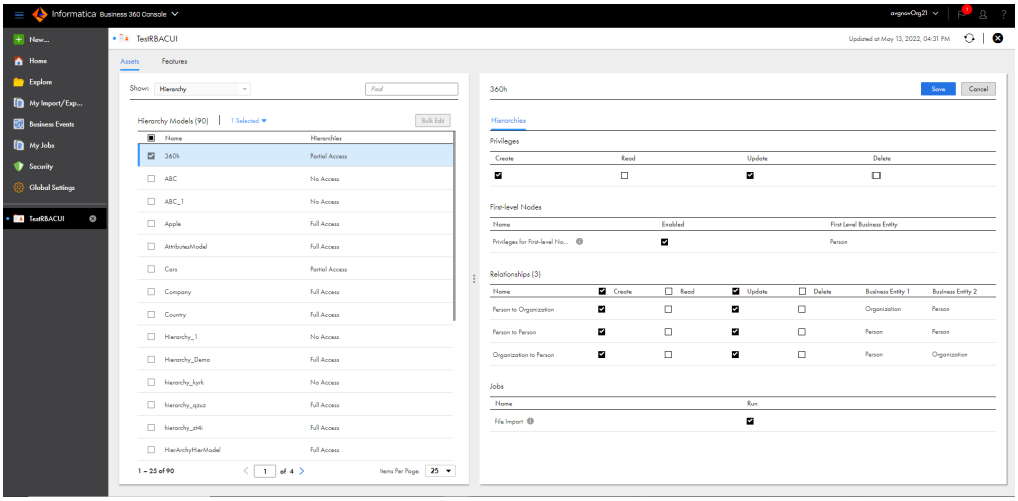


16. Click **Save**.

    The hierarchies for which you assign the privileges for file import appear in the **Target Hierarchies** section when the user with custom user role imports hierarchy data in your business application.

# Configure privileges for multiple assets

You can configure privileges for multiple business entities or relationships or hierarchies instead of configuring privileges for individual asset. You can configure metadata privileges and privileges related to the user roles. You cannot configure privileges to specific fields.

1. In Business 360 Console, click **Security**, and click the custom user role for which you want to assign privileges.

   The user role details page appears.

2. Perform one of the following tasks:

   - To configure privileges for multiple business entities, select **Business Entity** from the **Show:** list and select multiple business entities.

     **Note:** You can't assign privileges to business entities without fields. If you select business entities without fields, you get a message that lists these business entities. If you select few business entities without fields, the privileges that you assign is applied to the remaining business entities with fields.


   - To configure privileges for multiple relationships, select **Relationship** from the **Show:** list and select multiple relationships.

   - To configure privileges for multiple hierarchies, select **Hierarchy** from the **Show:** list and select multiple hierarchies.


   The **Bulk Edit** button is enabled.

3. Click **Bulk Edit**.


   The **Bulk Edit** dialog box appears.
   The following image shows the **Bulk Edit** dialog box for business entities:

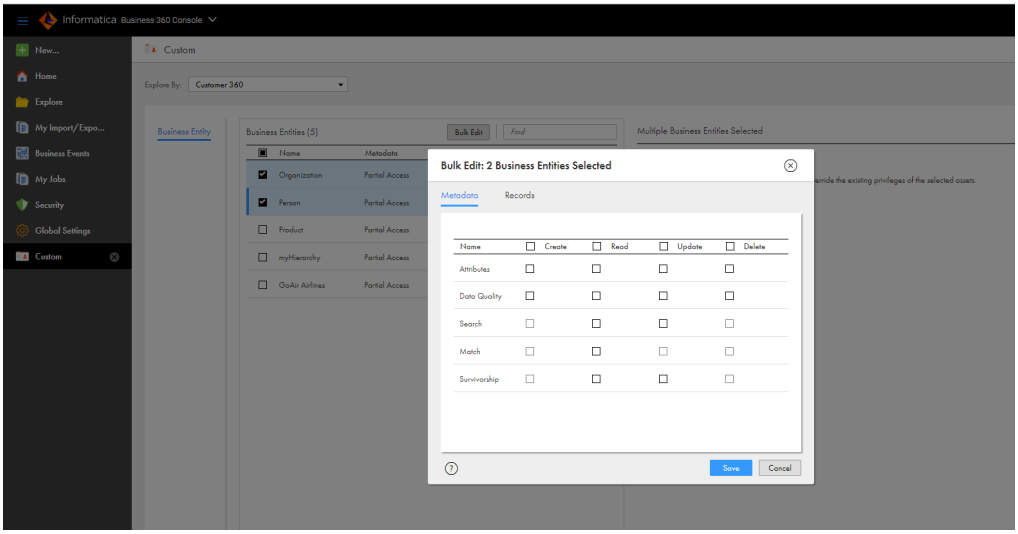


   The following image shows the **Bulk Edit** dialog box for relationships:

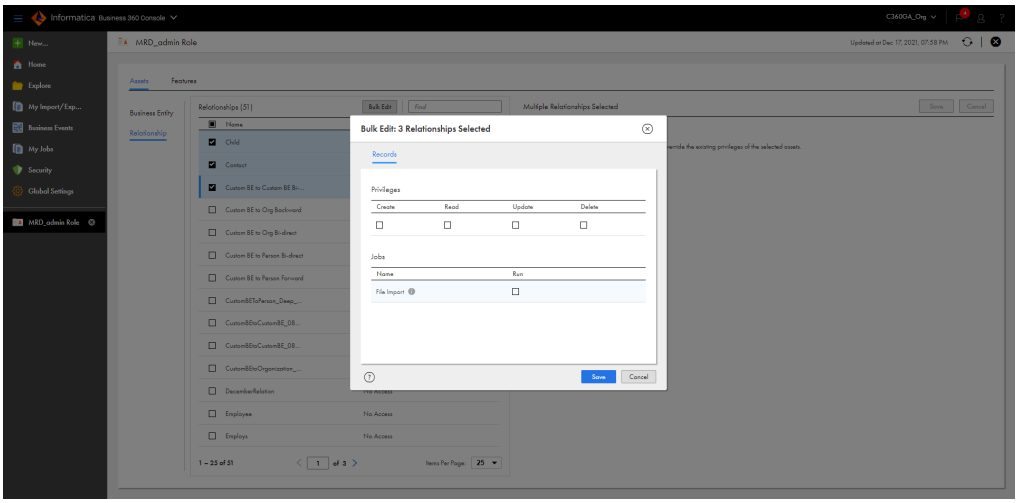


The following image shows the **Bulk Edit** dialog box for hierarchies:

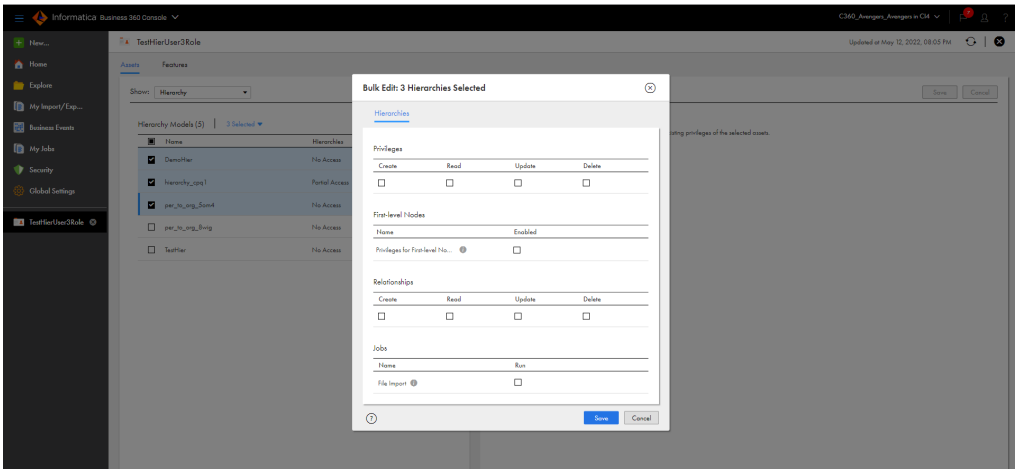


**Note:** When you assign privileges for multiple hierarchies, you can assign the privileges only for all the relationships associated with the hierarchy models and not for individual relationships. To assign privilege for each relationship within the hierarchy model, modify privileges for individual hierarchy model without using the **Bulk Edit** option.

4. Assign required privileges for selected assets in the **Bulk Edit** dialog box.

   For more information about these privileges, refer to the following topics:

   - Configure metadata privileges for Business 360 Console user roles on page 23
   - Configure privileges for business application user roles on page 29
   - "Configure related records privileges for business application users" on page 43.
   - "Configure hierarchy privileges for business application users" on page 45.

   **Note:** When you configure privileges for multiple business entities, the privileges that you assign on the **Records** tab aren't automatically assigned to all fields on the **Attributes** tab. You can fine-tune the privilege for each field within the **Attributes** tab without dependance on the record-level privileges.

5. Click **Save**.

   **Note:** The selected privileges override the existing privileges of the assets.

CHAPTER 3

# Managing data access rules

You can use data access rules to control access to active business entity records or data within these records. You can't control the access to deleted records. When users with custom user roles try to read data, access is granted or denied based on data access rules.

Data access rules restrict access to the data of a protected asset and its protected attributes. You need to configure conditions in the data access rules. Based on the conditions set for a rule a user role is allowed or denied access to data.

The data access rules and conditions are applicable for both master and source records. If the user searches for source records directly, the search requests retrieve results based on the record-level data access rule that you configure for the corresponding custom user role. The specific values that a user can access in both the master record and its source records are based on the attribute-level data access rules and conditions that you configure for the corresponding custom user role.

You can also set create, read, update, and delete privileges for data access rules.

When you add data access rules to protect a business entity, MDM SaaS might increase the duration of other jobs that are in progress for that business entity.

## Prerequisites

Ensure that you have the license to create custom user roles in Administrator. Before you configure privileges for custom user roles in Business 360 Console, ensure that you assign relevant privileges for those custom user roles in Administrator.

Data access rules are available only for custom user roles. Before you define a data access rule, ensure that the custom user role has read access to data.

For more information about assigning privileges to custom user roles, see Chapter 2, “Managing privileges for custom user roles” on page 14.

## Supported assets and attributes

You can create data access rules for business entities and relationships. You can't configure data access rules for dynamic fields.

You can create conditions for the attributes of the protected business entity.

If you create data access rules with conditions for attributes to restrict access to business entity records used in hierarchies and relationships, the users can't access these records. However, the internal ID of these restricted records appears in the **Hierarchy** and **Relationship Graphs** tabs in the record details page of your business applications.

Effective in the February 2023 release, the option to create conditions for the following assets and attributes is available for preview:

You can create conditions for the following assets and attributes:

- Attributes of the business entity related to the protected business entity through a business entity record field.

  For more information about business entity record fields, see *Define the Data Model*.
- Relationships. Relationships associated with the protected business entity.
- Relationship attributes. Attributes of the relationship that's associated with the protected business entity.
- Related business entity attributes. Attributes of the business entity that's related to the protected business entity through relationships.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

# Data access rules based on record states

Data access rules apply to records based on their state, such as active and pending.

If a record is in the pending state, data access rules apply to the corresponding instance of the record that's in the active state. For example, when changes to a record aren't approved, the record is in the pending state. The data access rules apply to the previous instance of the record that's in the active state.

New records that aren't in the active state yet are in the pending state. Data access rules apply to the pending state of these records.

# Types of data access rules

You can achieve full or limited access to records by using data access rules.

To control access to a whole record, create a data access rule at the record level. To control access to a partial record, create a data access rule at the attribute level.

## Record-level data access rule

You can allow or deny user access to records. A record-level data access rule controls access to all the records that meet the conditions in the data access rule.

For example, configure a data access rule for a user role to allow access to records that have the postal country as the United States of America. When a user with the user role logs in to a business application and

searches for records, the user can see only those records that have the postal country as the United States of America.

## Attribute-level data access rules

You can allow or deny user access to specific attributes or field groups of records. An attribute-level data access rule controls access to the selected attributes and field groups of all the records that meet the conditions in the data access rule.

You can define data access rules in terms of who is denied access, who is allowed access, or both. Familiarize yourself with the behaviors of each approach and create an overall plan. For maintenance purposes, it can be more straightforward to use only one type of rule.

For example, configure a data access rule for a user role to deny access to phone numbers. When a user with the user role logs in to a business application and searches for records, the user can view all the details of records except the phone numbers.

**Note:** If you use a searchable hierarchy as a hierarchy filter, ensure that you don't apply attribute-level access rules to the business entities that are part of the hierarchy.

If you configure a field as facetable, ensure that you follow the guidelines listed below:

- Ensure that you don't create data access rules with **Deny** permission for the field or associated field group.
- Assign read privilege for facetable fields in the user role details page in **Security**. For more information about configuring read privilege for a business entity field, see "Configure field privileges for business application user roles" on page 36.

**Note:** If you don't follow the preceding guidelines, the facetable field don't appear in the filters panel when the user searches for records in the business applications.

# Setting permissions in data access rules

By default, all existing data access rules include the read permission.

Based on the permissions you select, users assigned to user roles that are associated with these data access rules can access data in MDM SaaS. You can edit an existing data access rule to set create, read, update, and delete permissions. When you configure a new data access rule, you can set the create, read, update, and delete permissions.

For example, you run a retail company and want to control inventory access to ensure data accuracy and security. Your company has user roles such as Warehouse Staff, Inventory Manager, and Auditor. To provide controlled access to product data, you need to assign different permissions to each user role.

To provide better access control and enhance data security, understand the following permissions that each user role requires:

- Warehouse Staff. A warehouse staff can add new items of the type electronics. They can view records of type electronics and update attributes, such as expiration date, batch number, and storage location for these records. However, they can't delete item records or specific details in the records.
  To provide the required access, create a record-level data access rule, set create and read permissions, and configure the rule condition with item type as electronics. To update values in attributes, such as expiration date, batch number, and storage location, create an attribute-level data access rule. In the attribute-level data access rule, select the attributes to protect, set the update permission, and configure the condition with item type as electronics.
- Inventory Manager. An inventory manager can delete all records that have the availability status as out of stock.
  To provide delete permission to the inventory manager user role, create record-level data access rule, set the delete permission, and specify the condition with the availability status as out of stock.
- Auditor. An auditor can only read finance-related information in item records from the United States.
  To enable only read access, create an attribute-level data access rule, select the attribute to protect, set read permission, and define a condition with country equals to United States.

**Note:** You can't set create permissions in data access rules that you configure with conditions on relationship assets.

For more information about configuring data access rules and setting permissions, see "Defining data access rules" on page 56 and "Configure rule conditions for business entity attributes" on page 57.

## Rules and guidelines for setting permissions in data access rules

Consider the following rules and guidelines when you set permissions in data access rules:

- Ensure that you enable read privilege for records and attributes in a business entity.
  If you set create, read, update, and delete permissions in data access rules but don't enable read privilege, or disable the existing read privilege, users can't access data in business applications. However, read privilege isn't required to access data through file import and REST APIs.
- You can't set create, update, delete, or read permissions in data access rules if existing data access rules contain similar values for fields in the Rule Definition section.
- To enable create, update, read, or delete permissions in data access rules, ensure that the user role has the required privilege for records and attributes in a business entity.
- If a business entity has an existing data access rule configuration, you can't edit any permissions for records and attributes in the business entity.
- If a user role doesn't have required permissions to access data in a business entity, MDM SaaS displays an validation error when users with the user role submit records in business applications.
- When you publish draft data access rules with create, update, and delete permissions, MDM SaaS doesn't run the publish data access rules job. However, MDM SaaS runs the job if you include read permission along with other permissions.
  A publish data access rules job runs only for data access rules set with the read permission. To reduce loading time when users search for records, the job assigns user roles to records based on the conditions set in data access rules. When users assigned to these user role search for records, MDM SaaS returns records quickly. However, when users create, update, or delete records, MDM SaaS can't assign a user role to records because these actions are performed in real time.

- If you set create permissions for attribute-level data access rules, MDM SaaS evaluates conditions defined in these rules with the existing data. If the existing data doesn't meet the defined conditions, MDM SaaS doesn't allow you to create data.
  For example, consider that your organization has an attribute-level data access rule that protects the first name and last name attributes. You define a condition that the middle name equals Mick. When you enter Mick as the middle name, MDM SaaS checks the existing data. The existing data doesn't contain middle name as Mick. When users enter values for first name, last name, and middle name, MDM SaaS doesn't allow you to add data because the condition isn't satisfied.

# Defining data access rules

Before you define a data access rule, ensure that you have set the required privileges for the custom user roles. If you rename a custom user role in Administrator, the data access rule isn't valid for the user role.

You can create and publish up to 50 record-level and 50 attribute-level data access rules for a business entity.

For more information about the limits on data access rules, see "Limits on data access rules" on page 62.

To define a data access rule, perform the following steps:


- "Step 1: Select the asset to protect" on page 56
- "Step 2: Configure the rule conditions" on page 57


## Step 1: Select the asset to protect

You can create a data access rule to protect an asset, its attributes, and the user roles to which you want to apply the rule.

1. Click **Security** > **Data Access Rules**.
2. Click **Add Data Access Rule.**

   The **New Data Access Rule** page appears.
3. Enter a unique name and a description for the data access rule.

   For more information about the guidelines to add name and description for data access rules, see "Rules and guidelines for adding rule name and description" on page 57.
4. Select an asset to protect. Currently, you can only protect business entities.
5. Select one of the following permissions for the selected asset:
   - Allow. Allows the user role access to asset data.
   - Deny. Denies the user role access to asset data.
6. In the **Affected User Roles** section, click **Add User Role**, and select the user roles to which you want to apply the data access rule.

   The **Add User Roles** page appears.
7. Select the user roles, and click **Add**.

   The selected user roles are added to the **Affected User Roles** section.
8. Click **Next**.

   The **Conditions** page appears.

## Rules and guidelines for adding rule name and description

Consider the following rules and guidelines when you add the data access rule name and description:

- Rule name can include the following special characters: ! * ~ _ -
- Rule name can't include characters from languages other than English.
- Rule name can't begin with the * character.
- Rule description can include the following special characters: ! * ~ _ - . ,

# Step 2: Configure the rule conditions

Define conditions based on which rules must be applied. You can define conditions based on attributes and field group values that are configured as searchable.

You can configure conditions for the following assets and attributes:

- Business Entity. To configure conditions for business entity attributes, see "Configure rule conditions for business entity attributes" on page 57.
- Relationship. To configure conditions for relationship, see "Configure the rule conditions for relationships" on page 58.


**Note:** The more the conditions, the longer it takes to process search requests. If you have performance issues after adding conditions, consider reducing the number of conditions.

## Configure rule conditions for business entity attributes

You can create conditions only for business entity attributes that you configure as searchable.

1. On the **Conditions** page, select the level to which you want to apply the rule in the **Rule Applies To:** list.
   - Record Level. Applies the rule to the entire record data.
   - Attribute Level. Applies the rule to attributes or field groups within the record.
2. If you select **Attribute Level**, select the attributes you want to protect.
3. To set permissions in data access rules, enable the Create, Read, Update, or Delete actions.

   The following image shows the actions that you can enable when you configure a data access rule:

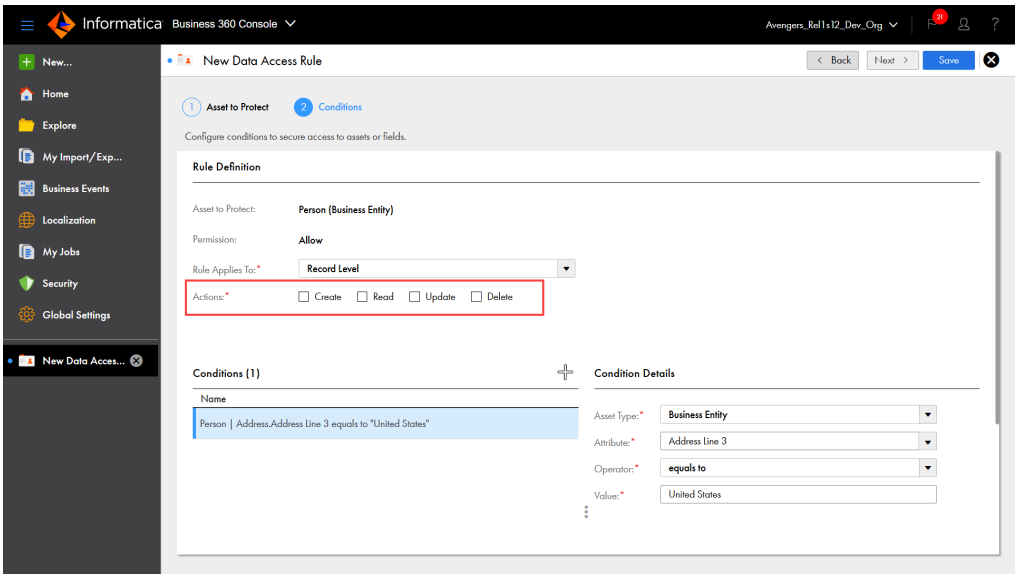

4. To add conditional statements, enter the required details in the **Condition Details** section.
5. In the **Asset Type** list, select **Business Entity** to create conditions for attributes of the protected business entity or attributes of the business entity related to the protected business entity through the business entity record field.

   **Note:** The conditions on attributes of related business entity in the business entity record field controls access to these attributes in the record details page and the related records component in your business application.

   Effective in the February 2023 release, the option to create conditions for the following assets and attributes is available for preview:

   You can create conditions for the following assets and attributes:

   - Attributes of the business entity related to the protected business entity through a business entity record field.

     For more information about business entity record fields, see Add business entity record fields.
   - Relationships. Relationships associated with the protected business entity.
   - Relationship attributes. Attributes of the relationship associated with the protected business entity.
   - Value of related business entity attributes. Attributes of the business entity related to the protected business entity.

   Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.
6. Select an attribute, and an applicable operator, and then enter a value. For more information about the supported operators, "Operators" on page 60.

   The conditional statement is listed in the **Conditions** section.
7. To add another condition, click **Add a condition** and repeat the steps 3 to 5.
8. Click **Save**.

   When you save the data access rule, the rule is saved as a draft after creation.
9. To review and publish draft data access rules, on the **Data Access Rules** tab, click **Publish Drafts**.

   For more information about reviewing and publishing data access rules, see "Reviewing and publishing data access rules" on page 61.

## Configure the rule conditions for relationships

You can configure conditions for relationships, relationship attributes, and related business entity attributes.

Effective in the February 2023 release, the option to create conditions for the following assets and attributes is available for preview:

- Attributes of the business entity related to the protected business entity through a business entity record field.

  For more information about business entity record fields, see Add business entity record fields.
- Relationships. Relationships associated with the protected business entity.
- Relationship attributes. Attributes of the relationship associated with the protected business entity.
- Related business entity attributes. Attributes of the business entity related to the protected business entity through relationships.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

1. On the **Conditions** page, select the level to apply the rule in the **Rule Applies To:** list.
   - Record Level. Applies the rule to the entire record data.
   - Attribute Level. Applies the rule to attributes or field groups within the record.
2. If you select **Attribute Level**, select the attributes you want to protect.
3. To add conditional statements, enter the required details in the **Condition Details** section.
4. In the **Asset Type** list, select **Relationship** to create conditions on relationships associated with the protected business entity and the relationship attributes.
5. Select a relationship that's associated with the protected business entity in the **Relationship Name** field.

   The **Direction** field that shows the relationship direction and the **Condition** list appears.

1. Select one of the following conditions:
   - **Exist**. Allows or denies access to attributes when the relationship exists for the records.
   - **Does Not Exist**. Allows or denies access to attributes when the relationship doesn't exist for the records.
   - **Value of Relationship Attributes**. Enables you to create conditions on values of relationship attributes.
   - **Value of Related Business Entity Attributes**. Enables you to create conditions on values of related business entity attributes.
6. Select an attribute for one of the following conditions:
   - **Value of Relationship Attributes**. The **Attribute** list displays the list of attributes of the selected relationship. Select the required attribute and specify an operator and a value.
   - **Value of Related Business Entity Attributes**.The **Attribute** list displays the attributes of the business entity related to the protected business entity through relationships. Select required attribute and specify an operator and a value.

     **Note:** If you select a picklist attribute, select a value from the list instead of entering a value.

   **Note:** The **Exist** and **Does Not Exist** conditions do not require an operator and value.

   After you specify all the required details, the condition is listed in the **Conditions** section.
7. To add another condition, click **Add a condition** and repeat steps 3 through 6.
8. Click **Save**.

   When you save the data access rule, the rule is saved as a draft after creation.
9. To review and publish draft data access rules, on the **Data Access Rules** tab, click **Publish Drafts**.

   For more information about reviewing and publishing data access rules, see "Reviewing and publishing data access rules" on page 61.

## Operators

The list of operators varies based on the type of attribute.

The following table lists the operators that you can use in the conditions within data access rules:

| Attribute Type | Operator |
|---|---|
| Boolean | - equals to<br>- not equal to |
| Date | - date equals to<br>- date is not equal to<br>- date greater than<br>- date lesser than<br>- date greater than or equal to<br>- date lesser than or equal to<br>- date between |
| Date and Time | - date equals to<br>- date is not equal to<br>- date greater than<br>- date lesser than<br>- date greater than or equal to<br>- date lesser than or equal to<br>- date between |
| Decimal | - equals to<br>- not equal to<br>- in<br>- not in<br>- exists<br>- not exists<br>- greater than<br>- lesser than |
| Double | - equals to<br>- not equal to<br>- in<br>- not in<br>- exists<br>- not exists<br>- greater than<br>- lesser than |
| Integer | - equals to<br>- not equal to<br>- in<br>- not in<br>- exists<br>- not exists<br>- greater than<br>- lesser than |


| Attribute Type | Operator |
|---|---|
| Text | - equals to<br>- not equal to<br>- starts with<br>- ends with<br>- in<br>- not in<br>- exists<br>- not exists<br>- contains<br>- does not contain |
| Picklist | - equals to<br>- not equal to<br>- in<br>- not in<br>- exists<br>- not exists |

# Reviewing and publishing data access rules

You must review and publish the existing and draft record-level data access rules in your organization. When you add, update, or delete a data access rule, the rule is saved as a draft after you create or update it. When you update data access rules that are in the draft state, users retain access to records based on the previously set conditions until you publish the drafts.

1. On the **Data Access Rules** tab, view the existing and draft data access rules.

   The following image shows the Data Access Rules tab with draft data access rules:

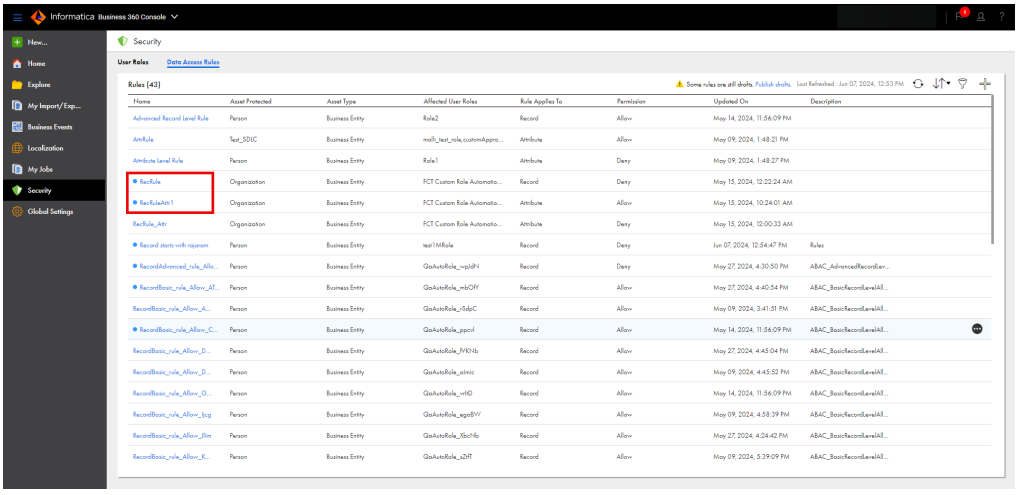


2. To publish the draft data access rules, click **Publish drafts**.

   The **Review and Publish Data Access Rules** dialog box appears.

3. In the **Review and Publish Data Access Rules** dialog box, view the total number of draft data access rules in each business entity.

4. To publish draft data access rules in a business entity, select the required business entity.

   **Note:** If an existing job is in progress or a publish data access rules job that ran earlier failed for a business entity, the business entity appears disabled.

   To publish draft data access rules for a business entity that appears disabled, wait until the current job completes or restart the failed publish data access rules job from the My Jobs page.

5. Click **Publish**.

A publish data access rules job is automatically created to publish draft data access rules for the business entity. After the publish data access rules job completes, users can access records based on the data access rules.

**Note:** To efficiently use resources, ensure that you review and publish all draft data access rules in a business entity at once.

For more information about monitoring the publish data access rules job, see Monitoring publish data access rules job.

# Deleting a data access rule

When you delete a data access rule, Business 360 Console marks the rule for deletion and changes it to the draft state. When you publish the draft, Business 360 Console permanently deletes the data access rule. After deletion, you can't recover the data access rule.

1. Click **Security** > **Data Access Rules**.
2. Hover over the required data access rule that you want to delete, and select **Delete** from the **Actions** menu.

   A confirmation dialog box appears.

3. Click **Delete**.

   When you delete the data access rule, MDM SaaS marks the rule for deletion. You can view the rule marked for deletion as a draft on the **Data Access Rules** tab.

4. To permanently delete the data access rule, on the **Data Access Rules** tab, click **Publish drafts**.

   You can publish the draft data access rule to permanently delete it.
   For more information about reviewing and publishing the draft data access rules, see "Reviewing and publishing data access rules" on page 61.

# Limits on data access rules

You can create and publish up to 50 record-level and 50 attribute-level data access rules for a business entity. The maximum limit includes both published and draft data access rules.

For example, consider that the Person business entity already has 50 record-level and 50 attribute-level data access rules. Out of the 50 record-level data access rules, 30 are published and 20 are in the draft state.

Consider the following rules and guidelines when you create or publish data access rules for the business entity:

- You can't create record-level and attribute-level data access rules because the business entity has exceeded the maximum limit of 50 record-level and 50 attribute-level data access rules.
- You can update the existing published and draft data access rules in the business entity.
- You can publish the 20 draft record-level data access rules for the business entity.
- After you publish the 20 draft record-level data access rules, you can update the existing 50 record-level data access rules and publish them.
  If you modify the rule type of an existing record-level data access rule to attribute-level data access rule, the rule moves to the draft state. However, you can't publish the draft data access rules because the business entity exceeds the maximum limit of 50 attribute-level data access rules.
- You can update the existing 50 attribute-level data access rules and publish them.

If an existing business entity has more than 50 record-level and 50 attribute-level rules, you can no longer create data access rules for the business entity.

Additionally, when you import the authorization asset, if the data access rule names in the asset from the source organization match the rule names in the target organization, MDM SaaS ignores the maximum limit and overwrites the existing data access rules in the target organization.

If the asset that you import contains new data access rules, MDM SaaS checks the maximum limit for each business entity in the target organization. If the maximum limit exceeds, the import of the asset fails.

# Data access rules example

The data access rules can include protected business entity, associated relationships, and business entities related to protected business entity through relationships and business entity record fields.

Effective in the February 2023 release, the option to create conditions for the following assets and attributes is available for preview:

- Attributes of the business entity related to the protected business entity through a business entity record field. For more information about business entity record fields.
- Relationships. Relationships associated with the protected business entity.
- Relationship attributes. Attributes of the relationship associated with the protected business entity.
- Value of related business entity attributes. Attributes of the business entity related to the protected business entity.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

For example, consider a scenario with the following requirements :

Provide access to records of employees from United States and from California or Florida and they are either employees of Informatica or contractors of Informatica.

To achieve the preceding requirement, you can create multiple data access rules which act as rules with both the AND and OR operators. Create multiple data access rules according to your requirement and assign them to multiple user roles. If you assign the user roles to a user in Administrator, the data access rules act as

rules with the AND and OR operators and the user gets access to the records in your business application according to the requirement .

Before you create a set of data access rules that act as rules with the AND and OR operators, familiarize the following concepts:

- A data access rule with multiple conditions acts as a rule with the AND operator. For example, if a data access rule has four conditions, the user with the custom user role can view the records that satisfy all the four conditions.
- Multiple data access rules assigned to a custom role behaves as a rule with the AND operator. For example, if you assign two data access rules to a custom user role, the user can view the records that satisfy both the data access rules assigned to the corresponding custom user role.
- If multiple data access rules assigned to different custom user roles and if a user is assigned all the custom user roles in Administrator, the multiple data access rules act as a rule with the OR operator. The following sample describes a set of rules that acts as rules with OR operator for a user:
  1. Rule A is associated to custom user role 1, and rule B is associated to custom user role 2.
  2. Custom user role 1 and custom user role 2 are assigned to a user in Administrator.
  3. Rule A and Rule B behave as rules with the OR operator for the user. The user can view the records that satisfy both rules or a single rule.

## Creating multiple data access rules

You can create multiple data access rules that act as rules with the AND and OR operator to get the results of a complex data access rule.

Consider the following sample rule for a `Person` business entity:

```
Employee Country=US (City Name contains California, Florida) AND (Relationship=Employee AND Organization Name=Informatica) OR (Relationship Name=Contractor AND Organization Name=Informatica)
```

To achieve the results of the preceding rule, you can create multiple data access rules that act as rules with the AND and OR operators.

The rule contains the following attributes, operators, conditions, values, and associated business entities:

| Attribute | Operator/ Condition | Value | Associated business entity | Type of business entity |
|---|---|---|---|---|
| Country | Equals to | United States | Person | Predefined business entity, which is the protected asset in your data access rule. |
| City Name | In | California, Florida | Person | Predefined business entity, which is the protected asset in your data access rule. |
| Organization Name | Equals to | Informatica | Organization | Predefined business entity that is related to the protected **Person** business entity. |

| Attribute | Operator/ Condition | Value | Associated business entity | Type of business entity |
|---|---|---|---|---|
| Relationship 1 | Exists | Employee | Organization | Predefined business entity that is related to the protected **Person** business entity. |
| Relationship 2 | Exists | Contractor | Organization | Predefined business entity that is related to the protected **Person** business entity. |

1. Create multiple data access rules based on the AND operators. Separate the applicable attributes for each rule. The following table lists the separated attributes:

| Attributes | Rule 1 | Rule 2 |
|---|---|---|
| Country | Applicable | Applicable |
| City | Applicable | Applicable |
| Organization Name | Applicable | Applicable |
| Relationship 1 | Applicable | Not Applicable |
| Relationship 2 | Not Applicable | Applicable |

   All the attributes in the sample rule is common except the relationships. The two relationships in the sample rule should act as rules that use OR operators. Hence, you need to create two individual data access rules using the AND operator.


2. After you separate the attributes, create individual data access rules with the AND operator in the following format:
   - Rule 1.Country=US (City Name in California, Florida) AND (Relationship Employee Exists and Organization Name=Informatica)
   - Rule 2.Country=US (City Name in California, Florida) AND (Relationship Contractor Exists and Organization Name=Informatica)

   **Note:** To create a data access rule with the AND operator, define conditional statements for each required attribute within the rule.

3. Assign each rule to individual custom user role. Assign the custom user roles to a single user in Administrator. The set of rules act as data access rules that uses both the AND and OR operators. The following table lists the assignment of data access rules to custom user roles and user:

| Data access rule | Custom user role assigned in the data access rule | User assigned in Administrator |
|---|---|---|
| Country=US (City in California, Florida) AND (Relationship Employee Exists and Organization Name=Informatica) | Custom user role 1 | User 1 |
| Country=US (City in California, Florida) AND (Relationship Contractor Exists and Organization Name=Informatica) | Custom user role 2 | User 1 |

The following image shows a sample rule configured on the **Security** page

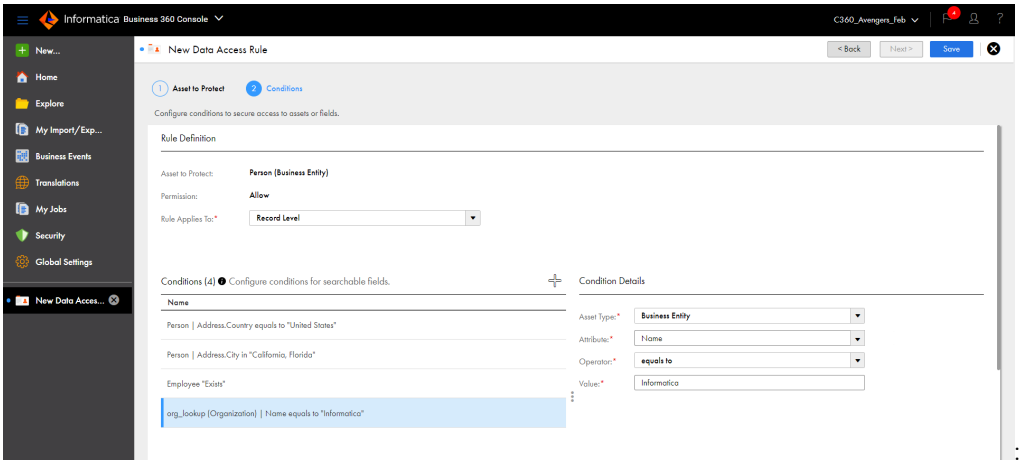


# Data access rules on search results in business applications

When users with custom user roles search for records in your business application, the search results are based on the data access rules that you configure for the custom user roles.

Consider the following guidelines when you configure data access rules:

- Multiple data access rules might impact the performance of search requests, so use an optimal number of data access rules with an optimal number of conditions.
- After you edit data access rules, users with custom user roles need to wait for at least ten minutes before they search for records in the business applications. If the users search for records immediately after the changes, the search results might be incorrect.

The data access rules impact the search results in the following ways:

- If you configure data access rules, the users can load and view up to 1000 matching records on the search results page. Without data access rules, users can load and view up to 10,000 matching records on the search results page.

- If you configure data access rules, the search results doesn't display the total number of records retrieved by the search request. The search results display the number of records that appears on the current page and this number varies when the user clicks load more.
- If data access rules deny access to Facetable fields for custom user roles, the user can't view these fields in the Filters panel of the search results page.
- If you configure and publish data access rules, MDM SaaS runs the publish data access rules job. When the job is in progress, users can load and view up to 1000 records in the search results. After the job completes, users can view up to 10,000 records in the search results.
- When the publish data access rules job is in progress, the count of records displayed in the Filters panel and on the search results page might vary.
  For example, a custom user role has access to 3000 records, until the job completes, users who belong to the custom user role can view the count as 1000 on the search results page. However, the Filters panel displays the count as 3000. After the job completes, the search results page displays the count as 3000.

  **Note:** A custom user role has access to 10,500 authorized records. Until the job completes, users who belong to the custom user role can view the count as 10,000 on the search results page. However, the Filters panel displays the count as 10,500.

## Data access rules with conditions on related business entity and relationship attributes

Effective in the February 2023 release, the option to create conditions for the following assets and attributes is available for preview:

- Relationships associated with the protected business entity.
- Attributes of the relationship associated with the protected business entity.
- Attributes of a business entity related to a protected business entity through a business entity record field.
- Attributes of a business entity related to a protected business entity through a relationship.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

If you configure conditions with the preceding assets and attributes in data access rules, the search process retrieve the results in the following sequence:

- The search request applies the conditions for business entity attributes or attributes of the business entity related to protected the business entity through the business entity record field and retrieves the records.
- The search request then applies the conditions for relationships, relationship attributes, and related business entity attributes through relationships in the set of matching records retrieved in the preceding step and displays the results.

## Records with validation errors

The data access rules that you configure for custom user roles impact records with validation errors listed on the search results page.

The data access rules might restrict access to fields with errors. When users search for records in business applications, they can view records with status as validation errors but can't view the fields with errors due to restricted access.

**Note:** The privileges that you assign in the user role details page might restrict users from viewing and updating fields with errors.

When users search for records in business applications, the Filters panel on the search results page lists the errors and types of errors along with the number of records retrieved. The number of records for each error and type of error includes records for which user access is restricted on selected attributes. The user can access the record details page but cannot view the fields with errors.

To enable users to view and fix the errors, perform the following steps:

- Edit the data access rules to allow access to fields with errors.
- Assign read and update privileges for fields with errors on the user role details page.

For more information about assigning record privileges, see *Managing privileges for custom user roles.*

# Data access rules on business application reports

The data access rules that you configure for the records in a business entity control the way users can view or create the reports on the business applications.

A data access rule impacts reports in the following ways:

- If you configure a record-level rule for a business entity, the users can't create reports for the business entity. Also, the users can't view reports or charts related to the business entity.
- If you configure a attribute-level rule for records in a business entity, the users can't view the reports or charts that use the affected attributes. Also, the users can't view the affected attributes when they create reports.

# Data access rules on workflow approval tasks in business applications

Data access rules that you configure for records impact the workflow approval process in business applications. The approvers view tasks in the workflow inbox based on the data access rules configured for their custom user roles.

If users create, update, merge, unmerge, or delete records and submit them for approval, the approval tasks aren't sent to the approvers who don't have permission to access the records.

For example, configure a record-level data access rule for a custom user role with a condition that denies access to Person records if the Country field is set to Australia. Users who belong to the custom user role can't view approval tasks related to records that contain Australia as the country value.

Approvers can't view approval tasks in the workflow inbox if they don't have permission to view all records that participate in the merge process.

Approvers can view approval tasks in the workflow inbox even if they don't have permission to view source records that participate in the unmerge process of a master record. However, they must have permission to view the master record that's submitted for the unmerge process.

For example, you unmerge records Dav, David, and David H from the record David Hendry and submit the record for approval. Approvers who have permission to access the David Hendry record can view the approval task in the workflow inbox even though they don't have permission to access other records.

However, approvers assigned to custom user roles that aren't affected by these data access rules can view approval tasks in the workflow inbox.

**Note:** If none of the approvers assigned with custom user roles have access to some records, users can't submit their changes related to those records for approval.

# Data access rules on Adaptive AI match models

Users can access the training data set associated with an Adaptive AI match model based on the data access rules that you configure for a business entity.

Data access rules impact the training of Adaptive AI match models in the following ways:

- If you configure attribute-level rules for a business entity, users can't start the training unless they have read access to all the match fields included in the model.
- If you configure record-level rules for a business entity, the training uses only the record pairs that users have permission to access.

# INDEX


## D

data access rules 52, 54, 57, 58, 61, 62, 68

## I

Informatica Global Customer Support
  contact information 7
Informatica Intelligent Data Management Cloud
  web site 6

## M

maintenance outages 7

## R

row level filtering 52, 54, 57, 58, 61, 62, 68

## S

status
  IDMC 7
system status 7

## T

trust site
  description 7

## U

upgrade notifications 7
users
  creating 12

## W

web site 6