Informatica® Cloud Business 360 Console
October 2026

What's New

Informatica Cloud Business 360 Console What's New
October 2026

© Copyright Informatica LLC 2021, 2026

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices and AI assistant acknowledgements are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2026-11-02

Table of Contents

Preface 5

Informatica Resources 5

- Informatica Documentation 5
- IDMC web site 5
- Intelligent Data Management Cloud Communities 5
- IDMC Marketplace 5
- Informatica Knowledge Base 6
- IDMC Trust Center 6
- Informatica Global Customer Support 6

Chapter 1: October 2026 7

Changelog October 2026 7

Important notices and upcoming changes 9

New features and enhancements 14

Changed behavior 16

Chapter 2: July 2026 20

Changelog July 2026 20

Important notices 21

New features and enhancements 24

Changed behavior 26

Chapter 3: April 2026 29

Changelog April 2026 29

Important notices 30

New features and enhancements 32

Changed behavior 37

Chapter 4: October 2025 41

Important Notices 41

New features and enhancements 42

Changed behavior 46

Chapter 5: Upgrade 52

Post-upgrade tasks for the latest release 52

- Reimport the match and merge process to update explainability metrics 52
- Advanced rule associations 57
- Update validation process objects to include group IDs 57
- Migrate assets 59
- Import the process for the reprocess master data job 59

Import the process for matching external data. 64
Reimport the process for matching external data. 68

Index. 75

Preface

Read *What's New* to learn about new features, enhancements, and behavior changes in Business 360 Console for the current release. You can also learn about upgrade steps that you might need to perform.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

IDMC web site

You can access the Informatica® Intelligent Data Management Cloud™ (IDMC) web site at http://www.informatica.com/cloud.

Intelligent Data Management Cloud Communities

Use the IDMC Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

To access the IDMC Community, see Master Data Management SaaS Community.

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

IDMC Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

IDMC Trust Center

The IDMC Trust Center provides information about Informatica security, compliance, and privacy practices.

You can access the trust center at https://trust.informatica.com/.

Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the IDMC Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

October 2026

The October 2026 release of Business 360 Console includes the following updates.

Changelog October 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
October 30, 2026	Deleted	Reindex job to enhance search performance in "Post-upgrade tasks for the latest release" on page 52
October 30, 2026	Deleted	Reindex records to view filter values in "Post-upgrade tasks for the latest release" on page 52
October 23, 2026	Added	"MDM Extension for Databricks" on page 16
October 22, 2026	Added	"Ingress jobs with no extracted records" on page 19
October 22, 2026	Added	Default values in "Preview initiated" on page 9
October 21, 2026	Deleted	Default values in "New features and enhancements" on page 14
October 21, 2026	Modified	"Preview initiated" on page 9
October 21, 2026	Deleted	Business events based on native workflows in "New features and enhancements" on page 14
October 21, 2026	Deleted	Preview lifted in Important notices and upcoming changeson page 9
October 16, 2026	Modified	"Enrichment and Validation Orchestrator" on page 15

Publication Date	Type of Change	Section Title
October 15, 2026	Added	Decimal valueson page 19
October 12, 2026	Added	Org version in Important notices and upcoming changeson page 9
October 12, 2026	Modified	Apache NiFi 2.5.0 runtime engine for Streaming Ingestion and Replication in Important notices and upcoming changeson page 9
October 9, 2026	Modified	"Preview initiated" on page 9
October 9, 2026	Added	Apache NiFi 2.5.0 runtime engine for MDM SaaS in Important notices and upcoming changeson page 9
October 8, 2026	Modified	"Preview initiated" on page 9
October 8, 2026	Modified	"Enrichment and Validation Orchestrator" on page 15
October 7, 2026	Modified	Important notices and upcoming changeson page 9
October 7, 2026	Modified	Business events based on native workflows
October 2, 2026	Added	Multilingual configuration in Important notices and upcoming changeson page 9
September 30, 2026	Modified	Important notices and upcoming changeson page 9
September 24, 2026	Added	"Field limits" on page 16
September 24, 2026	Added	Business events based on native workflows
September 24, 2026	Modified	Important notices and upcoming changeson page 9
September 18, 2026	Added	Localized picklist field valueson page 0
September 10, 2026	Initial publication	

Important notices and upcoming changes

The October 2026 release of Business 360 Console includes the following important notices:

Preview initiated

Effective in the October 2026 release, the following functionalities are available for preview:

Configure privileges for custom user roles to access Reference 360 assets

You can configure privileges for custom user roles to control access to reference data assets, attributes, code values, and workflows.

For more information about configuring privileges for custom user roles, see *Getting started with Reference 360* in Reference 360 Help.

REST API Explorer

You can now browse, test, and download Business 360 REST APIs directly from the REST API Explorer, a Swagger UI in the Business 360 Console.

Business events based on native workflows

You can design native workflows in Business 360 Console for business events related to business entity records, relationships, and hierarchies. Configure these business events for create, update, and delete actions on data through business applications and REST API. You can configure business events for changes to all field types in a business entity, including dynamic fields.

You can also configure business events to skip workflows for record data that passes validation against objectives that you specify.

Users can view, assign, act on, and comment on the related tasks in the task inbox of business applications. They can assign, act on, or comment on tasks individually or on multiple tasks at once. Users can also track the status of their updates in the ticket manager. A ticket is created automatically when a workflow is triggered, and shows workflow milestones, statuses of all the tasks in a workflow, and the comments as reviewers complete their tasks.

For example, a ticket for a product onboarding workflow lists all the tasks, such as validation of product name, brand name, and description, and approval or rejection of the product. The ticket is closed after the product is approved or rejected.

Disabling and enabling business events

You can disable business events that are based on native or external workflows. Disable business events to prioritize other business events or to save them for future use. You can enable disabled business events when you want to use them.

Search enhancements

The search process includes the following changes:

Search within specific field group entries

When you search for records using multiple conditions on fields in the same field group or nested field group, the search evaluates the conditions within each entry, and returns a record only if a single entry matches all the conditions.

For example, a record contains home and office address entries in the Address field group. The home address has city New York and street Main Street. The office address has city Chicago and street Oak Avenue.

If you use the Search REST API to search for the record with the condition `city = Chicago` AND `street = Main Street`, the search doesn't return the record because no single address entry matches both conditions.

Previously, the search returned the record if the conditions matched across different entries.

Find records that exceed the field group entry limit

The generate search index job indexes a maximum of 25,000 field group and nested field group entries in a record. If a record contains more than 25,000 entries, only the first 25,000 entries are indexed. A search returns results only for indexed data.

If a record exceeds the field group entry index limit, the Search REST API response includes the error code `100002`, which you can use to identify the affected record. You can also pass the error code in your request to retrieve all records that exceed the index limit.

Note: To apply these changes, reindex the records in your business entities. To reindex the records, run the Generate Search and Report Indexes or Match Keys job by using the MDMSearchIndex process.

Localized picklist field values

You can now manage reference data assets in multiple languages using the following capabilities:

Multilingual configuration

You can now have multilingual reference data in Reference 360. Configure the languages that you want to localize reference data into, then add values for each one. Enable name and description attributes to store values in multiple languages, and enter reference data set or code list attribute values for each language. When business users access applications in a localized language, picklist fields display values in that same language.

Search in localized languages

If picklist values are multilingual, you can now search for records with picklist values in any enabled language, regardless of your browser locale in business applications. Additionally, when you use a filtered search, business applications display picklist values based on your browser locale. However, when you sort records or use auto-suggest in business applications, MDM SaaS continues to use the default language configured for the field values.

Note: To search for records with picklist values in localized languages from existing business entities, run the batch job to reindex records.

For more information, see *Manage localized assets* in Reference 360 Help.

Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following features and enhancements:

Enrich and validate master records during batch processing

You can now configure objectives to run on master records when they are processed in batches.

Enhanced user interface for trigger settings

The triggers settings in the advanced settings of an objective now appear in a tabular layout instead of individual sections. The tabular layout arranges triggers, the option to enable or disable each trigger, the option to reject records with errors, and trigger conditions in adjacent columns.

Draft records

If you configure objectives to reject records, MDM SaaS still allows users to save the drafts with validation errors. As a result, they can continue to work on the drafts with validation errors until they're ready to submit them.

Configurations for the product experience agent

Users of business applications can now use the product experience agent to classify and enrich records with product data.

You can configure the following settings for the product experience agent:

- On request. Determines whether CLAIRE can run objectives on request when users prompt CLAIRE Copilot to enrich records. You can now specify whether objectives run automatically or on request. Automatic objectives run when records are created or updated. The existing objectives are automatic objectives by default.
- CLAIRE as a trigger. Determines whether CLAIRE can run an objective.
- CLAIRE-Based Enrichment plugin. Classifies records with product data. When users prompt CLAIRE Copilot to classify records, MDM SaaS runs the data quality objectives that use the CLAIRE-Based Enrichment plugin and classifies the records.

New triggers for objectives

You can now configure objectives with the following triggers:


- Bulk edit. Triggers objectives when users edit records in bulk.
- Merge job. Triggers objectives when match and merge jobs run to merge records.
- Recalculate trust scores job. Triggers objectives when recalculate trust scores jobs run. When you run the job for updated survivorship configurations, objectives now enrich and validate records. The objectives run only for master records that have updated values because of survivorship configuration.
- Reprocess master data job. Triggers objectives when reprocess master data jobs run. If you update enrichment and validation configurations after master records are created, you can reprocess the master records to apply the updated enrichment and validation configurations. The objectives run only for master records that have updated values because of survivorship configuration.

Product experience agent

You can enable or disable the product experience agent for individual business entities. When users prompt the product experience agent to enrich and classify records in business applications, the agent shares the metadata and data with external LLMs. These external LLMs don't use them to train their models. The data residency and retention policies that apply to CLAIRE GPT also apply to the product experience agent. When you enable the product experience agent, you give MDM SaaS your consent to share the information.

The product experience agent is designed to enrich and classify only product data. Before you enable the agent for a business entity that doesn't represent product data, assess whether sharing the data of the business entity with external LLMs meets your organization's requirements.

The following image shows the properties of Person business entity with the option to allow the product experience agent to share data with external LLMs:

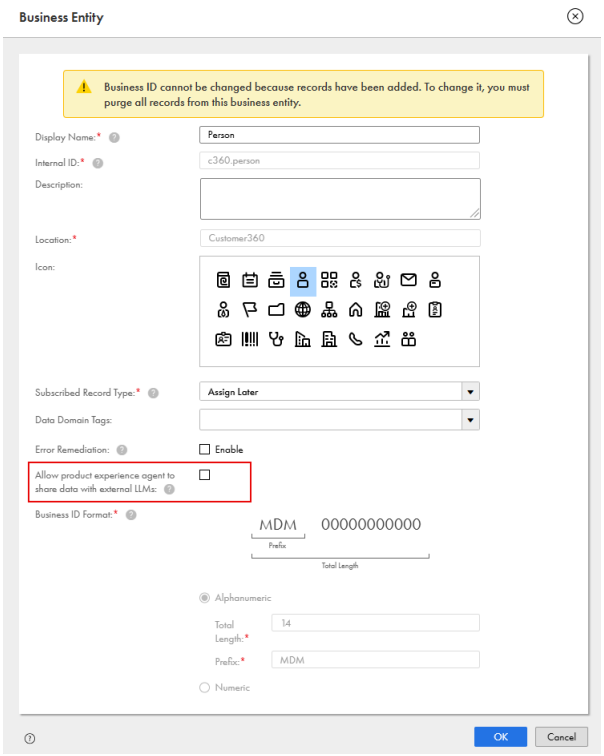

Default values

You can now configure default values for all business entity fields. When users create a record, MDM SaaS automatically populates the fields with their default values, which users can choose to edit. When you ingress, import records, or create records through REST APIs, fields without values are updated with their default values.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming changes

We want to let you know about the following upcoming changes:

Validation and cleansing response parameter

In the February 2027 release or later, Informatica requires you to include the groupId parameter in root field objects in the response that an Application Integration process returns for a validation or cleansing request.

To prepare for this change, update existing validation and cleansing processes to include the groupId parameter for root fields.

Informatica intends to include this functionality in February 2027 or later but might choose not to in accordance with changing market or technical circumstances.

Validation of output payloads from Application Integration processes

In the February 2027 release or later, Informatica requires that all existing Application Integration processes that you use in rule associations return valid payloads. If the processes return empty payloads, the associated rule associations will result in the Exception status instead of the Undecided status.

To prepare for this change, ensure that existing processes return a valid response to MDM SaaS.

Informatica intends to include this functionality in February 2027 or later but might choose not to in accordance with changing market or technical circumstances.

JWT authentication

We want to let you know that starting in an upcoming release, JWT authentication token values will be limited to a maximum of 2000 characters.

Deprecated support

Session-based authentication

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use REST V2 Connector to call IDMC APIs.

Apache NiFi 2.5.0 runtime engine for Streaming Ingestion and Replication

Streaming Ingestion and Replication uses the Apache NiFi version 2.5.0 runtime engine. No user action is required. The upgrade includes key updates to custom processors and AMQP NAR components. Streaming Ingestion and Replication is now enhanced to ensure compatibility with JDK 21, as Apache NiFi 2.5 requires a minimum of JDK 21 version to run effectively.

Org version

The October 2026 release doesn't include any data model changes. As a result, the org version for all MDM SaaS business applications remains at `202607.01`.

For more information about the versions in MDM SaaS, see MDM SaaS versions.

New features and enhancements

The October 2026 release of Business 360 Console includes the following new features and enhancements.

Mapping fields

In modernization projects, you can now use an interactive user interface to review and map objects between the MDM Hub and MDM SaaS. You no longer need to generate mapping files to manually map fields.

You can continue to edit or modify manual mapping files for existing modernization projects that aren't completed.

For more information about mapping fields through the user interface, see *Mapping fields using custom mapping*.

Modernization project enhancements

The modernization projects now include the following enhancements:

- You can create a consolidated summary of modernization progress across selected modernization projects. The summary shows key metrics on a read-only page, such as the number of objects modernized, in progress, pending, and excluded from modernization.
- You can now archive modernization projects to accommodate more active projects. However, archived projects are read-only and you can't move them to the active state again.

For more information about creating a summary of modernization projects and archiving modernization projects, see *Summary of modernization projects* and *Archiving modernization projects*.

Search Match API version 2

When master records belong to multiple populations, you can now specify the population parameter in the Search Match API version 2 to search within a specific population. For example, if your customer data includes the Chinese, Japanese, and US populations, specify Chinese as the population parameter to return master records that match the Chinese population.

To search by population, the master records must have population names:

- For master records created after the April 2026 release, MDM SaaS automatically assigns population names to master records based on the populations of their source records.
- For records created before the April 2026 release, use the *Migrate API* to add population names to master records.

After you assign populations to master records, run the Generate Search Indexes or Match Keys job to generate match keys based on the assigned population.

For more information about multi-population support and how population names are assigned to master records, see *Search Match API version 2* and *Assigning populations to master records*.

Search

To enhance search accuracy, MDM SaaS now returns more relevant results. When you search for records, you might notice changes in your search results. For example, a search for a record with the first name Benjamin also returns records with the first names Ben and Benny.

Reset organization

You can reset your organization to its default, newly provisioned state. A reset permanently deletes all data, assets, configurations, jobs, and job schedules in MDM SaaS. Consider a reset when configurations or extensive customizations make a development or QA organization difficult to manage, and starting over is simpler than fixing it. To enable reset for your organization, contact Informatica Global Customer Support.

For more information about resetting organizations and monitoring reset organization jobs, see *Resetting organizations* and *Monitoring reset organization jobs*.

Ingress records

When you run an ingress job, you can update individual fields in a target record instead of replacing the entire record. The update applies only to the fields in the source system that are mapped to the target fields. Other fields remain unchanged. You can also control how the update handles empty values in mapped fields. When a mapped field is empty in the source system, you can overwrite the target value with null or leave it unchanged.

Note: This functionality is available only after you migrate your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release.

For more information about updating fields containing data, see *Defining ingress jobs*.

Dynamic pool

You can now create folders within a dynamic pool to group dynamic fields by topic or purpose. You can add dynamic fields to folders at any level and drag them to rearrange their order. When you design your custom page layout, you can add these folders to the fields component on the page.

For more information about dynamic pools, see *Define the Data Model*.

Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following new features and enhancements:

Error messages in Application Integration-based plugins

The Application Integration-based plugins for validation and cleansing can now return error messages for the fields that fail validation. If you configure the rule associations to show these messages, those fields display the error messages. As a result, you can now show specific reasons for validation failures instead of a generic message.

Non-anonymous process authentication

If you enable a data enhancement rule to use a process with non-anonymous access, your organization can now use the session ID authentication type in addition to the JWT authentication type.

Empty field handling

You can now choose to run objectives on empty fields in lenient mode or controlled mode.

In the lenient mode, an objective runs when sibling fields at different levels, such as root fields and field groups, are updated. You can map business entity fields to input fields that mirror the field structure of a business entity. When input fields of an objective are empty and their sibling fields change, the objective can run on empty fields even if those fields belong to different levels.

In the controlled mode, an objective runs only when sibling fields at the same level, such as a single field group or a nested field group, are updated. Use controlled mode when you want control over which fields an objective can run on when its input fields are empty.

REST API

Business 360 REST API includes the following new resource:

Hierarchy API

Use the hierarchy REST API to create, update, delete, and filter hierarchies. You can add, retrieve, and delete parent and child records. You can move records within a hierarchy or across hierarchies. You can also retrieve the exact location of a specific record in a hierarchy by returning all paths from the parent record to the child record. Additionally, you can find a list of hierarchies that a record is part of based on its business ID.

For more information about the REST APIs to manage hierarchies, see *Business 360 REST API Reference*.

MDM Extension for Databricks

Use MDM Extension for Databricks to publish master data for the customer, supplier, product, and location domains from MDM SaaS to Databricks Data + AI Platform. You can use the published data for integrated analytics, machine learning, and agentic AI applications. With trusted master data, you can improve customer segmentation, strengthen supplier and supply chain risk management, and optimize retail and product performance.

For more information about MDM Extension for Databricks, see *MDM Extension for Databricks*.

Changed behavior

The October 2026 release includes the following changed behaviors.

Field limits

To maintain application performance as you read, create, or update data, MDM SaaS now limits a business entity to 350 enabled fields, including field groups. The system fields and disabled fields within a business entity don't count toward the limit. The limit applies when you create, edit, or import a business entity.

By default, for business entities that you created before the October 2026 release and that are close to or exceed the limit,Informatica sets its limit to the current field count plus a buffer of 20 fields. You can't import a business entity that has a buffer and more than 350 fields. Before you import such a business entity, ensure that it has 350 or fewer enabled fields. To increase the limit in the organization where you want to import the business entity, contact Informatica Global Customer Support.

Previously, MDM SaaS didn't limit the number of fields or field groups in a business entity.


For more information, see Limits and thresholds.

Migrate rule associations

You can now migrate your basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator from the **Global Settings** page. You can migrate the rule associations only once for each organization. Informatica recommends that you first migrate rule associations to use Enrichment and Validation Orchestrator in your development and QA organizations. After you complete testing the migrated rule associations, migrate them in your production organization.

When you migrate, MDM SaaS runs the migrate rule associations job. You can track the status of the job on the **Global Settings** page or monitor the job on the **My Jobs** page.

The following image shows the Rule Association Migration tab on the Global Settings page:

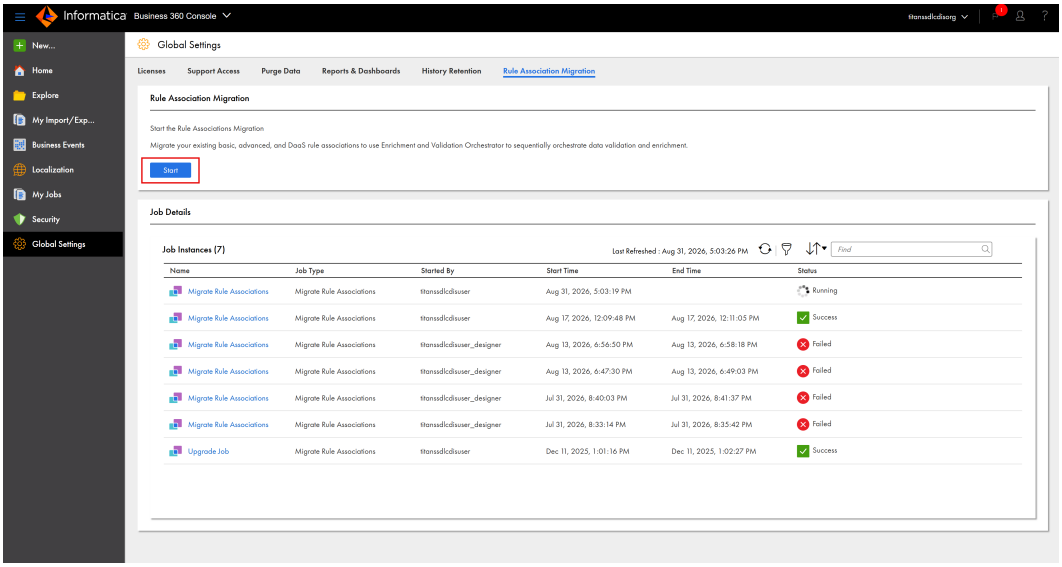

If you have already migrated your rule associations in existing organizations, the option to start the migration is disabled.

Previously, you migrated existing rule associations from the **Home** page of Business 360 Console.

For more information about migrating existing rule associations, see *Configure Global Settings*.

Match explainability metrics

You can now run match and merge jobs that only update match explainability metrics without performing matching. Normally, a match and merge job updates these metrics as part of performing matching, but you can now exclude the metrics update to complete the job faster.

Previously, the match process updated match explainability metrics only as part of a match and merge job.

For more information about updating match explainability metrics, see *Defining match and merge jobs*.

For more information about the post-upgrade tasks that you must perform to update match explainability metrics, see *Post-upgrade tasks for the October 2026 release*.

Candidate selection criteria

You can now configure candidate selection criteria separately and associate them with match models. As a result, match keys no longer regenerate each time you configure candidate selection criteria, which significantly improves match process performance. You can configure up to 10 candidate selection criteria for each business entity. Business entities that already exceed the limit retain the existing criteria, but you can't add new criteria.

Previously, you could create candidate selection criteria only as part of match model configuration.

For more information about candidate selection criteria, see *Candidate selection criteria*.

Search enhancements

The search process includes the following changes:

Search configuration for dynamic field values

You can now enable up to 5,000 searchable and 5,000 facetable dynamic fields in an organization.

Previously, you could enable only up to 50 searchable and 50 facetable dynamic fields in an organization.

Index limits

To optimize performance and enhance search results, the search process indexes 100 dynamic fields for each record. If a record exceeds this limit, MDM SaaS doesn't index the other fields, and searches on those fields don't return the record.

If a record exceeds the 100 index limit, the Search REST API response includes the error code `100001`, which you can use to identify the affected record. You can also pass the error code in your request to retrieve all records that exceed the index limit.

Previously, you couldn't identify records with fields that weren't completely indexed.

Note: To apply these changes, reindex the records in your business entities. To reindex the records, run the Generate Search and Report Indexes or Match Keys job by using the MDMSearchIndex process.

For more information about configuring search for dynamic field values and dynamic fields index limit, see *Getting Started with MDM SaaS* and *Business 360 REST API Reference*.

Internal ID of assets

After you delete an asset, you can reuse its internal ID for other assets.

Previously, you couldn't reuse the internal ID of a deleted asset.

For more information about deleting assets, see *Delete custom assets.*

Merge job

When you merge records, the merge job updates the first 1,000 relationships to the surviving master record and then ends its run. The resolve long-running operations job then updates the remaining relationships.

For example, when you merge records A and D, MDM SaaS updates the relationships of record D to reference master record A. If record D has more than 1,000 relationships, such as D-E and D-F, the merge job processes the first 1,000 updates. The job changes the business ID from D to A. As a result, the relationships become A-E and A-F. The merge job then ends its run, and the resolve long-running operations job updates the remaining relationships.

Previously, MDM SaaS considered a merge job complete only after it updated all relationships to reference the new master record.

Advanced rule associations

When you configure advanced rule associations in organizations that were created after the October 2025 release, MDM SaaS now displays error messages on all input fields. If you have existing advanced rule associations in these organizations, MDM SaaS doesn't apply this change until you update the rule associations.

However, MDM SaaS displays error messages on applied fields for advanced rule associations in organizations where you already migrated the rule associations during the April 2026 release.

Previously, MDM SaaS displayed error messages only on the applied fields for advanced rule associations that you created after the October 2025 release.

If you want to control how MDM SaaS displays error messages for advanced rule associations in both the organizations, see “Advanced rule associations ” on page 57.

For more information about configuring advanced rule associations, see *Configure Data Quality*.

Enrichment and Validation Orchestrator

A rule association configured with the Data Quality - Transformation plugin throws an exception if its output exceeds the maximum length of the target string field. Additionally, the rule association doesn’t return any value to the output field.

Previously, the rule association automatically trimmed the output to fit the length of the field.

For more information about the Data Quality - Transformation plugin, see *Configure Data Quality*.

Decimal values

When you run an ingress or file import job after you migrate your rule associations to use Enrichment and Validation Orchestrator, MDM SaaS removes trailing zeros after the decimal point. For example, if you import `145.00`, MDM SaaS retains the value as `145`. This change applies only to decimal fields that have no rule associations configured.

Previously, when you ran an ingress or file import job, MDM SaaS retained decimal values with trailing zeros.

For more information about migrating rule associations to Enrichment and Validation Orchestrator, see *Configure Data Quality*.

Ingress jobs with no extracted records

If the extract step of an ingress job that uses the Business 360 FEP Connector doesn't extract any records, MDM SaaS now sets the status of the Transform step and the job to Warning and ends the job.

This applies to organizations in which you migrated rule associations to Enrichment and Validation Orchestrator in the April 2026 and July 2026 releases. It also applies to new organizations that you created after the October 2025 release.

Previously, MDM SaaS ran the Transform, Load, Enrichment, Index for Search, and Generate Tokens steps and set the job status to Success.

For more information about ingress jobs, see Define Jobs.

CHAPTER 2

July 2026

The July 2026 release of Business 360 Console includes the following updates.

Changelog July 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
August 21, 2026	Added	"Customer 360 Extension for Salesforce" on page 28
August 7, 2026	Added	"MDM Extension for Data 360" on page 25
August 7, 2026	Added	"Customer 360 Extension for Salesforce" on page 25
August 6, 2026	Added	Search enhancementon page 0
July 31, 2026	Added	Data quality rule associationson page 27
July 23, 2026	Added	"Upcoming changes" on page 22
July 9, 2026	Added	"Merge API" on page 27
July 9, 2026	Added	"Deprecated support" on page 23
July 9, 2026	Modified	"Subscribed record type and data domain tags" on page 25
July 2, 20226	Modified	Upcoming changeson page 22
July 2, 20226	Modified	Preview initiatedon page 21
July 2, 2026	Added	"Resolve Long-Running Operations job" on page 27

Publication Date	Type of Change	Section Title
June 29, 2026	Added	Enrichment and Validation Orchestratoron page 24
June 25, 2026	Modified	Preview initiatedon page 21
June 18, 2026	Added	"REST API" on page 25
June 18, 2026	Added	"Subscribed record type and data domain tags" on page 25
June 11, 2026	Initial publication	

Important notices

The July 2026 release of Business 360 Console includes the following important notices:

Preview initiated

Effective in the July 2026 release, the following functionalities are available for preview:

Business events based on native workflows

You can use native workflows that you design in Business 360 Console to define business events for business entity records, relationships, and hierarchies. Configure these business events for create, update, and delete actions on data through business applications, ingress, and REST API. You can also configure business events for changes to all field types in a business entity, including dynamic fields.

When you configure business events for create and update actions on record data, you can choose to skip workflows for data that rule associations have successfully validated or enriched.

Stakeholders can view, act on, and add comments to related tasks in the task inbox of business applications. In the ticket manager, they can also view the tickets for workflows to which they're assigned. When a workflow is triggered, MDM SaaS automatically creates a ticket with details, such as task statuses and comments.

Disabling and enabling business events

You can disable a business event to prioritize another one or to save it for future use. You can enable disabled business events when you want to use them. If multiple business events apply to a change, the most recently updated business event takes precedence.

Ingress records

When you ingress records, you can now update only fields that contain values without overwriting other fields with null values.

Note: After migrating your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release, you can update only fields that contain values without overwriting other fields with null values.

Objectives for CLAIRE Copilot

You can now classify records by configuring objectives with the CLAIRE-Based Enrichment plugin. When users prompt CLAIRE Copilot to classify records, data quality objectives that use the CLAIRE-Based

Enrichment plugin run. You can also specify whether you want to run objectives automatically when records are created or updated, or on request when users request CLAIRE Copilot to enrich records using objectives. You can configure CLAIRE as a trigger for the on-request objectives.

Note: By default, all objectives created before the April 2026 release that use triggers, such as ingress, business applications, and REST APIs, are enabled as automatic objectives.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming changes

We want to let you know about the following upcoming changes:

Adaptive AI match training

You need to use sample data sets to train Adaptive AI match models for improving prediction accuracy.

To prepare for this change, you can create sample data sets by importing CSV files or filtering existing records.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Match explainability metrics

A new process type will be available within a match and merge job for updating match explainability metrics. Run a match and merge job exclusively to update the metrics. Alternatively, trigger the new process type as part of match and merge job.

To prepare for this change, import the new process type into your organization and update existing match and merge jobs to include the new process type. To import the new process type, contact Informatica Global Customer Support.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Migration of rule associations

Informatica plans to automatically migrate existing basic, advanced, and DaaS rule associations in your organizations to use Enrichment and Validation Orchestrator.

To avoid automatic migration, run the migrate rule associations job from the **Home** page.

After migration, you can continue to create basic, advanced, and DaaS rule associations in your organization.

Informatica intends to include this functionality in a future release but might choose not to in accordance with changing market or technical circumstances.

Validation and cleansing response parameter

In the October 2026 release or later, Informatica requires you to include the groupId parameter in root field objects in the response that an Application Integration process returns for a validation or cleansing request.

To prepare for this change, update existing validation and cleansing processes to include the groupId parameter for root fields.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Validation of output payloads from Application Integration processes

In the October 2026 release or later, Informatica requires that all existing Application Integration processes that you use in rule associations return valid payloads. If the processes return empty payloads, the associated rule associations will result in the Exception status instead of the Undecided status.

To prepare for this change, ensure that existing processes return a valid response to MDM SaaS.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Candidate selection criteria

In the October 2026 release or later, you can configure up to 10 candidate selection criteria for each business entity.

Business entities that already exceed the limit retain the existing criteria, but you can't add new criteria.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Search enhancement

In the October 2026 release or later, MDM SaaS will use an updated search synonym file to enhance search accuracy. The file contains synonym mappings that enable searches to return more relevant search results. For example, if you search for a record with the first name Benjamin, the search results also include records with the first names Ben and Benny.

After the update, you might notice changes in search results.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

JWT authentication

We want to let you know that starting in the October 2026 release or later, JWT authentication token values will be limited to a maximum of 2000 characters.

Dropped support

Effective in the July 2026 release, Informatica dropped support for the following functionalities:

Search using Application Integration through Customer 360 Extension for Salesforce

Support is dropped for searching for similar records using Application Integration through the Customer 360 Extension for Salesforce package.

If you deploy Customer 360 Extension for Salesforce, use the configurable Lightning component available in the extension package to search for similar records.

For more information about searching for similar records using the Lightning component, see *Customer 360 Extension for Salesforce*.

Guided assistance for installing Customer 360 Extension for Salesforce

Support is dropped for the guided assistance for installing Customer 360 Extension for Salesforce.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in a future release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs with JSON Web Tokens for user authentication. The organization administrator can change the authentication type used for REST API requests on the **Settings** page in Administrator. When the administrator enables JWT authentication, browser-based user interface communications use JWT automatically.

For REST API calls, session IDs must still be included in request headers. However, with JWT authentication, the session value carries a JWT with a fixed expiry time configured in Administrator. As a result, update REST API scripts to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the October 2026 release, JWT will be the default authentication method.

Note: Don't enable JWT authentication if you use API Manager or if you use REST V2 Connector to call IDMC APIs. API Center, which replaces API Manager, supports JWT authentication.

New features and enhancements

The July 2026 release of Business 360 Console includes the following new features and enhancements.

Watch the What's New video to learn about the new features and enhancements in the July 2026 release.

Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following new features and enhancements:


Downgrade trust score of field groups

You can now configure a rule association to downgrade the trust score for an entire field group if one of its input fields fails validation.

Display validation messages from Data Quality plugins

You can now configure rule associations to use validation messages from Data Quality plugins.


The following image shows the Message Type set to Plugin in a rule association:

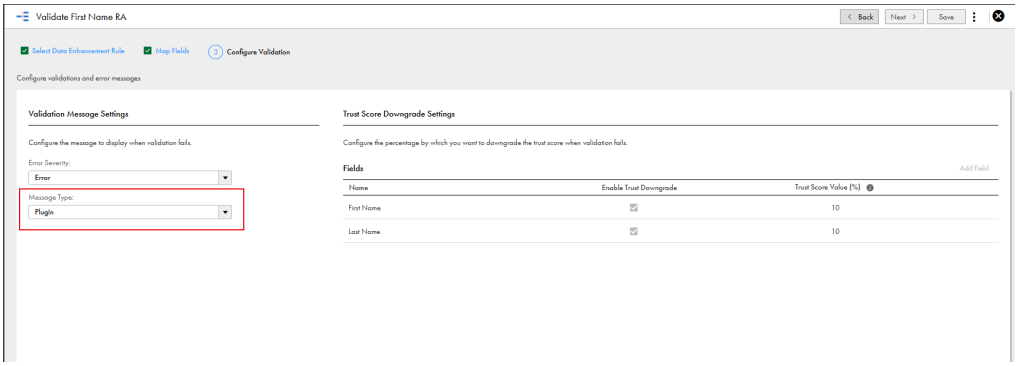

Enrich records with related records

You can now configure rule associations to relate master records. The relationship you select for a rule association determines the relationship that MDM SaaS automatically establishes between records. For example, you can relate a smartphone record with records for phone cases, screen protectors, or headphones to support cross-sell recommendations.

The following image shows the Map Fields page of a rule association with a target relationship selected:

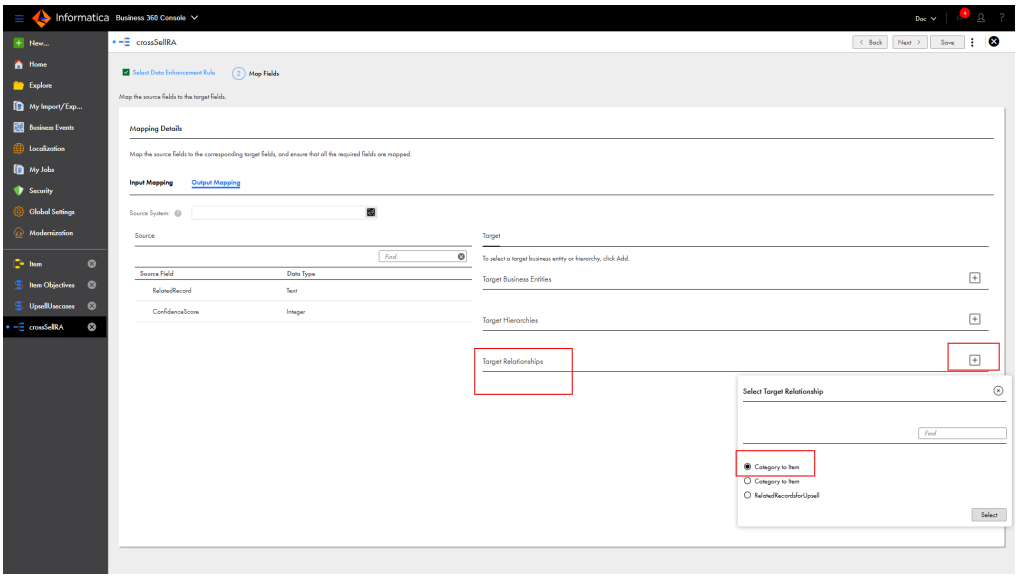

REST API

Business 360 REST API includes the following additional parameter within existing resources:

Read Source Record API

The Read Source Record API now returns the populationName parameter. This parameter includes population details, such as name and code, for a record.

For more information about the populationName parameter, see *Business 360 REST API Reference*.

Subscribed record type and data domain tags

You can now assign a subscribed record type to each business entity in your organization. The subscribed record type indicates the record type that you are licensed to use for managing master data. For example, you can assign Customer B2C as the subscribed record type for individual customer records. MDM SaaS uses the subscribed record type to report data consumption relative to your record entitlements.

To add context to the subscribed record type, select predefined data domain tags, such as patient, employee, person, and student, or specify custom tags to describe your data domain.

For more information about configuring subscribed record type and data domain tags for a business entity, see *Define the Data Model*.

Customer 360 Extension for Salesforce

You can now use Customer 360 Extension for Salesforce to synchronize master data from Customer 360 SaaS to Salesforce in real time. Records that you create, update, merge, or unmerge in Customer 360 SaaS appear immediately in Salesforce.

For more information about Customer 360 Extension for Salesforce, see *Customer 360 Extension for Salesforce*.

MDM Extension for Data 360

Use MDM Extension for Data 360 to publish trusted master records and relationships from Customer 360 SaaS into Salesforce Data 360. Enrich unified profiles with the published data to improve segmentation accuracy, enhance calculated insights, and provide trusted context for agentic enterprises. The extension contains predefined egress jobs, Data Integration mappings, and a Data 360 data kit.

For more information about MDM Extension for Data 360, see *MDM Extension for Data 360*.

Changed behavior

The July 2026 release includes the following changed behaviors.

Null matching

The match process now retains only one null match pair for each source record for a match model, irrespective of the number of Directed AI match rules that you configured. This behavior prevents inaccurate or large clusters from forming and applies to the Search Match REST API too. For example, you configure 10 Directed AI match rules with null matching enabled across two match models. A source record matches up to other two other records, creating one null match pair for each match model.

To optimize match results and avoid potential undermatching based on this change in null-to-null matching, choose to retain all match pairs. You don't need to reindex records after you choose this option.

For example, consider a list of customer records that don't contain data in some of the fields. Configure a match model with a Directed AI match rule that has null matching enabled. Select Full Name as a fuzzy match field, and Phone Number, Address, and SSN as exact match fields. Enable null matching for the SSN field.

The following table lists the sample records that don't contain values in the SSN field:

Record	Person Name	Phone	Address	SSN
1	James A Adam	4196251490	123 main st	-
2	J Adam	4196251490	123 main st	-
3	James Adam	4196251490	123 main st	-
4	James Alan Adam	4196251490	123 main st	-

If you choose to retain the match pair with the highest score, it might cause undermatching because the match process retains only one match pair for each source record and deletes the rest. The merge process merges records 1 and 2 into one master record and records 3 and 4 into another master record.

To reduce this risk of undermatching, choose to retain all match pairs so that the match process retains all the match pairs. The merge process then merges records 1, 2, 3, and 4 into a single master record.

Previously, the match process generated one null match pair per source record for each Directed AI match rule in a match model. For example, if you configured 10 Directed AI match rules with null matching enabled across two match models, a source record could match up to 10 other records, creating 10 null match pairs.

Consider the preceding example with a match model that has three Directed AI match rules. The match process could generate up to three null match pairs for a single source record:

- Records 1 and 2
- Records 1 and 3
- Records 1 and 4

For more information about null matching, see *Null matching*.

Mapping files

When you map fields in a modernization project, you can now download the latest reference data and data model mapping files directly from their corresponding sections.

Previously, you could download these files from the **Download Files** section on the Map fields page.

For more information about mapping files, see *Modernization mapping files*.

Survivorship

When you use the Update Source Record Field API to update source record attributes that have no survivorship configuration, the other attributes for that source system at the same level also survive.

Previously, metadata updates could cause incorrect field values to survive in the master record. Contact Informatica Global Customer Support to plan and run scripts to correct any incorrectly survived field values.

For more information about survivorship configuration, see *Configure Survivorship*.

Resolve Long-Running Operations job

MDM SaaS now limits the number of resolve long-running operations jobs that can run concurrently on a POD. When the number of concurrent jobs reaches the limit on a POD, API requests for operations might return an error with the response code 429. You can perform the operations again after some time.

Previously, MDM SaaS didn't limit resolve long-running operations jobs. The jobs could overuse resources and cause operations to fail repeatedly.

For more information about the resolve long-running operations job, see *Monitor MDM SaaS*.

Merge API

When you use the Merge API to merge a record pair that is already merged by using credentials that require approval, the API now returns a 400 error response code.

Previously, the API returned a success response for the same request, creating redundant approval tasks in MDM SaaS.

For more information about merge API, see *Merge API*.

Data quality rule associations

Advanced rule associations and rule associations that use Data Quality plugins reference input and output fields of rule specifications in Data Quality. If you update these input and output fields in Data Quality and don't update the corresponding fields of rule associations in the business entity, the following changes occur:

- If you run an ingress job or a file import job, the job fails at the load step. The job fails because the rule associations in the business entity are no longer in sync with the rule specifications from Data Quality.
- If you add or update field values of records in real time, MDM SaaS displays the status of the impacted rule associations as Exception in the **Data Quality Status** dialog box. Additionally, MDM SaaS marks the records for which the rule associations are triggered with the Exception validation status.

This behavior prevents data corruption from mismatched input and output fields.

To avoid these issues, keep the input and output fields of the rule specifications from Data Quality synchronized with the rule associations in MDM SaaS.

If you update only the rule logic without updating the input or output fields of the rule specification, MDM SaaS uses the latest rule specification. However, ensure that you don't update the fields of the rule associations in MDM SaaS.

Previously, MDM SaaS treated the modified input and output fields of the rule specifications as null.

For more information about advanced rule associations and rule associations with Data Quality - Validation and Data Quality - Transformation plugins, see *Configure Data Quality*.

Customer 360 Extension for Salesforce

When you synchronize a record from Salesforce to Customer 360 SaaS through real-time inbound synchronization, Customer 360 SaaS processes the record and assigns a Customer360 ID to the corresponding master record. The real-time outbound synchronization process then writes the Customer360 ID and Sync Date of the master record to the matching Salesforce record.

Previously, the real-time inbound synchronization process wrote the Customer360 ID and Sync Date of the master record to the matching Salesforce record.

For more information about real-time outbound synchronization, see *Customer 360 Extension for Salesforce*.

CHAPTER 3

April 2026

The April 2026 release of Business 360 Console includes the following updates.

Changelog April 2026

Read the changelog to learn about significant changes to this publication for this release.

The following table describes changes in this publication:

Publication Date	Type of Change	Section Title
May 13, 2026	Added	"Create Master Record and Update Source Record REST APIs" on page 39
April 16, 2026	Added	Match fields in Adaptive AI match modelson page 39 in the Changed behavior topic
April 16, 2026	Modified	Monitoring reprocess master data
April 16, 2026	Modified	Defining reprocess master data jobs
April 16, 2026	Modified	The Upcoming changes section in "Upcoming changes" on page 31
April 16, 2026	Modified	"Enrichment and Validation Orchestrator" on page 39
April 16, 2026	Added	"Securities 360" on page 36 in the New features and enhancements topic
April 10, 2026	Added	"Migrate assets" on page 59
April 10, 2026	Modified	"Enrichment and Validation Orchestrator" on page 39
April 10, 2026	Modified	Important noticeson page 30
April 10, 2026	Modified	"Migrate existing data quality rule associations" on page 33

Publication Date	Type of Change	Section Title
April 10, 2026	Modified	"Lineage of records" on page 32
April 03, 2026	Modified	"Enrichment and Validation Orchestrator" on page 35
April 03, 2026	Modified	"Enrichment and Validation Orchestrator" on page 39
April 02, 2026	Modified	Component types in Configuring components
April 02, 2026	Added	Configuring the Lineage component
April 02, 2026	Modified	Create Master Record and Update Source Record
March 26, 2026	Added	"Lineage of records" on page 32
March 19, 2026	Modified	"Relationship REST API " on page 39
March 19, 2026	Added	"Enrichment and Validation Orchestrator" on page 39 in the Changed behavior topic
March 19, 2026	Modified	"Enrichment and Validation Orchestrator" on page 35
March 11, 2026	Initial publication	

Important notices

The April 2026 release of Business 360 Console includes the following important notices:

Preview initiated

Effective in the April 2026 release, the following functionalities are available for preview:

Reprocess Master Data job

You can now run the reprocess master data job to apply the latest data enrichment, validation, survivorship, and search configurations to all master records. The job ensures that your data reflects the latest configuration for data quality, the best version of the truth, and data retrieval.

Ingress records

When you ingress records, you can now update only fields that contain values without overwriting other fields with null values.

Note: After migrating your rule associations to use Enrichment and Validation Orchestrator in organizations created before the October 2025 release, you can update only fields that contain values without overwriting other fields with null values.

Objectives for CLAIRE Copilot

You can now classify records by configuring objectives with the CLAIRE-Based Enrichment plugin. When users prompt CLAIRE Copilot to classify records, data quality objectives that use the CLAIRE-Based Enrichment plugin run. You can also specify whether you want to run objectives automatically when records are created or updated, or on request when users request CLAIRE Copilot to enrich records using objectives. You can configure CLAIRE as a trigger for the on-request objectives.

Note: By default, all objectives created before the April 2026 release that use triggers, such as ingress, business applications, and REST APIs, are enabled as automatic objectives.

Business events based on native workflows

You can now create and design workflows in Business 360 Console. You can then use these native workflows to define business events for business entity records, related records, and hierarchies.

Relevant stakeholders can then view, act on, and add comments to the related tasks in the task inbox of business applications. They can also view the tickets for workflows for which they're stakeholders in the ticket manager. Tickets are automatically created when workflows are triggered and contain details, such as the statuses of tasks and comments.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming changes

We want to let you know about the following upcoming changes:

Validation and cleansing response parameter

In the October 2026 release or later, Informatica requires you to include the groupId parameter in root field objects in the response that an Application Integration process returns for a validation or cleansing request.

To prepare for this change, update existing validation and cleansing processes to include the groupId parameter for root fields. For more information about updating process objects to include the groupId parameter, see “Update validation process objects to include group IDs” on page 57.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Validation of output payloads from Application Integration processes

In the October 2026 release or later, Informatica requires that all existing Application Integration processes that you use in rule associations return valid payloads. If the processes return empty payloads, the associated rule associations will result in the Exception status instead of the Undecided status.

To prepare for this change, ensure that existing processes return a valid response to MDM SaaS.

Informatica intends to include this functionality in October 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Deprecated support

The following functionalities are deprecated:

Search using Application Integration through Customer 360 Extension for Salesforce

Effective in the April 2026 release, the functionality to search for similar records using Application Integration through the Customer 360 Extension for Salesforce package is deprecated. Informatica intends to drop support for this functionality in a future release.

If you are deploying Customer 360 Extension for Salesforce for the first time, Informatica recommends that you use the configurable Lightning component available in the extension package to search for similar records.

For more information about searching for similar records using the Lightning component, see *Customer 360 Extension for Salesforce*.

Guided assistance for installing Customer 360 Extension for Salesforce

Effective in the April 2026 release, the guided assistance for installing Customer 360 Extension for Salesforce is deprecated. Informatica intends to drop support for the guidance assistance in a future release.

Session-based authentication

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in the October 2026 release.

Informatica plans to replace session IDs used for user authentication with JSON Web Tokens (JWT). Organization administrators have the option to use either session-based authentication or JWT-based authentication on the **Settings** page in Administrator. When JWT authentication is enabled, browser-based user interface communications seamlessly use JWT behind the scenes.

For REST API calls, session IDs must still be included in request headers. However, now the session value carries a JWT with a fixed expiry time configured on the **Settings** page. As a result, REST API scripts must be updated to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

Session-based authentication is the default authentication type. Sometime after the July 2026 release, JWT will be the default authentication method. By October 2026, session-based authentication will no longer be available.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

New features and enhancements

The April 2026 release of Business 360 Console includes the following new features and enhancements.

Watch the What's New video to learn about the new features and enhancements in the April 2026 release.

Lineage of records

You can now display record lineage as an interactive event timeline by adding the Lineage component to a page. A business user can then visually explore the create, merge, and unmerge events in the timeline to gain insight into how a master record evolved over time.

For more information about configuring the component, see *Design the User Interface*.

Rich text formatting for text fields

You can now configure a text field in a business entity to store values in rich text format. Use the rich text format to style and enhance text by applying formatting options, such as bold, italics, underline, fonts, colors, bullet points, and hyperlinks. Users can enter HTML tags and attributes directly when they enter text values or use the rich text editor to format text values.

For more information about rich text formatting, see *Rich text formatting for text fields*.

Purge code values of code lists

You can now purge code values of code lists along with their relationships and historical data. You can purge code values of custom code lists that aren't picklist values of business entities in business applications, such as Customer 360 SaaS.

For more information about purging reference data assets, see *Configure Global Settings*.

Migrate existing data quality rule associations

To optimize performance and ensure faster validation and enrichment, you can now migrate your existing basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator. When you choose to migrate existing rule associations, MDM SaaS runs the migrate rule associations job. The job automatically creates a predefined objective group for each business entity, objectives, and equivalent rule associations within those objectives.

Rule association migration is applicable to organizations that were created before the October 2025 release.

Note: To enable migration of rule associations for your development, QA, or production organizations, contact Informatica Global Customer Support. After the functionality is enabled, you can migrate rule associations to use Enrichment and Validation Orchestrator.

Informatica recommends that you first migrate rule associations to use Enrichment and Validation Orchestrator in your development and QA organizations. After you complete testing the migrated rule associations, migrate rule associations in your production organization.

For more information about migrating existing data quality rule associations, see *Configure Data Quality*.

REST API

Business 360 REST API includes the following new resources and additional parameters within existing resources:

Create Master Record and Update Source Record APIs

You can use the optional _population parameter in the Create Master Record and Update Source Record APIs to assign a population to a record. Match keys are generated for the record based on the assigned population instead of the match model populations to improve match accuracy.

For more information about the _population parameter, see *Business 360 REST API*.

Permissions for data access rules

To provide better access control and enhance data security, you can now set create, update, and delete permissions in record-level and attribute-level data access rules. You can edit an existing data access rule to set create, read, update, and delete permissions. By default, all existing data access rules include the read permission.

Note: You can't set create permissions in data access rules that you configure with conditions on relationship assets.

For more information about configuring permissions in data access rules, see *Manage User Roles and Privileges*.

Adaptive AI match model

The training process of the Adaptive AI match model now includes the following enhancements:

- You can continue training an Adaptive AI match model to enhance its accuracy and precision even after you publish the match model.
- You can retrain an Adaptive AI match model as a new version if the training fails to produce the desired results after you publish the match model.
- You can reset the training of an Adaptive AI match model during or after training if the training fails to produce the desired results.
- You can now use the conclusive label named Requires Manual Review to send record pairs to a data steward for manual review when you train an Adaptive AI match model.
- You can now use the inconclusive label named Skip to skip labeling record pairs when you train an Adaptive AI match model. The record pairs with the Skip label don't appear for labeling again within the same batch during the training process.

For more information about the Adaptive AI match model training process, see *Training the Adaptive AI match model*.

URL fields

You can now configure rules for field groups to identify URL values in multiple field group entries and display them as preview images in search results, page headers, summary, and related records components.

For example, consider a phone product record containing a field group with URLs for preview images of the front and back of a phone, you can configure a rule to identify the URL of the front side for the search results layout component.

For more information about configuring the user interface components, see *Design the User Interface*.

Modernize objects from Multidomain MDM or third-party MDM providers

You can now modernize on-premises objects by migrating them from the MDM Hub to MDM SaaS. You can modernize objects, such as lookup tables, business entities, user roles, users, match rule sets, survivorship configurations, source systems, hierarchies, and relationships. Modernize the objects to take advantage of the scalability, flexibility, and continuous updates that MDM SaaS provides.


You can also modernize objects from third-party MDM providers, such as IBM and Semarchy, through REST APIs.

For more information about modernizing on-premises objects, see *Modernize on-premises objects*.


Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following new features and enhancements:

- You can configure an objective to run when users create records, update records, or perform both actions. The following image shows the create and update actions enabled in the advanced settings of an objective:

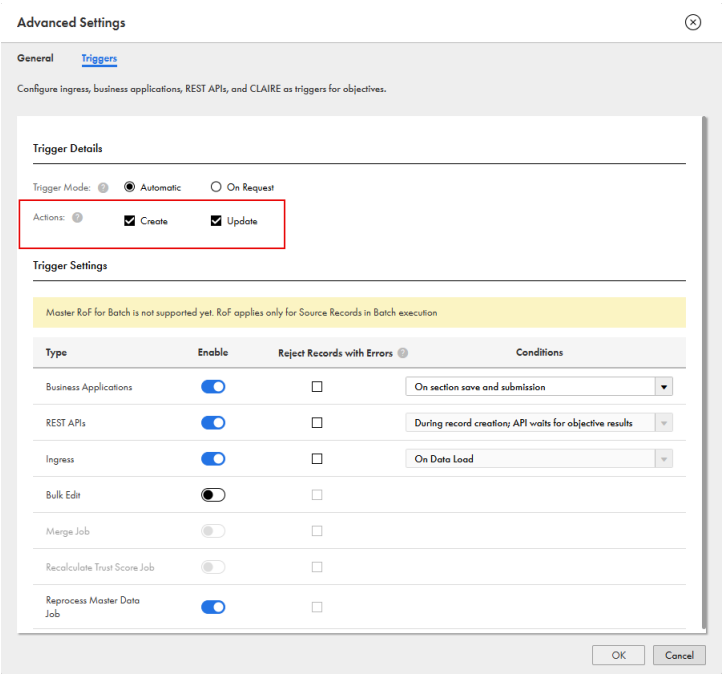

- You can now use Application Integration processes that require authentication in data enhancement rules. You can also specify the user under whose credentials the Application Integration process will run. The following image shows a data enhancement rule with the Application Integration-based Enrichment plugin selected:

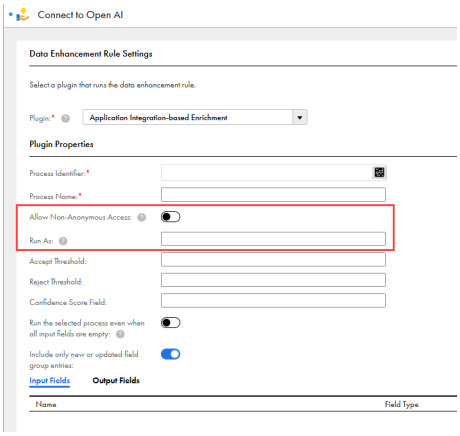

- You can now configure an objective to run when all input fields of its associated rule associations are empty. When you disable this property, an objective runs only if any of its input fields are updated with a value. When you enable this property, the objective runs if all its input fields are empty or if a value is added to or updated in one of its input fields.
- When configuring an objective for master records with business applications as a trigger, you can now choose to reject master records that fail validation, similar to how source records can be rejected.

- To avoid creating new assets because of changes in a process or a rule specification, you can now refresh data enhancement rules that use the process or rule specification.
- In rule associations, you can map output fields to business entity record fields.

Ingress and file import

You can now view the details for each rule association by downloading the rule association-based report from the load step. You can also continue to view the existing record-based report.

Also, the ingress or file import job metrics in the load step now include enrichment and validation metrics.

Export search results job

When you export search results in a business application, MDM SaaS now creates a job to export the search results asynchronously.

You can view the export search results job and its metrics on the My Jobs page. After you export the search results, download the exported data from the job details page in the MDM SaaS business application.

For more information about the export search results job, see *Monitoring MDM SaaS*.

Merge Job

Merge jobs now include a preliminary step to identify groups of record pairs that are potential candidates for automated merges. The additional step enhances the overall performance of merge jobs.

For more information about merge jobs, see *Monitoring MDM SaaS*.

Configure search for dynamic field values

You can now enable dynamic fields to be searchable and facetable in a dynamic pool. After you enable them, you can search for records based on dynamic field values and filter search results by using dynamic fields in business applications. You can enable up to 50 searchable and 50 facetable dynamic fields in an organization.

For more information about configuring search for dynamic field values, see *Design the User Interface*.

Securities 360

You can now use predefined mapplets to integrate securities data from market data providers, such as Bloomberg and London Stock Exchange Group (LSEG), into Securities 360. Use mapplets to normalize complex data formats into a standard market data format and then transform the normalized data into data model attributes of Securities 360.
For more information about the integration assets for market data provider, see *Securities 360*.

Changed behavior

The April 2026 release includes the following changed behavior.

Data quality rule associations

After you migrate existing basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator, you can view the following changes:

- When you run ingress or file import jobs, MDM SaaS runs all migrated rule associations in the load step.
  Previously, when you ran ingress or file import jobs, MDM SaaS ran all basic, advanced, and DaaS rule associations in the transform step.
- When you import or ingress records without mapping input fields from migrated rule associations configured to run even if all input fields are empty, MDM SaaS runs these associations.
  Previously, MDM SaaS didn't run these rule associations.
- When you import or ingress records with picklist values, MDM SaaS retains the values that you import even if they aren't available in the enterprise or custom code list.
  Previously, MDM SaaS converted these picklist values to null.

For more information about migrating data quality rule associations, see *Configure Data Quality*.

Adaptive AI match model training process

The training process of the Adaptive AI match model includes the following changes:

- When you create a match model, the Adaptive AI match model doesn’t include any match fields by default. Match fields added in the candidate selection criteria and Directed AI match rules appear as recommendations for inclusion in the Adaptive AI match model training.
  Previously, the match fields added in the candidate selection criteria and Directed AI match rules appeared by default as match fields in the Adaptive AI match model.
- You can now modify the configuration of a match model even after you start training its Adaptive AI match model. For example, you can add or remove match fields from existing Directed AI match rules or add new Directed AI match rules to the match model. The match process displays the newly added match fields as recommendations for inclusion in the Adaptive AI match model training.
  Previously, you couldn’t modify the configuration of a match model after you started training its Adaptive AI match model.
- If you modify the following settings of a match model during or after training the Adaptive AI match model, the match process discards the training and requires you to retrain the model from the beginning:
  - Default population
  - Candidate selection criteria
  - Match fields in the Adaptive AI match model

  Previously, you couldn’t modify these settings during or after training the Adaptive AI match model.
- When you train an Adaptive AI match model, the match process now requires a minimum of 500 candidate record pairs to generate sample match candidates for accurate predictions. You can contact Informatica Global Support to modify this minimum requirement based on your business needs.
  Previously, no minimum candidate record pairs requirement was enforced.

  For more information about sample match candidates generation, see *Viewing Match – Start Training jobs*.

For more information about the Adaptive AI match model training process, see *Training the Adaptive AI match model*.


Purge data

You can now use the **Purge records** option to permanently delete code values in a code list, along with their relationships and historical data.

The following table lists the user interface changes to the **Purge Data** dialog box:

User interface change	Current user interface label	Previous user interface label
Permanently delete historical data from business entity records, hierarchies, and relationships	Purge history data	Purge the History of all records
Permanently delete all records in a business entity	Purge records	Purge records that belong to a specific business entity

The following image shows the **Purge Data** dialog box:

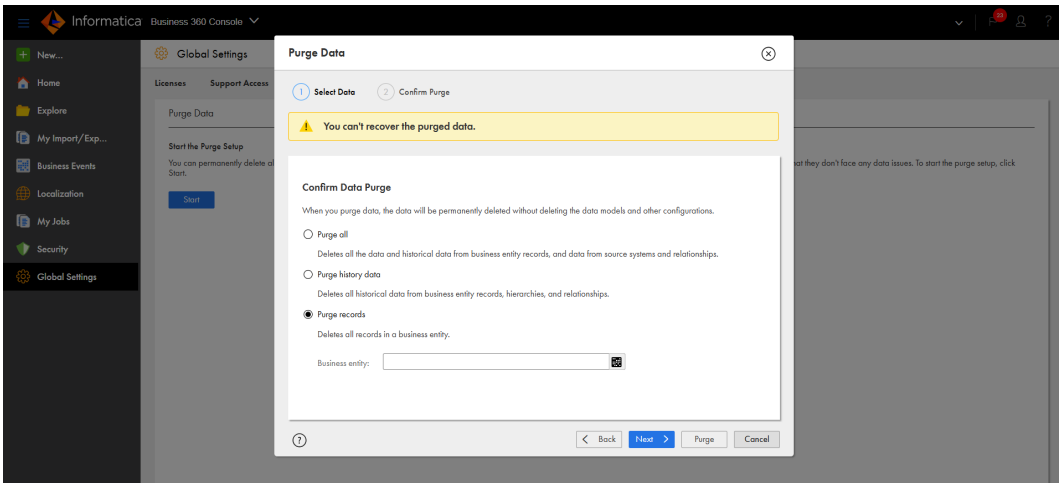

For more information about purging code values of a code list, see *Configure Global Settings*.

Dynamic pools

You can now add up to 10,000 fields and field groups across all dynamic pools in an organization.

Previously, you could add up to 1000 fields and field groups.

For more information about dynamic pools, see *Define the Data Model*.

Reprocess master data jobs

When you run a reprocess master data job, the index for search step indexes only master records for which trust scores change during recalculation. This optimization might reduce the run time of the job.

Previously, the index for search step indexed all master records.

For more information about reprocess master data jobs, see *Defining reprocess master data jobs*.

Enrichment and Validation Orchestrator

Enrichment and Validation Orchestrator includes the following changes in behavior:

- If the option to reject records on validation failure is enabled for an objective and a rule association in the objective returns the Exception status, records are rejected.
  Previously, users could submit records even when rule associations returned the Exception status.
- When you enable the option to reject records that fail validation for an objective, you can save the objective only if you add at least one rule association with the error severity set to Error. The option to reject records works only when the error severity is set to Error in rule associations. This change ensures that the configuration to reject records works as intended.
  Previously, you could save an objective when you enabled the option to reject records but didn't include any rule associations with the error severity set to Error. However, when such objectives ran, records weren't rejected even if the option to reject records that fail validation was enabled.
- You can now configure an objective to run when all input fields of the associated rule associations are empty. When a user creates or updates a record, an objective with this setting enabled runs if all input fields of its associated rule associations are empty.
  Previously, during record creation, if a value was added to a field at the same level as the input fields, the objective ran even if its own input fields were empty. However, the objective didn't run during record updates.

  This change doesn't impact objectives that you created before the April 2026 release. However, if you edit an objective that you created before the April 2026 release, the feature takes effect and the option to run the objective on empty fields is disabled by default for that objective. As a result, the objective doesn't run even if users add or update values in any of the fields that are at the same level as its input fields.

  To run an objective on empty fields, enable the option. If you create an objective after the April 2026 release, the option to run the objective on empty fields is disabled by default.

Relationship REST API

You can now use the sourcePKey and sourceSystem parameters in the Create Relationship API to create relationships.

Previously, you could create relationships using the businessId parameter.

For more information about the Relationship REST API, see *Business 360 REST API*.

Create Master Record and Update Source Record REST APIs

When you pass an invalid value for the population parameter in the Create Master Record or Update Source Record API, the API request returns a validation error.

Previously, the API request didn't return an error when you passed invalid values for the population parameter.

Match fields in Adaptive AI match models

After your organization is upgraded to April 2026, some match fields in Adaptive AI match models might be removed. It happens when match fields were added exclusively to Adaptive AI match models and weren't included in any Directed AI match rules.

To add the match fields again, contact Informatica Global Customer Support.

Associate picklists with reference data code lists

When you associate business entity picklists with code lists from MDM - Reference 360 on the source system page, MDM SaaS displays only the picklists whose reference data contains custom code lists. If the reference data contains both Enterprise and custom code lists, MDM SaaS lists only the custom code lists.

MDM SaaS doesn't display the Enterprise code lists because standardization of picklist values requires a crosswalk with value mappings between the Enterprise and custom code lists.

If picklists are associated with only Enterprise code lists in existing organizations, MDM SaaS doesn't display those picklists on the source system page.

Previously, MDM SaaS displayed all picklists regardless of the code list type.

For more information about associating picklists with reference data code lists, see *Define Source Systems*.

CHAPTER 4

October 2025

The October 2025 release of Business 360 Console includes the following updates.

Important Notices

The October 2025 release of Business 360 Console includes the following important notices.

Preview initiated

Effective in the October 2025 release, the following functionalities are available for technical preview:

- You can use a business entity record field to map an output field in a rule association.
- You can modernize by migrating the on-premises configuration from the MDM Hub to MDM SaaS. You can modernize objects, such as lookup tables, business entities, user roles, users, match rule sets, survivorship configurations, source systems, hierarchies, and relationships. Migrate to MDM SaaS to take advantage of the scalability, flexibility, and continuous updates that it provides.

Preview functionality is supported for evaluation purposes but is unwarranted and is not supported in production environments or any environment that you plan to push to production. Informatica intends to include the preview functionality in an upcoming release for production use, but might choose not to in accordance with changing market or technical circumstances. For more information, contact Informatica Global Customer Support.

Upcoming changes

We want to let you know that by April 2026 or later, you can migrate your existing basic, advanced, and DaaS rule associations to Enrichment and Validation Orchestrator. During migration, MDM SaaS automatically generates a predefined objective group for each business entity and then creates objectives and equivalent rule associations within those objectives.

During the load step of an ingress or import job, all objectives run in parallel and rule associations within each objective run sequentially. However, the existing basic, advanced, and DaaS rule associations run during the transform step. After you migrate the existing rule associations, Enrichment and Validation Orchestrator runs them during the load step.

Because objectives run in parallel, rule associations across objectives might also run in parallel. To prepare for the change, avoid creating rule associations in Enrichment and Validation Orchestrator that depend on the results of the basic, advanced, and DaaS rule associations until you migrate them.
For example, your organization contains a basic rule association that concatenates first name, middle name, and last name and uses the concatenated value as full name. Additionally, you have a rule association in Enrichment and Validation Orchestrator that validates the length of full name. After you migrate the basic rule association, both rule associations might run in parallel because they are part of two different objectives.

If the rule association that validates the length of full name runs before the rule association that concatenates the first, middle, and last names, you might not get the expected results. For more information about rule association migration, contact Informatica Global Customer Support.

Informatica intends to include these functionalities in April 2026 or later but might choose not to in accordance with changing market or technical circumstances.

Deprecated support

Effective in the October 2025 release, session-based authentication is deprecated. Informatica intends to drop support for session-based authentication in the October 2026 release.

Deprecated functionality is supported, but Informatica intends to drop support in a future release. Informatica requests that you transition to different functionality before the functionality is dropped.

Informatica plans to replace session IDs used for user authentication with JSON Web Tokens (JWT). Starting on November 3, 2025, you have the option to switch from session-based to JWT-based authentication on the **Organization** page in Administrator. Once enabled, browser-based user interface communications seamlessly use JWT behind the scenes.

For REST API calls, session IDs must still be included in request headers as usual. However, now the session value carries a JWT with a fixed expiry time configured on the **Organization** page. As a result, REST API scripts need to be updated to handle automatic re-authentication before or after the token expires. For more information, see the JWT Support Knowledge article.

In the October 2025 release, session-based authentication will remain the default. Starting in April 2026, JWT will become the default authentication method. By October 2026, session-based authentication will no longer be available.

New features and enhancements

The October 2025 release of Business 360 Console includes the following new features and enhancements.


Watch the What's New video to learn about the new features and enhancements in the October 2025 release.

Enrichment and Validation Orchestrator

You can now use Enrichment and Validation Orchestrator to create rule associations that are equivalent to basic, advanced, and DaaS rule associations in an objective group through plugins. The plugins are grouped into the categories Validation, Transformation, and Cleansing and Standardization. Also, MDM SaaS now includes predefined data enhancement rules for creating rule associations that are equivalent to the basic and DaaS rule associations.

For example, to create a rule association that verifies maximum length, use the Maximum Length predefined data enhancement rule. Similarly, to create rule associations that verify addresses, email addresses, and phone numbers, use the Address Verification, Email Verification, or Global Phone Verification data enhancement rules.

The following image shows Data Enrichment Rule Settings page with plugin categories, such as Cleansing and Standardization and Enrichment:

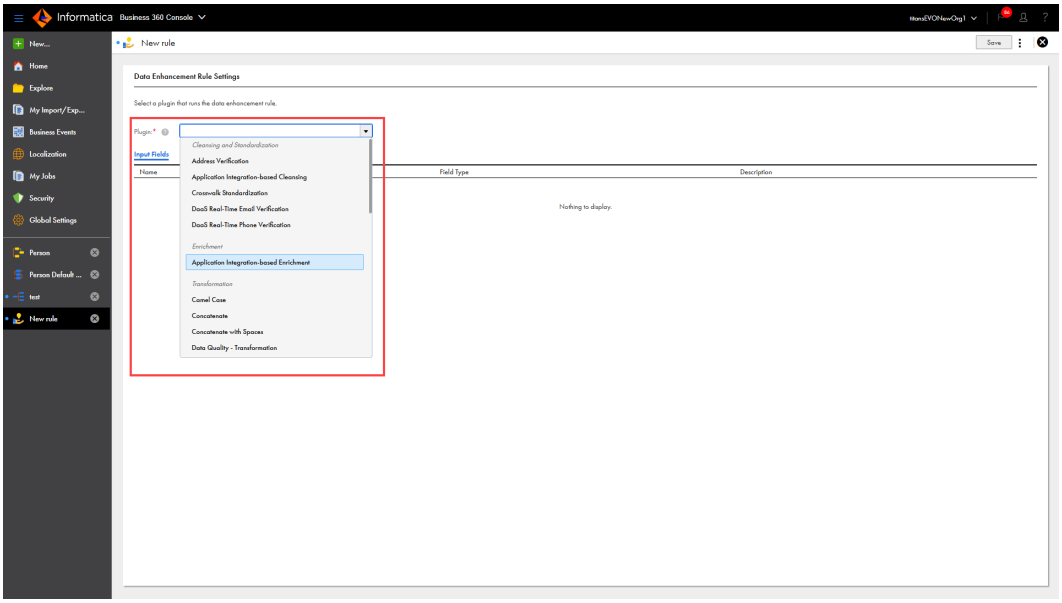

Additionally, Enrichment and Validation Orchestrator has the following enhancements:

- If source records are the input record type for an objective, the objective is triggered when patch records are created.
- When you map input fields in rule associations, you can now map system fields and business entity record fields.
- You can configure a data enhancement rule to process empty fields. You can also configure the rule to include only new or updated entries of input field groups in the payload that's sent to the enrichment and validation service.
- When you configure objectives, you can now disable individual rule associations in the objectives.
- You can configure objective groups for custom address, email, and phone field groups in your business entity using predefined Address Verification, Email Verification, and Global Phone Verification data enhancement rules.
- You can now configure ingress as a trigger for an objective. When you run ingress or file import jobs, MDM SaaS runs objectives during the load step and generates metrics at this step.
  When you create rule associations without using objective groups, MDM SaaS runs rule associations during the transform step. If your organization uses basic, advanced, and DaaS rule associations, and rule associations that are created using objective groups MDM SaaS runs rule associations and objectives during both transform and load steps. You can view the metrics generated at each step.

For more information about configuring objective groups to validate, transform, cleanse and standardize data using different plugins, see *Configure Data Quality*.

Enhanced Adaptive AI match model

The training process of the Adaptive AI match model now includes the following enhancements:

- An intuitive training page that organizes record pairs in separate sections based on the exact match fields to simplify the labeling process. For example, record pairs with addresses that match exactly are grouped in one section, while record pairs with phone numbers that match exactly are grouped in another section. By grouping record pairs, you can understand the match process better and can label pairs more precisely.

- You can label record pairs in bulk and complete the labeling process quickly and efficiently.
- To improve the training accuracy, you can now label up to 90 record pairs in a batch, even though only 30 conclusive record pairs are required to complete a batch.

For more information about training an Adaptive AI match model, see *Training Adaptive AI match models*.

Manage assets

You can use a source control repository to manage and track changes to MDM SaaS projects, folders, and assets. You can pull assets, projects, and folders from the source control repository to your organization. You can copy projects, folders, predefined MDM SaaS assets, and custom assets to a location instead of creating them from scratch and improve usability of assets. You can also move custom assets to a custom project or folder.

For more information about manage and migrate assets, see *Manage and Migrate Assets*.

REST API

Business 360 REST API includes the following new resources and additional parameters within existing resources:

Search Match API version 2

The Search Match API version 2 uses master records for searching instead of source records and provides better performance compared to version 1.

To use the Search Match API version 2 in your organization, contact Informatica Global Customer Support.

For more information about using Search Match API version 2 to search for master records, see *Search Match API version 2*.

Direct link REST API

You can now directly access master records from external applications through the direct link REST API. The URI of the API provides real-time, secure data access without transferring data to third-party applications.

For more information about the direct link REST API, see *Business 360 REST API*.

Business entity record APIs

You can now use the optional _showPending parameter in the Read Master Record by Business ID and Read Master Record by SourcePKey APIs to retrieve master records that are in the pending state.

For more information about the _showPending API parameter, see *Read Master Record by Business ID* and *Read Master Record by SourcePKey*.

Unmerge API

You can now use the optional parameter _allowMergeBack to allow source records to merge back into the master record that they were unmerged from. By default, the source records don't merge back.

For more information about the _allowMergeBack API parameter, see *Unmerge API*.

URL fields


You can now use URL fields within a field group to display preview images in the page header or fields component.

For more information about configuring the page headers or fields components, see *Design the User Interface*.

Custom pages

You can now configure the default sort field and order for a field group based on its fields on a custom page. The custom page in a business application displays the field group entries after sorting them based on your configuration.

The following image shows a sample custom View and Edit page and its sorting configuration:

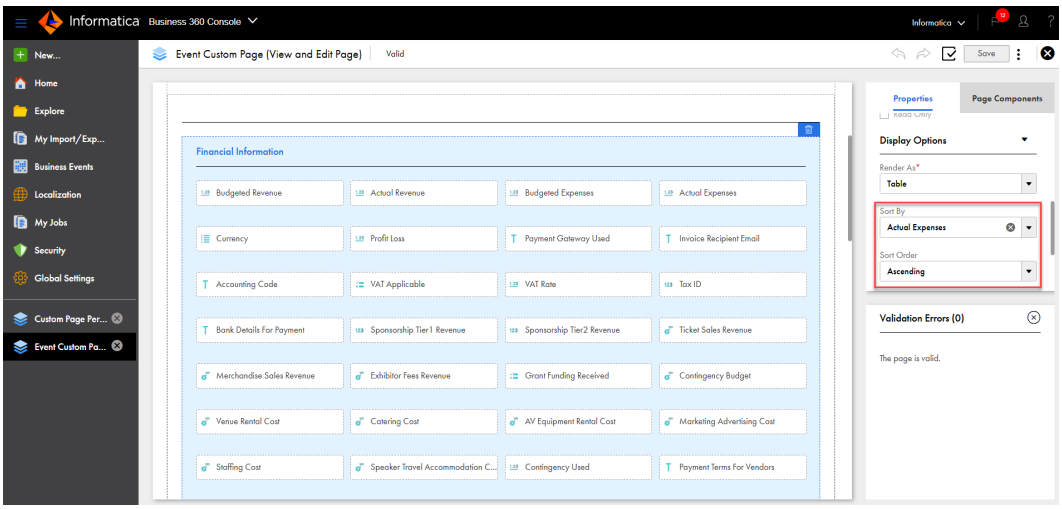

For more information about configuring custom pages, see *Configuring components*.

Date fields

Date values of display fields configured for business entities now appear in the format that the browser locale uses.

REST API authentication type

You can now use JWT-based authentication instead of session-based authentication for REST API calls. You can choose the authentication type on the **Organization** page in Administrator. For more information, see "Deprecated support" on page 42.

Cloud services for digital content

You can now use images that are stored in any cloud service or file storage system on your premises. Before you use such a service, contact Informatica Global Customer Support for approval and to have its domain added to the allowlist.

For more information about cloud services for hosting images, see *Cloud services for hosting images*.

Segment matching

When you enable segment matching for multiple fields in a Directed AI match rule, you can now choose to segment data based on all or any of these match fields. The AND operator uses all the match fields, and the OR operator uses any of the match fields.

For example, consider a Directed AI match rule with the following exact match fields configured for segment matching:

- Country field with Spain as the segment value.
- Source System field with Salesforce as the segment value.

When you choose to segment data based on all segment matching-enabled match fields, the segment data contains records with the value Spain in the Country field and Salesforce in the Source System field.

When you choose to segment data based on any of the segment matching-enabled match fields, the segment data contains records with either the value Spain in the Country field or Salesforce in the Source System field.

For more information about enabling segment matching for the match fields, see *Segment matching*.

MDM Extension for Agentforce

Use MDM Extension for Agentforce to seamlessly integrate MDM SaaS with Agentforce, an AI agent platform in Salesforce. The integration enables AI agents to perform on-demand searches and retrieve real-time master records and related data from MDM SaaS. These capabilities empower Agentforce AI agents to deliver intelligent, personalized, and efficient customer interactions across various industries.

For more information about MDM Extension for Agentforce, see *MDM Extension for Agentforce*.

Customer 360 Extension for Consent Management

Use Customer 360 Extension for Consent Management to manage customer consents, preferences, processing purposes, and lawful bases collected from multiple channels. You can track data subject rights requests and ensure compliance with global data privacy laws. Use the centralized consent data to conduct lawful marketing, enable compliant data processing, and deliver personalized customer engagement.

For more information about Customer 360 Extension for Consent Management, see *Customer 360 Extension for Consent Management*.

Changed behavior

The October 2025 release includes the following changed behavior.

Control access to train Adaptive AI match models

You can now control which user roles to train an Adaptive AI match model. By default, no user roles are allowed to train models.

To allow a user role to train models, assign the **Adaptive AI Match Model** privilege to the user role on the **Security** page. Users without this privilege can't view the Adaptive AI Match Model tab on the match model configuration page.

If you have users who previously had access to train these models, ensure that you update their custom user roles with the new privilege.

Previously, the following predefined user roles had the privilege to train Adaptive AI match models:

- MDM Designer
- Designer
- Admin

For more information about configuring privileges for training an Adaptive AI match model, see *Configuring privileges for training Adaptive AI match models.*

Adaptive AI match model

You can now remove the match fields that were added in the following scenarios from the Adaptive AI match model training process:

- Match fields added during candidate selection criteria.

- Match fields added while configuring Directed AI match rules.

Previously, you couldn't remove these fields from the Adaptive AI match model training process.

For more information about training an Adaptive AI match model, see *Training Adaptive AI match models*.

Training Adaptive AI match models




When you train Adaptive AI match models, you can no longer label record pairs as Need More Data.


Previously, the Need More Data label was available for labeling during match model training.


For more information about training an Adaptive AI match model, see *Training Adaptive AI match models*.

Survivorship page enhancements

The following table lists the user interface changes to the Survivorship page:

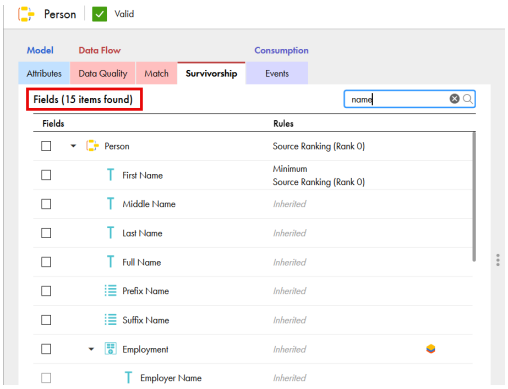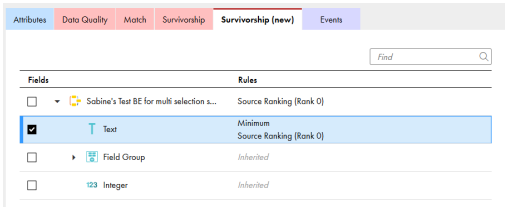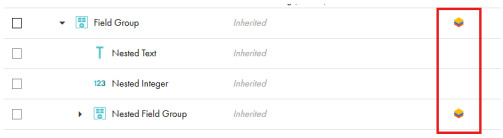User interface changes	Current behavior	Previous behavior
Count of fields	When you search for fields, MDM SaaS displays the count of enabled fields. The following image shows the count of fields: 	Previously, the count also included disabled fields.
Selection check box	The selection check box for fields now aligns with the selection check box of the business entity. The following image shows the selection check box: 	Previously, the selection check box was indented to the right.
Block survivorship	The block survivorship icon is modified and is aligned to the right. The following image shows the block survivorship icon: 	Previously, the block survivorship icon was aligned to the left.

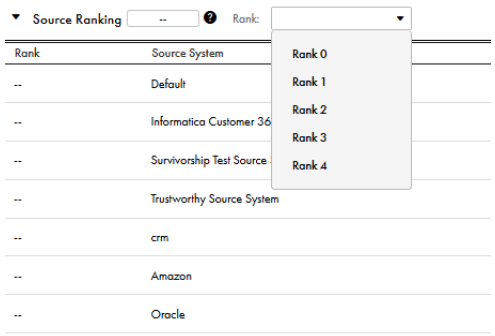User interface changes	Current behavior	Previous behavior
Fields tree filter	You can apply a filter when you press Enter or click the search icon. MDM SaaS expands field groups that contain matching fields.	Previously, the search filtered root fields and field groups with matches but didn't display the individual fields within the field groups.
Fields tree	When you hover over a field, the row is not highlighted.	Previously, the field was highlighted.
Field selection	You can now use the following keyboard shortcuts to select or deselect fields: - Press SHIFT and select fields to select or clear all fields between the first and last selected fields. - Press CTRL and then select a field or clear the selection.	Previously, you couldn't select or clear multiple fields.
Block survivorship confirmation dialog box	After you enable block survivorship for a field group, if you select another field without applying changes, a warning message appears. The message warns you to apply your changes and indicates that the survivorship configuration of fields will reset to match the survivorship configuration of the field group.	Previously, a confirmation about applying the changes appeared, followed by a warning about resetting the survivorship of fields within the field group.
Source ranking	After you configure source ranking for a field and select the field, the source ranking list displays the rank.	Previously, the source ranking list didn't display the rank.
Validation message	If a business entity doesn't have source ranking configuration, adding a rule to a field without such configuration triggers a single validation message. The message indicates that both the business entity and the field require source ranking configuration.	Previously, multiple validation messages appeared, one for the business entity and one for the field.
Validation messages for dynamic fields	New error messages are introduced when dynamic fields fail to load.	Previously, error messages didn't appear.
Source rank list	The source rank list now displays the ranks in ascending order. The following image shows a list of ranks: 	Previously, the source rank list was sorted lexicographically by rank.

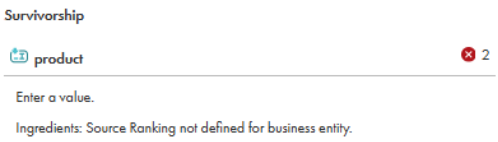User interface changes	Current behavior	Previous behavior
Multiple fields selection	When you select multiple fields, click **Edit All**, add survivorship configuration, and discard the survivorship configuration, the selection stays intact.	Previously, discarding survivorship configuration cleared your selection.
Dynamic fields validation message	The validation messages for dynamic fields now appear beneath their corresponding dynamic field value attributes. The following image shows a validation message: 	Previously, only the dyanmic field appeared.

For more information about configuring survivorship, see *Configure Survivorship*.

Data access rules

When you train an Adaptive AI match model, the data access rules configured for a business entity control your access to the training data set associated with the model.

Previously, you could access the training data set associated with an Adaptive AI match model irrespective of the data access rules configured for the business entity.

For more information about the impact of data access rules on Adaptive AI match models, see *Data access rules on Adaptive AI match models*.

Uniqueness Criteria

The uniqueness criteria property of field groups has been removed from the general properties.

Previously, you could view uniqueness criteria as a general property of field groups, along with a message indicating that it has been moved to the **Survivorship** page and renamed **Deduplication**.

For more information about deduplication criteria, see *Configure Survivorship*.

Enhanced match process


After creating match pairs, the match process now identifies related record pairs and organizes them into record pair groups. In a future release, you can view these grouped records in the Match Analysis and Explainability dashboard.

Previously, the merge process created record pair groups.

Match Analysis and Explainability dashboard

You can now control access to the Match Analysis and Explainability dashboard related to a business entity. The custom user roles with the **Match Analysis and Explainability Dashboard** privilege can now access the Match Analysis and Explainability dashboard related to a business entity. Additionally, ensure that these custom roles have read privileges for the records and attributes of the selected business entity.

The following image shows the read permission assigned for accessing the Match Analysis and Explainability Dashboard related to the Person business entity:

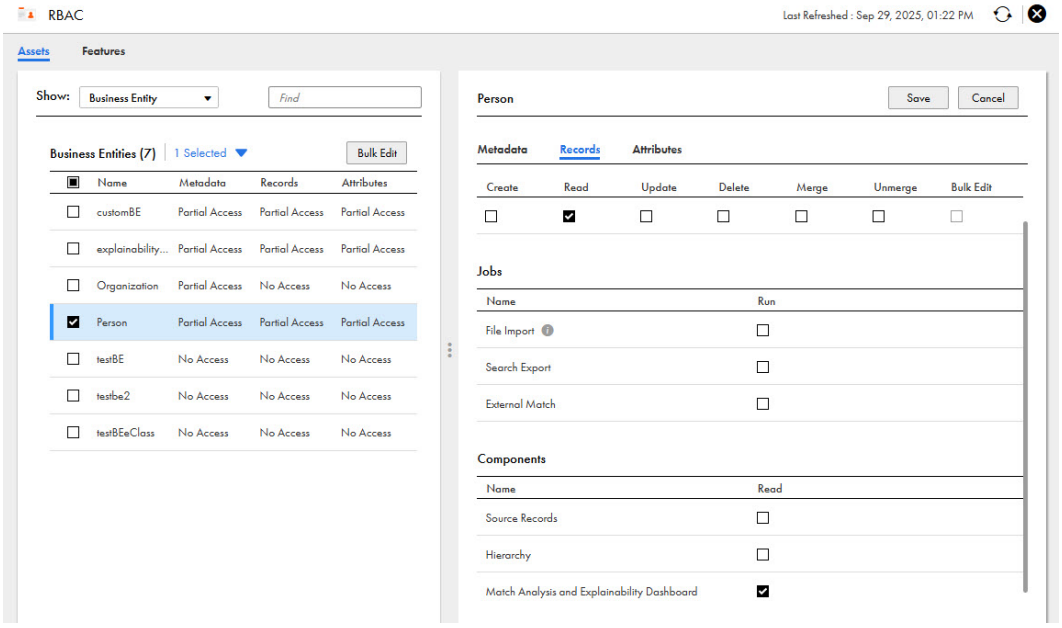

Previously, all custom user roles had access to the Match Analysis and Explainability dashboard.

For more information about configuring privileges for custom user roles to access the Match Analysis and Explainability dashboard, see *Match Analysis and Explainability Dashboard*.

Basic rule associations

When you configure a basic rule association on a picklist field and enable it to run even if all input fields are empty, the rule association returns the output as null if the input field value is empty.MDM SaaS considers null as the output and allows users to save the record.

Previously, if you didn't specify the input field value, the rule association returned the output as empty and didn't allow users to save the record.

For more information about configuring basic rule associations, see *Configure Data Quality*.

REST APIs

The responses of the Read Master Record by Business ID and Read Master Record by SourcePKey REST APIs don’t include the survival parameter in the ruleAssociation array.

Previously, the ruleAssociation array included the survival parameter.

For more information about the Read Master Record by Business ID and Read Master Record by SourcePKey APIs, see *Business 360 REST API Reference*.

Application Integration-based Enrichment and Validation

When a rule association configured for Application Integration-based enrichment or validation runs on a record, the payload that's sent to the associated process also includes fields with null values. Previously, MDM SaaS included only the fields that had values in the payload.

For more information about Enrichment and Validation Orchestrator, see *Configure Data Quality*.

Search Match API

To improve matching accuracy, the Search Match API versions 1 and 2 now require you to specify search terms in a specific format based on their data type. If you don’t use the correct format, the API request fails. For example, if you use TRUE or False as the boolean field value, the API request fails.

Previously, the search terms didn't require any specific format.

For more information about the formats of search terms, see *Formats of search terms for Search Match API version 1* and *Formats of search terms for Search Match API version 2*.

Egress jobs

When the total number of records processed in the stage step of an egress job is zero, MDM SaaS now skips the extract step and completes the job, thereby reducing the job runtime.

Previously, MDM SaaS continued with the extract step when the total number of records processed in the stage step was zero.

Industry 360 applications and MDM SaaS extensions

You can now use industry 360 applications and MDM SaaS extensions that are compatible with your current MDM SaaS version. You don't need to upgrade to the latest MDM SaaS version. Based on your MDM SaaS version, request the required industry 360 application or extension package from Global Customer Support. Previously, you had to upgrade to the latest MDM SaaS version to install the industry 360 applications and extensions packages.

Informatica Customer 360 Extension for Salesforce

When you use Informatica Customer 360 Extension for Salesforce, an unmanaged Salesforce package, the Salesforce application now retains the data that you enter on the search screen. The data retention on the search screen ensures a seamless experience for users.

If a record doesn't exist in MDM SaaS, the record creation screen retains the data that you entered on the search screen.

If a record exists in MDM SaaS, importing it combines the data that you entered on the search screen with the imported record data. The imported record data takes priority over the data that you entered on the search screen.

Previously, the Salesforce application didn't retain the search screen data when you created a record or imported an existing record from MDM SaaS.

For more information about Informatica Customer 360 Extension for Salesforce, see *Customer 360 Extension for Salesforce*.

CHAPTER 5

Upgrade

The following topics provide information about tasks that you might need to perform before or after an upgrade of Business 360 Console.

Post-upgrade tasks for the latest release

Perform the following tasks after your organization is upgraded to the latest release.

Reimport the match and merge process to update explainability metrics

Effective in the October 2026 release, you can update the match explainability metrics independently without performing matching. To update the match explainability metrics independently, reimport the latest version of the `MDMMatchMerge` process.

The `MDMMatchMerge` process is a predefined Cloud Application Integration process that matches the records, creates match pairs, merges the match pairs, and resets the matched records.

To overwrite the existing `MDMMatchMerge` process with the latest version, perform the following steps:

1. “Step 1. Get the artifact ID of the existing process” on page 52
2. “Step 2. Assign write permission to the user” on page 54
3. “Step 3. Import the latest process” on page 55
4. “Step 4. Delete the write permission assigned to the user” on page 55
5. “Step 5. Publish the process” on page 57

After you successfully overwrite the existing `MDMMatchMerge` process, you can define a match and merge job to update the match explainability metrics without performing matching. For more information about defining a match and merge job that updates explainability metrics, see *Defining match and merge jobs*.

Step 1. Get the artifact ID of the existing process

To overwrite the existing `MDMMatchMerge` process, you require the artifact ID of the process to uniquely identify it.

Before you get the artifact ID, log in to MDM SaaS to get a session ID or JSON web token (JWT). To log in, use the Login API and submit a POST request with the following URI:

```
POST <baseApiURL>/saas/public/core/v3/login
```

The login response contains the session ID that you use in the subsequent API requests. To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Requests

Use the following POST request to log in to MDM SaaS:

```
POST https://use4.dm-us.informaticacloud.com/saas/public/core/v3/login
Content-Type: application/json
{
  "username": "<User name>",
  "password": "<Password>"
}
```

Use the following POST request to get the artifact ID of the `MDMMatchMerge` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
  "lookupParamPath": [
    {
      "name": "MDMMatchMerge",
      "type": "PROCESS",
      "location": [
        { "type": "Space", "name": "REG" },
        { "name": "Business360", "type": "Project" }
      ]
    }
  ]
}
```

Sample Response

After the POST request to log in to MDM SaaS is successful, you get the following response:

```
{
    "products": [
        {
            "name": "Integration Cloud",
            "baseApiUrl": "https://qa-pod1.rel.infaqa.com/saas"
        }
    ],
    "userInfo": {
        "sessionId": "<Session ID>",
        "id": "<User ID>",
        "name": "<username>",
        "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "orgId": "<Org ID>",
        "orgName": "<Org name>",
        "groups": {},
        "status": "Active"
    }
}
```

The sample response shows the HTTP 200 OK response code and contains the artifact ID of the `MDMMatchMerge` process. The response shows the artifact ID as `a7d1raphIOLdjfNVarUJaC` in the artifact section.

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    {
      "orgId": "lkV1tSYJzKYcdNHddSjsWN",
      "status": { "code": "FRS_200", "message": "" },
      "tags": [],
      "artifact": {
        "@odata.type": "#OData.frs.Document",
```

```
        "id": "a7d1raphIOLdjfNVarUJaC",
        "name": "MDMMatchMerge",
        "description": "",
        "owner": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastUpdatedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastAccessedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "documentType": "PROCESS",
        "contentType": "application/json; charset=utf-8",
        "documentState": "VALID",
        "aclRule": "org",
        "isSourceControlled": false,
        "checkedOutById": null
      },
      "docRef": null
    }
  ]
}
```

Step 2. Assign write permission to the user

To overwrite the existing `MDMMatchMerge` process, assign write permission to the user who logged in.

To assign write permission to the user, use the UpdateACL API and submit a POST request. To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiURL>/frs/api/v1/UpdateACL
```

Sample Request

Use the following POST request to assign write permission to the user:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
  "artifactId": "<Artifact ID from Step 1>",
  "aces": [
    {
      "operation": "CREATE_ACE",
      "permission": {
        "changePermission": true,
        "read": true,
        "update": true,
        "delete": false,
        "execute": true
      },
      "idsInfo": { "id": "<User ID from the login response>", "type": "USER" }
    }
  ]
}
```

Note: The user ID specifies the identifier of the user who logged in to reimport the `MDMMatchMerge` process.

Sample Response

After the POST request to assign write permission to the user is successful, you get the following response:

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    { "guid": "FRS_ID", "code": "FRS_200", "message": "Successfully Updated ACLs" }
  ]
}
```

Step 3. Import the latest process

You require the latest `MDMMatchMerge` process to update match explainability metrics. When you import the latest process, overwrite the existing process to retain its permissions and configuration.

1. To request the latest `MDMMatchMerge` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the latest `MDMMatchMerge` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, select the ZIP file that contains the latest `MDMMatchMerge` process, and click **Open**.
6. In the **Specify Import Job Details** section, select **Overwrite existing assets, excluding connections and runtime environments**.
7. Click **Import**.

Step 4. Delete the write permission assigned to the user

After you import the latest `MDMMatchMerge` process, delete the write permission that you assigned to the user and set the process to read only so that users can't modify it.

To identify the write permission to delete, use the GetACL API and submit a GET request with the following URI:

```
GET <baseApiURL>/frs/api/v1/GetACL?artifactId=<Artifact ID from Step 1>
```

To delete the write permission, use the UpdateACL API and submit a POST request with the following URI:

```
<baseApiURL>/frs/api/v1/UpdateACL
```

Sample Requests

Use the following GET request to retrieve the access control entries of the `MDMMatchMerge` process:

```
GET https://use4.dm-us.informaticacloud.com/frs/api/v1/GetACL?
artifactId=a7d1raphIOLdjfNVarUJaC
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

From the response, identify the access control entry for the write permission. To identify the correct entry, match the creation timestamp of the entry to the time when you assigned the write permission in Step 2.

Use the following POST request to delete the write permission:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
  "artifactId": "<Artifact ID from Step 1>",
  "aces": [
    {
      "aceId": "<Write Permission ID>",
      "operation": "DELETE_ACE",
      "operation": "DELETE_ACE",
      "idsInfo": {
           "id": "<User ID from Step 1>",
           "type": "USER"
    }
  ]
  "artifactId": "<Artifact ID from Step 1>"
}
```

Sample Response

After the GET request is successful, you get the following response:


```
{
    "@odata.context": "$metadata#Collection(OData.frs.Ace)",
    "value": [
        {
            "id": "9aMAeHngAJeezftidP23i9",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:42:51Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:42:51Z",
            "permission": {
                "create": null,
                "read": true,
                "update": true,
                "delete": true,
                "execute": true,
                "changePermission": true {{            }}
            }
        },
        {
            "id": "bmo9yhPqYc2fwBEHK9Timf",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "8OSrngWzLw3bgwgRbqUy2f",
                "type": "ORG"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:44:33Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:44:33Z",
            "permission": {
                "create": null,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true,
                "changePermission": true {\{}
                }
            }
        },
        {
            "id": "<Write Permission ID>",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "hIC3qRnQfqqj00zDeJnd6S",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-03-03T07:11:08Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-03-03T07:11:08Z",
            "permission": {
                "create": null,
                "read": true,
                "update": true,
                "delete": false,
                "execute": true,
                "changePermission": true
            }
        }
    ]
}
```

Note: Identify the ID of the write permission based on the date when you assigned the permission to the user.

After the POST request to delete the write permission is successful, you get the following response:

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    { "guid": "FRS_ID", "code": "FRS_200", "message": "Successfully Updated ACLs" }
  ]
}
```

Step 5. Publish the process

After you delete the write permission assigned to the user, publish the `MDMMatchMerge` process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the `MDMMatchMerge` process, and click **Actions**.
4. Click **Publish**.

Advanced rule associations

Effective in the October 2026 release, MDM SaaS displays error messages on all input fields for new advanced rule associations. This change applies only to organizations created after the October 2025 release. It doesn't apply to advanced rule associations that were migrated during the April 2026 release.

If you want to display error messages only on the applied fields for advanced rule associations created in organizations after the October 2025 release, perform the following steps:

1. Disable the advanced rule association and save the business entity.
2. Create an objective group, objective, and rule association with the Data Quality - Validation plugin in Enrichment and Validation Orchestrator.
3. When you map the input field for the rule association, map only the applied field.

For more information about adding rule associations for data enrichment and validations in Enrichment and Validation Orchestrator, see *Configure Data Quality*.

If you have already migrated advanced rule associations during the April 2026 release and want to display error messages on all input fields, perform the following steps:

1. Disable the advanced rule association.
2. Enable the advanced rule association again.
3. Save the business entity.

Update validation process objects to include group IDs

Effective in the July 2026 release, `groupId` is a required parameter for root fields in responses that an Application Integration process returns for validation and cleansing requests.

To prepare for this change, update the validation process objects in existing processes to include the `groupId` parameter for root fields.

For example, a process that handles validation expects MDM SaaS to send values for the drugCode and approvalStatus, regulatoryAuthority, and patentExpiry input fields. A business entity root field is mapped to the drugCode input field. Also, fields from a field group in the business entity are mapped to the

approvalStatus, regulatoryAuthority, and patentExpiry input fields, which belong to the regulatoryInformation field group.

The following sample JSON is an input payload that MDM SaaS sends to a validation process:

```
[
  {
    "docId": "business_entity_master_id1",
    "payload": [
      {
        "drugCode": " 12345 - 6789 -01 ",
        "regulatoryInformation": [
          {
            "approvalStatus": "apprved",
            "regulatoryAuthority": "fda ",
            "patentExpiry": "2038.08.14",
            "sys": {
              "groupId": "f88114db-461c-34c3-87b6-d2cebc76e85e"
            }
          }
        ],
        "sys": {
          "recordId": "payload-01"
        }
      }
    ]
  }
]
```

The root field mapped to the drugCode input field and the field mapped to the approvalStatus input field might fail validation. Currently, if the process sends a response without groupId for root fields, the validation errors appear in the record.

The following sample JSON is a response without the groupId parameter for root fields:

```
[
  {
    "docId": "business_entity-master_id1",
    "validation": [
      {
        "passed": false,
        "fields": [
          {
            "fieldName": "drugCode",
            "dtsp": 23
          },
          {
            "fieldName": "approvalStatus",
            "dtsp": 23,
            "sys": {
              "groupId": "f88114db-461c-34c3-87b6-d2cebc76e85e"
            }
          }
        ]
      }
    ]
  }
]
```

Effective in the July 2026 release, this output payload will be invalid and the associated rule association will result in the Exception status.

The following sample JSON is a valid response in the July 2026 release:

```
[
  {
    "docId": "business_entity-master_id1",
    "validation": [
      {
        "passed": false,
```

```
        "fields": [
          {
            "fieldName": "drugCode",
            "dtsp": 23,
            "sys": {
              "groupId": "rghh667-461c-34c3-87b6-45566"
            }
          },
          {
            "fieldName": "approvalStatus",
            "dtsp": 23,
            "sys": {
              "groupId": "f88114db-461c-34c3-87b6-d2cebc76e85e"
            }
          }
        ]
      }
    ]
  }
]
```

The sample payload includes the groupId parameter for the root fields. Before the July 2026 release, ensure that all root field objects in the response include a `sys` object with a `groupId`.

Migrate assets

Effective in the April 2026 release, MDM SaaS restricts asset migration from organizations that haven't migrated their basic, advanced, and DaaS rule associations to use Enrichment and Validation Orchestrator into organizations that have. This restriction ensures consistency and compatibility. However, if you have already migrated these rule associations in your source organization, you can import assets into the target organization even if it hasn't migrated to use Enrichment and Validation Orchestrator.

MDM SaaS doesn't support migration of assets between organizations containing basic, advanced, and DaaS rule associations that are partially migrated to use Enrichment and Validation Orchestrator.

For example, if some rule associations fail to migrate, the organization might end up with a partial migration. Rerun the job to resolve the issue. If the issue persists, contact Informatica Global Customer Support.

Additionally, ensure that you don't migrate assets and run the migrate rule associations job simultaneously.

For example, if you export assets while the migrate rule associations job is in progress, the exported file doesn't contain rule associations that are created as part of the migration process. If you import the exported file into a target organization that's migrated to use Enrichment and Validation Orchestrator, the import fails. When you import assets into an organization, if you simultaneously run the migrate rule associations job, the migration process doesn't consider the rule associations that are being imported.

For more information about migrating assets between organizations, see *Manage and Migrate Assets*.

Import the process for the reprocess master data job

Effective in the October 2024 release, you need the predefined Cloud Application Integration process, `MDMProcessMasterData`, to recalculate the trust scores of the active and deleted master records.

To reprocess master data, ensure that you perform the following tasks after the organization is upgraded:

1. *Modify permissions for organizations in the July 2024* .
2. *Import the process to reprocess master data*.
3. *Get the artifact ID of the process*.
4. *Modify permissions and create a user for reprocessing master data*.
5. *Publish the process for reprocessing master data*.

Step 1. Modify permissions for the existing process

If you don't have the `MDMProcessMasterData` process in your organization, you can start by importing the process to reprocess master data. For more information about importing the process to reprocess master data, see *Import the process to reprocess master data*.

If you have the `MDMProcessMasterData` process from the July 2024 release, you need to get the latest process file that supports processing active and deleted records. Before you get the latest file, remove the read-only access to the process so that you can overwrite the existing file with the latest file.

To set the update permissions, use the UpdateACL API and submit a POST request.

To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiUrl>/frs/v1/UpdateACL
```

When you submit a POST request to set the update permissions, you require the `artifactId` of the process. To get the `artifactId` of the process, see *Get the artifact ID of the process*.

Sample Request

Use the following POST request to set the update permissions of the `MDMProcessMasterData` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
          {
              "artifactId": "<Artifact ID from Step 3>",
               "aces": [
                            {
                              "operation": "CREATE_ACE",
                              "permission": {
                                          "changePermission": true,
                                          "read": true,
                                          "update": true,
                                          "delete": true,
                                           "execute": true
                                                    },
                              "idsInfo": {
                                          "id": "3VMH0uFUXQVddwVkjrfJUv",
                                           "type": "USER"
                                              }
                            }
                          ]
            }
```

Note: The service user ID, `3VMH0uFUXQVddwVkjrfJUv`, remains a constant value for all the predefined Application Integration processes and doesn't vary between organizations.

Sample Response

After the POST request to modify the permissions of the `MDMProcessMasterData` process, you get the following response:

```
{
     "@odata.context": "$metadata#BaseEntities",
     "value": [
                        {
                            "guid": "FRS_ID",
                            "code": "FRS_200",
                             "message": "Successfully Updated ACLs"
                         }
                      ]
}
```

Step 2. Import the process to reprocess master data

To reprocess master data, import the `MDMProcessMasterData` process after you upgrade the organization.

1. To request the `MDMProcessMasterData` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the `MDMProcessMasterData` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, and select the ZIP file that contains the `MDMProcessMasterData` process, and click **Open**.
6. Click **Import**.

Step 3. Get the artifact ID of the process

To modify permissions and create a user to access the `MDMProcessMasterData` process, you require the artifact ID of the process to uniquely identify it.

To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Request

Use the following POST request to get the artifact ID of the `MDMProcessMasterData` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "lookupParamPath": [
        {
            "name": "MDMProcessMasterData",
            "type": "PROCESS",
            "location": [
                {
                    "type": "Space",
                    "name": "REG"
                },
                {
                    "name": "Business360",
                    "type": "Project"
                }
            ]
        }
    ]
}
```

Sample Response

The sample response shows the HTTP 200 OK response code and gets the artifact ID of the `MDMProcessMasterData` process. The response shows the artifact ID as `9TvdYgWHVOrhUHnMLMCc0z` in the `artifact` section.

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "orgId": "4MEN7vwklj8biicae7QiKX",
            "status": {
                "code": "FRS_200",
                "message": ""
```

```
},
"tags": [],
"artifact": {
    "@odata.type": "#OData.frs.Document",
    "id": "9TvdYgWHVOrhUHnMLMCc0z",
    "name": "MDMProcessMasterData",
    "description": "",
    "owner": "2UQOrM7xtu1euGYkYlBeOr",
    "createdBy": "2UQOrM7xtu1euGYkYlBeOr",
    "lastUpdatedBy": "2UQOrM7xtu1euGYkYlBeOr",
    "lastAccessedBy": "2UQOrM7xtu1euGYkYlBeOr",
    "createdTime": "2024-07-25T04:01:13Z",
    "lastUpdatedTime": "2024-08-01T11:29:30Z",
    "lastAccessedTime": "2024-08-01T11:29:30Z",
    "expiresBy": "2038-01-18T00:00:00Z",
    "parentInfo": [
        {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
        },
        {
            "parentId": "0XuRGcy4SdyehONacV75yq",
            "parentName": "Business360",
            "parentType": "Project"
        }
    ],
    "documentType": "PROCESS",
    "contentType": "application/json; charset=utf-8",
    "documentState": "VALID",
    "aclRule": "org",
    "subcontainerCount": 0,
    "customAttributes": {
        "stringAttrs": [
            {
                "name": "publishedBy",
                "value": "Delta_Apr4Adm"
            },
            {
                "name": "SubType",
                "value": ""
            },
            {
                "name": "binding",
                "value": "rest"
            },
            {
                "name": "ReferencedPublishingAllowed",
                "value": "true"
            },
            {
                "name": "APIName",
                "value": "MDMProcessMasterData"
            },
            {
                "name": "publicationStatus",
                "value": "published"
            }
        ],
        "numberAttrs": [],
        "dateAttrs": [
            {
                "name": "publicationDate",
                "value": "2024-08-01T11:29:39Z"
            }
        ]
    },
    "repoInfo": {
        "repoParams": [],
        "repoPath": null,
        "repoHandle": "tf2VR4109cjIw8j-
```

```
gt-3576941-2024-07-25T04:01:13.177Z::pd.xml",
                    "frsPath": null
                },
                "isSourceControlled": false,
                "checkedOutById": null
            },
            "docRef": null
        }
    ]
}
```

Step 4. Modify permissions and create a user for reprocessing master data

After you import the `MDMProcessMasterData` process, set the process to read only so that users can't modify it. Additionally, the `MDMProcessMasterData` process includes a service user created and assigned to it by default.

You can remove the service user or modify its permission, but you can't create a new service user. When you upgrade your organizations to the latest release and the `MDMProcessMasterData` process has updates in the latest release, the service user requires the necessary permissions to upgrade the process. If you don't assign the necessary permissions to the service user, the upgrade might fail.

To set the read-only permission for the process and to assign necessary permissions to the service user, use the UpdateACL API and submit a POST request. To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiUrl>/frs/v1/UpdateACL
```

Sample Request

Use the following POST request to modify the permissions of the `MDMProcessMasterData` process to read only:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true
            },
            "idsInfo": {
                "id": "<Organization ID>",
                "type": "ORG"
            }
        }
    ]
}
```

Note: The `Organization ID` specifies the identifier of the organization to which the `MDMProcessMasterData` process was imported.

Use the following POST request to assign the necessary permissions for the service user assigned to the `MDMProcessMasterData` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
```

```
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": true,
                "delete": true,
                "execute": true
            },
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            }
        }
    ]
}
```

Sample Response

After the POST requests to modify the permissions of the `MDMProcessMasterData` process and create a user to access the `MDMProcessMasterData` process are successful, you get the following response:

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "guid": "FRS_ID",
            "code": "FRS_200",
            "message": "Successfully Updated ACLs"
        }
    ]
}
```

Step 5. Publish the process for reprocessing master data

After you modify permissions and create a user for the `MDMProcessMasterData` process, publish the process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the **MDMProcessMasterData** process, and click **Actions**.
4. Click **Publish**.

Import the process for matching external data

Effective in the July 2024 release, the match process requires match keys for master or source records to match external data with master or source records without storing the external data. You can generate match keys for master records by using a generate search indexes or match keys job. The match keys for source records are generated during the ingress process.

Additionally, you need the predefined Cloud Application Integration process, `MDMExternalMatch`, to match external data with master or source records.

If you import the `MDMExternalMatch` process for the first time in your organization, perform the following steps:

1. “Step 1. Generate match keys for master records” on page 65

2. “Step 2. Import the process for matching external data” on page 65
3. “Step 3. Get the artifact ID of the process” on page 65
4. “Step 4. Modify permissions for matching external data orchestration” on page 67
5. “Step 5. Publish the process” on page 68

Note: If the `MDMExternalMatch` process is already imported in your organization during the previous releases, you must reimport the latest version of the `MDMExternalMatch` process. For more information about reimporting the process, see “Reimport the process for matching external data” on page 68.

Step 1. Generate match keys for master records

To match external data with master records, generate match keys for master records by running a generate search indexes or match keys job. The match process uses match keys of master records for matching.

For more information about the generate search indexes or match keys job, see Define and run the generate search indexes or match keys job.

Step 2. Import the process for matching external data

MDM SaaS uses the predefined `MDMExternalMatch` process to orchestrate the process for matching external data.

1. To request the `MDMExternalMatch` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the `MDMExternalMatch` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, and select the ZIP file that contains the `MDMExternalMatch` process, and click **Open**.
6. Click **Import**.

Step 3. Get the artifact ID of the process

To modify permissions of the `MDMExternalMatch` process, you require the artifact ID of the process to uniquely identify it.

To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Requests

Use the following POST request to get the artifact ID of the `MDMExternalMatch` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "lookupParamPath": [
        {
            "name": "MDMExternalMatch",
            "type": "PROCESS",
            "location": [
                {
                    "type": "Space",
```

```
                    "name": "REG"
                },
                {
                    "name": "Business360",
                    "type": "Project"
                }
            ]
        }
    ]
}
```

Sample Response

The sample response shows the HTTP 200 OK response code and contains the artifact ID of the `MDMExternalMatch` process. The response shows the artifact ID as `a7d1raphIOLdjfNVarUJaC` in the `artifact` section.

```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    {
      "orgId": "lkV1tSYJzKYcdNHddSjsWN",
      "status": {
        "code": "FRS_200",
        "message": ""
      },
      "tags": [],
      "artifact": {
        "@odata.type": "#OData.frs.Document",
        "id": "a7d1raphIOLdjfNVarUJaC",
        "name": "MDMExternalMatch",
        "description": "",
        "owner": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastUpdatedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastAccessedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdTime": "2024-06-11T09:22:29Z",
        "lastUpdatedTime": "2024-06-11T09:22:29Z",
        "lastAccessedTime": "2024-06-11T09:22:29Z",
        "expiresBy": "2038-01-18T00:00:00Z",
        "parentInfo": [
          {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
          },
          {
            "parentId": "9Lf4MSeHu5vkk8CS6pTcA2",
            "parentName": "Business360",
            "parentType": "Project"
          }
        ],
        "documentType": "PROCESS",
        "contentType": "application/json; charset=utf-8",
        "documentState": "VALID",
        "aclRule": "org",
        "subcontainerCount": 0,
        "customAttributes": {
          "stringAttrs": [],
          "numberAttrs": [],
          "dateAttrs": []
        },
        "repoInfo": {
          "repoParams": [],
          "repoPath": null,
          "repoHandle": "f2B7O2htghGZ5i4-gt-483987-2024-06-11T09:22:29.093Z::pd.xml",
          "frsPath": null
        },
        "isSourceControlled": false,
        "checkedOutById": null
```

```
        },
        "docRef": null
      }
    ]
}
```

Step 4. Modify permissions for matching external data orchestration

After you import the `MDMExternalMatch` process, set the process to read only so that users can't modify it. Additionally, the `MDMExternalMatch` process is assigned to a service user by default.

You can remove the service user or modify its permission, but you can't create a new service user. When you upgrade your organizations to the latest release and the `MDMExternalMatch` process has updates in the latest release, the service user requires the necessary permissions to upgrade the process. If you don't assign the necessary permissions to the service user, the upgrade might fail.

To set the read-only permission for the process and to assign necessary permissions to the service user, use the UpdateACL API and submit a POST request. To submit a POST request, use the following URI with the session ID of the administrator who manages the organization:

```
<baseApiUrl>/frs/v1/UpdateACL
```

Sample Requests

Use the following POST request to modify the permissions of the `MDMExternalMatch` process to read only:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true
            },
            "idsInfo": {
                "id": "<Organization ID>",
                "type": "ORG"
            }
        }
    ]
}
```

Note: The `Organization ID` specifies the identifier of the organization to which the `MDMExternalMatch` process was imported.

Use the following POST request to assign the necessary permissions for the service user assigned to the `MDMExternalMatch` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "artifactId": "<Artifact ID from Step 3>",
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
```

```
                "update": true,
                "delete": true,
                "execute": true
            },
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            }
        }
    ]
}
```

Note: The service user ID, `3VMH0uFUXQVddwVkjrfJUv`, remains a constant value for all the predefined Application Integration processes and doesn't vary between organizations.

Sample Response

After the POST requests to modify the permissions of the `MDMExternalMatch` process and the service user assigned to it are successful, you get the following response:

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "guid": "FRS_ID",
            "code": "FRS_200",
            "message": "Successfully Updated ACLs"
        }
    ]
}
```

Step 5. Publish the process

After you modify permissions for the `MDMExternalMatch` process, publish the process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.
2. Navigate to the **Business360** folder.
3. Select the **MDMExternalMatch** process, and click **Actions**.
4. Click **Publish**.

Reimport the process for matching external data

Effective in the July 2024 release, if you already have the `MDMExternalMatch` process in your organization, you must reimport the latest version of the `MDMExternalMatch` process to match external data with master or source records.

To reimport the latest version of the `MDMExternalMatch` process, perform the following steps:

1. “Step 1. Get the artifact ID of the existing process” on page 69
2. “Step 2. Assign write permissions to the user ” on page 71
3. “Step 3. Import the latest process for matching external data” on page 71
4. “Step 4. Delete the write permission assigned to users” on page 72
5. “Step 5. Publish the process” on page 73

Note: If you import the `MDMExternalMatch` process for the first time in your organization, see “Import the process for matching external data” on page 64.

Step 1. Get the artifact ID of the existing process

To overwrite the existing `MDMExternalMatch` process, you need the artifact ID of the process to uniquely identify it. To get the artifact ID, log in to MDM SaaS.

To log in to MDM SaaS, use the Login API and submit a POST request with the following URI:

```
POST <baseApiURL>/saas/public/core/v3/login
```

To get the artifact ID of the process, use the LookupArtifactsDetailsByPath API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/LookupArtifactsDetailsByPath
```

Sample Requests

Use the following POST request to log in to MDM SaaS:

```
POST https://use4.dm-us.informaticacloud.com/saas/public/core/v3/login
Content-Type: application/json
{
    "username": "<username>",
    "password": "<password>"
}
```

Use the following POST request to get the artifact ID of the existing `MDMExternalMatch` process:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/LookupArtifactsDetailsByPath
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "lookupParamPath": [
        {
            "name": "MDMExternalMatch",
            "type": "PROCESS",
            "location": [
                {
                    "type": "Space",
                    "name": "REG"
                },
                {
                    "name": "Business360",
                    "type": "Project"
                }
            ]
        }
    ]
}
```

Sample Responses

After the POST request to log in to MDM SaaS is successful, you get the following response:

```
{
    "products": [
        {
            "name": "Integration Cloud",
            "baseApiUrl": "https://qa-pod1.rel.infaqa.com/saas"
        }
    ],
    "userInfo": {
        "sessionId": "<Session ID>",
        "id": "<User ID>",
        "name": "<username>",
        "parentOrgId": "52ZSTB0IDK6dXxaEQLUaQu",
        "orgId": "<Org ID>",
        "orgName": "<Org name>",
        "groups": {},
        "status": "Active"
    }
}
```

After the POST request to get the artifact ID of the process is successful, you get the following response that shows the artifact ID as `a7d1raphIOLdjfNVarUJaC`.


```
{
  "@odata.context": "$metadata#BaseEntities",
  "value": [
    {
      "orgId": "lkV1tSYJzKYcdNHddSjsWN",
      "status": {
        "code": "FRS_200",
        "message": ""
      },
      "tags": [],
      "artifact": {
        "@odata.type": "#OData.frs.Document",
        "id": "a7d1raphIOLdjfNVarUJaC",
        "name": "MDMExternalMatch",
        "description": "",
        "owner": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastUpdatedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "lastAccessedBy": "dR1G6Qi59OKj6qCYOfWZsA",
        "createdTime": "2024-06-11T09:22:29Z",
        "lastUpdatedTime": "2024-06-11T09:22:29Z",
        "lastAccessedTime": "2024-06-11T09:22:29Z",
        "expiresBy": "2038-01-18T00:00:00Z",
        "parentInfo": [
          {
            "parentId": "7cCn5thwWFLhiZoSosphKL",
            "parentName": "REG",
            "parentType": "Space"
          },
          {
            "parentId": "9Lf4MSeHu5vkk8CS6pTcA2",
            "parentName": "Business360",
            "parentType": "Project"
          }
        ],
        "documentType": "PROCESS",
        "contentType": "application/json; charset=utf-8",
        "documentState": "VALID",
        "aclRule": "org",
        "subcontainerCount": 0,
        "customAttributes": {
          "stringAttrs": [],
          "numberAttrs": [],
          "dateAttrs": []
        },
        "repoInfo": {
          "repoParams": [],
          "repoPath": null,
          "repoHandle": "f2B7O2htghGZ5i4-gt-483987-2024-06-11T09:22:29.093Z::pd.xml",
          "frsPath": null
        },
        "isSourceControlled": false,
        "checkedOutById": null
      },
      "docRef": null
    }
  ]
}
```

Step 2. Assign write permissions to the user

To overwrite the existing `MDMExternalMatch` process, assign write permission to the user who logged in to MDM SaaS.

To assign write permission to the user, use the UpdateACL API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/UpdateACL
```

Sample Request

Use the following POST request to assign write permission to the user who logged in to MDM SaaS:

```
{
    "aces": [
        {
            "operation": "CREATE_ACE",
            "permission": {
                "changePermission": true,
                "read": true,
                "update": true,
                "delete": false,
                "execute": true
            },
            "idsInfo": {
                "id": "<User ID from Step 1>",
                "type": "USER"
            }
        }
    ],
    "artifactId": "<Artifact ID from Step 1>"
}
```

Sample Response

After the POST request to assign the write permission to the user is successful, you get the following response:

```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "guid": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "code": "FRS_200",
            "message": "Successfully Updated ACLs"
        }
    ]
}
```

Step 3. Import the latest process for matching external data

You require the latest `MDMExternalMatch` process to match external data with source records.

1. To request the latest `MDMExternalMatch` process, contact Informatica Global Customer Support.

   After the necessary approvals, you'll receive a ZIP file that contains the `MDMExternalMatch` process.
2. In Cloud Application Integration, click **Explore**.
3. Navigate to the **Business360** folder.
4. Click **Import**.
5. On the **Import Assets** page, click **Choose File**, and select the ZIP file that contains the `MDMExternalMatch` process, and click **Open**.
6. In the **Specify Import Job Details** section, select **Overwrite existing assets, excluding connections and runtime environments**.

7. Click **Import**.

Step 4. Delete the write permission assigned to users

After you import the latest `MDMExternalMatch` process, delete the write permission assigned to the user and set the process to read only so that users don't modify it.

To delete the write permission, you require the ID of the write permission. Use the GetACL API to get a list of permissions assigned to the process. You can identify the ID of the write permission based on the date when you assigned the permission.

To get a list of permissions assigned to the user, use the GetACL API and submit a GET request with the following URI:

```
GET <baseApiURL>/frs/api/v1/GetACL
```

To delete the write permission, use the UpdateACL API and submit a POST request with the following URI:

```
POST <baseApiURL>/frs/api/v1/UpdateACL
```

Sample Requests

Use the following GET request to get the list of permissions assigned to the user:

```
GET https://use4.dm-us.informaticacloud.com/frs/api/v1/GetACL(artifactId='<Artifact ID
from Step 1>')
```

Use the following POST request to delete the write permission assigned to the user:

```
POST https://use4.dm-us.informaticacloud.com/frs/api/v1/UpdateACL
IDS-SESSION-ID: XXXXXXXXXXXXXXXXXXXXXX
Content-Type: application/json
{
    "aces": [
        {
            "aceId": "<Write Permission ID>",
            "operation": "DELETE_ACE",
            "idsInfo": {
                "id": "<User ID from Step 1>",
                "type": "USER"
            }
        }
    ],
    "artifactId": "<Artifact ID from Step 1>"
}
```

Sample Responses

After the GET request is successful, you get the following response:

```
{
    "@odata.context": "$metadata#Collection(OData.frs.Ace)",
    "value": [
        {
            "id": "9aMAeHngAJeezftidP23i9",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "3VMH0uFUXQVddwVkjrfJUv",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:42:51Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:42:51Z",
            "permission": {
                "create": null,
                "read": true,
                "update": true,
                "delete": true,
```

```
                "execute": true,
                "changePermission": true {{            }}
            }
        },
        {
            "id": "bmo9yhPqYc2fwBEHK9Timf",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "8OSrngWzLw3bgwgRbqUy2f",
                "type": "ORG"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-02-28T07:44:33Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-02-28T07:44:33Z",
            "permission": {
                "create": null,
                "read": true,
                "update": false,
                "delete": false,
                "execute": true,
                "changePermission": true {\{}
                }
            }
        },
        {
            "id": "<Write Permission ID>",
            "artifactId": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "idsInfo": {
                "id": "hIC3qRnQfqqj00zDeJnd6S",
                "type": "USER"
            },
            "createdBy": "hIC3qRnQfqqj00zDeJnd6S",
            "createdTime": "2025-03-03T07:11:08Z",
            "lastUpdatedBy": "hIC3qRnQfqqj00zDeJnd6S",
            "lastUpdatedTime": "2025-03-03T07:11:08Z",
            "permission": {
                "create": null,
                "read": true,
                "update": true,
                "delete": false,
                "execute": true,
                "changePermission": true
            }
        }
    ]
}
```


Note: Identify the ID of the write permission based on the date when you assigned the permission to the user.

After the POST request to delete the write permission assigned to the user is successful, you get the following response:


```
{
    "@odata.context": "$metadata#BaseEntities",
    "value": [
        {
            "guid": "aEy8Tl6yhl2lgQBrdDCbEZ",
            "code": "FRS_200",
            "message": "Successfully Updated ACLs"
        }
    ]
}
```


Step 5. Publish the process

After you delete the write permissions assigned to the user, publish the process to invoke or run it.

1. In Cloud Application Integration, click **Explore**.

2. Navigate to the **Business360** folder.
3. Select the **MDMExternalMatch** process, and click **Actions**.
4. Click **Publish**.

INDEX

I

Informatica Global Customer Support
  contact information 6
Informatica Intelligent Data Management Cloud
  web site 5

M

maintenance outages 6

S

status
  IDMC 6
  system status 6

T

trust site
  description 6

U

upgrade notifications 6

W

web site 5