




CAM FOLLOWERS STAINLESS STEEL
HEXAGON SOCKET ON STUD HEAD

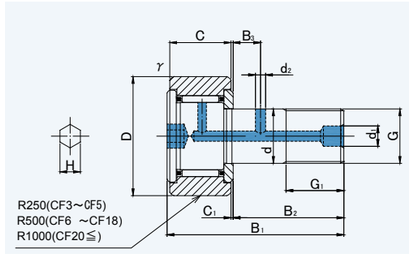


CF..MA


CF..MRA


CF..MUUA


CF..MUURA

CF..MA, MRA, MUUA, MUURA

DIMENSION TABLE

JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating
CF..MA	CF..MRA	CF..MUUA	CF..MUURA	g	d	D	C	G	B1	C1	Cr N	Cor N
CF30MA	**CF30MRA**	**CF30MUUA**	**CF30MUURA**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250
CF30VMA	**CF30VMRA**	**CF30VMUUA**	**CF30VMUURA**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530
CF30-1MA	**CF30-1MRA**	**CF30-1MUUA**	**CF30-1MUURA**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250
CF30-1VMA	**CF30-1VMRA**	**CF30-1VMUUA**	**CF30-1VMUURA**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530
CF30-2MA	**CF30-2MRA**	**CF30-2MUUA**	**CF30-2MUURA**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250
CF30-2VMA	**CF30-2VMRA**	**CF30-2VMUUA**	**CF30-2VMUURA**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530


INTERCHANGE TABLE

INA		NTN		IKO				MCGILL	
CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITH SEALS	CROWNED OUTER RING WITH SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—


Stud diameter (d) 3 to 10mm : No grease refilling hole is provided (except "K" type)

CAM FOLLOWERS STAINLESS STEEL


HEXAGON SOCKET ON BOTH SIDES GREASE NIPPLE INSTALLED




CF. . MAB (CF10MABK, CF10−1MABK)




CF. . MAB (CF12≦)




CF. . MAB



CF. . MRAB



CF. . MUUAB



CF. . MUURAB

CF..MAB, MRAB, MUUAB, MUURAB

STAINLESS STEEL

CF..MAB, MRAB, MUUAB, MUURAB


DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CF..MAB	CF..MRAB	CF..MUUAB	CF..MUURAB	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CF10MABK	**CF10MRABK**	**CF10MUUABK**	**CF10MUURABK**	**45**	10	22	12	M10×1	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CF10VMABK	**CF10VMRABK**	**CF10VMUUABK**	**CF10VMUURABK**	**45**	10	22	12	M10×1	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CF10-1MABK	**CF10-1MRABK**	**CF10-1MUUABK**	**CF10-1MUURABK**	**60**	10	26	12	M10×1	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CF10-1VMABK	**CF10-1VMRABK**	**CF10-1VMUUABK**	**CF10-1VMUURABK**	**60**	10	26	12	M10×1	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CF12MAB	**CF12MRAB**	**CF12MUUAB**	**CF12MUURAB**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CF12VMAB	**CF12VMRAB**	**CF12VMUUAB**	**CF12VMUURAB**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CF12-1MAB	**CF12-1MRAB**	**CF12-1MUUAB**	**CF12-1MUURAB**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CF12-1VMAB	**CF12-1VMRAB**	**CF12-1VMUUAB**	**CF12-1VMUURAB**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CF16MAB	**CF16MRAB**	**CF16MUUAB**	**CF16MUURAB**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CF16VMAB	**CF16VMRAB**	**CF16VMUUAB**	**CF16VMUURAB**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CF18MAB	**CF18MRAB**	**CF18MUUAB**	**CF18MUURAB**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CF18VMAB	**CF18VMRAB**	**CF18VMUUAB**	**CF18VMUURAB**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CF20MAB	**CF20MRAB**	**CF20MUUAB**	**CF20MUURAB**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CF20VMAB	**CF20VMRAB**	**CF20VMUUAB**	**CF20VMUURAB**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CF20-1MAB	**CF20-1MRAB**	**CF20-1MUUAB**	**CF20-1MUURAB**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CF20-1VMAB	**CF20-1VMRAB**	**CF20-1VMUUAB**	**CF20-1VMUURAB**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CF24MAB	**CF24MRAB**	**CF24MUUAB**	**CF24MUURAB**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CF24VMAB	**CF24VMRAB**	**CF24VMUUAB**	**CF24VMUURAB**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CF24-1MAB	**CF24-1MRAB**	**CF24-1MUUAB**	**CF24-1MUURAB**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CF24-1VMAB	**CF24-1VMRAB**	**CF24-1VMUUAB**	**CF24-1VMUURAB**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CF30MAB	**CF30MRAB**	**CF30MUUAB**	**CF30MUURAB**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30VMAB	**CF30VMRAB**	**CF30VMUUAB**	**CF30VMUURAB**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CF30-1MAB	**CF30-1MRAB**	**CF30-1MUUAB**	**CF30-1MUURAB**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30-1VMAB	**CF30-1VMRAB**	**CF30-1VMUUAB**	**CF30-1VMUURAB**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CF30-2MAB	**CF30-2MRAB**	**CF30-2MUUAB**	**CF30-2MUURAB**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30-2VMAB	**CF30-2VMRAB**	**CF30-2VMUUAB**	**CF30-2VMUURAB**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


INTERCHANGE


CAM FOLLOWERS STAINLESS STEEL
SCREWDRIVER SLOT HEAD

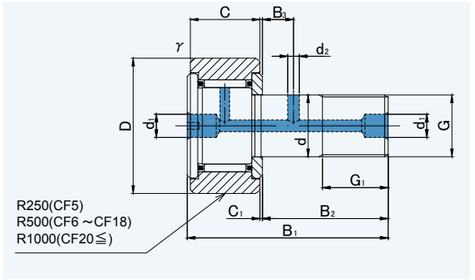


CF..M


CF..MR


CF..MUU


CF..MUUR

CF..M, MR, MUU, MUUR

DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CF..M	CF..MR	CF..MUU	CF..MUUR	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CF5M	**CF5MR**	**CF5MUU**	**CF5MUUR**	**10.5**	5	13	9	M5×0.8	23	0.5	2 880	2 540	—	—	—	—	—	—	—	—
CF5VM	**CF5VMR**	**CF5VMUU**	**CF5VMUUR**	**10.5**	5	13	9	M5×0.8	23	0.5	4 690	5 060	—	—	—	—	—	—	—	—
CF6M	**CF6MR**	**CF6MUU**	**CF6MUUR**	**18.5**	6	16	11	M6×1	28	0.6	3 330	3 330	—	—	—	—	—	—	—	—
CF6VM	**CF6VMR**	**CF6VMUU**	**CF6VMUUR**	**18.5**	6	16	11	M6×1	28	0.6	6 400	7 840	—	—	—	—	—	—	—	—
CF8M	**CF8MR**	**CF8MUU**	**CF8MUUR**	**28.5**	8	19	11	M8×1.25	32	0.6	3 960	4 330	—	—	—	—	—	—	—	—
CF8VM	**CF8VMR**	**CF8VMUU**	**CF8VMUUR**	**28.5**	8	19	11	M8×1.25	32	0.6	7 470	10 270	—	—	—	—	—	—	—	—
CF10M	**CF10MR**	**CF10MUU**	**CF10MUUR**	**45**	10	22	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CF10VM	**CF10VMR**	**CF10VMUU**	**CF10VMUUR**	**45**	10	22	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CF10MK	**CF10MRK**	**CF10MUUK**	**CF10MUURK**	**45**	10	22	12	M10×1	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CF10VMK	**CF10VMRK**	**CF10VMUUK**	**CF10VMUURK**	**45**	10	22	12	M10×1	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CF10-1M	**CF10-1MR**	**CF10-1MUU**	**CF10-1MUUR**	**60**	10	26	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CF10-1VM	**CF10-1VMR**	**CF10-1VMUU**	**CF10-1VMUUR**	**60**	10	26	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CF10-1MK	**CF10-1MRK**	**CF10-1MUUK**	**CF10-1MUURK**	**60**	10	26	12	M10×1	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CF10-1VMK	**CF10-1VMRK**	**CF10-1VMUUK**	**CF10-1VMUURK**	**60**	10	26	12	M10×1	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CF12M	**CF12MR**	**CF12MUU**	**CF12MUUR**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CF12VM	**CF12VMR**	**CF12VMUU**	**CF12VMUUR**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CF12-1M	**CF12-1MR**	**CF12-1MUU**	**CF12-1MUUR**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CF12-1VM	**CF12-1VMR**	**CF12-1VMUU**	**CF12-1VMUUR**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CF16M	**CF16MR**	**CF16MUU**	**CF16MUUR**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CF16VM	**CF16VMR**	**CF16VMUU**	**CF16VMUUR**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CF18M	**CF18MR**	**CF18MUU**	**CF18MUUR**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CF18VM	**CF18VMR**	**CF18VMUU**	**CF18VMUUR**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CF20M	**CF20MR**	**CF20MUU**	**CF20MUUR**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CF20VM	**CF20VMR**	**CF20VMUU**	**CF20VMUUR**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CF20-1M	**CF20-1MR**	**CF20-1MUU**	**CF20-1MUUR**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CF20-1VM	**CF20-1VMR**	**CF20-1VMUU**	**CF20-1VMUUR**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CF24M	**CF24MR**	**CF24MUU**	**CF24MUUR**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CF24VM	**CF24VMR**	**CF24VMUU**	**CF24VMUUR**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CF24-1M	**CF24-1MR**	**CF24-1MUU**	**CF24-1MUUR**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CF24-1VM	**CF24-1VMR**	**CF24-1VMUU**	**CF24-1VMUUR**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CF30M	**CF30MR**	**CF30MUU**	**CF30MUUR**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30VM	**CF30VMR**	**CF30VMUU**	**CF30VMUUR**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CF30-1M	**CF30-1MR**	**CF30-1MUU**	**CF30-1MUUR**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30-1VM	**CF30-1VMR**	**CF30-1VMUU**	**CF30-1VMUUR**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CF30-2M	**CF30-2MR**	**CF30-2MUU**	**CF30-2MUUR**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30-2VM	**CF30-2VMR**	**CF30-2VMUU**	**CF30-2VMUUR**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


Stud diameter (d) 5 to 10mm : Without oil hole in the thread side.(except "K" type)


CAM FOLLOWERS STAINLESS STEEL


HEXAGON SOCKET ON THREAD SIDE SCREWDRIVER SLOT HEAD

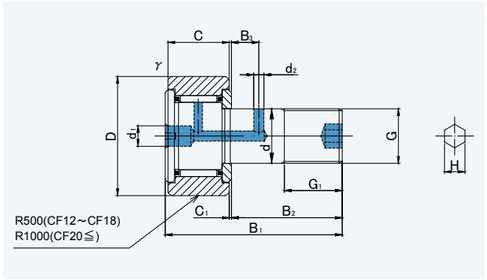


CF..MB


CF..MRB


CF..MUUB


CF..MUURB

CF..MB, MRB, MUUB, MUURB


DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CF..MB	CF..MRB	CF..MUUB	CF..MUURB	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CF12MB	**CF12MRB**	**CF12MUUB**	**CF12MUURB**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CF12VMB	**CF12VMRB**	**CF12VMUUB**	**CF12VMUURB**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CF12-1MB	**CF12-1MRB**	**CF12-1MUUB**	**CF12-1MUURB**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CF12-1VMB	**CF12-1VMRB**	**CF12-1VMUUB**	**CF12-1VMUURB**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CF16MB	**CF16MRB**	**CF16MUUB**	**CF16MUURB**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CF16VMB	**CF16VMRB**	**CF16VMUUB**	**CF16VMUURB**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CF18MB	**CF18MRB**	**CF18MUUB**	**CF18MUURB**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CF18VMB	**CF18VMRB**	**CF18VMUUB**	**CF18VMUURB**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CF20MB	**CF20MRB**	**CF20MUUB**	**CF20MUURB**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CF20VMB	**CF20VMRB**	**CF20VMUUB**	**CF20VMUURB**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CF20-1MB	**CF20-1MRB**	**CF20-1MUUB**	**CF20-1MUURB**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CF20-1VMB	**CF20-1VMRB**	**CF20-1VMUUB**	**CF20-1VMUURB**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CF24MB	**CF24MRB**	**CF24MUUB**	**CF24MUURB**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CF24VMB	**CF24VMRB**	**CF24VMUUB**	**CF24VMUURB**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CF24-1MB	**CF24-1MRB**	**CF24-1MUUB**	**CF24-1MUURB**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CF24-1VMB	**CF24-1VMRB**	**CF24-1VMUUB**	**CF24-1VMUURB**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CF30MB	**CF30MRB**	**CF30MUUB**	**CF30MUURB**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30VMB	**CF30VMRB**	**CF30VMUUB**	**CF30VMUURB**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CF30-1MB	**CF30-1MRB**	**CF30-1MUUB**	**CF30-1MUURB**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30-1VMB	**CF30-1VMRB**	**CF30-1VMUUB**	**CF30-1VMUURB**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CF30-2MB	**CF30-2MRB**	**CF30-2MUUB**	**CF30-2MUURB**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CF30-2VMB	**CF30-2VMRB**	**CF30-2VMUUB**	**CF30-2VMUURB**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


CAM FOLLOWERS STAINLESS STEEL


SOLID ECCENTRIC TYPE HEXAGON SOCKET ON STUD HEAD

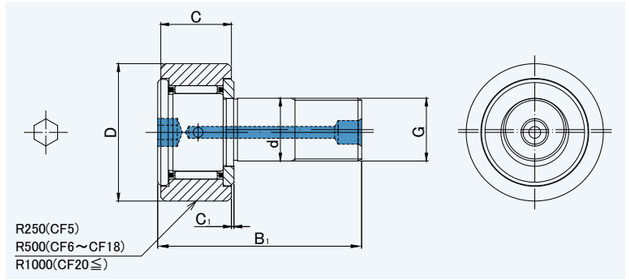


CFH. . MA


CFH. . MRA


CFH. . MUUA


CFH. . MUURA

CFH..MA, MRA, MUUA, MUURA

DIMENSION TABLE

INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CFH..MA	CFH..MRA	CFH..MUUA	CFH..MUURA	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CFH5MA	**CFH5MRA**	**CFH5MUUA**	**CFH5MUURA**	**10.5**	5	13	9	M5×0.8	23	0.5	2 880	2 540	—	—	—	—	—	—	—	—
CFH5VMA	**CFH5VMRA**	**CFH5VMUUA**	**CFH5VMUURA**	**10.5**	5	13	9	M5×0.8	23	0.5	4 690	5 060	—	—	—	—	—	—	—	—
CFH6MA	**CFH6MRA**	**CFH6MUUA**	**CFH6MUURA**	**18.5**	6	16	11	M6×1	28	0.6	3 330	3 330	—	—	—	—	—	—	—	—
CFH6VMA	**CFH6VMRA**	**CFH6VMUUA**	**CFH6VMUURA**	**18.5**	6	16	11	M6×1	28	0.6	6 400	7 840	—	—	—	—	—	—	—	—
CFH8MA	**CFH8MRA**	**CFH8MUUA**	**CFH8MUURA**	**28.5**	8	19	11	M8×1.25	32	0.6	3 960	4 330	—	—	—	—	—	—	—	—
CFH8VMA	**CFH8VMRA**	**CFH8VMUUA**	**CFH8VMUURA**	**28.5**	8	19	11	M8×1.25	32	0.6	7 470	10 270	—	—	—	—	—	—	—	—
CFH10MA	**CFH10MRA**	**CFH10MUUA**	**CFH10MUURA**	**45**	10	22	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CFH10VMA	**CFH10VMRA**	**CFH10VMUUA**	**CFH10VMUURA**	**45**	10	22	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CFH10-1MA	**CFH10-1MRA**	**CFH10-1MUUA**	**CFH10-1MUURA**	**60**	10	26	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CFH10-1VMA	**CFH10-1VMRA**	**CFH10-1VMUUA**	**CFH10-1VMUURA**	**60**	10	26	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CFH12MA	**CFH12MRA**	**CFH12MUUA**	**CFH12MUURA**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12VMA	**CFH12VMRA**	**CFH12VMUUA**	**CFH12VMUURA**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH12-1MA	**CFH12-1MRA**	**CFH12-1MUUA**	**CFH12-1MUURA**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12-1VMA	**CFH12-1VMRA**	**CFH12-1VMUUA**	**CFH12-1VMUURA**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH16MA	**CFH16MRA**	**CFH16MUUA**	**CFH16MUURA**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CFH16VMA	**CFH16VMRA**	**CFH16VMUUA**	**CFH16VMUURA**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CFH18MA	**CFH18MRA**	**CFH18MUUA**	**CFH18MUURA**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CFH18VMA	**CFH18VMRA**	**CFH18VMUUA**	**CFH18VMUURA**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CFH20MA	**CFH20MRA**	**CFH20MUUA**	**CFH20MUURA**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20VMA	**CFH20VMRA**	**CFH20VMUUA**	**CFH20VMUURA**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH20-1MA	**CFH20-1MRA**	**CFH20-1MUUA**	**CFH20-1MUURA**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20-1VMA	**CFH20-1VMRA**	**CFH20-1VMUUA**	**CFH20-1VMUURA**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH24MA	**CFH24MRA**	**CFH24MUUA**	**CFH24MUURA**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24VMA	**CFH24VMRA**	**CFH24VMUUA**	**CFH24VMUURA**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH24-1MA	**CFH24-1MRA**	**CFH24-1MUUA**	**CFH24-1MUURA**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24-1VMA	**CFH24-1VMRA**	**CFH24-1VMUUA**	**CFH24-1VMUURA**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH30MA	**CFH30MRA**	**CFH30MUUA**	**CFH30MUURA**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30VMA	**CFH30VMRA**	**CFH30VMUUA**	**CFH30VMUURA**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-1MA	**CFH30-1MRA**	**CFH30-1MUUA**	**CFH30-1MUURA**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-1VMA	**CFH30-1VMRA**	**CFH30-1VMUUA**	**CFH30-1VMUURA**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-2MA	**CFH30-2MRA**	**CFH30-2MUUA**	**CFH30-2MUURA**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-2VMA	**CFH30-2VMRA**	**CFH30-2VMUUA**	**CFH30-2VMUURA**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


Stud diameter (d) 5 to 10mm : No grease refilling hole is provided


INTERCHANGE


CAM FOLLOWERS STAINLESS STEEL


SOLID ECCENTRIC TYPE
HEXAGON SOCKET ON BOTH SIDES
GREASE NIPPLE INSTALLED

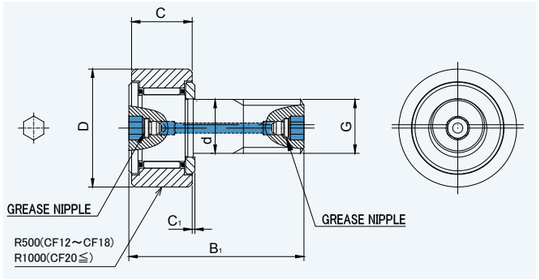


CFH. . MAB


CFH. . MRAB


CFH. . MUUAB


CFH. . MUURAB

CFH..MAB, MRAB, MUUAB, MUURAB

STAINLESS STEEL


CFH..MAB, MRAB, MUUAB, MUURAB


DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CFH..MAB	CFH..MRAB	CFH..UUAB	CFH..UURAB	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CFH12MAB	**CFH12RMAB**	**CFH12MUUAB**	**CFH12MUURAB**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12MVAB	**CFH12VMRAB**	**CFH12VMUUAB**	**CFH12VMUURAB**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH12-1MAB	**CFH12-1RMAB**	**CFH12-1MUUAB**	**CFH12-1MUURAB**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12-1MVAB	**CFH12-1VMRAB**	**CFH12-1VMUUAB**	**CFH12-1VMUURAB**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH16MAB	**CFH16RMAB**	**CFH16MUUAB**	**CFH16MUURAB**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CFH16MVAB	**CFH16VMRAB**	**CFH16VMUUAB**	**CFH16VMUURAB**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CFH18MAB	**CFH18RMAB**	**CFH18MUUAB**	**CFH18MUURAB**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CFH18MVAB	**CFH18VMRAB**	**CFH18VMUUAB**	**CFH18VMUURAB**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CFH20MAB	**CFH20RMAB**	**CFH20MUUAB**	**CFH20MUURAB**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20MVAB	**CFH20VMRAB**	**CFH20VMUUAB**	**CFH20VMUURAB**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH20-1MAB	**CFH20-1RMAB**	**CFH20-1MUUAB**	**CFH20-1MUURAB**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20-1MVAB	**CFH20-1VMRAB**	**CFH20-1VMUUAB**	**CFH20-1VMUURAB**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH24MAB	**CFH24RMAB**	**CFH24MUUAB**	**CFH24MUURAB**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24MVAB	**CFH24VMRAB**	**CFH24VMUUAB**	**CFH24VMUURAB**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH24-1MAB	**CFH24-1RMAB**	**CFH24-1MUUAB**	**CFH24-1MUURAB**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24-1MVAB	**CFH24-1VMRAB**	**CFH24-1VMUUAB**	**CFH24-1VMUURAB**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH30MAB	**CFH30RMAB**	**CFH30MUUAB**	**CFH30MUURAB**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30MVAB	**CFH30VMRAB**	**CFH30VMUUAB**	**CFH30VMUURAB**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-1MAB	**CFH30-1RMAB**	**CFH30-1MUUAB**	**CFH30-1MUURAB**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-1MVAB	**CFH30-1VMRAB**	**CFH30-1VMUUAB**	**CFH30-1VMUURAB**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-2MAB	**CFH30-2RMAB**	**CFH30-2MUUAB**	**CFH30-2MUURAB**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-2MVAB	**CFH30-2VMRAB**	**CFH30-2VMUUAB**	**CFH30-2VMUURAB**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


CAM FOLLOWERS STAINLESS STEEL
SOLID ECCENTRIC TYPE SCREWDRIVER SLOT HEAD

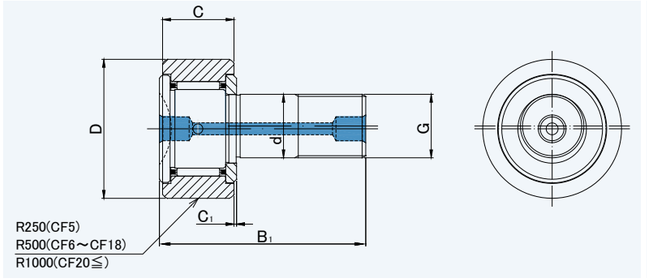


CFH. . M


CFH. . MR


CFH. . MUU


CFH. . MUUR

CFH..M, MR, MUU, MUUR

DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING	JNS NUMBER CROWNED OUTER RING	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CFH..M	CFH..MR	CFH..MUU	CFH..MUUR	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CFH5M	**CFH5MR**	**CFH5MUU**	**CFH5MUUR**	**10.5**	5	13	9	M5×0.8	23	0.5	2 880	2 540	—	—	—	—	—	—	—	—
CFH5VM	**CFH5VMR**	**CFH5VMUU**	**CFH5VMUUR**	**10.5**	5	13	9	M5×0.8	23	0.5	4 690	5 060	—	—	—	—	—	—	—	—
CFH6M	**CFH6MR**	**CFH6MUU**	**CFH6MUUR**	**18.5**	6	16	11	M6×1	28	0.6	3 330	3 330	—	—	—	—	—	—	—	—
CFH6VM	**CFH6VMR**	**CFH6VMUU**	**CFH6VMUUR**	**18.5**	6	16	11	M6×1	28	0.6	6 400	7 840	—	—	—	—	—	—	—	—
CFH8M	**CFH8MR**	**CFH8MUU**	**CFH8MUUR**	**28.5**	8	19	11	M8×1.25	32	0.6	3 960	4 330	—	—	—	—	—	—	—	—
CFH8VM	**CFH8VMR**	**CFH8VMUU**	**CFH8VMUUR**	**28.5**	8	19	11	M8×1.25	32	0.6	7 470	10 270	—	—	—	—	—	—	—	—
CFH10M	**CFH10MR**	**CFH10MUU**	**CFH10MUUR**	**45**	10	22	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CFH10VM	**CFH10VMR**	**CFH10VMUU**	**CFH10VMUUR**	**45**	10	22	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CFH10-1M	**CFH10-1MR**	**CFH10-1MUU**	**CFH10-1MUUR**	**60**	10	26	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CFH10-1VM	**CFH10-1VMR**	**CFH10-1VMUU**	**CFH10-1VMUUR**	**60**	10	26	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CFH12M	**CFH12MR**	**CFH12MUU**	**CFH12MUUR**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12VM	**CFH12VMR**	**CFH12VMUU**	**CFH12VMUUR**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH12-1M	**CFH12-1MR**	**CFH12-1MUU**	**CFH12-1MUUR**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12-1VM	**CFH12-1VMR**	**CFH12-1VMUU**	**CFH12-1VMUUR**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH16M	**CFH16MR**	**CFH16MUU**	**CFH16MUUR**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CFH16VM	**CFH16VMR**	**CFH16VMUU**	**CFH16VMUUR**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CFH18M	**CFH18MR**	**CFH18MUU**	**CFH18MUUR**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CFH18VM	**CFH18VMR**	**CFH18VMUU**	**CFH18VMUUR**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CFH20M	**CFH20MR**	**CFH20MUU**	**CFH20MUUR**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20VM	**CFH20VMR**	**CFH20VMUU**	**CFH20VMUUR**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH20-1M	**CFH20-1MR**	**CFH20-1MUU**	**CFH20-1MUUR**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20-1VM	**CFH20-1VMR**	**CFH20-1VMUU**	**CFH20-1VMUUR**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH24M	**CFH24MR**	**CFH24MUU**	**CFH24MUUR**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24VM	**CFH24VMR**	**CFH24VMUU**	**CFH24VMUUR**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH24-1M	**CFH24-1MR**	**CFH24-1MUU**	**CFH24-1MUUR**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24-1VM	**CFH24-1VMR**	**CFH24-1VMUU**	**CFH24-1VMUUR**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH30M	**CFH30MR**	**CFH30MUU**	**CFH30MUUR**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30VM	**CFH30VMR**	**CFH30VMUU**	**CFH30VMUUR**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-1M	**CFH30-1MR**	**CFH30-1MUU**	**CFH30-1MUUR**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-1VM	**CFH30-1VMR**	**CFH30-1VMUU**	**CFH30-1VMUUR**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-2M	**CFH30-2MR**	**CFH30-2MUU**	**CFH30-2MUUR**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-2VM	**CFH30-2VMR**	**CFH30-2VMUU**	**CFH30-2VMUUR**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


Stud diameter (d) 5 to 10mm : Without oil hole in the thread side.


CAM FOLLOWERS STAINLESS STEEL


SOLID ECCENTRIC TYPE
HEXAGON SOCKET ON THREAD SIDE
SCREWDRIVER SLOT HEAD

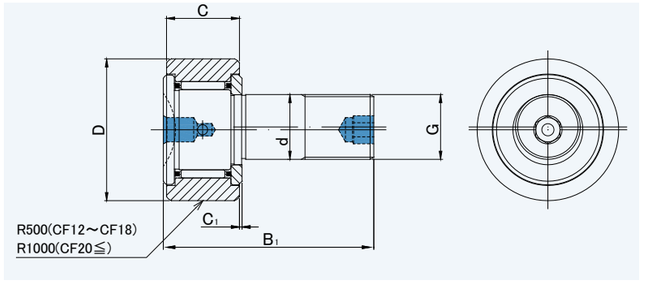


CFH. . MB


CFH. . MRB


CFH. . MUUB


CFH. . MUURB

CFH..MB, MRB, MUUB, MUURB


DIMENSION TABLE


INTERCHANGE TABLE

JNS NUMBER CYLINDRICAL OUTER RING	JNS NUMBER CROWNED OUTER RING	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CFH..MB	CFH..MRB	CFH..MUUB	CFH..MUURB	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CFH12MB	**CFH12MRB**	**CFH12MUUB**	**CFH12MUURB**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12VMB	**CFH12VMRB**	**CFH12VMUUB**	**CFH12VMUURB**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH12-1MB	**CFH12-1MRB**	**CFH12-1MUUB**	**CFH12-1MUURB**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFH12-1VMB	**CFH12-1VMRB**	**CFH12-1VMUUB**	**CFH12-1VMUURB**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFH16MB	**CFH16MRB**	**CFH16MUUB**	**CFH16MUURB**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CFH16VMB	**CFH16VMRB**	**CFH16VMUUB**	**CFH16VMUURB**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CFH18MB	**CFH18MRB**	**CFH18MUUB**	**CFH18MUURB**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CFH18VMB	**CFH18VMRB**	**CFH18VMUUB**	**CFH18VMUURB**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CFH20MB	**CFH20MRB**	**CFH20MUUB**	**CFH20MUURB**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20VMB	**CFH20VMRB**	**CFH20VMUUB**	**CFH20VMUURB**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH20-1MB	**CFH20-1MRB**	**CFH20-1MUUB**	**CFH20-1MUURB**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFH20-1VMB	**CFH20-1VMRB**	**CFH20-1VMUUB**	**CFH20-1VMUURB**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFH24MB	**CFH24MRB**	**CFH24MUUB**	**CFH24MUURB**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24VMB	**CFH24VMRB**	**CFH24VMUUB**	**CFH24VMUURB**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH24-1MB	**CFH24-1MRB**	**CFH24-1MUUB**	**CFH24-1MUURB**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFH24-1VMB	**CFH24-1VMRB**	**CFH24-1VMUUB**	**CFH24-1VMUURB**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFH30MB	**CFH30MRB**	**CFH30MUUB**	**CFH30MUURB**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30VMB	**CFH30VMRB**	**CFH30VMUUB**	**CFH30VMUURB**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-1MB	**CFH30-1MRB**	**CFH30-1MUUB**	**CFH30-1MUURB**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-1VMB	**CFH30-1VMRB**	**CFH30-1VMUUB**	**CFH30-1VMUURB**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFH30-2MB	**CFH30-2MRB**	**CFH30-2MUUB**	**CFH30-2MUURB**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFH30-2VMB	**CFH30-2VMRB**	**CFH30-2VMUUB**	**CFH30-2VMUURB**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


CAM FOLLOWERS STAINLESS STEEL

TAP HOLE FOR PIPING SCREWDRIVER SLOT HEAD

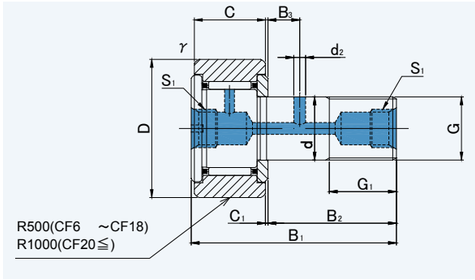





CFT..M



CFT..MR



CFT..MUU



CFT..MUUR

CFT..M, MR, MUU, MUUR

DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING	JNS NUMBER CROWNED OUTER RING	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CFT..M	CFT..MR	CFT..MUU	CFT..MUUR	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CFT6M	**CFT6MR**	**CFT6MUU**	**CFT6MUUR**	**18.5**	6	16	11	M6×1	28	0.6	3 330	3 330	—	—	—	—	—	—	—	—
CFT6VM	**CFT6VMR**	**CFT6VMUU**	**CFT6VMUUR**	**18.5**	6	16	11	M6×1	28	0.6	6 400	7 840	—	—	—	—	—	—	—	—
CFT8M	**CFT8MR**	**CFT8MUU**	**CFT8MUUR**	**28.5**	8	19	11	M8×1.25	32	0.6	3 960	4 330	—	—	—	—	—	—	—	—
CFT8VM	**CFT8VMR**	**CFT8VMUU**	**CFT8VMUUR**	**28.5**	8	19	11	M8×1.25	32	0.6	7 470	10 270	—	—	—	—	—	—	—	—
CFT10M	**CFT10MR**	**CFT10MUU**	**CFT10MUUR**	**45**	10	22	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CFT10VM	**CFT10VMR**	**CFT10VMUU**	**CFT10VMUUR**	**45**	10	22	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CFT10-1M	**CFT10-1MR**	**CFT10-1MUU**	**CFT10-1MUUR**	**60**	10	26	12	M10×1.25	36	0.6	4 950	6 310	—	—	—	—	—	—	—	—
CFT10-1VM	**CFT10-1VMR**	**CFT10-1VMUU**	**CFT10-1VMUUR**	**60**	10	26	12	M10×1.25	36	0.6	8 740	13 340	—	—	—	—	—	—	—	—
CFT12M	**CFT12MR**	**CFT12MUU**	**CFT12MUUR**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFT12VM	**CFT12VMR**	**CFT12VMUU**	**CFT12VMUUR**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFT12-1M	**CFT12-1MR**	**CFT12-1MUU**	**CFT12-1MUUR**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFT12-1VM	**CFT12-1VMR**	**CFT12-1VMUU**	**CFT12-1VMUUR**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFT16M	**CFT16MR**	**CFT16MUU**	**CFT16MUUR**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CFT16VM	**CFT16VMR**	**CFT16VMUU**	**CFT16VMUUR**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CFT18M	**CFT18MR**	**CFT18MUU**	**CFT18MUUR**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CFT18VM	**CFT18VMR**	**CFT18VMUU**	**CFT18VMUUR**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CFT20M	**CFT20MR**	**CFT20MUU**	**CFT20MUUR**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFT20VM	**CFT20VMR**	**CFT20VMUU**	**CFT20VMUUR**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFT20-1M	**CFT20-1MR**	**CFT20-1MUU**	**CFT20-1MUUR**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFT20-1VM	**CFT20-1VMR**	**CFT20-1VMUU**	**CFT20-1VMUUR**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFT24M	**CFT24MR**	**CFT24MUU**	**CFT24MUUR**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFT24VM	**CFT24VMR**	**CFT24VMUU**	**CFT24VMUUR**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFT24-1M	**CFT24-1MR**	**CFT24-1MUU**	**CFT24-1MUUR**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFT24-1VM	**CFT24-1VMR**	**CFT24-1VMUU**	**CFT24-1VMUUR**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFT30M	**CFT30MR**	**CFT30MUU**	**CFT30MUUR**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFT30VM	**CFT30VMR**	**CFT30VMUU**	**CFT30VMUUR**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFT30-1M	**CFT30-1MR**	**CFT30-1MUU**	**CFT30-1MUUR**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFT30-1VM	**CFT30-1VMR**	**CFT30-1VMUU**	**CFT30-1VMUUR**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFT30-2M	**CFT30-2MR**	**CFT30-2MUU**	**CFT30-2MUUR**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFT30-2VM	**CFT30-2VMR**	**CFT30-2VMUU**	**CFT30-2VMUUR**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—


Stud diameter (d) 6 to 10mm : Without oil hole in the thread side.


CAM FOLLOWERS STAINLESS STEEL


TAP HOLE FOR PIPING
HEXAGON SOCKET ON STUD HEAD

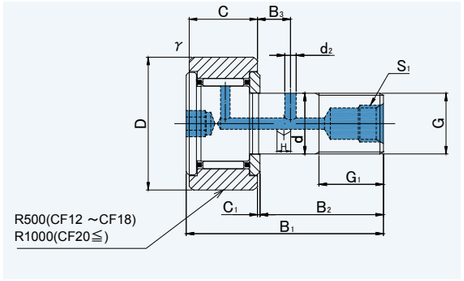


CFT..MA


CFT..MRA


CFT..MUUA


CFT..MUURA


CFT..MA, MRA, MUUA, MUURA


DIMENSION TABLE


INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING	JNS NUMBER CROWNED OUTER RING	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)						Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
													CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
CFT..MA	CFH..MRA	CFT..MUUA	CFT..MUURA	g	d	D	C	G	B1	C1	Cr N	Cor N	—	—	—	—	—	—	—	—
CFT12MA	**CFT12MRA**	**CFT12MUUA**	**CFT12MUURA**	**95**	12	30	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFT12VMA	**CFT12VMRA**	**CFT12VMUUA**	**CFT12VMUURA**	**95**	12	30	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFT12-1MA	**CFT12-1MRA**	**CFT12-1MUUA**	**CFT12-1MUURA**	**105**	12	32	14	M12×1.5	40	0.6	7 300	9 010	—	—	—	—	—	—	—	—
CFT12-1VMA	**CFT12-1VMRA**	**CFT12-1VMUUA**	**CFT12-1VMUURA**	**105**	12	32	14	M12×1.5	40	0.6	12 350	18 120	—	—	—	—	—	—	—	—
CFT16MA	**CFT16MRA**	**CFT16MUUA**	**CFT16MUURA**	**170**	16	35	18	M16×1.5	52	0.8	11 080	16 860	—	—	—	—	—	—	—	—
CFT16VMA	**CFT16VMRA**	**CFT16VMUUA**	**CFT16VMUURA**	**170**	16	35	18	M16×1.5	52	0.8	19 020	34 610	—	—	—	—	—	—	—	—
CFT18MA	**CFT18MRA**	**CFT18MUUA**	**CFT18MUURA**	**250**	18	40	20	M18×1.5	58	0.8	13 520	23 180	—	—	—	—	—	—	—	—
CFT18VMA	**CFT18VMRA**	**CFT18VMUUA**	**CFT18VMUURA**	**250**	18	40	20	M18×1.5	58	0.8	23 250	47 240	—	—	—	—	—	—	—	—
CFT20MA	**CFT20MRA**	**CFT20MUUA**	**CFT20MUURA**	**460**	20	52	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFT20VMA	**CFT20VMRA**	**CFT20VMUUA**	**CFT20VMUURA**	**460**	20	52	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFT20-1MA	**CFT20-1MRA**	**CFT20-1MUUA**	**CFT20-1MUURA**	**385**	20	47	24	M20×1.5	66	0.8	19 020	31 830	—	—	—	—	—	—	—	—
CFT20-1VMA	**CFT20-1VMRA**	**CFT20-1VMUUA**	**CFT20-1VMUURA**	**385**	20	47	24	M20×1.5	66	0.8	30 470	59 320	—	—	—	—	—	—	—	—
CFT24MA	**CFT24MRA**	**CFT24MUUA**	**CFT24MUURA**	**815**	24	62	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFT24VMA	**CFT24VMRA**	**CFT24VMUUA**	**CFT24VMUURA**	**815**	24	62	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFT24-1MA	**CFT24-1MRA**	**CFT24-1MUUA**	**CFT24-1MUURA**	**1 140**	24	72	29	M24×1.5	80	0.8	28 040	48 410	—	—	—	—	—	—	—	—
CFT24-1VMA	**CFT24-1VMRA**	**CFT24-1VMUUA**	**CFT24-1VMUURA**	**1 140**	24	72	29	M24×1.5	80	0.8	42 820	84 650	—	—	—	—	—	—	—	—
CFT30MA	**CFT30MRA**	**CFT30MUUA**	**CFT30MUURA**	**1 870**	30	80	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFT30VMA	**CFT30VMRA**	**CFT30VMUUA**	**CFT30VMUURA**	**1 870**	30	80	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFT30-1MA	**CFT30-1MRA**	**CFT30-1MUUA**	**CFT30-1MUURA**	**2 030**	30	85	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFT30-1VMA	**CFT30-1VMRA**	**CFT30-1VMUUA**	**CFT30-1VMUURA**	**2 030**	30	85	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—
CFT30-2MA	**CFT30-2MRA**	**CFT30-2MUUA**	**CFT30-2MUURA**	**2 220**	30	90	35	M30×1.5	100	1	41 740	78 250	—	—	—	—	—	—	—	—
CFT30-2VMA	**CFT30-2VMRA**	**CFT30-2VMUUA**	**CFT30-2VMUURA**	**2 220**	30	90	35	M30×1.5	100	1	62 210	132 530	—	—	—	—	—	—	—	—

INTERCHANGE










RNAST..M, MR, NAST..M, MR


DIMENSION TABLE

INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT INNER RING	JNS NUMBER CROWNED OUTER RING WITHOUT INNER RING	Mass (Approx.)	JNS NUMBER CYLINDRICAL OUTER RING WITH INNER RING	JNS NUMBER CROWNED OUTER RING WITH INNER RING	Mass (Approx.)	Dimensions(mm)					Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		TORRINGTON(KOYO)	
													CYLINDRICAL OUTER RING WITHOUT INNER RING	CROWNED OUTER RING WITHOUT INNER RING	CYLINDRICAL OUTER RING WITHOUT INNER RING	CROWNED OUTER RING WITHOUT INNER RING	CYLINDRICAL OUTER RING WITHOUT INNER RING	CROWNED OUTER RING WITHOUT INNER RING	CYLINDRICAL OUTER RING WITHOUT INNER RING	CROWNED OUTER RING WITHOUT INNER RING
RNAST..M	RNAST..MR	g	NAST..M	NAST..MR	g	Fw (F)	D	d	C	B	Cr N	Cor N	—	—	—	—	—	—	—	—
RNAST5M	**RNAST5MR**	**8.9**	—	—	—	7	16	—	7.8	—	2 520	2 190	—	—	—	—	—	—	—	—
RNAST6M	**RNAST6MR**	**13.9**	**NAST6M**	**NAST6MR**	**17.8**	10	19	6	9.8	10	3 790	4 180	—	—	—	—	—	—	—	—
RNAST8M	**RNAST8MR**	**23.5**	**NAST8M**	**NAST8MR**	**28**	12	24	8	9.8	10	5 220	5 410	—	—	—	—	—	—	—	—
RNAST10M	**RNAST10MR**	**42.5**	**NAST10M**	**NAST10MR**	**50**	14	30	10	11.8	12	8 920	8 890	—	—	—	—	—	—	—	—
RNAST12M	**RNAST12MR**	**49.5**	**NAST12M**	**NAST12MR**	**58**	16	32	12	11.8	12	9 560	10 020	—	—	—	—	—	—	—	—
RNAST15M	**RNAST15MR**	**50**	**NAST15M**	**NAST15MR**	**62**	20	35	15	11.8	12	11 310	13 150	—	—	—	—	—	—	—	—
RNAST17M	**RNAST17MR**	**90**	**NAST17M**	**NAST17MR**	**110**	22	40	17	15.8	16	16 000	19 220	—	—	—	—	—	—	—	—
RNAST20M	**RNAST20MR**	**135**	**NAST20M**	**NAST20MR**	**155**	25	47	20	15.8	16	17 660	22 540	—	—	—	—	—	—	—	—
RNAST25M	**RNAST25MR**	**152**	**NAST25M**	**NAST25MR**	**180**	30	52	25	15.8	16	19 040	26 120	—	—	—	—	—	—	—	—
RNAST30M	**RNAST30MR**	**255**	**NAST30M**	**NAST30MR**	**320**	38	62	30	19.8	20	27 870	41 760	—	—	—	—	—	—	—	—
RNAST35M	**RNAST35MR**	**375**	**NAST35M**	**NAST35MR**	**440**	42	72	35	19.8	20	29 620	46 550	—	—	—	—	—	—	—	—
RNAST40M	**RNAST40MR**	**420**	**NAST40M**	**NAST40MR**	**530**	50	80	40	19.8	20	32 840	56 210	—	—	—	—	—	—	—	—
RNAST45M	**RNAST45MR**	**460**	**NAST45M**	**NAST45MR**	**580**	55	85	45	19.8	20	34 130	61 080	—	—	—	—	—	—	—	—
RNAST50M	**RNAST50MR**	**500**	**NAST50M**	**NAST50MR**	**635**	60	90	50	19.8	20	35 600	66 050	—	—	—	—	—	—	—	—




NAST. . MZZ



NAST. . MZZR



NAST. . MZZUU




NAST. . MZZUUR

NAST..MZZ, MZZR, MZZUU, MZZUUR


DIMENSION TABLE

INTERCHANGE TABLE


JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)				Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		TORRINGTON(KOYO)	
											CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
NAST..MZZ	NAST..MZZR	NAST..MZZUU	NAST..MZZUUR	g	d	D	B	C	Cr N	Cor N	—	—	—	—	—	—	—	—
NAST6MZZ	**NAST6MZZR**	**NAST6MZZUU**	**NAST6MZZUUR**	**24.5**	6	19	14	13.8	3 790	4 180	—	—	—	—	—	—	—	—
NAST8MZZ	**NAST8MZZR**	**NAST8MZZUU**	**NAST8MZZUUR**	**39**	8	24	14	13.8	5 220	5 410	—	—	—	—	—	—	—	—
NAST10MZZ	**NAST10MZZR**	**NAST10MZZUU**	**NAST10MZZUUR**	**65**	10	30	16	15.8	8 920	8 890	—	—	—	—	—	—	—	—
NAST12MZZ	**NAST12MZZR**	**NAST12MZZUU**	**NAST12MZZUUR**	**75**	12	32	16	15.8	9 560	10 020	—	—	—	—	—	—	—	—
NAST15MZZ	**NAST15MZZR**	**NAST15MZZUU**	**NAST15MZZUUR**	**83**	15	35	16	15.8	11 310	13 150	—	—	—	—	—	—	—	—
NAST17MZZ	**NAST17MZZR**	**NAST17MZZUU**	**NAST17MZZUUR**	**135**	17	40	20	19.8	16 000	19 220	—	—	—	—	—	—	—	—
NAST20MZZ	**NAST20MZZR**	**NAST20MZZUU**	**NAST20MZZUUR**	**195**	20	47	20	19.8	17 660	22 540	—	—	—	—	—	—	—	—
NAST25MZZ	**NAST25MZZR**	**NAST25MZZUU**	**NAST25MZZUUR**	**225**	25	52	20	19.8	19 040	26 120	—	—	—	—	—	—	—	—
NAST30MZZ	**NAST30MZZR**	**NAST30MZZUU**	**NAST30MZZUUR**	**400**	30	62	25	24.8	27 870	41 760	—	—	—	—	—	—	—	—
NAST35MZZ	**NAST35MZZR**	**NAST35MZZUU**	**NAST35MZZUUR**	**550**	35	72	25	24.8	29 620	46 550	—	—	—	—	—	—	—	—
NAST40MZZ	**NAST40MZZR**	**NAST40MZZUU**	**NAST40MZZUUR**	**710**	40	80	26	25.8	32 840	56 210	—	—	—	—	—	—	—	—
NAST45MZZ	**NAST45MZZR**	**NAST45MZZUU**	**NAST45MZZUUR**	**760**	45	85	26	25.8	34 130	61 080	—	—	—	—	—	—	—	—
NAST50MZZ	**NAST50MZZR**	**NAST50MZZUU**	**NAST50MZZUUR**	**830**	50	90	26	25.8	35 600	66 050	—	—	—	—	—	—	—	—




NART. . MX



NART. . MR



NART. . MVX



NART. . MVR

NART..MX, MR, MUUX, MUUR

DIMENSION TABLE

INTERCHANGE TABLE

JNS NUMBER CYLINDRICAL OUTER RING WITHOUT SEALS	JNS NUMBER CROWNED OUTER RING WITHOUT SEALS	JNS NUMBER CYLINDRICAL OUTER RING WITH SEALS	JNS NUMBER CROWNED OUTER RING WITH SEALS	Mass (Approx.)	Dimensions(mm)				Basic dynamic load rating	Basic static load rating	INA		NTN		IKO		MCGILL	
											CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS	CYLINDRICAL OUTER RING WITHOUT SEALS	CROWNED OUTER RING WITHOUT SEALS
NART..MX	NART..MR	NART..MUUX	NART..MUUR	g	d	D	B	C	Cr N	Cor N	—	—	—	—	—	—	—	—
NART5MX	**NART5MR**	**NART5MUUX**	**NART5MUUR**	**14.5**	5	16	12	11	3 330	3 420	—	—	—	—	—	—	—	—
NART5MVX	**NART5MVR**	**NART5MUUVX**	**NART5MUUVR**	**15.1**	5	16	12	11	6 210	7 670	—	—	—	—	—	—	—	—
NART6MX	**NART6MR**	**NART6MUUX**	**NART6MUUR**	**20.5**	6	19	12	11	3 860	4 320	—	—	—	—	—	—	—	—
NART6MVX	**NART6MVR**	**NART6MUUVX**	**NART6MUUVR**	**21.5**	6	19	12	11	7 020	9 470	—	—	—	—	—	—	—	—
NART8MX	**NART8MR**	**NART8MUUX**	**NART8MUUR**	**41.5**	8	24	15	14	6 070	6 710	—	—	—	—	—	—	—	—
NART8MVX	**NART8MVR**	**NART8MUUVX**	**NART8MUUVR**	**42.5**	8	24	15	14	10 850	14 350	—	—	—	—	—	—	—	—
NART10MX	**NART10MR**	**NART10MUUX**	**NART10MUUR**	**64.5**	10	30	15	14	7 910	7 630	—	—	—	—	—	—	—	—
NART10MVX	**NART10MVR**	**NART10MUUVX**	**NART10MUUVR**	**66.5**	10	30	15	14	14 350	16 650	—	—	—	—	—	—	—	—
NART12MX	**NART12MR**	**NART12MUUX**	**NART12MUUR**	**71**	12	32	15	14	8 370	8 460	—	—	—	—	—	—	—	—
NART12MVX	**NART12MVR**	**NART12MUUVX**	**NART12MUUVR**	**73**	12	32	15	14	15 450	18 860	—	—	—	—	—	—	—	—
NART15MX	**NART15MR**	**NART15MUUX**	**NART15MUUR**	**102**	15	35	19	18	13 240	16 190	—	—	—	—	—	—	—	—
NART15MVX	**NART15MVR**	**NART15MUUVX**	**NART15MUUVR**	**106**	15	35	19	18	23 090	33 480	—	—	—	—	—	—	—	—
NART17MX	**NART17MR**	**NART17MUUX**	**NART17MUUR**	**149**	17	40	21	20	17 110	20 700	—	—	—	—	—	—	—	—
NART17MVX	**NART17MVR**	**NART17MUUVX**	**NART17MUUVR**	**155**	17	40	21	20	29 440	42 500	—	—	—	—	—	—	—	—
NART20MX	**NART20MR**	**NART20MUUX**	**NART20MUUR**	**250**	20	47	25	24	22 170	30 080	—	—	—	—	—	—	—	—
NART20MVX	**NART20MVR**	**NART20MUUVX**	**NART20MUUVR**	**255**	20	47	25	24	38 360	61 910	—	—	—	—	—	—	—	—
NART25MX	**NART25MR**	**NART25MUUX**	**NART25MUUR**	**285**	25	52	25	24	23 730	34 500	—	—	—	—	—	—	—	—
NART25MVX	**NART25MVR**	**NART25MUUVX**	**NART25MUUVR**	**295**	25	52	25	24	41 860	72 680	—	—	—	—	—	—	—	—
NART30MX	**NART30MR**	**NART30MUUX**	**NART30MUUR**	**470**	30	62	29	28	33 300	52 340	—	—	—	—	—	—	—	—
NART30MVX	**NART30MVR**	**NART30MUUVX**	**NART30MUUVR**	**485**	30	62	29	28	55 010	101 560	—	—	—	—	—	—	—	—
NART35MX	**NART35MR**	**NART35MUUX**	**NART35MUUR**	**640**	35	72	29	28	35 140	57 770	—	—	—	—	—	—	—	—
NART35MVX	**NART35MVR**	**NART35MUUVX**	**NART35MUUVR**	**655**	35	72	29	28	57 960	111 780	—	—	—	—	—	—	—	—
NART40MX	**NART40MR**	**NART40MUUX**	**NART40MUUR**	**845**	40	80	32	30	42 500	77 920	—	—	—	—	—	—	—	—
NART40MVX	**NART40MVR**	**NART40MUUVX**	**NART40MUUVR**	**865**	40	80	32	30	70 100	151 060	—	—	—	—	—	—	—	—
NART45MX	**NART45MR**	**NART45MUUX**	**NART45MUUR**	**915**	45	85	32	30	45 350	87 580	—	—	—	—	—	—	—	—
NART45MVX	**NART45MVR**	**NART45MUUVX**	**NART45MUUVR**	**935**	45	85	32	30	73 780	166 610	—	—	—	—	—	—	—	—
NART50MX	**NART50MR**	**NART50MUUX**	**NART50MUUR**	**980**	50	90	32	30	47 010	94 110	—	—	—	—	—	—	—	—
NART50MVX	**NART50MVR**	**NART50MUUVX**	**NART50MUUVR**	**1 010**	50	90	32	30	77 370	182 160	—	—	—	—	—	—	—	—

All of JNS products are made in Japan.



HEAD OFFICE

OSAKA,JAPAN

NARA,JAPAN



NARA PLANT

All rights reserved.

* Exterior and/or specification of products listed in the catalog is subject to be changed without advanced notice for improvement purpose.
* While this catalog is prepared with great care for its accuracy, NOSE SEIKO may not be responsible for any damage caused by any typographical error or omission in this catalog.

©NOSE SEIKO.CO.,LTD Printed in Japan