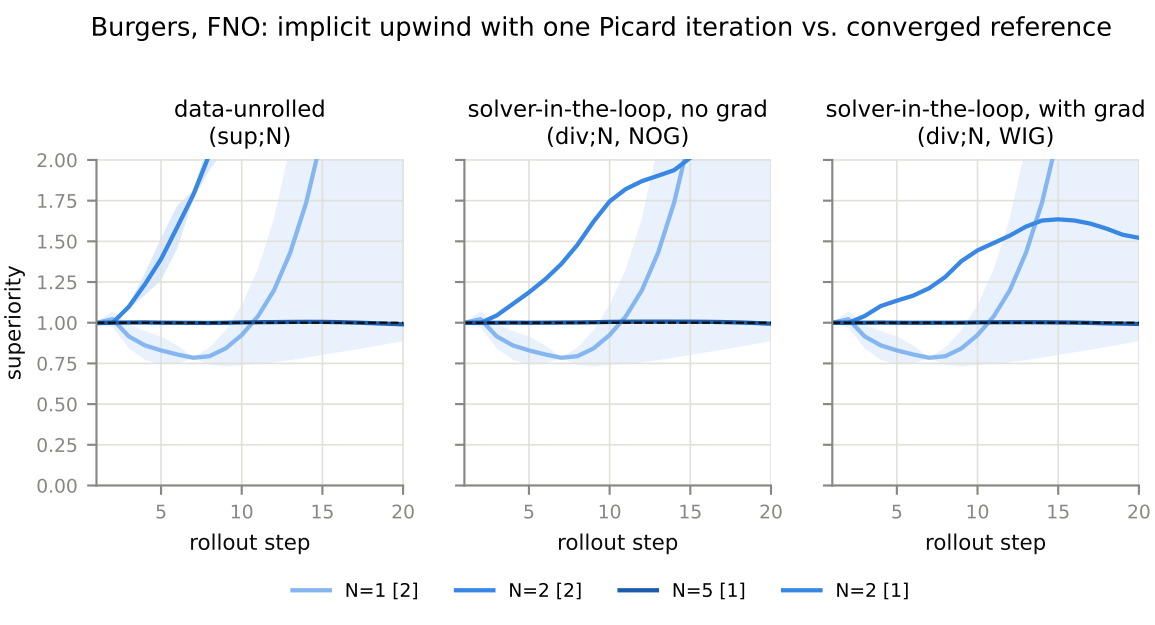
Burgers, FNO: implicit upwind with one Picard iteration vs. converged reference
data-unrolled
(sup;N)
solver-in-the-loop, no grad
(div;N, NOG)
solver-in-the-loop, with grad
(div;N, WIG)
superiority
2.00
1.75
1.50
1.25
1.00
0.75
0.50
0.25
0.00
5
10
15
20
rollout step
N=1 [2]
N=2 [2]
N=5 [1]
N=2 [1]