

# Отчёт

## Лабораторная работа №8

Оразклычев Довлет НФИбд-02-18

### Содержание


Цель работы .....	1
Процесс выполнения лабораторной работы .....	2
Лабораторная работа 8 .....	2
Лабораторная работа 8 .....	3
Лабораторная работа 8 .....	4
Лабораторная работа 8 .....	5
Лабораторная работа 8 .....	5
Лабораторная работа 8 .....	5
Выводы по проделанной работе .....	5
Вывод .....	5
Вывод .....	5

### Цель работы

Освоить на практике применение режима однократного гаммирования на примере кодирования различных исходных текстов одним ключом

## Процесс выполнения лабораторной работы

### Лабораторная работа 8

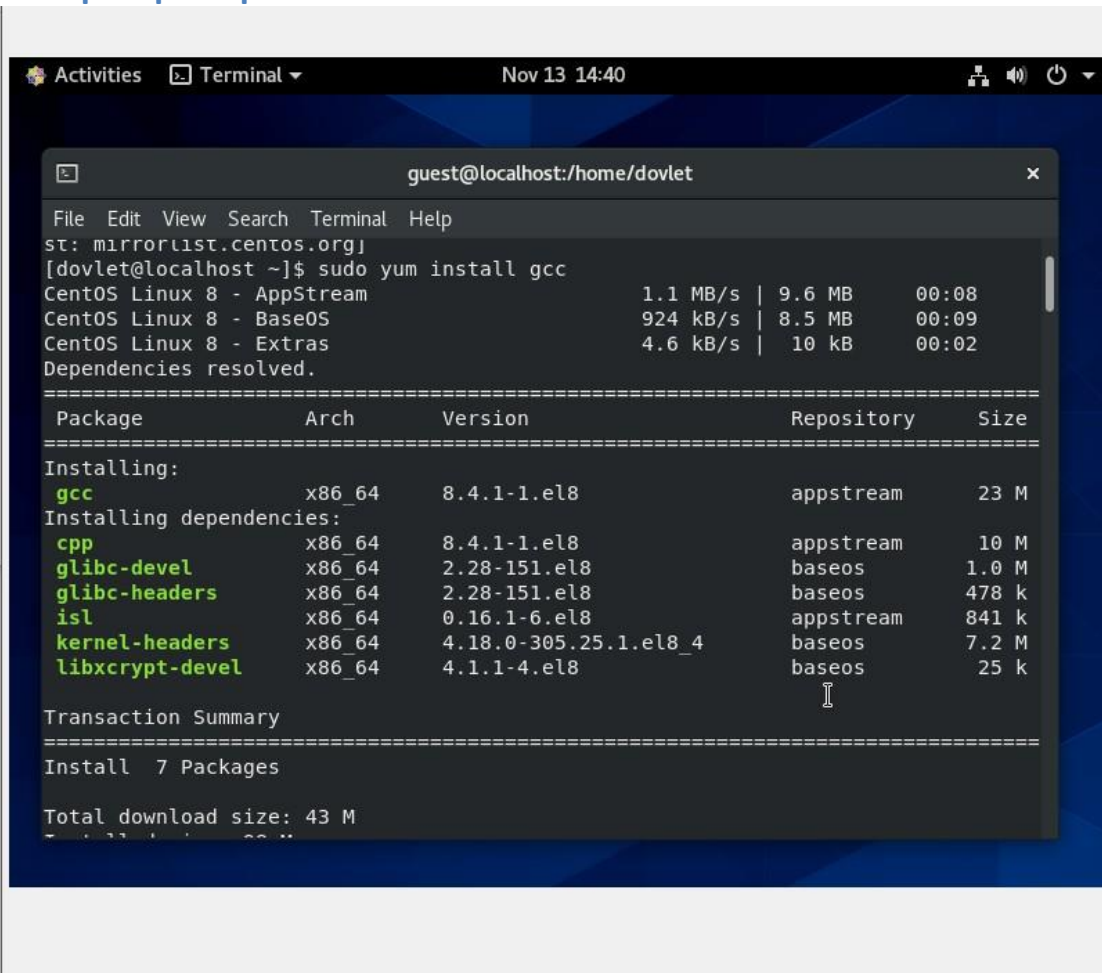

The screenshot shows a terminal window titled "guest@localhost:/home/dovlet" with a menu bar (File, Edit, View, Search, Terminal, Help). The user has executed the command `sudo yum install gcc`. The terminal output shows the progress of the installation, including the download of packages from various repositories (AppStream, BaseOS, Extras) and a detailed list of installed packages and their dependencies.

```
st: mirrorlist.centos.org]
[dovlet@localhost ~]$ sudo yum install gcc
CentOS Linux 8 - AppStream          1.1 MB/s | 9.6 MB      00:08
CentOS Linux 8 - BaseOS             924 kB/s | 8.5 MB      00:09
CentOS Linux 8 - Extras             4.6 kB/s | 10 kB       00:02
Dependencies resolved.
=====
Package                Arch      Version                Repository      Size
=====
Installing:
gcc                    x86_64    8.4.1-1.el8            appstream       23 M
Installing dependencies:
cpp                    x86_64    8.4.1-1.el8            appstream       10 M
glibc-devel           x86_64    2.28-151.el8           baseos          1.0 M
glibc-headers         x86_64    2.28-151.el8           baseos          478 k
isl                    x86_64    0.16.1-6.el8           appstream       841 k
kernel-headers        x86_64    4.18.0-305.25.1.el8_4  baseos          7.2 M
libxcrypt-devel       x86_64    4.1.1-4.el8            baseos          25 k
=====
Transaction Summary
=====
Install 7 Packages

Total download size: 43 M
```

Создание пользователя *guest*

## Лабораторная работа 8

```
Activities Terminal Nov 13 14:44
guest@localhost:/home/dovlet
File Edit View Search Terminal Help
: ine connection is closed


(gedit:33752): dconf-WARNING **: 13:59:45.088: failed to commit changes to dconf
: The connection is closed

** (gedit:33752): WARNING **: 14:02:48.247: Set document metadata failed: Setting attribute metadata::gedit-position not supported

(gedit:33752): dconf-WARNING **: 14:02:48.279: failed to commit changes to dconf
: The connection is closed
[root@localhost dovlet]# ls
Desktop Downloads Pictures simpleid.c Videos
Documents Music Public Templates
[root@localhost dovlet]# rm -r simpleid.c
rm: remove regular empty file 'simpleid.c'? y
[root@localhost dovlet]# ls
Desktop Documents Downloads Music Pictures Public Templates Videos
[root@localhost dovlet]# curl clck.ru/Yofby --output simpleid.c
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100  185  100  185    0     0   934      0 --:--:-- --:--:-- --:--:--   929
[root@localhost dovlet]# gedit simpleid.c
No protocol specified
```

*Переход на пользователя guest*

## Лабораторная работа 8

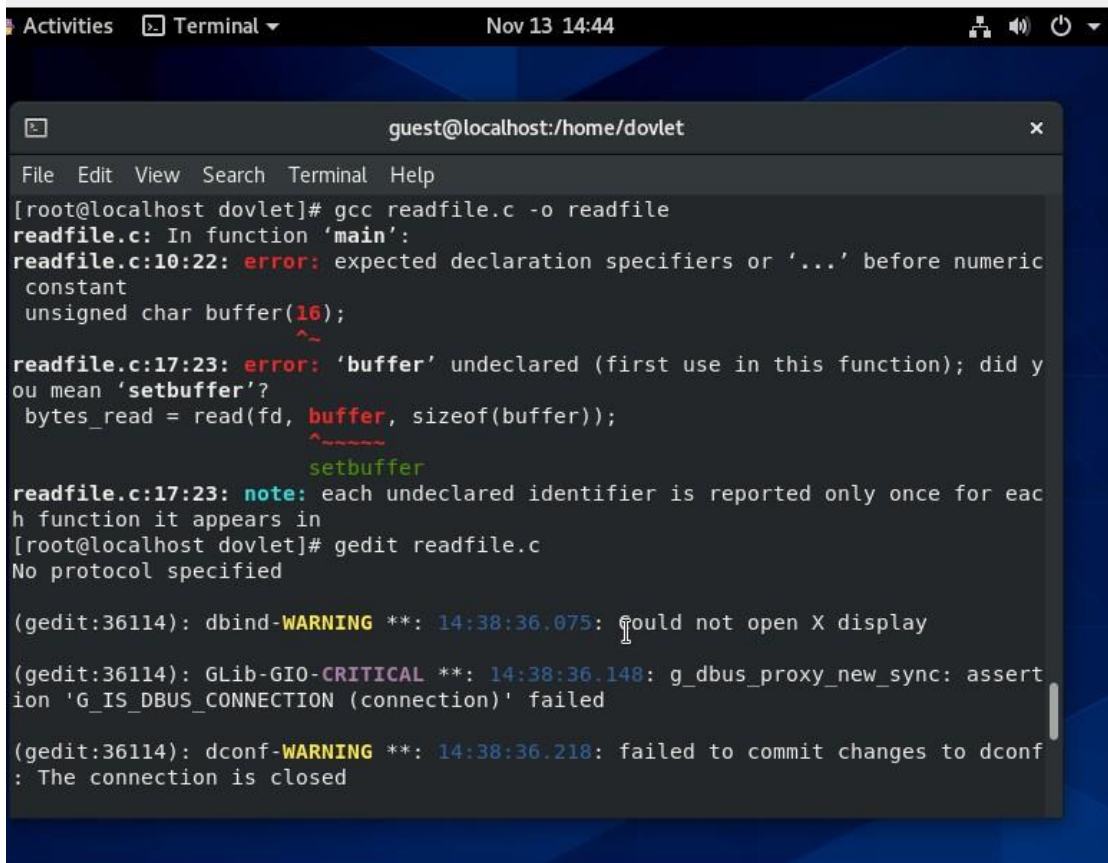


The screenshot shows a terminal window titled "guest@localhost:/home/dovlet" with a menu bar (File, Edit, View, Search, Terminal, Help). The terminal output shows the compilation of readfile.c using gcc. The compiler reports two errors in the 'main' function: an expected declaration specifier for a numeric constant and an undeclared identifier 'buffer'. A note indicates that undeclared identifiers are reported only once. The user then opens the file with gedit, which triggers several system warnings and errors related to the X display and dbus connection.

```
guest@localhost:/home/dovlet
File Edit View Search Terminal Help
[root@localhost dovlet]# gcc readfile.c -o readfile
readfile.c: In function 'main':
readfile.c:10:22: error: expected declaration specifiers or '...' before numeric
constant
unsigned char buffer(16);
                    ^
readfile.c:17:23: error: 'buffer' undeclared (first use in this function); did y
ou mean 'setbuffer'?
bytes_read = read(fd, buffer, sizeof(buffer));
                    ^
                    setbuffer
readfile.c:17:23: note: each undeclared identifier is reported only once for eac
h function it appears in
[root@localhost dovlet]# gedit readfile.c
No protocol specified

(gedit:36114): dbind-WARNING **: 14:38:36.075: could not open X display
(gedit:36114): GLib-GIO-CRITICAL **: 14:38:36.148: g_dbus_proxy_new_sync: assert
ion 'G_IS_DBUS_CONNECTION (connection)' failed
(gedit:36114): dconf-WARNING **: 14:38:36.218: failed to commit changes to dconf
: The connection is closed
```

Команды: *pwd*, *whoami*, *id*, *groups*

## Лабораторная работа 8

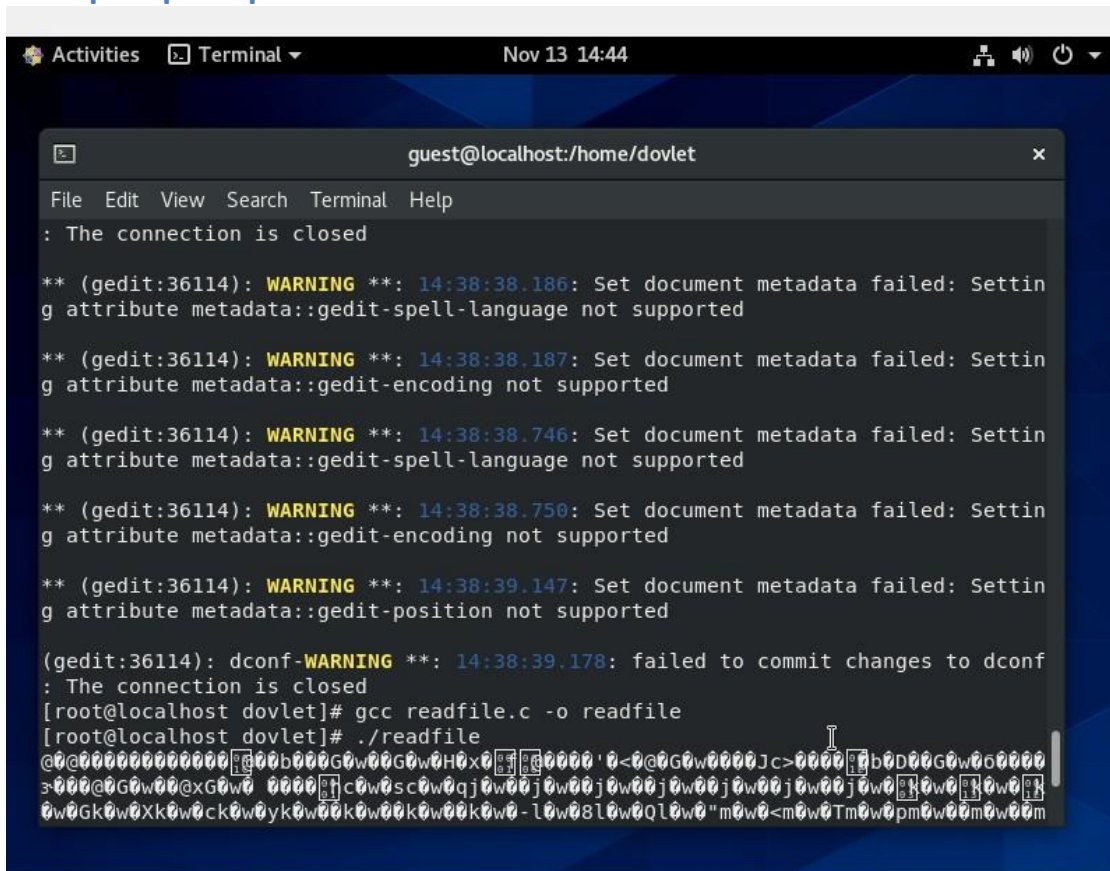

Команда `cat /etc/passwd` с фильтром и без

## Лабораторная работа 8

### Правильность выполнения команды

### Правильность выполнения команды

## Лабораторная работа 8

## Попытка создать файл в директории

### Попытка создать файл в директории

## Выводы по проделанной работе

## Вывод

## Вывод

Освоили на практике применение режима однократного гаммирования на примере кодирования различных исходных текстов одним ключом