


1. Bootstrap 簡介

1. Vscode

- (1) Atom One Dark Theme
- (2) IntelliSense for CSS class names in HTML
- (3) AutoFileName
- (4) Bootstrap 5 & Font Awesome Snippets
- (5) Chinese (Traditional) Language Pack for Visual Studio
- (6) Chinese Lorem
- (7) Fake Image Snippet Collection
- (8) Live Server
- (9) indent-rainbow
- (10) Font Awesome Auto-complete & Preview

2. Bootstrap是一組用於網站和網路應用程式開發的開源前框架，包括HTML、CSS及JavaScript的框架，提供字體排印、表單、按鈕、導航及其他各種元件及Javascript擴充套件，旨在使動態網頁和Web應用的開發更加容易。
3. 使用官方網站提供的樣板建立初始版面

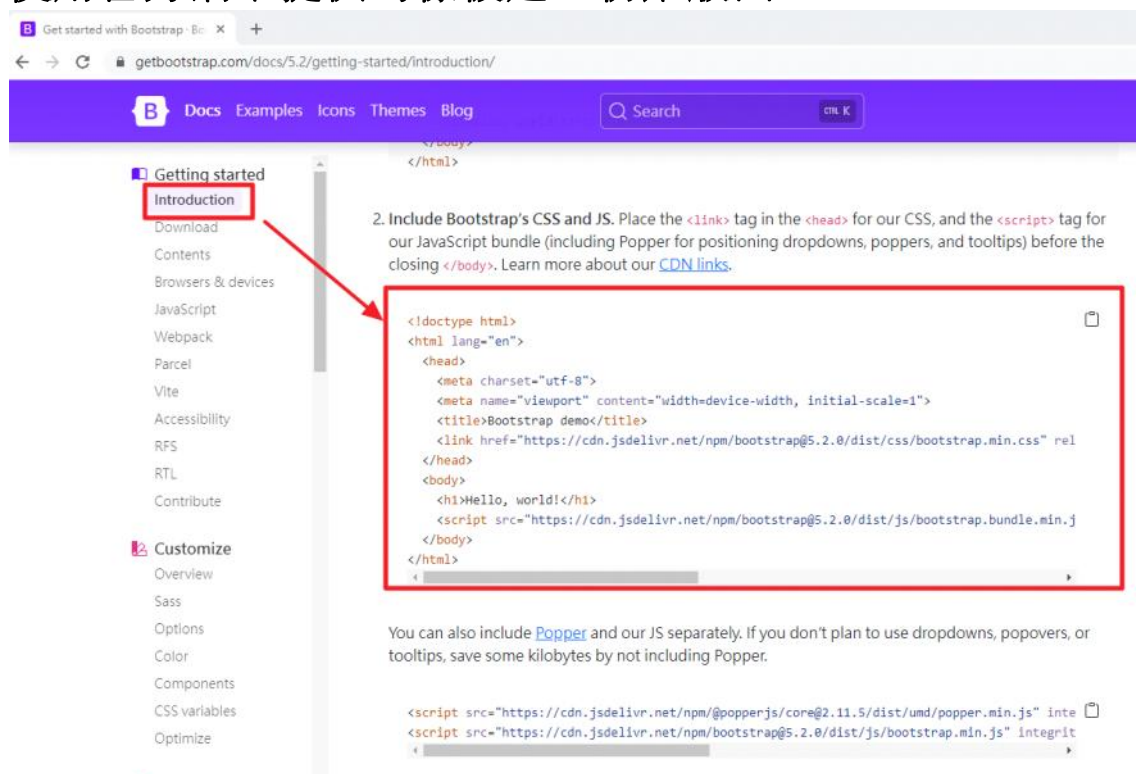


修改為zh-TW 繁體中文(zh-CN 簡體中文)

```

1 <!doctype html>
2 <html lang="zh-TW">
3 <head>
4   <meta charset="utf-8">
5   <meta name="viewport" content="width=device-width, initial-s
6   <title>Bootstrap demo</title>
7   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dis
8   integrity="sha384-gH2yIJqKdNHPEq0n4Mqa/HGKIhSkIHeL5Ayhky
9 </head>
10 <body>
11   <h1>Hello, world!</h1>
12   <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/di
13   integrity="sha384-A3rJD856KowSb7dwlZdYEk039Gagi7vIsF0jrR
14   crossorigin="anonymous"></script>
15 </body>
16 </html>

```

4. 加入第一個bootstrap元件 Button

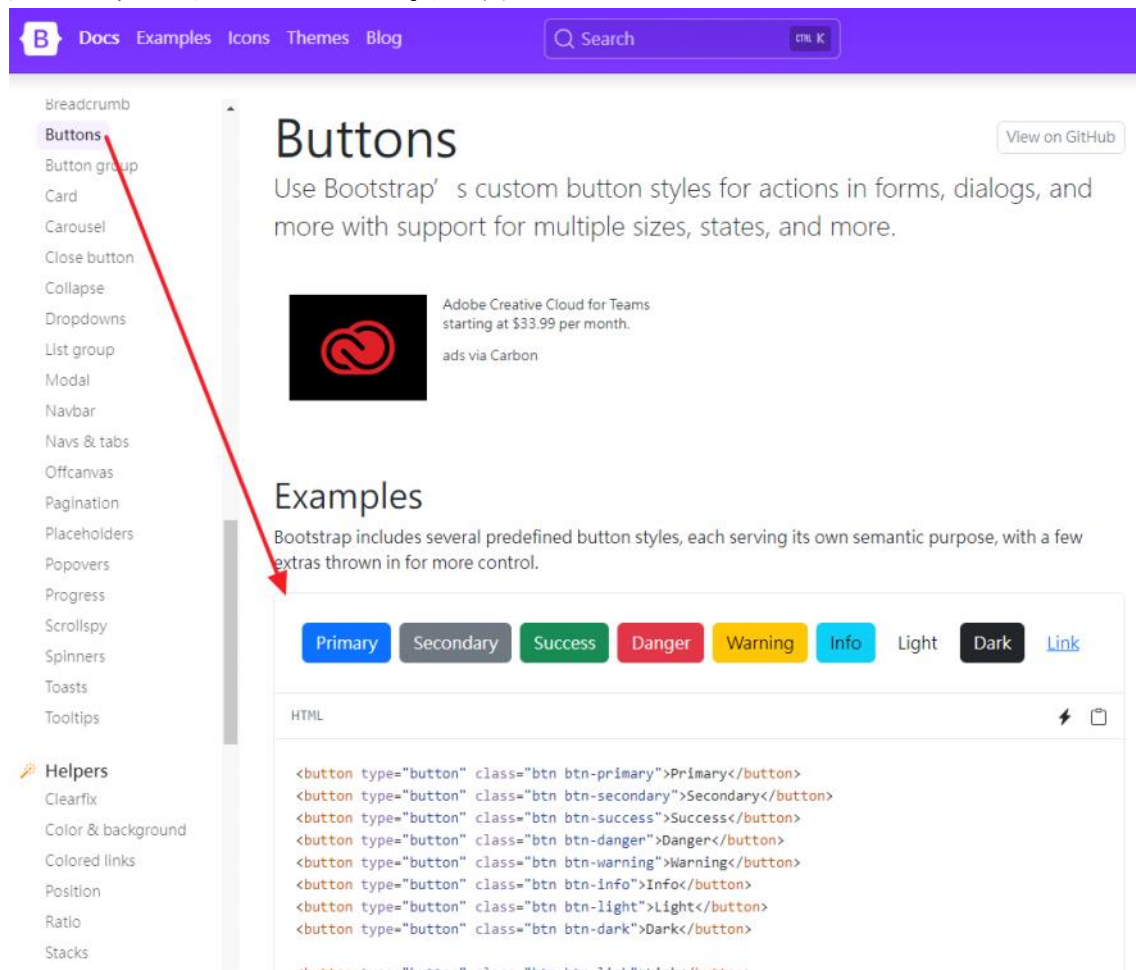

The screenshot shows the Bootstrap 5 documentation page for Buttons. The left sidebar contains a list of components, with 'Buttons' highlighted. A red arrow points from 'Buttons' in the sidebar to the 'Examples' section of the main content area. The main content area has a purple header with the Bootstrap logo and navigation links (Docs, Examples, Icons, Themes, Blog). Below the header, the 'Buttons' section is titled 'Buttons' with a subtitle 'Use Bootstrap's custom button styles for actions in forms, dialogs, and more with support for multiple sizes, states, and more.' Below this, there is an advertisement for Adobe Creative Cloud for Teams. The 'Examples' section follows, with a subtitle 'Bootstrap includes several predefined button styles, each serving its own semantic purpose, with a few extras thrown in for more control.' Below the text, there is a row of button examples: Primary (blue), Secondary (gray), Success (green), Danger (red), Warning (yellow), Info (cyan), Light (light gray), Dark (dark gray), and Link (blue text). Below the buttons, there is an 'HTML' section showing the code for each button style.

Buttons

Use Bootstrap's custom button styles for actions in forms, dialogs, and more with support for multiple sizes, states, and more.

Examples

Bootstrap includes several predefined button styles, each serving its own semantic purpose, with a few extras thrown in for more control.

Primary Secondary Success Danger Warning Info Light Dark Link

HTML

```


<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-dark">Dark</button>
<button type="button" class="btn btn-link">Link</button>

```

```

1 <!doctype html>
2 <html lang="zh-TW">
3 <head>
4   <meta charset="utf-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1">
6   <title>Bootstrap demo</title>
7   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/css/bootstrap.min.css" rel="stylesheet"
8     integrity="sha384-gH2yIJqKdNHPEq0n4Mqqa/HGKIhSkIHeL5AyhkYV8i59U5AR6csBvApHHNl/vI1Bx" crossorigin="anonymous">
9 </head>
10 <body>
11   <h1>Hello, world!</h1>
12   <button type="button" class="btn btn-primary">Primary</button>
13   <button type="button" class="btn btn-secondary">Secondary</button>
14   <button type="button" class="btn btn-success">Success</button>
15   <button type="button" class="btn btn-danger">Danger</button>
16   <button type="button" class="btn btn-warning">Warning</button>
17   <button type="button" class="btn btn-info">Info</button>
18   <button type="button" class="btn btn-light">Light</button>
19   <button type="button" class="btn btn-dark">Dark</button>
20   <button type="button" class="btn btn-link">Link</button>
21   <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/js/bootstrap.bundle.min.js"
22     integrity="sha384-A3rJD856KowSb7dwIzDYEk039Gagi7vIsF0jrRAoQmDkKtQ8HUUuLZ9AsSv4jD4Xa"
23     crossorigin="anonymous"></script>
24 </body>
25 </html>

```

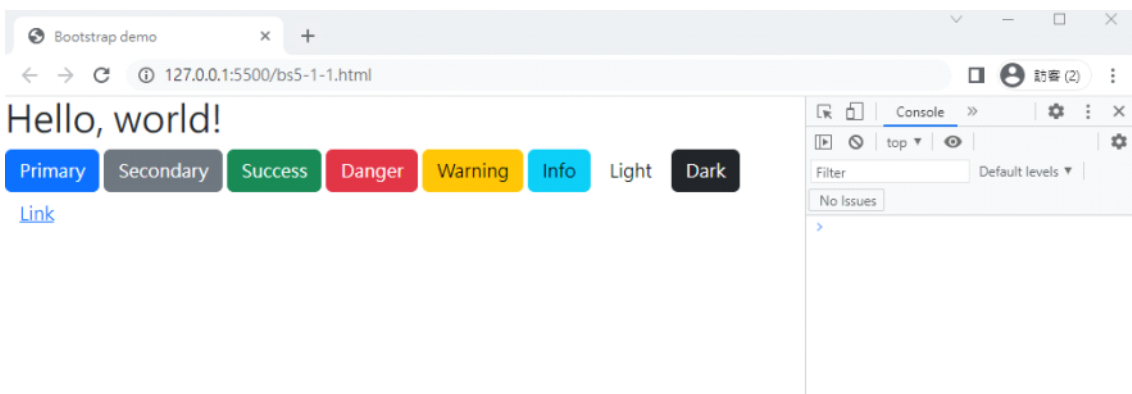


若css沒有正確載入

```



1 <!doctype html>
2 <html lang="zh-TW">
3 <head>
4   <meta charset="utf-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1">
6   <title>Bootstrap demo</title>
7   <!-- <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/css/bootstrap.min.css" rel="stylesheet"
8     integrity="sha384-gH2yIJqKdNHPEq0n4Mqqa/HGKIhSkIHeL5AyhkYV8i59U5AR6csBvApHHNl/vI1Bx"
9     crossorigin="anonymous"> -->
10 </head>
11 <body>
12   <h1>Hello, world!</h1>
13   <button type="button" class="btn btn-primary">Primary</button>
14   <button type="button" class="btn btn-secondary">Secondary</button>
15   <button type="button" class="btn btn-success">Success</button>
16   <button type="button" class="btn btn-danger">Danger</button>
17   <button type="button" class="btn btn-warning">Warning</button>
18   <button type="button" class="btn btn-info">Info</button>
19   <button type="button" class="btn btn-light">Light</button>
20   <button type="button" class="btn btn-dark">Dark</button>
21   <button type="button" class="btn btn-link">Link</button>
22   <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/js/bootstrap.bundle.min.js"
23     integrity="sha384-A3rJD856KowSb7dwIzDYEk039Gagi7vIsF0jrRAoQmDkKtQ8HUUuLZ9AsSv4jD4Xa"
24     crossorigin="anonymous"></script>
25 </body>
26 </html>

```


可觀察出相關的顏色已消失

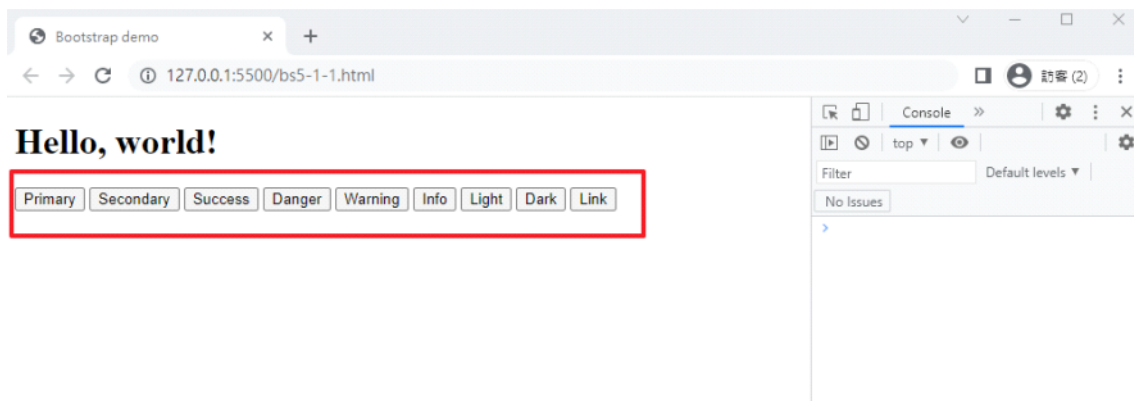

若js沒有正確載入

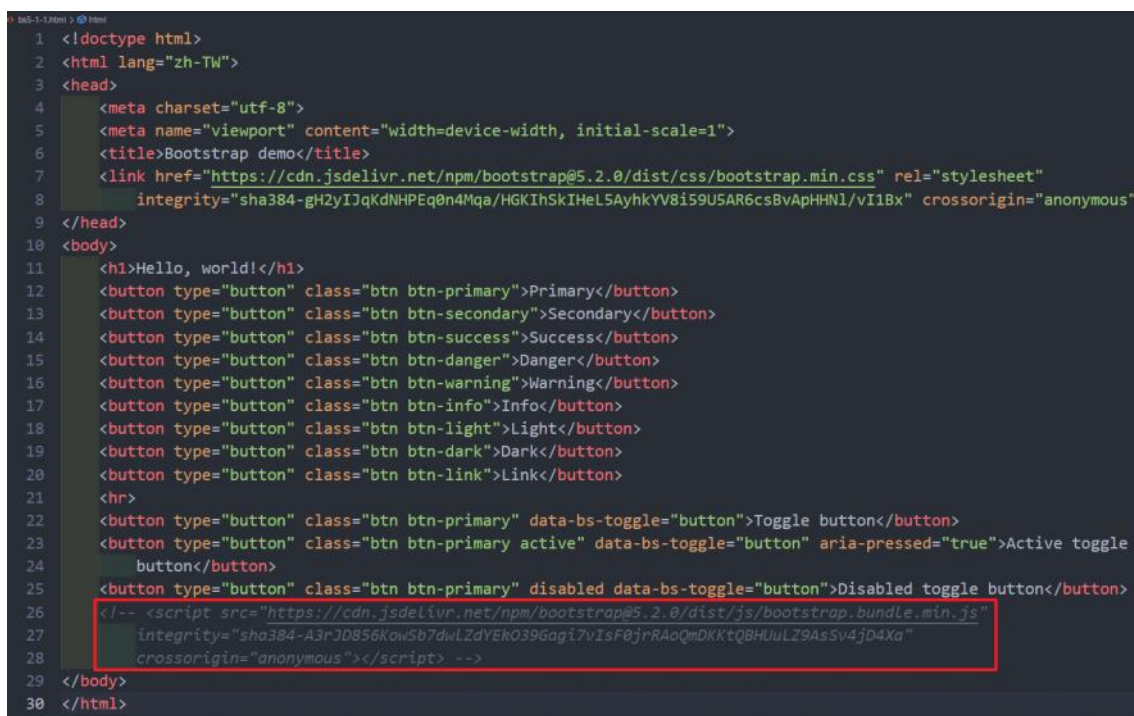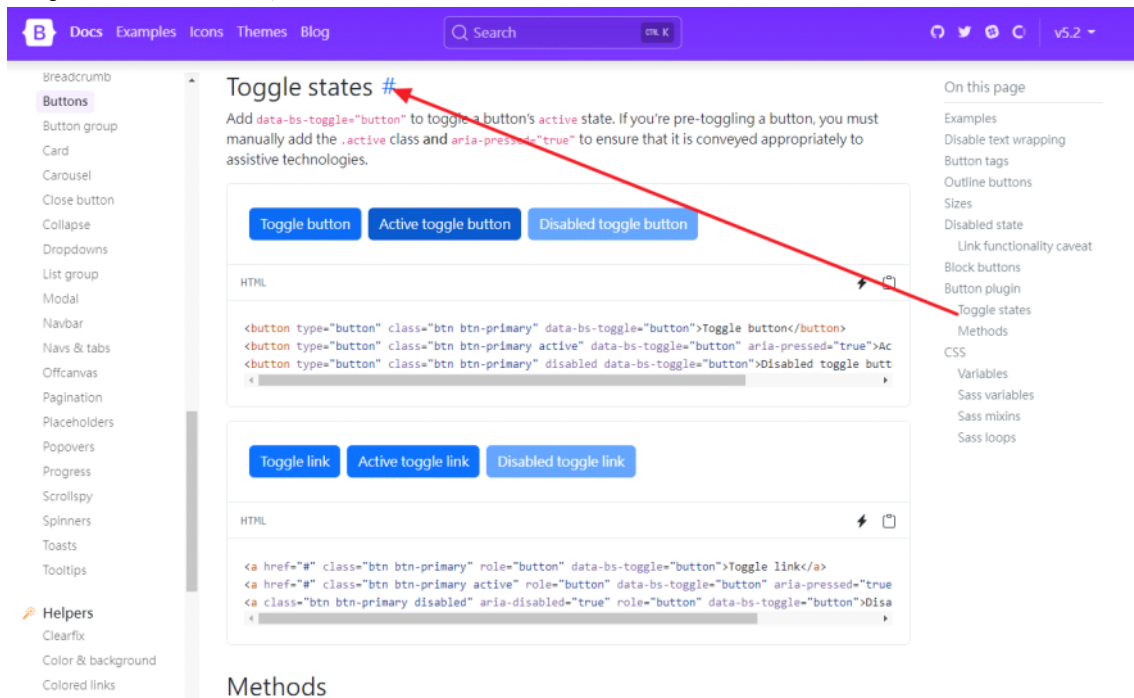


觀察按鈕變化, 狀態無法保留

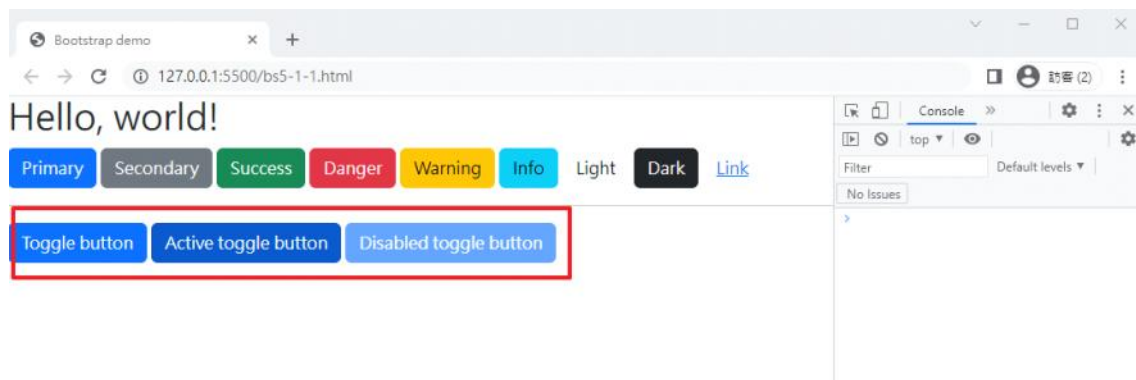

5. CSS的class使用規則

```
<!doctype html>
<html lang="zh-Tw">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>Bootstrap demo</title>
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/css/bootstrap.min.css" rel="sty
    integrity="sha384-gH2yIjQKdNHPEq0n4Mqa/HGKIhSkIHeL5AyhkYV8i59U5AR6csBvApHHN1/vI1Bx" cross
  </head>
<body>
  <button type="button" class="btn btn-primary">Primary</button>
  <hr>
  <button type="button" class="btn" class="btn-primary">Primary</button>
  <!-- <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/js/bootstrap.bundle.min.js"
    integrity="sha384-A3rJD856KowSb7dwlZdYEk039Gagi7vIsF0jrRAoQmDkKtQBHUuLZ9AsSv4jD4Xa"
    crossorigin="anonymous"></script> -->
</body>
</html>
```

class不能出現兩次，如下圖出現兩次的button無法使用！

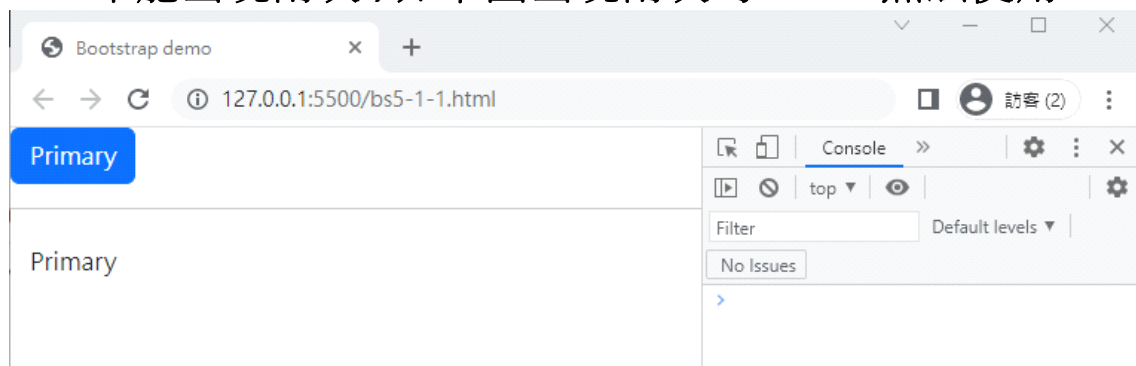

6. 快速建立一個BS網頁 加入navbar

Navbar Home Link Dropdown Disabled Search Search

HTML

```
<nav class="navbar navbar-expand-lg bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarS"
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="#">Home</a>
        </li>
        <li class="nav-item">
```

並選擇相關配色

Color schemes #

New in v5.2.0: Navbar theming is now powered by CSS variables and `.navbar-light` has been deprecated. CSS variables are applied to `.navbar`, defaulting to the "light" appearance, and can be overridden with `.navbar-dark`.

Navbar themes are easier than ever thanks to Bootstrap's combination of Sass and CSS variables. The default is our "light navbar" for use with light background colors, but you can also apply `.navbar-dark` for dark background colors. Then, customize with `.bg-*` utilities.

Navbar Home Features Pricing About Search Search

Navbar Home Features Pricing About Search Search


Navbar Home Features Pricing About Search Search

```
<nav class="navbar navbar-dark bg-dark">
  <!-- Navbar content -->
</nav>
```

```

1 <!doctype html>
2 <html lang="zh-TW">
3 <head>
4   <meta charset="utf-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1">
6   <title>Bootstrap demo</title>
7   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/css/bootstrap.min.css"
8     integrity="sha384-gH2yIJqKdNHPEq0n4Mqa/HGKIhSkIHeL5AyhkYV8i59U5AR6csBv"
9   </head>
10 <body>
11   <nav class="navbar navbar-expand-lg navbar-dark bg-dark">
12     <div class="container-fluid"> ...
49   </div>
50 </nav>
51 <!-- <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/js/bootstrap.min.js"
52   integrity="sha384-A3rJD856KowSb7dwLZdYEk039Gagi7vIsF0jrRAoQmDCKKtQBHUUU
53   crossorigin="anonymous"></script> -->
54 </body>
55 </html>

```

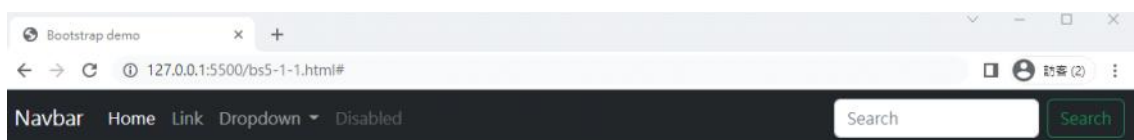

加入card 並更新圖片位址

Bootstrap 5.2.0 documentation page showing the Card component.

Components

- Select
- Checks & radios
- Range
- Input group
- Floating labels
- Layout
- Validation
- Card**
- Carousel
- Close button
- Collapse
- Dropdowns
- List group
- Modal
- Navbar
- Navs & tabs
- Offcanvas
- Pagination
- Placeholders
- Popovers

HTML

```

<div class="row row-cols-1 row-cols-md-2 g-4">
  <div class="col">
    <div class="card">
      
      <div class="card-body">
        <h5 class="card-title">Card title</h5>
        <p class="card-text">This is a longer card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.</p>
      </div>
    </div>
  </div>
  <div class="col">
    <div class="card">
      
      <div class="card-body">
        <h5 class="card-title">Card title</h5>
        <p class="card-text">This is a longer card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.</p>
      </div>
    </div>
  </div>
</div>

```


On this page

- About
- Example
- Content types
- Body
- Titles, text, and links
- Images
- List groups
- Kitchen sink
- Header and footer
- Sizing
- Using grid markup
- Using utilities
- Using custom CSS
- Text alignment
- Navigation
- Images
- Image caps
- Image overlays
- Horizontal
- Card styles
- Background and color
- Border
- Mixins utilities
- Card layout
- Card groups
- Grid cards
- Masonry
- CSS
- Variables
- Sass variables


```

<body>
  <nav class="navbar navbar-expand-lg navbar-dark bg-dark">
    <div class="container-fluid">...
    </div>
  </nav>
  <div class="container">
    <div class="row row-cols-1 row-cols-md-2 g-4">
      <div class="col">
        <div class="card">
          
          <div class="card-body">
            <h5 class="card-title">Card title</h5>
            <p class="card-text">This is a longer card with supporting text below as a natural lead-
              to additional
              content. This content is a little bit longer.</p>
          </div>
        </div>
      </div>
      <div class="col">
        <div class="card">...
        </div>
      </div>
      <div class="col">...
      </div>
      <div class="col">...
      </div>
    </div>
  </div>


```

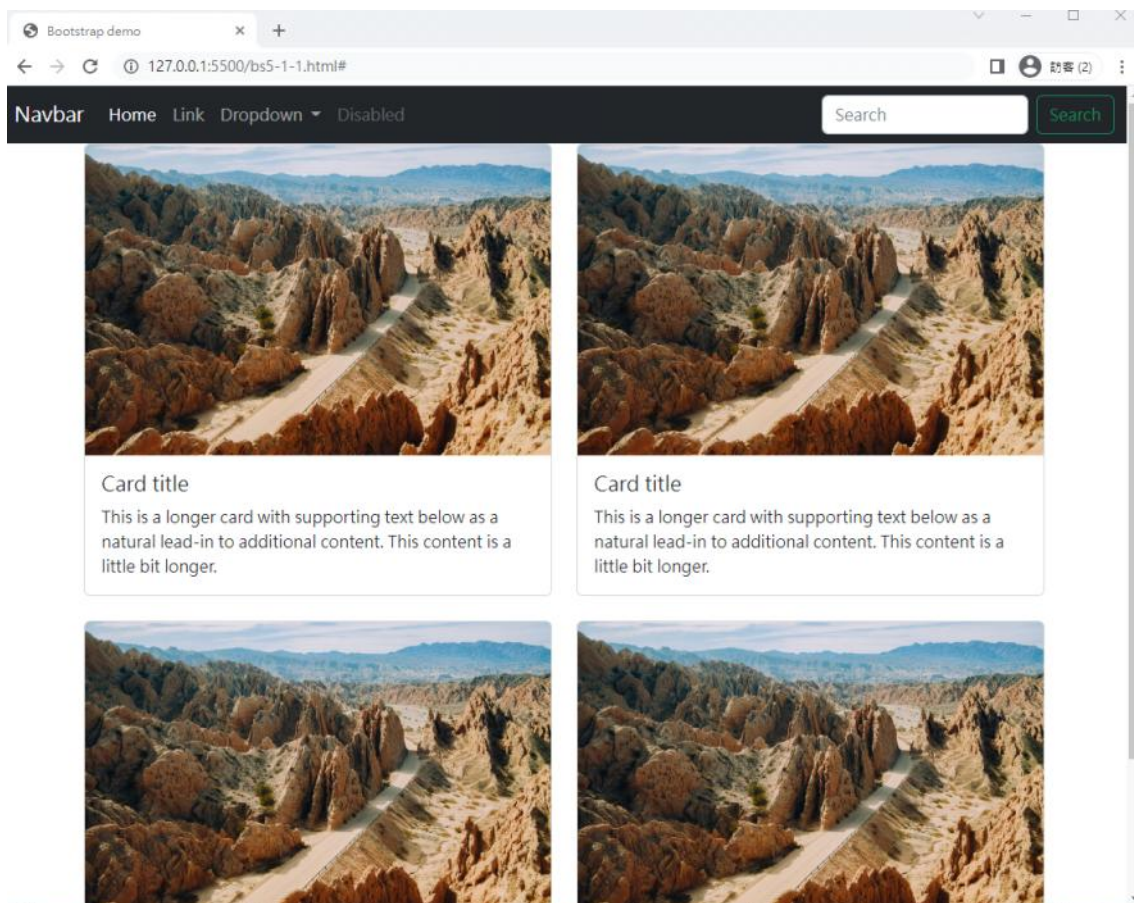

加入spacing相關設定調整間隔

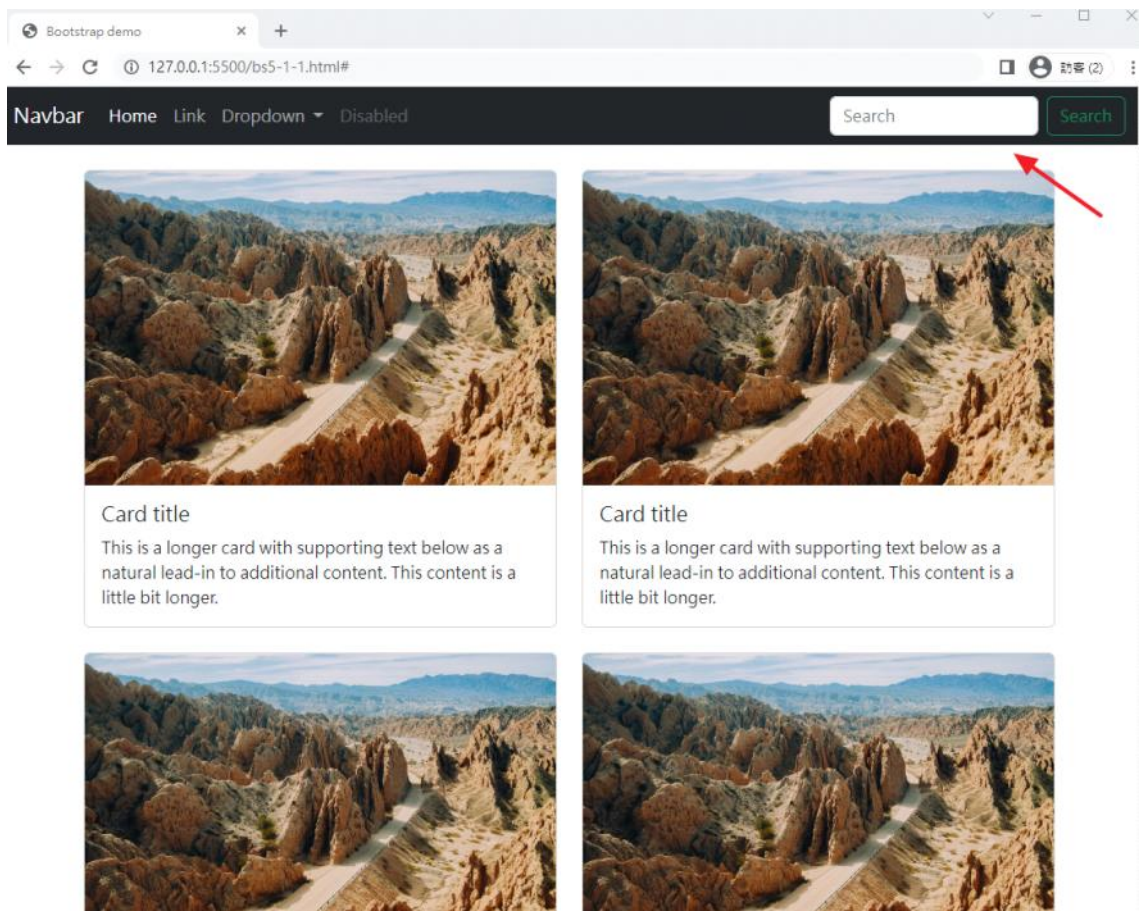

加入footer並設定顏色

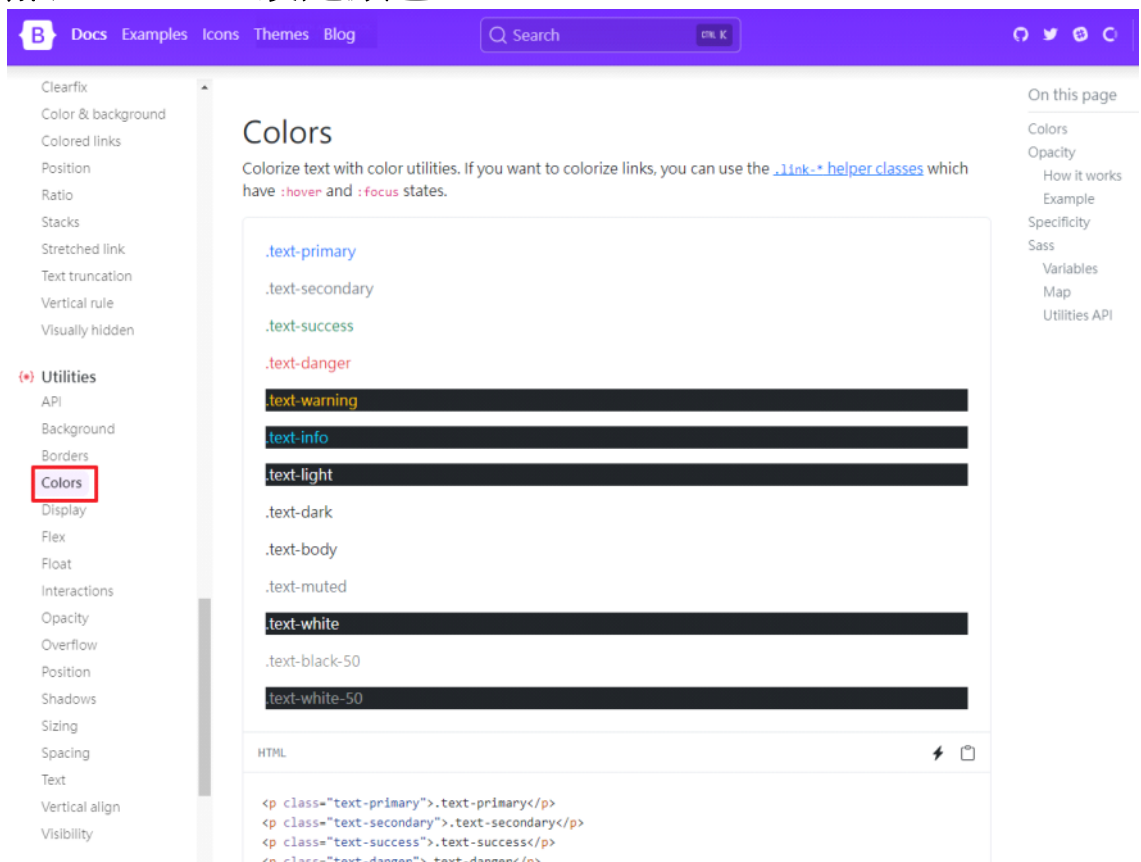

```

<body>
<nav class="navbar navbar-expand-lg navbar-dark bg-dark"> ...
</nav>


<div class="container my-4"> ...
</div>

<div class="footer bg-secondary p-4">
  <p>這是footer</p>
</div>

<!-- <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/bootstrap.bundle.min.js"
integrity="sha384-A3rJD856KowSb7dwlZdYEkO39Gagi7vIsF0jrRA
crossorigin="anonymous"></script> -->
</body>

```

發現**footer**下方間隔比較大, 這是因為<p>下方margin造成

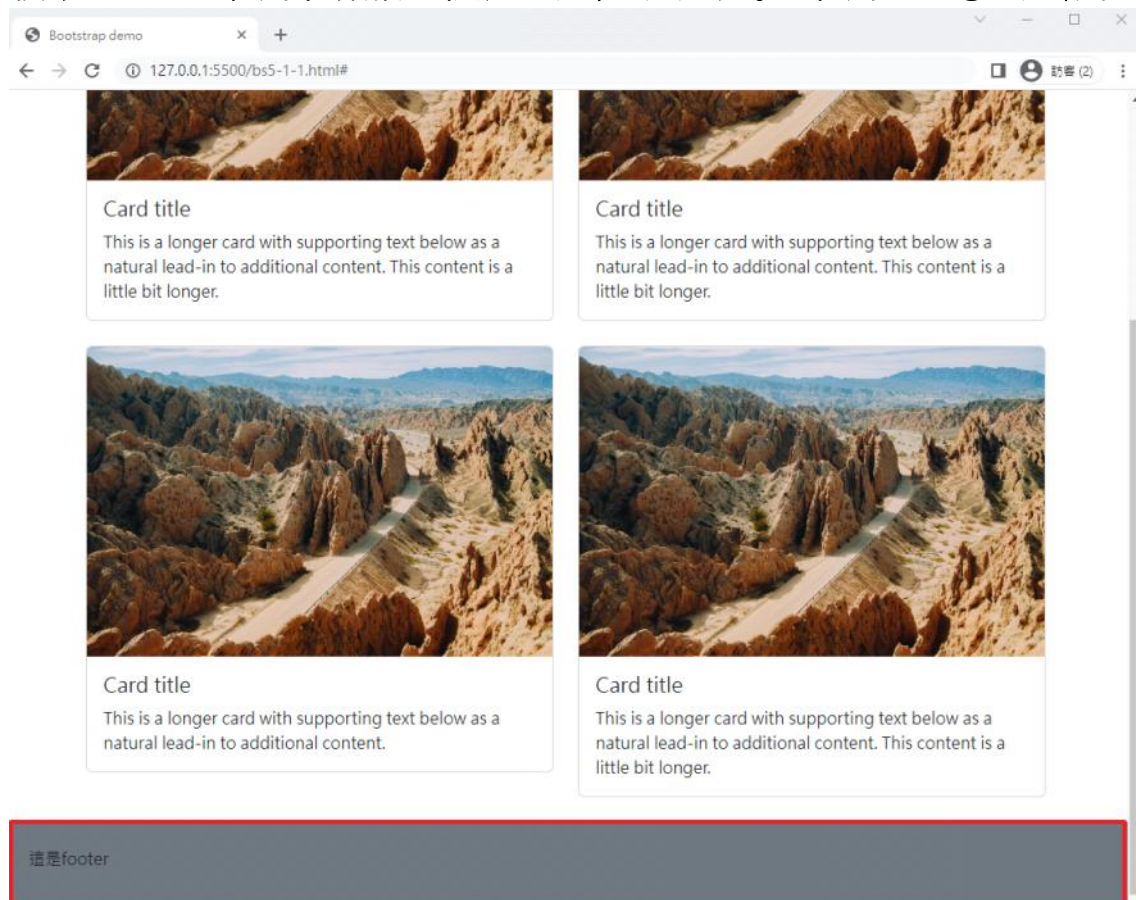

<p> 設定mb-0

```

<body>
  <nav class="navbar navbar-expand-lg navbar-dark bg-dark"> ...
</nav>


  <div class="container my-4"> ...
</div>

  <div class="footer bg-secondary p-4">
    <p class="mb-0">這是footer</p>
  </div>

  <!-- <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.
        integrity="sha384-A3rJD856KowSb7dwlZdYEk039Gagi7vIsF0j
        crossorigin="anonymous"></script> -->
</body>

```

footer 上下間隔相同

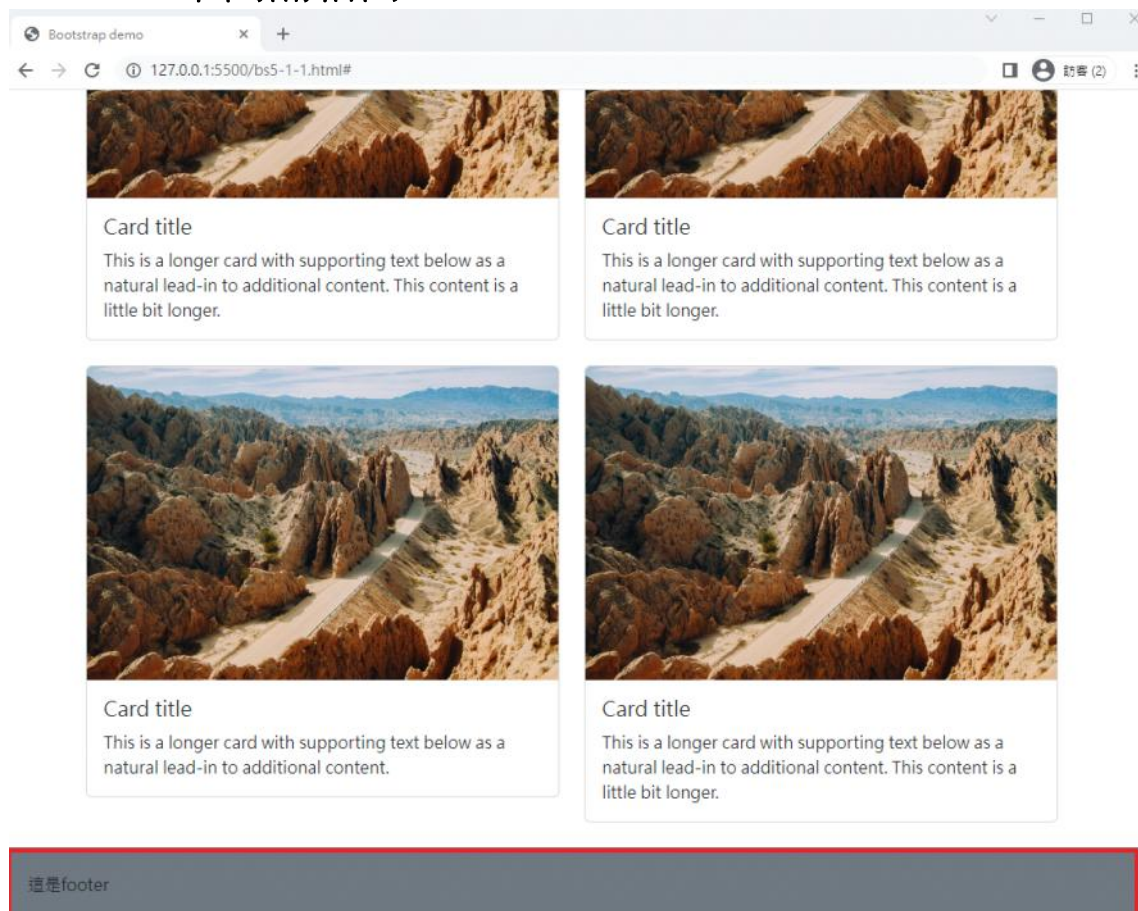

加上container 與內容卡片對齊

```

<body>
  <nav class="navbar navbar-expand-lg navbar-dark bg-dark"> ...
</nav>

  <div class="container my-4"> ...
</div>

  <div class="footer bg-secondary p-4">
    <div class="container">
      <p class="mb-0">這是footer</p>
    </div>
  </div>

  <!-- <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2
    integrity="sha384-A3rJD856KowSb7dwlZdYEk039Gagi7vIsF0jrR
    crossorigin="anonymous"></script> -->
</body>

```

