

# Objectives for Information Extraction

Justin T. Chiu

June 28, 2019

## Abstract

Many recent information extraction systems predict the relationship between an entity and value given the positions of their mentions in the text. This requires observed locations of mentions, which requires annotations at the word level. Any form of annotation at the word level does not scale as the size of the text and the number of labels increases, and even more so if there is ambiguity. In order to train a probabilistic information extraction model without mention position annotations, we specify a model that, for each word, either chooses a triple from a knowledge base to explain or chooses to explain nothing.

## 1 Problem Statement

In relation extraction (RE) we extract facts from a passage of text. The goal of RE is to convert facts expressed in natural language into a form amenable to computation. RE uses a relational representation: facts detail how values are related to entities. The challenge of RE is to not only extract facts from text, but also localize where those facts are mentioned. In this work we build a relation extraction system with minimal supervision. We assume access to a knowledge base (KB) that is aligned to sequences of text that discuss subsets of the information in the KB.

In order to perform extraction, we must first identify where facts are mentioned then aggregate those decisions to construct a knowledge base. As sentences may contain many entity and value mentions, and therefore a large number of facts, we identify facts at a scale that minimizes ambiguity by casting the mention identification problem as an unsupervised word level classification task. We first identify the position of value mentions, predict who (the entity) and what (the relation type) the value mention is discussing, then aggregate those decisions.

Note on related work: Except for Zeng et al. (2018), prior work has either assumed that the locations of entities and values are given as input features or that the locations of entities and values are observed at training time.

We are primarily concerned with the scenario where we have an overcomplete KB schema with respect to a specific passage of text. This fits many scenarios in real world applications: we may have thousands of entities of interest if our KB was pulled from an external source

such as Freebase, but the particular document we wish to analyze only discusses tens of entities, only a few of which are present in our KB.

The problem description is as follows: given a text  $x = x_0, \dots, x_I$  we model the facts  $r = \{(e_j, t_j, v_j)\}_{j=0}^J$  expressed in that text with respect to a schema that details all entities  $e_j \in \mathcal{E}$ , relation types  $t_j \in \mathcal{T}$ , and all values  $v_j \in \mathcal{V}$ . We assume that the schema of the KB  $(\mathcal{E}, \mathcal{T}, \mathcal{V})$  is known at all times, and that the schema covers all facts of interest. The set of facts  $r$  is our knowledge base (KB), and each individual fact  $r_j$  is a record. For brevity, let  $e = \{e_j\}_{j=0}^J, t = \{t_j\}_{j=0}^J, v = \{v_j\}_{j=0}^J$  be the list of the entities, types, and values of the records in  $r$  respectively.

Given all entities  $e$  and types  $t$ , we reduce the construction of  $r$  to predicting, for every  $j \in 0, \dots, J$ , the value  $v_j$  corresponding to the entity  $e_j$  and type  $t_j$ . We propose a model for  $p(v \mid x, e, t)$ , the distribution over values of corresponding entities and types given the text.

## 2 Model

We define a graphical model that jointly models word and KB level extraction. The model first predicts the word level information, then aggregates its predictions at the KB level.

We introduce the following random variables for each index  $i \in 0, \dots, I$ :

- $c_i$  indicates whether a word is a value mention. We have  $c_i \in \{0, 1\}$ . The word  $x_i$  is a mention if  $x_i$  is part of a possibly multi-word expression that refers to a value from the KB schema.
- $a_i$  indicates the index of the record aligned to word  $x_i$ . We have  $a_i \in 0, \dots, J$ . We make the assumption that each value mention aligns to a single record.
- $z_i$  indicates the value word  $x_i$  is a mention of, such that  $z_i \in \mathcal{V}$ . Note that the mention of a value may not correspond exactly to the representation in the KB schema.

We specify the relationship between these variables with the following process:

1. Value mention identification: Given a sequence of words  $x$ , we identify whether each word is a value mention independently with  $p(c \mid x) = \prod_i p(c_i \mid x)$ .
2. Mention alignment: Each mention is then aligned to a record in the knowledge base with  $p(a \mid x) = \prod_i p(a_i \mid x, e, t)$ . We align the word  $y_i$  by choosing who (the entity) and what (the relation type) generate the possible value mention at index  $i$ . In particular,  $a_i = j$  denotes the alignment to the record  $r_j$ .
3. Value mention translation: All value mentions are translated into its representation from the KB schema with  $p(z \mid x) = \prod_i p(z_i \mid x)$ .

Finally, we aggregate the word level information at the sequence level.

4. Aggregation  $p(v \mid z, a, c) = \prod_j p(v_j \mid z, a, c)$ : Given the word level values  $z$ , alignments  $a$ , value mention decisions  $c$ , we choose the KB level value  $v_j$  from a conditional random field. We parameterize

$$p(v_j \mid z, a, c, e, t) \propto \prod_i \exp(\psi(v_j, z_i, a_i, c_i, e, t)),$$

with

$$\psi(v_j, z_i, a_i, c_i, e, t) = \begin{cases} f_v(v_j, e, t), & c_i = 0 \\ 1(v_j = z_i, a_i = j), & c_i = 1. \end{cases}$$

We model the distribution  $p(z \mid x)$  rather than the joint distribution  $p(v, z \mid x)$  with an undirected model because we are interested in extracting the facts expressed in the text without the influence of the values in a KB.

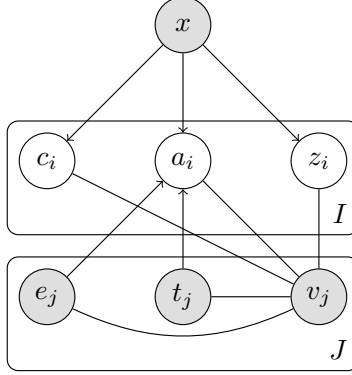


Figure 1: Our model predicts word-level values and alignments then aggregates those choices over all indices  $i$  to predict values at the KB level.

This gives us the following factorization of the relation extraction system:

$$\begin{aligned} p(v \mid x, e, t) &= \sum_{z, a, c} p(v, z, a, c \mid x, e, t) \\ &= \sum_{z, a, c} p(v \mid z, a, c, x, e, t) \prod_i p(z_i, a_i, c_i \mid x, e, t) \\ &= \sum_{z, a, c} \prod_j p(v_j \mid z, a, c, x, e, t) \prod_i p(z_i \mid x) p(a_i \mid x, e, t) p(c_i \mid x) \end{aligned} \quad (1)$$

### 3 Training

To train a latent variable model, we must marginalize over the unobserved RVs and maximize the likelihood of the observed. However, maximizing  $\log p(v \mid x)$  directly is very expensive for this model. The aggregation model alone with  $z$  unobserved is a Restricted Boltzmann Machine, where exact inference is  $O(|\mathcal{V}|^{|\mathcal{I}|} + |\mathcal{V}|^{|\mathcal{J}|})$ .

We therefore resort to approximate inference, specifically amortized variational inference.

#### 3.1 Inference network

Our first approach is to specify an inference network  $q(z, a, c \mid v, x, e, t)$ . We then optimize the following lower bound on the marginal likelihood with respect to the parameters of both

$p$  and  $q$ :

$$\log p(v \mid x) \geq \mathbb{E}_{q(z,a,c \mid v,x,e,t)} \left[ \log \frac{p(v, z, a, c \mid x, e, t)}{q(z, a, c \mid v, x, e, t)} \right] \quad (2)$$

We propose to parameterize  $q(z, a, c \mid v, x, e, t)$  as follows. We decompose

$$\begin{aligned} q(z, a, c \mid v, x, e, t) &= q(z \mid a, v, x) q(a \mid v, x, e, t) q(c \mid v, x) \\ &= \prod_i q(z_i \mid a, v, x) q(a_i \mid v, x, e, t) q(c_i \mid v, x) \end{aligned} \quad (3)$$

The conditional distributions of our inference network are very similar to the relation extraction model, but they condition on the values  $v$ . Let  $g_*(\cdot)$  be a function that maps its arguments to a  $|\mathcal{I}| \times D$  dimension tensor, where  $g_*(\cdot)_i$  returns a point on the  $D$  dimensional simplex. At each index  $i \in \mathcal{I}$ , the conditional distributions are given by:

1. The value mention model  $q(c_i \mid v, x) = \text{Bern}(g_c(v, x)_i)$  has access to the values  $v$  from the KB, which it conditions on when detecting value mentions.
2. The alignment model  $q(a_i \mid v, x, e, t) = \text{Cat}(g_a(v, x, e, t))$  uses a contextual representation of each  $x_i$  and chooses a record. In contrast to  $p(a \mid x, e, t)$ , this model has access to values as well.
3. The translation model  $q(z_i \mid a, v, x) = 1(z_i = v_{a_i})$  conditions on the alignments  $a$  and ensures the chosen  $z$  is consistent with the alignments.

One concern is that the model may learn to never rely on the text for extraction, setting  $c_i = 0$  at every index. We can avoid this by initializing  $q(z)$  to ensure that for words  $x \in \mathcal{V}$  we have  $q(z = x)$  is high, biasing the translation model towards transliteration at the start of training.

### 3.2 Approximate the posterior of a generative model

Alternatively, we may decompose the training of our extraction system  $p(v \mid x)$  into two stages: In the first stage we train  $p(z, a, c \mid x, e, t)$  to approximate the posterior of a conditional model of text given a complete KB  $q(x, z, a, c \mid e, t, v)$ . This has the benefit of allowing us to exert control over where value mentions are detected through our design of the text model  $q$ .

In the second stage, we have two choices: a) train  $p(v \mid z, a, c, x, e, t)$  to approximate the posterior of a full generative model of text and the values of KB  $q(x, v \mid e, t)$ . b) train  $p(v \mid z, a, c, x, e, t)$  using the following lower bound:

$$\log p(v \mid x) \geq \mathbb{E}_{p(z,a,c \mid x,e,t)} [\log p(v \mid z, a, c, x, e, t)] \quad (4)$$

Ideally the bound in Eqn. 4 should not be looser than the one presented in Eqn. 2, as conditioning on the observed values of a KB should not reduce the entropy of a good alignment model.

## 4 Evaluation

Although we have a model over the values of all records, evaluation does not include the final distribution over all record values. As we assumed that the KB contained a superset of the facts contained in a sequence of text, we are evaluate whether the model can discover the subset of facts that are expressed in the text. We therefore perform extraction by using the marginal distributions  $q(z)$ ,  $q(a)$ ,  $q(c)$  to value mentions as well as entities and types, giving us facts.

## References

Xiangrong Zeng, Daojian Zeng, Shizhu He, Kang Liu, and Jun Zhao. 2018. Extracting relational facts by an end-to-end neural model with copy mechanism. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 506–514, Melbourne, Australia. Association for Computational Linguistics.