

Configure

The following sections describe FortiDLP configuration tasks:

- [Labels on page 150](#)
- [Policies on page 158](#)
- [Assets on page 185](#)
- [Incident sequence rules on page 199](#)
- [Agent offline warning on page 207](#)
- [Agent configuration groups on page 209](#)
- [Node archiving on page 234](#)
- [SaaS apps on page 238](#)
- [Evidence capturing on page 241](#)
- [Login banner message on page 269.](#)

Labels

Labels allow you to associate entities with policies, Agent configuration groups, the Agent offline detection rule, and more.

FortiDLP provides the following label types:

- A *custom* label is one that an operator creates and assigns to users and nodes. You can remove, modify, and delete custom labels.
- An *automatic* label is one that the FortiDLP Infrastructure creates and assigns to nodes using information from the FortiDLP Agent. Each node has two automatic labels, which classify them by their operating system and Agent software version. You cannot remove or delete automatic labels, but you can modify some of their properties.
- A *directory* label is one that the FortiDLP Infrastructure creates and assigns to users after syncing with a directory, such as Entra ID or LDAP. Directory labels map to the directory's user attributes.
 - For details about Entra ID directory labels, see [Entra ID users on page 96](#).
 - For details about Google Workspace directory labels, see [Google Workspace users on page 116](#).
 - For details about LDAP directory labels, see the [FortiDLP LDAP Sync Tool Administration Guide](#). Once created, you can manage directory labels centrally, as described in [Unassigning labels on page 155](#) and [Deleting labels on page 157](#).



We recommend reading [Policies on page 158](#), [Agent configuration groups on page 209](#), and [Agent offline warning on page 207](#) in their entirety to determine the labels you require for your organization.

If you decide to use custom labels, see the following sections:

- [Creating custom labels on page 151](#)
- [Assigning custom labels on page 152.](#)

Creating custom labels

You can create custom labels to classify groups of users and nodes. Then, you can enable policies and Agent functionality for these groups.



For example, you could create department-specific labels and assign them to users in your sales, finance, and HR departments. You could then configure and publish department-specific policy groups.

How to create a custom label

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Agents* or *Users*, select the *Labels* tab.
3. Click *Create new custom label*.
4. In the *Create a new custom label* dialog box, do the following:
 - a. In the *Name* field, type the label name.
 - b. In the *Description* field, type a label description.
 - c. To flag the label to highlight entities of interest, turn the *Flag label* toggle on. For details about this functionality, see [Flagging labels on page 154](#).
 - d. To pseudonymize the label value, turn the *Pseudonymize label* toggle on. For details about this functionality, see [Operator roles on page 24](#).

Create a new custom label

Name

Leaver

Description (optional)

Label for employees leaving the organization

Flag label



- e. Click *Save*.

After you create a custom label, you must assign it to the relevant users and nodes. For details, see [Assigning custom labels on page 152](#).

Assigning custom labels


To assign custom labels to one or more users or nodes (entities), follow these steps.



Labels can also be assigned to nodes during enrollment through an Agent enrollment token. For details, see the [FortiDLP Agent Deployment Guide](#).

How to assign custom labels to a single entity

1. In the FortiDLP Console, on the left-hand sidebar, click  to assign labels via the *Users* module or click  to assign labels via the *Nodes* module.
2. Filter for the relevant entity. For guidance, see [Users](#) or [Nodes](#) in the *FortiDLP Console User Guide*.
3. On the table row of the entity, click  > *Edit labels*.

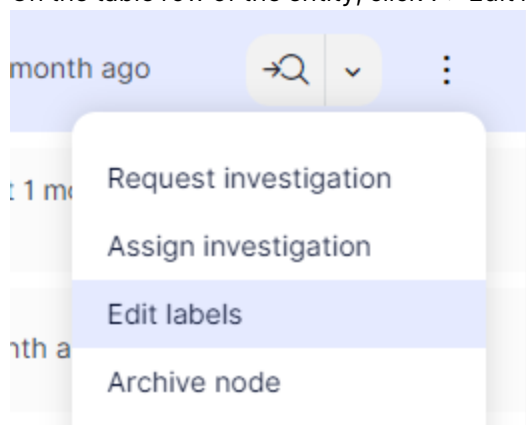


4. In the *Edit labels* panel, do one of the following:
 - To assign an existing label:
 - i. In the label selector box, type the label name and then select it from the list that displays. Repeat as needed.
 - To assign a new label:
 - i. In the label selector box, type the label name and then select *Create and add new label*.
 - ii. *Optionally*, turn the *Flag label* toggle on.
 - iii. *Optionally*, to pseudonymize the label, turn the *Pseudonymize label* toggle on.
 - iv. *Optionally*, in the *Description* field, type the label's description.
 - v. Click *Create*.
 - Click *Save*.



Node labels can also be updated from the *Node profile* page. For details, see [Viewing the Node profile page](#) in the *FortiDLP Console User Guide*.

How to assign custom labels to multiple entities

1. In the FortiDLP Console, on the left-hand sidebar, click  to assign labels via the *Users* module or click  to assign labels via the *Nodes* module.
2. Filter for the relevant entities so that only those you want to assign labels to are in view. For guidance, see [Users](#) or [Nodes](#) in the *FortiDLP Console User Guide*.
3. On the top-right corner of the page, click *Assign labels*. (In the *Nodes* module, you will need to be in either the *Aggregations* or *Table* tab.)

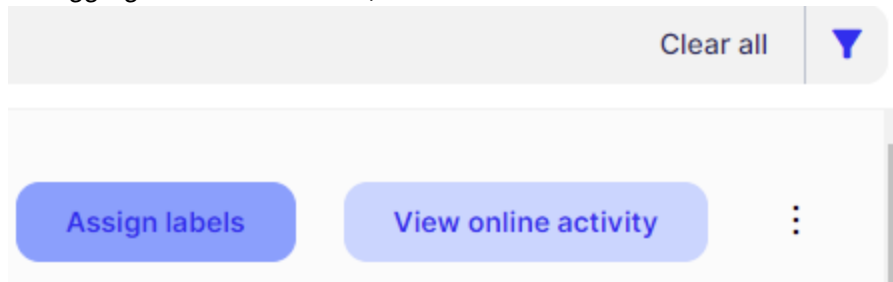

4. In the *Assign labels* panel, do one of the following:
 - To assign an existing label:
 - i. In the label selector box, type the label name and then select it from the list that displays. Repeat as needed.
 - To assign a new label:
 - i. In the label selector box, type the label name and then select *Create and add new label*.
 - ii. *Optionally*, turn the *Flag label* toggle on.
 - iii. *Optionally*, to pseudonymize the label, turn the *Pseudonymize label* toggle on.
 - iv. *Optionally*, in the *Description* field, type the label's description.
 - v. Click *Create*.
 - Click *Assign*.


Editing labels

You can easily edit the properties of a custom, directory, or automatic label by following these steps.

How to edit a label

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Agents* or *Users*, select the *Labels* tab.

3. In the *Labels* table, on the row of the relevant label, click $\vdots$ > *Edit*.

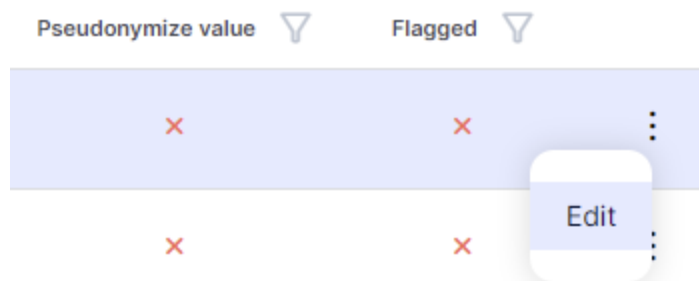

You can filter labels by their type, pseudonymize value, and flagged status. Just click a column name, select the relevant checkboxes, and then click *Apply*.

4. In the *Edit label* dialog box, do the following:
 - a. Modify the label name and description, flag, and/or pseudonymize value as needed.



You cannot modify an automatic label's name or an Entra ID directory label's name.

Also, to modify a LDAP directory label's name, you must edit the related directory label mapping in your configuration file and then sync your directory using the LDAP Sync Tool. Note that any unwanted, previously generated directory labels will require deleting after the sync. For instructions, see [Deleting labels on page 157](#).

- b. Click *Save*.

Flagging labels

FortiDLP allows you to flag labels to increase visibility of certain users and nodes across the user interface.


Entities assigned a flagged label are more prominently displayed, easing oversight by operators. For example, such entities will be highlighted in policy reports, as well as within the *Watchlists* module.

You can flag custom, automatic, and directory labels as follows.

How to flag a label

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙ .
2. Under *Agents* or *Users*, select the *Labels* tab.
3. In the *Labels* table, on the row of the relevant label, click $\vdots$ > *Edit*.

4. In the *Edit label* dialog box, do the following:
 - a. Turn the *Flag label* toggle on.

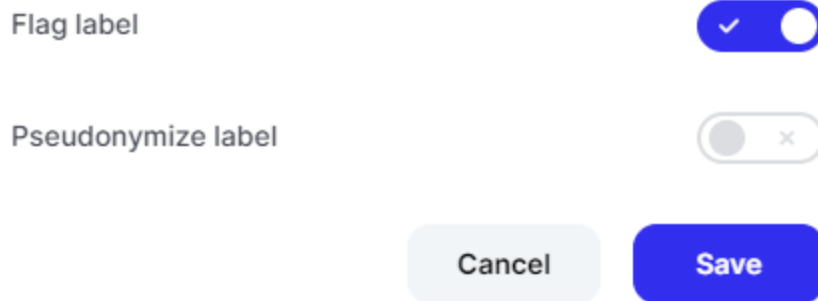

Flag label ☒

Pseudonymize label ☐

Cancel Save

- b. Click *Save*.


Unassigning labels

There are various methods for unassigning custom labels from users and nodes, as detailed below.


You can also remove directory labels from users by deleting the associated directory label mappings and performing a sync.

How to unassign custom labels from a single entity

1. In the FortiDLP Console, on the left-hand sidebar, click  to unassign labels via the *Users* module or click  to unassign labels via the *Nodes* module.
2. Filter for the relevant entity. For guidance, see [Users](#) or [Nodes](#) in the *FortiDLP Console User Guide*.
3. On the table row of the entity, click  > *Edit labels*.

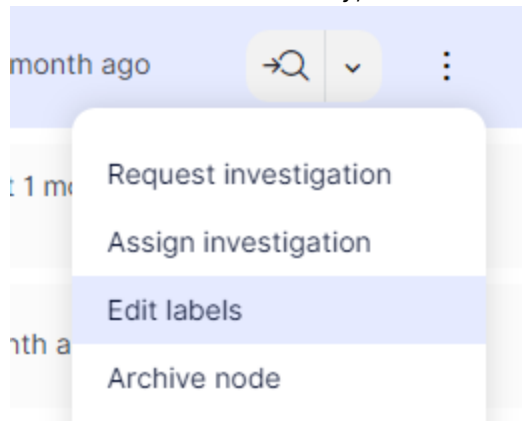

4. In the *Edit labels* panel, do the following:
 - a. Click the **X** within the label you want to remove.

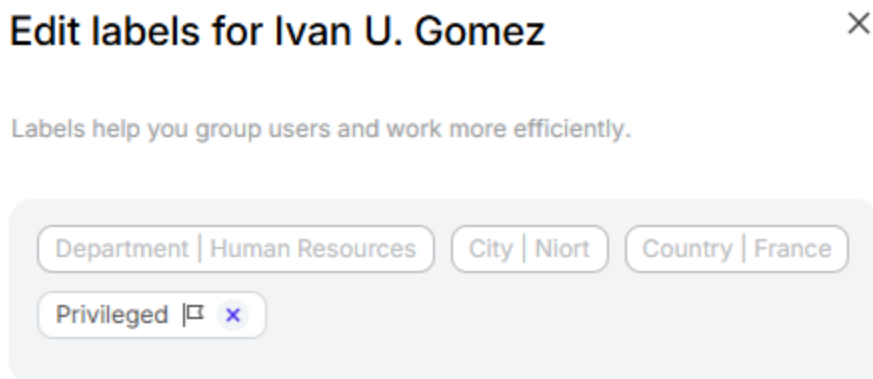


- b. Click Save.



Node labels can also be updated from the *Node profile* page. For details, see [Viewing the Node profile page](#).

How to unassign custom labels from multiple entities

1. In the FortiDLP Console, on the left-hand sidebar, click  to unassign labels via the *Users* module or click  to unassign labels via the *Nodes* module.
2. Filter for the relevant entities so that only those you want to unassign labels from are in view. For guidance, see [Users](#) or [Nodes](#) in the *FortiDLP Console User Guide*.
3. On the top-right corner of the page, click  > *Unassign labels*. (In the *Nodes* module, you will need to be in either the *Aggregations* or *Table* tab.)

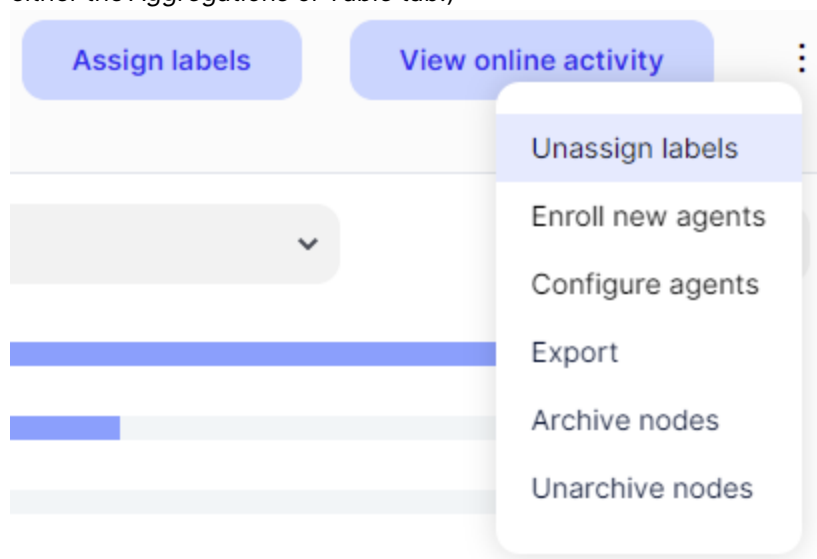

4. In the *Unassign labels* panel, do the following:
 - a. In the label selector box, type the label name and then select it from the list that displays. Repeat as needed.

- b. Click *Unassign*.

How to unassign an Entra ID, Google Workspace, or Box directory label

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Integrations* > *Microsoft*, select *Directory*.
 - Under *Integrations* > *Google*, select *Directory*.
 - Under *Integrations* > *Box*, select *Directory*.
3. Click the relevant directory configuration.
4. In the *Edit directory config* modal, do the following:
 - a. *Label import* section, in the *User properties* or *Group memberships* menu, deselect the checkbox of the property you want to remove.

User properties

The following 7 labels will be imported:

☐ City
 ☐ Country
 ☐ Department
 ☐ Hire date
 ☐ Employee type
 ☐ Job title
 ☐ Office location

▼ Edit selection

Property	Flag	Pseudonymize values
☒ City	☐	☐
☒ Country	☐	☐

- b. Click *Save*.
5. On the directory configuration's panel, click *Sync*.

How to unassign an LDAP directory label

To unassign an LDAP directory label, you must delete the related directory label mapping in your configuration file and then sync your directory using the LDAP Sync Tool.



Any unwanted, previously generated directory labels will require deleting after the sync. For instructions, see [Deleting labels on page 157](#).

Deleting labels

You can easily delete unwanted directory and custom labels. When you delete a label, that label is removed from all entities, policies, and Agent configuration groups.

How to delete a label

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Agents* or *Users*, select the *Labels* tab.
3. In the *Labels* table, on the row of the relevant label, click  > *Delete*.

Type	Pseudonymize value	Flagged	
Custom	✓	✓	⋮
Custom	✗	✓	⋮
Custom	✗	✗	⋮

Edit

Delete

4. In the *Delete label* dialog box, click *Delete label*.



To avoid re-syncing an unwanted directory label, ensure you also follow the guidance in [Unassigning labels on page 155](#).

Policies

Policies automate threat detection and response. They enable you to define rules for specific user activities and the actions that are taken if these rules are breached.

Policies can be customized to align with your IT policies and security needs. You can use policies for educational purposes—for example, to display an on-screen message to a user upon connecting to an unsecured public Wi-Fi network, informing them that they are violating the corporate policy. Or, you can enforce stricter policies to prevent data loss, such as locking a computer if a user attempts to upload a sensitive file to a file sharing site. You can also use policies to highlight activities as detections in the FortiDLP Console. For example, you could be alerted to a user updating their profile and career interests on LinkedIn and visiting recruitment websites, so you could monitor their file activity and protect against data theft until they depart your organization.

Policies run on the FortiDLP Agent or through a FortiDLP Cloud Connector (see [Google Drive policies \(Preview\) on page 128](#) and [Microsoft SharePoint and OneDrive policies \(Preview\) on page 110](#)). When a user violates a policy, a detection is generated and one or more actions are optionally executed on the device. Policy detections display throughout the FortiDLP Console, such as in the *Investigate* and *Detection reports* modules. Detections can optionally be configured to raise/form incidents, as described later in [Configuring policy templates on page 163](#). An incident groups together detections that have the same root cause to prevent alert fatigue.

Fortinet provides a range of policy templates, as detailed in the [FortiDLP Policies Reference Guide](#).

It is recommended that you review these documents prior to configuration.

Policy terms

Before you enable policies, it is important that you understand the following terms.

Policy terms

Term	Definition
Policy	A rule that defines an activity to monitor and the response to take when that activity is detected.
Policy group	A collection of policies to apply to one or more entities. FortiDLP lets you create custom policy groups from scratch to configure policies individually or use predefined policy groups to create policies in bulk.
Policy template	A form exposing a set of configurable parameters for creating a policy. FortiDLP provides standard policy templates that require partial configuration and out-of-box policy templates that require minimal configuration.
Policy asset	A predefined policy template parameter value that eases setup. FortiDLP lets you create custom policy assets from scratch and use out-of-box policy assets that require little or no configuration.
Incident clustering rule	A method for grouping detections together by a common property (such as a domain name, filename, and so on) or a common policy to form an incident. When this method is used, a single incident can encompass detections for one or multiple entities.
Incident sequence rule	A method for grouping detections together to form an incident when a chain of threat activities occurs during a given time window. When this method is used, a single incident will encompass detections for one entity only.

Policy template availability

By default, the latest policy templates are automatically available within the FortiDLP Console.

Standard policy templates are added and enhanced during FortiDLP Policies releases and made accessible within the *Policy templates* panel as soon as a new version becomes available. It is during these releases that templates associated with custom and predefined policy groups are updated.

OOB policy templates are added and enhanced during FortiDLP Cloud releases. They are accessible within pregenerated policy groups in the *Policies* module after a FortiDLP deployment or upgrade. The policy groups containing OOB policy templates are disabled by default.

Upon upgrade, existing policies automatically update to use the latest template functionality, preserving your custom values and applying default values where possible. If a custom value cannot be preserved and a default value cannot be applied, the FortiDLP Console will prompt you to provide input and upgrade manually.

If preferred, you can disable the auto-released policy template functionality and manually import our policy templates after each release (see [Importing policy templates on page 160](#)). To do this, contact your Fortinet Account Manager.

Policy setup

The following table provides an overview of the setup tasks when using standard policy templates with custom policy groups.

Custom policy group setup tasks

Task	Description
1. Importing policy templates on page 160 (optional).	If you have not enabled auto-released policy templates, you must manually import them into the FortiDLP Console.
2. Creating custom policy groups on page 161 .	Next, you must decide how you will apply policies to entities and create any custom policy groups you require. At this time, you may also want to create custom labels to ease configuration and assign labels to target the entities the group applies to. For more information on this, see Labels on page 150 .
3. Configuring policy templates on page 163 .	After you create custom policy groups, you must add policy templates to the groups and configure them to suit your needs. Labels can be chosen at the group level (as stated above) and/or at the individual policy level to exclude entities from specific policies within a group. See Policy label scoping examples on page 169 for details.
4. Publishing policy groups on page 178 .	Lastly, you must publish policy groups to make the policies they contain effective. You can either publish a policy group immediately, or you can save a draft and publish the policy group later.

Alternatively, when using predefined policy groups, you just need to ensure you have access to the desired policy template pack before completing [Using predefined policy groups on page 171](#).


Importing policy templates

If you have not enabled FortiDLP's auto-released policy template functionality for your tenant, you must manually import a policy template bundle each time you want to upgrade your templates. The bundle is versioned and distributed independent of FortiDLP and FortiDLP Agent releases as new templates become available and existing templates are enhanced.

After you import the bundle, FortiDLP will attempt to upgrade previously configured policies to use the latest template functionality while preserving the existing configuration. Where this is not possible, the FortiDLP Console will indicate that manual input is required. Policies created after importing the new policy template bundle will automatically use the new functionality.

How to import policy templates

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. On the top-right corner of the page, click  > *Import policy templates*.

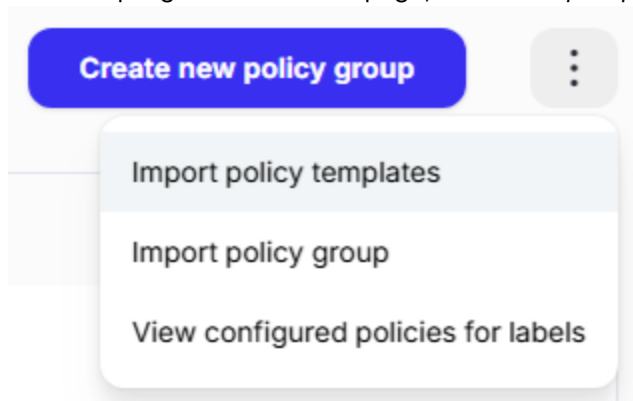

3. Select the policy template bundle (PACK file).

Creating custom policy groups

FortiDLP allows you to create custom policy groups and tailor the policies within them, individually, to meet your organization's needs.



For example, you could create department-specific policy groups, where you configure policies for various activities, such as those related to USB device usage and files. In this scenario, you might enforce stricter policies for users in your Sales department because they can access confidential client information.

You could also create activity-specific policy groups that apply across all departments, where you specify general corporate security policies.



To alternatively use predefined policy groups to create policies in bulk, see [Using predefined policy groups on page 171](#).

Policy label scoping

When creating custom policy groups or using predefined policy groups, it is important to consider labels. [Labels on page 150](#) allow you to associate policy groups with a subset of entities rather than all entities or no entities (depending on whether inclusions or exclusions are being configured).


When setting the policy group scope, you can select one or more labels to define the entities to include and/or exclude. Additionally, you can choose whether a policy group applies to entities that are assigned any or all of the selected labels. If required, additional entity label exclusions can be added to specific policies. See [Configuring policy templates on page 163](#) for details about this. Be sure to also check out our [Policy label scoping examples on page 169](#).



In the event that multiple policy groups are created that contain the same policies and are enabled for the same node, all policies will be passed to the FortiDLP Agent, regardless of how they are configured. This would result in duplicate detections and incidents being generated for the node if the policies are violated. Please be mindful of this when assigning labels and structuring your policy groups.

How to create a custom policy group

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click *Create new group*.
3. In the *Create new policy group* dialog box, do the following:
 - a. Click *Custom policy group*.
 - b. In the *Name* field, type a policy group name.
 - c. *Optionally*, in the *Description* field, type a policy group description.

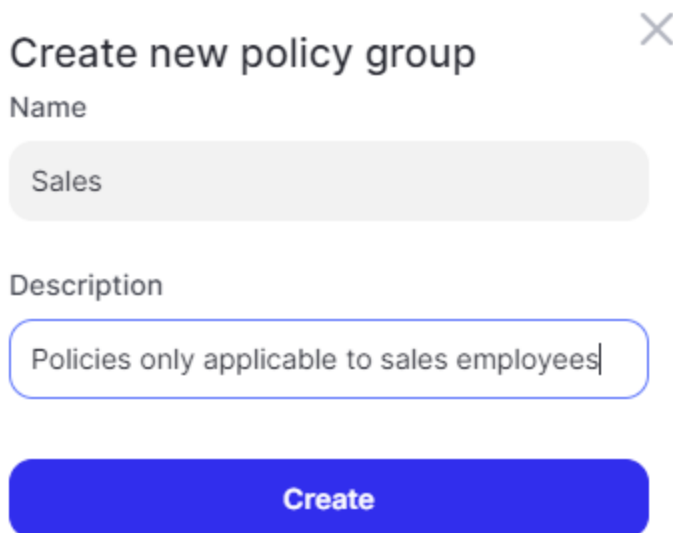

Create new policy group X

Name

Sales

Description

Policies only applicable to sales employees

Create

- d. Click *Create*.
4. Set the policy group's scope by doing one of the following:
 - To apply the policy group all entities, leave the default setting and proceed to the next step.
 - To apply the policy group to a subset of entities by only selecting labels to include:
 - i. In the *Scope* widget, click .
 - ii. Do one of the following:
 - To include entities that have all of the labels you will choose, in the *Include* menu, select *Entities with all selected labels*.
 - To include entities that have any of the labels you will choose, in the *Include* menu, select *Entities with any selected labels*.
 - iii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
 - iv. In the *Exclude* menu, select *No entities*.
 - v. Click *Save*.

- To apply the policy group to a subset of entities by selecting labels to include and exclude:
 - i. In the *Scope* widget, click .
 - ii. Follow the steps above to define the entities to include.
 - iii. Do one of the following:
 - To exclude entities that have all of the labels you will choose, in the *Exclude* menu, select *Entities with all selected labels*.
 - To exclude entities that have any of the labels you will choose, in the *Exclude* menu, select *Entities with any selected labels*.
 - iv. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
 - v. Click *Save*.

To start building policies for your policy group, proceed to [Configuring policy templates on page 163](#).

Configuring policy templates

Policy templates encapsulate the policy logic and expose a set of configurable parameters that you can tailor to your organization's needs. Fortinet provides various policy templates, giving you control over how users interact with files, use USB storage devices, browse the web, and more.

Each policy template contains four panels:

- *Additional exclusions* settings define policy-level label exclusions that are applied in addition to policy group-level label exclusions to exclude entities from specific policies within a group.
- *Policy configuration* parameters define the conditions of the policy.
- *Detection and incident configuration* parameters define how the detection displays in the FortiDLP Console if the policy is violated and if/how an associated incident is formed.
- *Action configuration* parameters define the action(s) executed if the policy is violated.



For most templates, *Policy configuration* parameter groups use AND logic, where detections are only generated if the criteria for all configured parameters is met. There are exceptions to this, such as with the *Sensitive file opened*, *Sensitive file uploaded*, and *Sensitive file downloaded* templates. For details about the logic for these templates, contact Fortinet Support.

To ease setup, most policy templates provide default values and tooltips. Some also support assets, which are predefined parameter values that can be reused across policies. For example, you can select from an array of content inspection pattern assets for detecting credit and debit card numbers and social security numbers.

To ease setup, most policy templates provide default values and tooltips. Some also support assets, which are predefined parameter values that can be reused across policies. For example, you can select from an array of content inspection pattern assets for detecting credit and debit card numbers and social security numbers.

How to configure a policy template



By default, FortiDLP rate limits certain Agent actions to protect against misconfigured policy templates. This rate limit, which applies to all actions except *Capture clipboard evidence*, *Capture file evidence*, *Empty clipboard*, and *Kill process*, ensures actions are not executed on a node more than once per minute per policy.

Where a custom rate limit is also configured for *Display message* actions, the rate limit with the longer duration applies. For example, if *Display message* actions are rate limited to once per hour, this overrides FortiDLP's default rate limit of once per minute.

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click the policy group you want to add policies to.
3. On the right side of the policy group page, click *Add policies*.
4. In the *Policy templates* selector, do the following:
 - a. Click a template category.
 - b. In the template category list, select a template to add to the policy group.



You can quickly find a template by typing the first few letters of its name or description into the *Search* field. You can also filter templates by their default tags and FortiDLP Agent and OS requirements.

5. In the template editor, configure the policy as needed:
 - *Optionally*, edit the policy name.
 - *Optionally*, edit the policy description.
 - *Optionally*, to apply policy-level exclusions in addition to policy group-level exclusions:
 - i. Do one of the following:
 - To exclude entities that have all of the labels you will choose, in the *Additional exclusions* menu, select *Entities with all selected labels*.
 - To exclude entities that have any of the labels you will choose, in the *Additional exclusions*, select *Entities with any selected labels*.
 - ii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.



To view the policy's scope based on the selected labels at both the policy group and policy levels, click the *View scope* button on the right side of the panel. Be sure to also check out our [Policy label scoping examples on page 169](#).

- Do one of the following:
 - To enable the policy after configuring the template, keep the *Enable policy* toggle on.
 - To disable the policy after configuring the template, turn the *Enable policy* toggle off.



A policy is effective when the *Enable policy* toggle is on and the policy is published, as described later in these instructions.

- In the *Policy configuration* panel, set any relevant parameters, referring to the [FortiDLP Policies Reference Guide](#) for detailed information.



You can also hover over the  icon corresponding to a parameter to view a description in a tooltip.

- *Optionally*, in the *Detection and incident configuration* panel, do the following:
 - In the *Score* field, type a number between 1–100 to define the risk score to assign to detections.



The risk score determines the detection's severity level, helping security analysts best allocate their time to threat response:

- A risk score of 0 is classified as no severity.
- A risk score between 1–39 is classified as low severity.
- A risk score between 40–69 is classified as medium severity.
- A risk score between 70–89 is classified as high severity.
- A risk score between 90–100 is classified as critical severity.

- In the *Description* field, type the detection's description.



This field supports string formatting, where replacement fields are used to extract event data for display in the FortiDLP Console. This formatting is used in some of the default values provided, where one or more parts of the description are surrounded by curly brackets (`{ }`).

For example, in the description `Connected to open Wi-Fi network {event.network.ssid}, {event.network.ssid}` would be replaced with the SSID the user connected to when displayed in the FortiDLP Console.


- In the *Tags* field, type one or more keywords or terms describing the detection, separated by a space.
- To apply the [MITRE ATT&CK](#) framework to detections, under *MITRE ATT&CK indicators*, do the following:
 - In the *Tactic* menu, select the MITRE ATT&CK tactic to assign to detections. Your selection will determine the available values in the *Technique* and *Sub-technique* menus.
 - In the *Technique* menu, select the MITRE ATT&CK technique to assign to detections.
 - In the *Sub-technique* menu, select the MITRE ATT&CK sub-technique to assign to detections.



Multiple indicators can be added by clicking the *Add indicator* button and selecting the relevant values from the above menus. For more on this, see [MITRE ATT&CK indicators](#) in the *FortiDLP Policies Reference Guide*.

- To raise an incident when the policy is breached:
 - Turn the *Raise incident if policy is violated* toggle on.
 - In the *Incident clustering rule* menu, select the method for grouping detections to form the incident. You can either cluster detections by a common property or by policy.
- Optionally*, in the *Action configuration* panel, to execute one or more actions when the policy is violated, do the following:

- To block browser downloads, turn the *Block browser download* toggle on.
- To block browser uploads, turn the *Block browser upload* toggle on.
- To block transfers of sensitive files to USB storage devices, turn the *Block file transfer to USB storage device* toggle on.
- To block outbound emails, turn the *Block outbound email* toggle on (*Windows and macOS only*).
- To block printing of sensitive documents, turn the *Block print job* toggle on.
- To block mounting of USB storage devices, turn the *Block USB storage device* toggle on.
- To capture clipboard evidence, turn the *Capture clipboard evidence* toggle on.
- To capture file evidence, turn the *Capture file evidence* toggle on.
- To capture screenshot evidence of the user's computer screen(s), turn the *Capture screenshot evidence* toggle on (*Windows and macOS only*).
- To display an on-screen message to the user:
 - Turn the *Display message* toggle on.
 - In the *Title* field, type a message title.
 - In the *Body* field, type a message body:
 - *Optionally*, to apply italic or bold formatting, highlight the relevant text and click *I* or *B*.
 - *Optionally*, to create a dynamic message containing detection-specific event data, click *{.data}* and then select the desired variable. For example, inserting the *event.url* variable into the body would enable the URL related to a detection to display in the message.

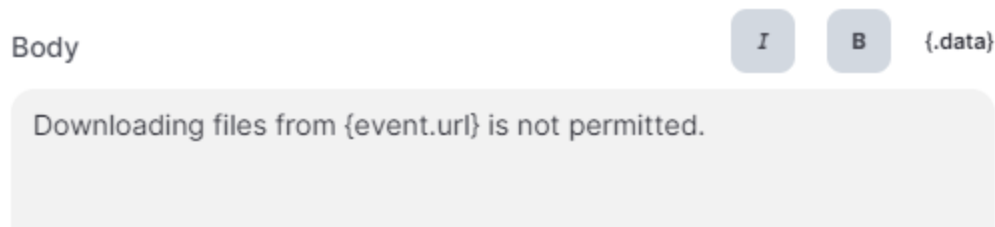

- Optionally, to limit the number of messages displayed:
 - Turn the *Rate limit messages on screen* toggle on.
 - In the *Display no more than one message per* field, set the maximum number of messages you want displayed on a managed node using day, hour, minute, and second units.



For example, setting the *Hour(s)* field to 1 would ensure the message would not display on the same managed node more than once per hour.

- Optionally, to include 1–5 links in the message:
 - Turn the *Include link(s) to URL(s)* toggle on.
 - In the *Primary URL* field, type/paste the URL to direct the user to.
 - In the *Link text* field, type the text to display as the link.
 - To add additional links, click *Add URL* and repeat as needed.



FortiDLP Agent 12.2.1+ is required for multiple links to be shown in a message. Nodes running earlier Agent versions will only be shown the *Primary URL* link.

- v. To require the user to click a specified link, turn the *Make clicking a link mandatory* toggle on.
- vi. *Optionally*, to include a feedback form:
 - i. Turn the *Include feedback form to provide a reason for the violation* toggle on.
 - ii. In the *Feedback form* text field, type the text to display with feedback form.
 - iii. To require the user to submit feedback, turn the *Make submitting feedback mandatory* toggle on.
- vii. *Optionally*, to include an acknowledgement checkbox:
 - i. Turn the *Include mandatory acknowledgement checkbox* toggle on.
 - ii. In the *Acknowledgement checkbox* text field, type the text to display with the checkbox.
- To clear the system clipboard, turn the *Empty clipboard* toggle on (*Windows and macOS only*).
- To block current and new connections to the node, turn the *Isolate* toggle on.
- To kill the process on the node, turn the *Kill process* toggle on.
- To block the node's keyboard and mouse input, turn the *Lock* toggle on (*Windows and macOS only*).
- To restart the node, turn the *Reboot* toggle on.
- To send a Slack or Teams message to the user who violated the policy:
 - i. Turn the *Send message* toggle on.
 - ii. Under *Messaging app*, select one of the following:
 - To send the message to your default messaging app, select *Default*.
 - To send the message to Slack, select *Slack*.
 - To send the message to Teams, select *Teams*.
 - iii. In the *Title* field, type a message title.
 - iv. In the *Body* field, type the body of the message. The following HTML tags are supported:
 - `<b>` or `<strong>` bolds text
 - `<i>` or `<em>` italicizes text
 - `<br>` inserts a line break
 - `<p>` starts a paragraph on a new line.



You can also highlight text and then click *I* or *B* to apply italic and bold formatting, respectively.

- v. *Optionally*, do the following:
 - To include 1–5 links in the message:
 - i. Turn on the *Include link to URL* toggle.
 - ii. In the *URL* field, type/paste the URL to direct the user to.
 - iii. In the *Link text* field, type the text to display as the link.
 - iv. To add additional links, click *Add URL* and repeat as needed.
 - To request feedback from the user about why they violated the policy:
 - i. Turn on the *Include feedback form to request a reason for the violation* toggle.
 - ii. *Optionally*, in the *Feedback form* text field, edit the text that displays as the title of the feedback form.

- To include an acknowledgement checkbox:
 - i. Turn on the *Include acknowledgement checkbox* toggle.
 - ii. *Optionally*, in the *Acknowledgement checkbox text* field, edit the text that displays as the name of the checkbox.
- To modify the message that displays if the user's response is successfully recorded, in the *Success message* field, edit the text.
- To modify the message that displays if the user's response is unsuccessfully recorded, in the *Failure message* field, edit the text.
- To limit the number of messages sent to a user:
 - i. Turn the *Rate limit messages* toggle on.
 - ii. In the *Display no more than one message per* field, set the maximum number of messages you want to send, using day, hour, minute, and second units.



For example, setting the *Hour(s)* field to 1 would ensure messages would not be sent to a user more than once per hour.

- To change the file access permission assigned to a sharing target:
 - i. Do one of the following:
 - If both the *Change shared file access permission* and *Unshare file* file actions are available in the policy:
 - i. Turn the *File action* toggle on.
 - ii. Select the *Change shared file access permission* radio button.
 - If only the *Change shared file access permission* file action is available in the policy, turn the *Change shared file access permission* toggle on.
 - ii. In the *Set permission to* menu, select one of the following permissions to restrict access:
 - Viewer
 - Commentor (Google Drive only)
 - Contributor/Editor
 - Content Manager (shared Google Drives only)
 - iii. Under *Response type*, do one of the following:
 - To automatically change the permission, select the *Automatically change permissions* radio button.
 - To prompt the user who shared the file to change the permission within a Slack or Teams message:
 - i. Select the *Prompt user to change permission via an action button* radio button.
 - ii. Under *Messaging app*, follow the instructions above for sending messages.
- To unshare a file from a sharing target:
 - i. Do one of the following:
 - If both the *Unshare file* and *Change shared file access permission* file actions are available in the policy:
 - i. Turn the *File action* toggle on.
 - ii. Select the *Unshare file* radio button.
 - If only the *Unshare file* file action is available in the policy, turn the *Unshare file* toggle on.

- ii. Under *Response type*, do one of the following:
 - To automatically unshare the file, select the *Automatically unshare file* radio button.
 - To prompt the user who shared the file to unshare the file within a Slack or Teams message:
 - i. Select the *Prompt user to unshare file via an action button* radio button.
- ii. Under *Messaging app*, follow the instructions above for sending messages.

6. Click *Save and exit*.

7. Do one of the following:

- To configure additional templates for the policy group, repeat steps 3–6.
- To publish the policy group now, click *Publish policy group* and then click *Publish now* in the dialog box that displays. Policies will be applied to FortiDLP Agents within 15 minutes.
- To publish the policy group later, exit the policy group page, and see [Publishing policy groups on page 178](#) for instructions when you are ready.

Policy label scoping examples

The examples below demonstrate how to apply labels for common policy scoping use cases. Refer to these examples when following the steps in [Creating custom policy groups on page 161](#) and [Configuring policy templates on page 163](#).

Group-level label configurations

Apply a policy group to entities with a 'Finance' OR a 'Sales' label

Policy group scope:

- Include [Finance] OR [Sales]



In the group's *Policy group scope* panel, do the following.

1. In the *Include* menu, select *Entities with any selected labels*. Then, in the corresponding label picker, apply the *Sales* and *Finance* labels.
2. In the *Exclude* menu, select *No entities*.

Apply a policy group to all entities except those with a 'Finance' OR a 'Sales' label

Policy group scope:

- Include [All entities]
- Exclude [Finance] OR [Sales]



In the group's *Policy group scope* panel, do the following.

1. In the *Include* menu, select *All entities*.
2. In the *Exclude* menu, select *Entities with any selected labels*. Then, in the corresponding label picker, apply the *Finance* and *Sales* labels.

Apply a policy group to entities with the 'Manager' AND 'Product' labels, except those with a 'Windows' label

Policy group scope:

- Include [Manager AND Product]
- Exclude [Windows]



In the group's *Policy group scope* panel, do the following.

1. In the *Include* menu, select *Entities with all selected labels*. Then, in the corresponding label picker, apply the *Manager* and *Product* labels.
2. In the *Exclude* menu, select either *Entities with all selected labels* or *Entities with any selected labels*. Then, in the label picker, apply the *Windows* label.

Group- and policy-level label configurations

Apply a policy group to all entities except those with an 'IT' label, and exclude entities with an 'HR' label from one policy

Policy group scope:

- Include [All entities]
- Exclude [IT]

Policy scope:

- Exclude [HR]



In the group's *Policy group scope* panel, do the following.

1. In the *Include* menu, select *All entities*.
2. In the *Exclude* menu, select either *Entities with all selected labels* or *Entities with any selected labels*. Then, in the corresponding label picker, apply the *IT* label.

In the template's *Additional exclusions* panel, do the following.

1. In the menu, select either *Entities with all selected labels* or *Entities with any selected labels*. Then, in the label picker, apply the *HR* label.

Apply a policy group to all entities except those with an 'IT' label, and exclude entities with the 'England' AND 'Linux' labels from one policy

Policy group scope:

- Include [All entities]
- Exclude [IT]

Policy scope:

- Exclude [England AND Linux]



In the group's *Policy group scope* panel, do the following.

1. In the *Include* menu, select *All entities*.
2. In the *Exclude* menu, select either *Entities with all selected labels* or *Entities with any selected labels*. Then, in the corresponding label picker, apply the *IT* label.

In the template's *Additional exclusions* panel, do the following.

1. In the menu, select *Entities with all selected labels*. Then, in the label picker, apply the *England* and *Linux* labels.

Apply a policy group to all entities except those with the 'IT' AND 'Linux' labels, and exclude entities with the 'England' AND 'Linux' labels from one policy

Policy group scope:

- Include [All entities]
- Exclude [IT AND Linux]

Policy scope:

- Exclude [England AND Linux]



In the group's *Policy group scope* panel, do the following.

1. In the *Include* menu, select *All entities*.
2. In the *Exclude* menu, select *Entities with all selected labels*. Then, in the corresponding label picker, apply the *IT* and *Linux* labels.

In the template's *Additional exclusions* panel, do the following.

1. In the menu, select *Entities with all selected labels*. Then, in the label picker, apply the *England* and *Linux* labels.

Using predefined policy groups

Predefined policy groups can accelerate your policy implementation. These groups allow you to set common parameters for multiple policies at once instead of setting parameters for each policy individually. Some groups prepopulate content inspection patterns and keywords for you to save you even more time.

When using a predefined policy group, our wizard guides you through the steps to bulk create policies. Once the policies are created, you can manage them as you would policies within a custom policy group. For example, after you complete the wizard, you can tailor any policy in the group individually to meet any further requirements.

FortiDLP offers an array of predefined policy groups to help your organization comply with information security, financial, and medical regulations, and protect personally identifiable information. To learn about the groups that are available, see the [FortiDLP Policies Reference Guide](#).

Policy label scoping

When creating custom policy groups or using predefined policy groups, it is important to consider labels. [Labels on page 150](#) allow you to associate policy groups with a subset of entities rather than all entities or no entities (depending on whether inclusions or exclusions are being configured).

When setting the policy group scope, you can select one or more labels to define the entities to include and/or exclude. Additionally, you can choose whether a policy group applies to entities that are assigned any or all of the selected labels. If required, additional entity label exclusions can be added to specific policies. See [Configuring policy templates on page 163](#) for details about this. Be sure to also check out our [Policy label scoping examples on page 169](#).



In the event that multiple policy groups are created that contain the same policies and are enabled for the same node, all policies will be passed to the FortiDLP Agent, regardless of how they are configured. This would result in duplicate detections and incidents being generated for the node if the policies are violated. Please be mindful of this when assigning labels and structuring your policy groups.

How to use predefined policy groups



If you do not set a common parameter in the wizard, it will need to be set on a per-policy basis after the group is created. For detailed policy configuration instructions, see [Configuring policy templates on page 163](#).

1. In the FortiDLP Console, on the left-hand sidebar, click [\[S\]](#).
2. Click *Create new policy group*.
3. In the dialog box, do the following:
 - a. Click *Predefined policy group*.
 - b. Click the policy group you want to use.

Select the policy group

Q Search on name or tags ✕

GDPR compliance

Build policies to support General Data Protection Regulation compliance

GLBA compliance

Build policies to support Gramm-Leach-Bliley Act compliance

HIPAA/HITECH compliance

Build policies to support Health Insurance Portability and Accountability Act and Health Information

- c. Review the policy group description and then click *Next*.
- d. Select the checkboxes for the channels you want to monitor and then click *Next*.

- e. Set common policy parameters and then click *Next*. Common parameters will be shown across a series of screens, which will vary by the chosen group/channel(s).

Set common content inspection parameters for the policy group

Content inspection patterns

Narrow breadth detection



National...

+ 2 more



 14

Content inspection keywords



HIPAA di...

+ 4 more



 14



In the wizard, you can hover over any parameter or  icon to view the parameter's description. You can also hover over any  icon to view the templates containing the parameter.

f. Set common detection parameters:

- i. In the *Score* field, type a number between 1–100 to define the risk score to assign to detections.



The risk score determines the detection's severity level, helping security analysts best allocate their time to threat response:

- A risk score of 0 is classified as no severity.
- A risk score between 1–39 is classified as low severity.
- A risk score between 40–69 is classified as medium severity.
- A risk score between 70–89 is classified as high severity.
- A risk score between 90–100 is classified as critical severity.

If you do not provide a score, the default scores for the corresponding policy templates will be applied.

- ii. In the *Tags* field, type one or more keywords or terms to apply to detections, separated by a space.

Set common detection parameters for the policy group

Detection configuration

Score



75

High

Tags



healthcare PHI



Any tags you provide will be used along with the default tags for the corresponding policy templates.

- iii. Click Next.
- g. Set the policy group scope by doing one of the following:
 - To apply the policy group all entities:
 - i. In the *Include* menu, select *All entities*.
 - ii. In the *Exclude* menu, select *No entities*.
 - To apply the policy group to a subset of entities by only selecting labels to include:
 - i. Do one of the following:
 - To include entities that have all of the labels you will choose, in the *Include* menu, select *Entities with all selected labels*.
 - To include entities that have any of the labels you will choose, in the *Include* menu, select *Entities with any selected labels*.
 - ii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.

- iii. In the *Exclude* menu, select *No entities*.



For example, to apply a policy group to all entities with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *Entities with any selected labels*. Then, in the corresponding label picker, select the *Sales* and *Finance* labels.
2. In the *Exclude* menu, select *No entities*.

- To apply the policy group to a subset of entities by selecting labels to include and exclude:
 - i. Follow the steps above to define the entities to include.
 - ii. Do one of the following:
 - To exclude entities that have all of the labels you will choose, in the *Exclude* menu, select *Entities with all selected labels*.
 - To exclude entities that have any of the labels you will choose, in the *Exclude* menu, select *Entities with any selected labels*.
 - iii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.



For example, to apply a policy group to all entities except those with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *All entities*.
2. In the *Exclude* menu, select *Entities with any selected labels*. Then, in the corresponding label picker, select the *Sales* and *Finance* labels.

Or, to apply a policy group to entities with a "Manager" label and a "Product" label, but not a "Windows" label:

1. In the *Include* menu, select *Entities with all selected labels*. Then, in the corresponding label picker, select the *Manager* and *Product* labels.
2. In the *Exclude* menu, select either *Entities with all selected labels* or *Entities with any selected labels*. Then, in the label picker, select the *Windows* label.

- h. Click *Next*.

- i. Do one of the following:

- To create and review the policy group before publishing it, click *Create & review*. For instructions to publish the policy group later, see [Publishing policy groups on page 178](#).
- To create and publish the policy group immediately, click *Create & publish*. Policies will be applied to nodes within 15 minutes.

Duplicating policies


Instead of recreating similar policies from scratch, you can duplicate an existing one to a different policy group.

When you duplicate a policy, you can reuse some of the existing parameter values and modify those you wish to change.

How to duplicate a policy

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click the policy group containing the policy you want to duplicate.
3. On the row of the relevant policy, click  > *Duplicate*.

Enabled 

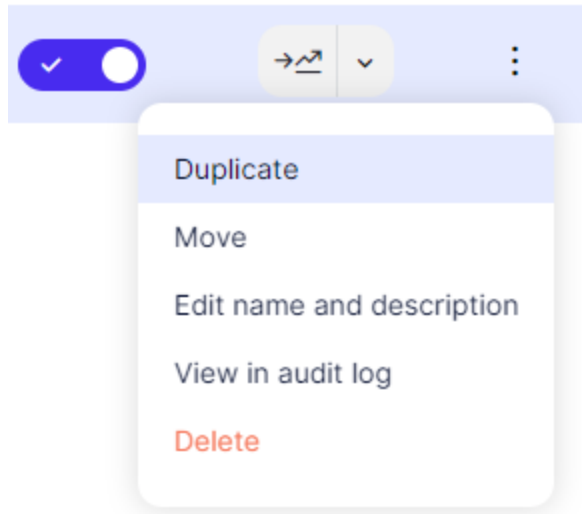

4. Select the checkbox of the policy group(s) you want to duplicate the policy to, or select the *All* checkbox to duplicate it to all groups.
5. Click *Apply*.

The duplicated policy will display within your selected policy group(s) with the previous policy name, appended with (Copy)). For guidance on editing policies, see [Configuring policy templates on page 163](#). A duplicated policy is not effective unless it is enabled within a policy group and that policy group is republished.


Moving policies

To move a policy to a different policy group, follow these steps.

How to move a policy

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click the policy group containing the policy you want to move.

- On the row of the relevant policy, click $\vdots$ > Move.

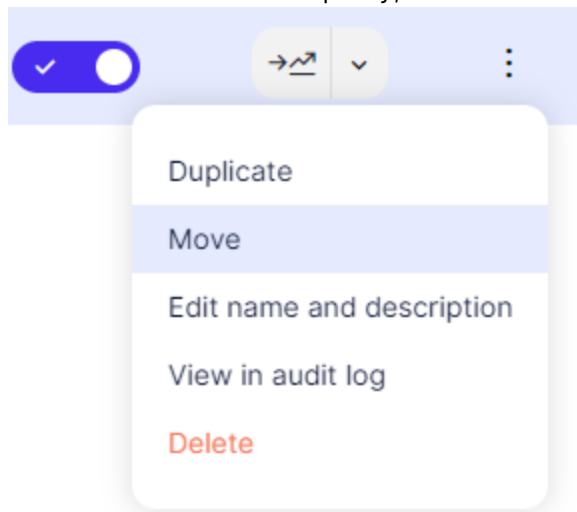

- Select the radio button of the policy group you want to move the policy to.
- Click *Apply*.


The moved policy will display within your selected policy group. After you move a policy, you must publish both policy groups (the old group and the new group) for the changes to take effect. For instructions, see [Publishing policy groups on page 178](#).

Disabling policies

To disable a policy within a policy group, follow these steps.

How to disable a policy

- In the FortiDLP Console, on the left-hand sidebar, click [P](#).
- Click the policy group containing the policy you want to disable.
- On the row of the relevant policy, turn the *Enabled* toggle off.

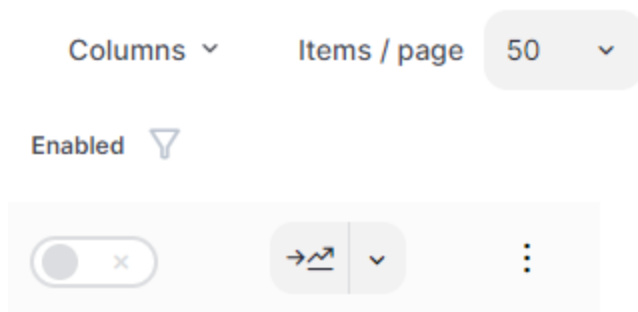

- Do one of the following:
 - To publish the policy group now, click *Publish policy group* and then click *Publish now* in the dialog box that displays. Your changes will be rolled out to FortiDLP Agents within 15 minutes.


- To publish the policy group later, close the policy group page. For instructions on publishing the policy group later, see [Publishing policy groups on page 178](#).

Deleting policies

If you no longer require a policy, you can delete it by following these steps.

How to delete a policy

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click the policy group containing the policy you want to delete.
3. On the row of the relevant policy, click  > *Delete*.

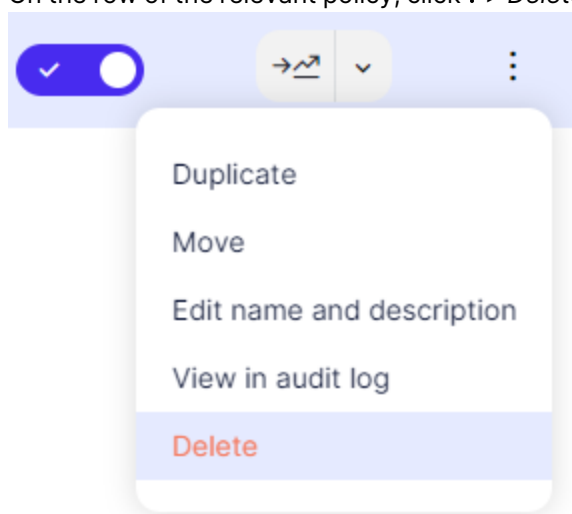

4. In the *Are you sure?* dialog box, click *Delete*.
5. Do one of the following:
 - To publish the policy group now, click *Publish policy group*. Your changes will be rolled out to FortiDLP Agents within 15 minutes.
 - To publish the policy group later, close the policy group page. For instructions on publishing the policy group later, see [Publishing policy groups on page 178](#).

Publishing policy groups


After you configure a policy group, you must publish it to make the policies it contains effective for the FortiDLP Agents in your deployment.

You can publish a policy group immediately, where policies are applied to FortiDLP Agents within 15 minutes. Alternatively, if you need more time to review your policies before pushing them to FortiDLP Agents, you can save a draft and publish the group later.


The instructions for publishing a policy group immediately are described in [Configuring policy templates on page 163](#). To publish a draft policy group, follow these steps.

How to publish a policy group draft

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - To review/update the configuration prior to publishing the group:
 - i. Click the policy group containing the policies you want to publish.
 - ii. Edit the policy group as needed, referring to [Editing policy groups on page 179](#) and [Configuring policy templates on page 163](#) for detailed instructions.
 - iii. Verify the *Enabled* toggle is turned on for all the policies you want to publish within the group.
 - iv. Verify the *Enable policy group* toggle is turned on for the policy group.
 - v. Click *Publish policy group*.

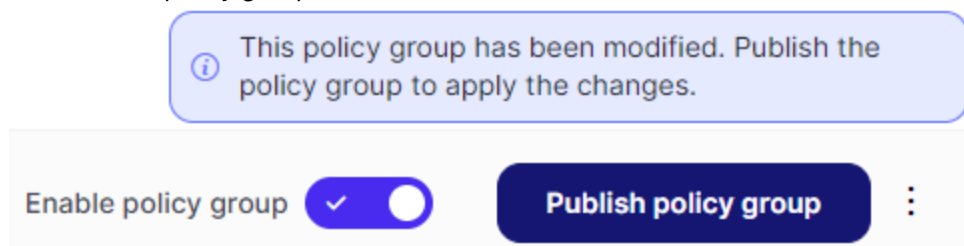

- vi. In the *Publish policy group* dialog box, click *Publish now*.
- To publish the policy group without reviewing/updating the configuration, on the right-hand side of the panel for the relevant policy group, click *Publish*.

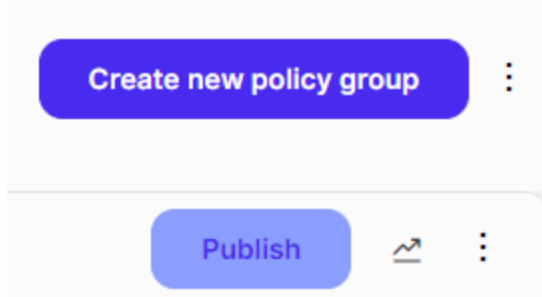

Editing policy groups

To edit a policy group, follow these steps.

Changes made to a policy group will not be applied until they are published.

How to edit a policy group


1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click the relevant policy group.




On the top-right side of the page, you can select an option in the *Sort by* menu to sort policy groups by their name (in alphabetical order), or whether they contain warnings, are OOB, enabled, or have/have not been published.

3. Modify the policy group as needed:

- To edit a policy group name and/or description:
 - On the top-right corner of the page, click **> Edit name and description**.

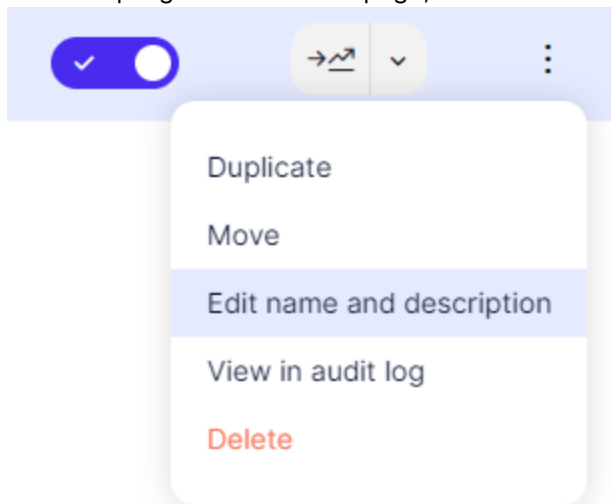

- Modify the group name and description as needed.
 - Click **Save**.
- To edit a label configuration:
 - In the label widget, click **Edit**.
 - Modify the *Include* and *Exclude* list configurations as needed, as detailed in [Configuring policy templates on page 163](#).
 - Click **Save**.
 - To edit template parameter values:
 - Click the policy you want to modify.

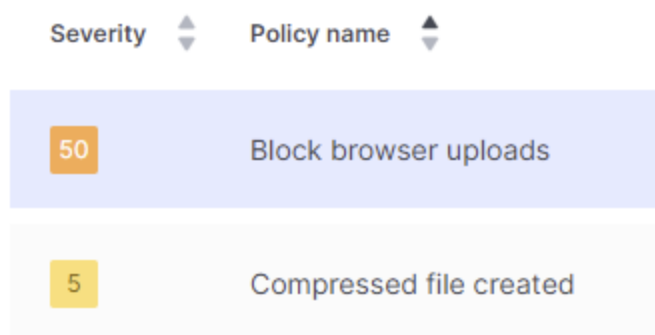

- Update the parameters as needed, as detailed in [Configuring policy templates on page 163](#).
 - Click **Save**.
- To add a policy, see [Configuring policy templates on page 163](#).
 - To remove a policy, see [Deleting policies on page 178](#).
- ### 4. Do one of the following:
- To publish the policy group now, click **Publish policy group**. Your changes will be rolled out to FortiDLP Agents within 15 minutes.
 - To publish the policy group later, close the policy group page. For instructions on publishing the policy group later, see [Publishing policy groups on page 178](#).


Duplicating policy groups

Instead of recreating similar policy groups from scratch, you can duplicate and edit an existing one.

When you duplicate a policy group, you can reuse some of the existing parameter values and modify those you wish to change.

How to duplicate a policy group

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. On the row of the policy group you want to duplicate, click  > *Duplicate policy group*.

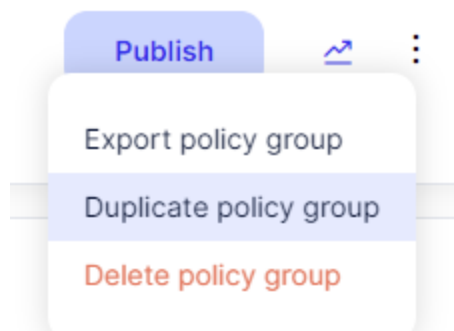

3. Edit the duplicated policy group as needed (it will display with the previous policy group name, appended with (Copy)). For guidance, see [Editing policy groups on page 179](#).
4. Do one of the following:
 - To publish the policy group now, click *Publish policy group*. Your changes will be rolled out to FortiDLP Agents within 15 minutes.
 - To publish the policy group later, close the policy group page. For instructions on publishing the policy group later, see [Publishing policy groups on page 178](#).

Exporting and importing policy groups

The FortiDLP Console allows you to export and import previously customized policy groups to cut configuration time.


You can use this functionality to import a preconfigured policy group provided by your Fortinet representative. You can also use it to create a backup of a policy group, which you can revert to at a later stage to override any changes.

When you export a policy group, all of its parameters are preserved except for labels, which can be assigned to the new group after import.

This functionality should not be used to duplicate or clone a policy group within the same tenant. When you export and import the same policy group within the same tenant, that policy group will be overwritten.

How to export a policy group


1. In the FortiDLP Console, on the left-hand sidebar, click .
2. On the row of the policy group you want to export, click  > *Export policy group*.

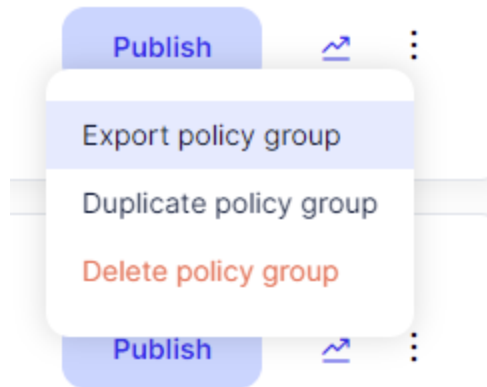

When the export completes, the policy group bundle (GZ file) will be downloaded to your computer.

How to import a policy group

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. On the top-right corner of the page, click  > *Import policy group*.

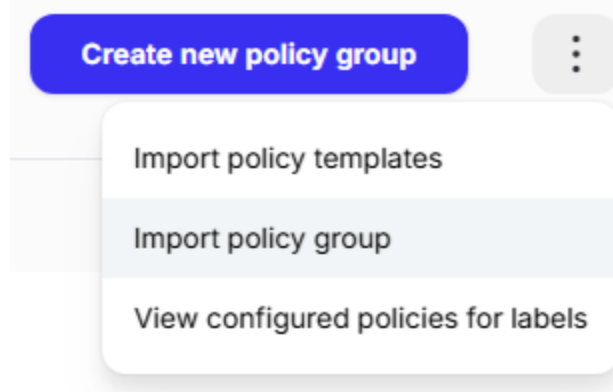

3. Select the policy group bundle (GZ file).

When the import completes, the new policy group will display in the policy group list, but will be unpublished.


For information on assigning labels and modifying parameters, see [Editing policy groups on page 179](#).

Disabling policy groups

To disable a policy group, follow these steps.

How to disable a policy group

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Click the policy group you want to disable.
3. Turn the *Enable policy group* toggle off.

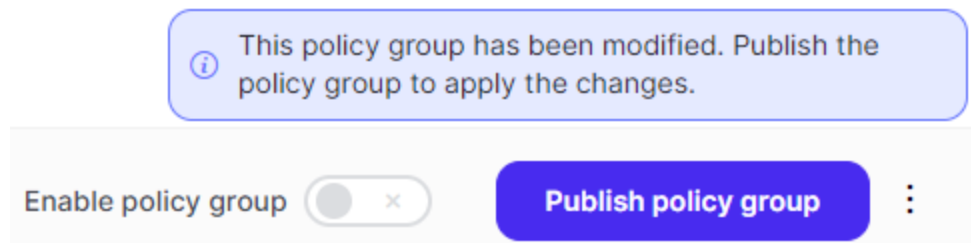


4. Do one of the following:
 - To publish the policy group now, click *Publish policy group*. Your changes will be rolled out to FortiDLP Agents within 15 minutes.
 - To publish the policy group later, close the policy group page. For instructions on publishing the policy group later, see [Publishing policy groups on page 178](#).

Deleting policy groups

If you no longer require a policy group, you can delete it. Deleting a policy group deletes the policy group and all associated policies.

How to delete a policy group

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. On the row of the policy group you want to delete, click  > *Delete policy group*.

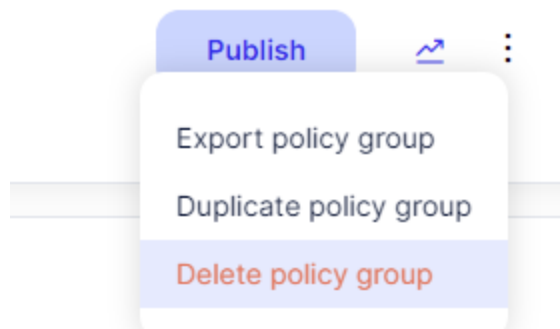

3. In the *Delete policy group* dialog box, click *Delete*.

Viewing configured policies

The FortiDLP Console allows you to view configured policies across different policy groups for a given set of labels. This is helpful for identifying which policies are associated with a group of entities.

For each policy, you can improve its configuration and view corresponding information by navigating to related pages.

View configured policies

Labels

Europe +2 Clear selection

Configured policies (59)


Severity	Policy name	Policy group	Template version	Requirements	Raise incidents	
90	File opened matching advanced content inspection	Data Tracking	4.4.0	os!=linux agent_version>=7.1.0	Off	→ ⓘ ▾
65	Sensitive content copied from desktop application	Data Tracking	4.4.0	os!=linux agent_version>=7.1.0	Off	→ ⓘ ▾
90	Sensitive file opened	Sales Team	4.4.0	os!=linux agent_version>=7.1.0	On	→ ⓘ ▾
50	Sensitive file uploaded	Sales Team	4.4.0	agent_version >= 7.0.2	Off	→ ⓘ ▾
50	Sensitive file uploaded to personal file share website	Sales Team	4.4.0	agent_version >= 7.10.1	On	→ ⓘ ▾



Configured policies displayed in this modal reflect the current state of all policies that have been *configured* in the FortiDLP Console, rather than the state of policies that have been *applied* by the Agent. Therefore, results could include unpublished changes saved to a policy or policy group.

How to view configured policies

1. In the FortiDLP Console, on the left-hand sidebar, click ⓘ.
2. At the top-right corner of the page, click ⓘ > *View configured policies for labels*.

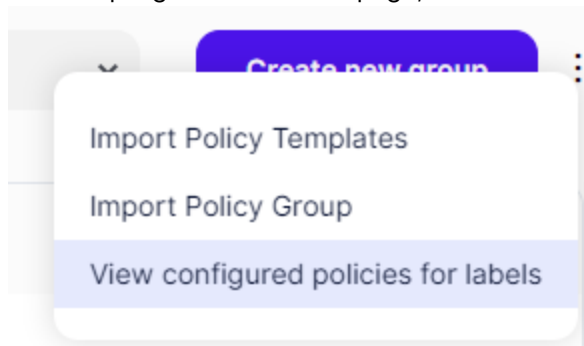

3. In the label selector box, type the label name and then select it from the list that displays. Repeat as needed.

View configured policies



Labels

Department | IT x

Department | HR x

Clear selection

If all/any of the selected labels can be matched to the labels of a policy group, policies belonging to the group will be shown in the table.

4. *Optionally*, do the following:

- To modify the table columns:
 - i. Click *Columns*.
 - ii. Select/deselect relevant checkboxes.
- To filter the policy results:
 - i. Click ▼ next to a column title.
 - ii. Select/deselect relevant checkboxes.
 - iii. Click *Apply* (if applicable).
- To edit the selected labels, from the *Labels* list, select/deselect labels as needed.
- To clear all labels selected, click the *Clear selection* button.
- To search for configured policies, type into the *Configured policies* search bar.
If the search value matches part or all of a policy's name or tag, the policy will remain in the table.
- To view more information related to a policy:
 - To view a policy's detections, at the end of the relevant policy row, click ▼ > *View in Investigate*.
 - To view a policy's incidents (if applicable), at the end of the relevant policy row, click ▼ > *View in Incidents*.
 - To view a policy's template, at the end of the relevant policy row, click ▼ > *View in Policies*.
 - To view a policy's audit logs, at the end of the relevant policy row, click ▼ > *View in Audit log*.

Assets

Assets are predefined policy template parameter values that can be reused across policies, allowing you to work more efficiently.

Assets fall under four categories:

- *Out of box*: FortiDLP provides a series of out-of-box (OOB) assets you can choose from that do not require configuration. This includes common webmail domains, dangerous file extensions, and content inspection patterns.
- *Out of box (editable)*: FortiDLP provides editable OOB assets which have been partially configured, but require customization by your organization.
- *Custom*: For complete flexibility, you can create custom assets from scratch, tailoring them to your specific needs.
- *Sensitivity labels*: If you enable a [Microsoft sensitivity labels on page 102](#) integration, you can create assets for your organization's file and email sensitivity labels.

The following asset types are supported.

Asset types

Type	Description
<i>Application binary name list</i>	Used to create lists of binary names.
<i>Application called path pattern list</i>	Used to create lists of regular expressions to match binary called paths.
<i>Application identifier list</i>	Used to create lists of process metadata application identifiers.
<i>Application list</i>	Used to define application properties to match processes.
<i>Application window title pattern list</i>	Used to create lists of regular expressions to match application window titles.
<i>Content inspection keyword list</i>	Used to create lists of content inspection keywords and key phrases, such as HIPAA diseases and treatments. For more on content inspection keywords, see the FortiDLP Policies Reference Guide .
<i>Content inspection pattern</i>	Used to create content inspection patterns, such as credit and debit card numbers and social security numbers. For more on content inspection patterns, see the FortiDLP Policies Reference Guide .
<i>Domain name list</i>	Used to create lists of DNS names, IPv4 addresses, and/or IPv6 addresses.
<i>File attribute value list</i>	Used to create lists of file attribute values for third-party plugins.
<i>File extension list</i>	Used to create lists of file extensions.
<i>File path keyword list</i>	Used to create lists of keywords appearing anywhere in a file path.
<i>Filename pattern list</i>	Used to create lists of regular expressions to match filenames.
<i>Generic string list</i>	Used to create lists that are not met by other string list asset types.
<i>Glob-style file/folder path list</i>	Used to create lists of file path expressions/glob-style shell filename patterns.
<i>IP address list</i>	Used to create lists of IPv4 or IPv6 addresses in CIDR format for denylists, internal subnets, and so on.
<i>Microsoft sensitivity label</i>	Microsoft sensitivity labels on page 102 integration required. Used to identify sensitivity labels that have been applied to files and emails and synced to the FortiDLP Infrastructure.
<i>Port numbers or range list</i>	Used to create lists of port numbers or port ranges.
<i>PowerShell cmdlet pattern list</i>	Used to create lists of regular expressions to match unauthorized PowerShell cmdlets.
<i>Registry key list</i>	Used to create lists of glob-style shell filename patterns to match Windows registry keys.
<i>SaaS app specifier</i>	Used to define app conditions to match SaaS apps, and/or choose apps directly from the SaaS app inventory.
<i>String mapping</i>	Used to create sets of key-value string pairs defining mappings; e.g. domain names (keys) could be mapped to website categories (values) for phishing,

Type	Description
	gambling, and gaming.
<i>URL pattern list</i>	Used to create lists of regular expressions to match URLs.
<i>USB VID/PID identifier list</i>	Used to create lists of USB device Vendor ID (VID) and Product ID (PID) combinations.
<i>USB serial number list</i>	Used to create lists of USB device serial numbers.
<i>User identifier pattern list</i>	Used to create lists of regular expressions to match user identifiers (SID on Windows, and UID on Linux and macOS).
<i>Username list</i>	Used to create lists of usernames.
<i>Username pattern list</i>	Used to create lists of regular expressions to match usernames.
<i>Wi-Fi BSSID list</i>	Used to create lists of Wi-Fi BSSIDs/wireless access point MAC addresses.
<i>Wi-Fi SSID list</i>	Used to create lists of Wi-Fi SSIDs/wireless network names.

Viewing assets

OOB, custom, and sensitivity label assets are viewable from the *Policies* module's *Policy assets* tab.

From here, you can view an asset's configuration details as well as the number of policies where the asset is in use. You can also quickly navigate to the corresponding templates to make changes.

How to view assets

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.
Assets are displayed.



You can quickly find an asset by:

- typing the first few letters of its name, tag, or description into the search box.
- clicking a column name and applying a filter. For example, you can filter by asset type.

3. To view an asset's configuration details or linked policies, click the row of the relevant asset.

In the dialog box that displays, the *Asset configuration* tab provides the asset configuration and the *Linked policies* tab shows policies using the asset. To open the template editor for a linked policy, click .

Creating custom assets

For complete flexibility, you can create custom assets that are tailored to your organization's needs. Custom assets can be created from scratch or based off of an existing asset by duplicating it. For more on duplicating assets, see [Duplicating assets on page 198](#).

Some assets must be provided in JSON format, either by uploading a JSON file or copying and pasting JSON text into the FortiDLP Console. However, to simplify creation of list assets, such as IP address lists, these values can alternatively be entered as plain text.



Before you create content inspection pattern assets or content inspection keyword list assets, see [Content inspection parameters](#).

Before you create SaaS app specifier assets, see [Website parameters](#) and [File and attachment origin parameters](#).

How to create a custom asset (for all asset types except SaaS app specifiers)

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.
3. Click *Create new policy asset*.
4. In the dialog box, do the following:
 - a. In the *Policy asset name* field, type a policy asset name.
 - b. *Optionally*, click the *Policy asset description* field, type a policy asset description
 - c. *Optionally*, click the *Policy asset tags* field, type one or more keywords or terms describing the asset, separated by a space.
 - d. In the menu, select the relevant asset type. For asset type descriptions, see [Assets on page 185](#).
 - e. Do one of the following:
 - To manually create an asset, either type or paste the values into the entry box. Non-list assets must be provided in JSON format, and list assets can be provided using plain text or JSON text as follows:
 - To provide plain text, select the *List* radio button and then enter one value per line. Ensure you delete any empty lines or you will be unable to create the asset.

IP address list



List



JSON

192.0.2.1/16
2001:db8::68/128

- To provide JSON, select the *JSON* radio button and then enter the values. Ensure you delete any empty entries or you will be unable to create the asset.

IP address list ▼

☐ List ☒ JSON

```
[
  "192.0.2.1/16",
  "2001:db8::68/128"
]
```



The FortiDLP Console indicates if the JSON text is invalid.

- To upload a JSON file:
 - On the top-right corner of the dialog box, click  > *Upload a JSON file*.
 - Select the JSON file.
- f. Click *Create*.

How to create a custom SaaS app specifier asset



It is recommended that you prepare your SaaS app inventory prior to creating SaaS app specifier assets. This will ensure that the needed apps are available for selection in the asset editor and that app conditions defined for assets align with those of apps in your inventory. For more information, see [SaaS apps](#).

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.
3. Click *Create new policy asset*.
4. In the dialog box, do the following:
 - a. In the *Policy asset name* field, type a policy asset name.
 - b. *Optionally*, click the *Policy asset description* field, type a policy asset description.
 - c. *Optionally*, click the *Policy asset tags* field, type one or more keywords or terms describing the asset, separated by a space.
 - d. In the menu, select *SaaS app specifier*.

- e. Do at least one of the following:
 - To define conditions to match web apps:
 - Turn the *Specify SaaS app conditions* toggle on.
 - Turn the toggles on for the conditions you want to match, and then select the relevant categories, verdicts, minimum and/or maximum risk scores. You can also filter by *Corporate* or *Non-corporate* user account types, which are determined by your corporate domain list defined in *Admin settings > SaaS apps*, and/or *Unknown* account types, where the account details are unavailable (for example, for password-free logins, where a one-time code, face, fingerprint, pin, or security key is used for authentication). If multiple conditions are specified, a SaaS app will match if it has at least one of the defined values in each section. When configuring SaaS app specifiers with user account filters, FortiDLP Agent 12.1.0+ must be used for the policy to be functional.

For example, you might want to configure upload policy templates to only allow uploads to sanctioned apps when a corporate account is used. To do this, you could create an asset with a configuration that includes the *Sanctioned* verdict and the *Corporate* account type.

AND

Verdicts ⓘ



Sanctioned



AND

Risk score ⓘ



AND

User account types ⓘ



Corporate domains are specified in [Admin settings/SaaS apps](#)

Domainless logins (e.g. tim rather than tim@company.com) are classified as non-corporate or corporate in [SaaS apps/Inventory](#)

☒ Corporate ☐ Non-corporate ☐ Unknown



Or, if your configuration includes the *File sharing and storage* and *Google Apps* categories, the *Sanctioned* verdict, and the *Corporate* and *Unknown* account types, apps in either category that are sanctioned will match for a corporate or unknown account.

Categories ⓘ



File Sharing and Storage + 1



AND

Verdicts ⓘ



Sanctioned



AND

Risk score ⓘ



AND

User account types ⓘ



Corporate domains are specified in [Admin settings/SaaS apps](#)

Domainless logins (e.g. tim rather than tim@company.com) are classified as non-corporate or corporate in [SaaS apps/Inventory](#)

☒ Corporate ☐ Non-corporate ☒ Unknown

- To choose web apps from the inventory:
 - i. Turn the *Select from the SaaS app inventory* toggle on.
 - ii. Click *Add apps*.

- iii. In the *Add SaaS applications* dialog box:
 - i. Select the checkbox(es) for the relevant app(s).

Name	Category	Risk score
☒ Google Drive	File Sharing and Storage	5 Moderate risk

- ii. Click *Add apps*.
- iv. Optionally, turn the *User account types* toggle on and select the checkbox(es) corresponding to the account types you want to match. You can filter by *Corporate* or *Non-corporate* user account types, which are determined by your corporate domain list defined in *Admin settings > SaaS apps*, and/or *Unknown* account types, where the account details are unavailable. When configuring SaaS app specifiers with user account filters, FortiDLP Agent 12.1.0+ must be used for the policy to be functional.



If you define app conditions *and* choose apps from the inventory, apps will match if they meet the criteria for *either* of these configurations (that is, OR logic applies).

- f. Click *Create*.

Example assets

Refer to the following example assets when creating your own.

Application binary name list

Application binary names (list format)

```
chrome.exe
Finder
```

Application called path pattern list

Application called path patterns (list format)

```
.*chrome\\.exe
.*compattelrunner\\.exe -maintenance
```

Application identifier list

Application identifiers (list format)

```
v1.com.google.Chrome
v1.349c76189d1923511855d5ecd55e7f3100b6251952420cb0940ba64ac1ea0b1a
```

Application list

Authorized application parameters (JSON format)

```
[
  {
    "binary_name": "demo.exe",
    "binary_path": "C:\\Windows\\demo.exe"
  }
]
```

Application window title pattern list

Application window title patterns (list format)

```
phish(ed|ing)
```

Content inspection keyword list

HIPAA diseases (list format)

```
a2 anemia
aarskog's
aarskog's syndrome
aat deficiency
ab igne
abacterial
```

Content inspection pattern

US Social Security Numbers (JSON format)

```
{
  "name": "US Social Security Numbers (SSN)",
  "pattern": "\\b(?:[0-9]{9})|(?:[0-9]{3}-[0-9]{2}-[0-9]{4})|(?:[0-9]{3} [0-9]{2} [0-9]{4}))\\b",
  "filter": "ssn"
}
```

Domain name list

Domain names (list format)

```
mail.google.com
1.1.1.1
2001:0db8:85a3:0000:0000:8a2e:0370:7334
```

File extension list

File extensions (list format)

```
docx
.docx
```

File path keyword list

File path keywords (list format)

```
confidential
secrets
```

Glob-style file/folder path list

Glob-style file/folder path list (list format)

```
C:\\Users\\**\\Shared\\**
**\\*.pdf
*\\Program Files\\Mozilla Firefox\\updater.exe
/Users/*/Applications/**
```

IP address list

Denylist (list format)

```
192.0.2.1/16
2001:db8::68/128
```

Port numbers or ranges list

Port numbers or ranges (list format)

```
22
22-24
```

Registry key list

Registry keys (list format)

```
HKEY_CURRENT_USER\\Software\\Microsoft\\SystemCertificates\\Root\\Certificates\\*
HKEY_LOCAL_MACHINE\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\RunOnceEx\\*\\*
HKEY_CURRENT_USER\\Software\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\*
```

String mapping

Prohibited websites (JSON format)

```
{
  "gambling.com": "Gambling",
  "facebook.com": "Social Media"
}
```

URL pattern list

URL patterns (list format)

```
http:\\\\
example\\.com\\download
```

USB serial number list

USB serial numbers (list format)

```
1000000
12345678
```

USB VID/PID identifier list

USB VID/PID identifiers (list format)

```
0BDA:8152
ABCD:*
*:CDEF
```

User identifier pattern list

User identifier patterns (list format)

```
S-1-0-.*
s-1-5-20
0
```

Username list

Username (list format)

```
NT AUTHORITY\SYSTEM
root
```

Username pattern list

Username patterns (list format)

```
admin.*  
svc.*  
NT AUTHORITY\.*
```

Wi-Fi BSSID list

Wi-Fi BSSIDs (list format)

```
18:35:D1:33:EA:BF  
d8:c7:c8:44:32:40
```

Wi-Fi SSID list

Wi-Fi SSIDs (list format)

```
_Heathrow Wi-Fi  
BTWifi-X
```

Editing custom assets

You can easily edit the configuration of a custom asset.

How to edit a custom asset

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.
3. Click the row of the relevant asset.



You can quickly find an asset by:

- typing the first few letters of its name, tag, or description into the search box.
- clicking a column name and applying a filter. For example, you can filter by asset type.

4. Edit the configuration as needed, referring to [Creating custom assets on page 187](#) for detailed, asset type-specific instructions.
5. Click **Save**.



You must republish all policy groups linked to the asset for your changes to take effect. For instructions, see [Publishing policy groups on page 178](#).


Deleting custom assets

You can easily delete unwanted custom assets. When you delete a custom asset, that asset is removed from the *Policy assets* tab and relevant policy template selection menus.

A custom asset can only be deleted if the asset is not in use by any policy templates (published or unpublished). OOB and editable OOB assets cannot be deleted.

How to delete a custom asset

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.
3. On the row of the relevant asset, click  > *Delete*.

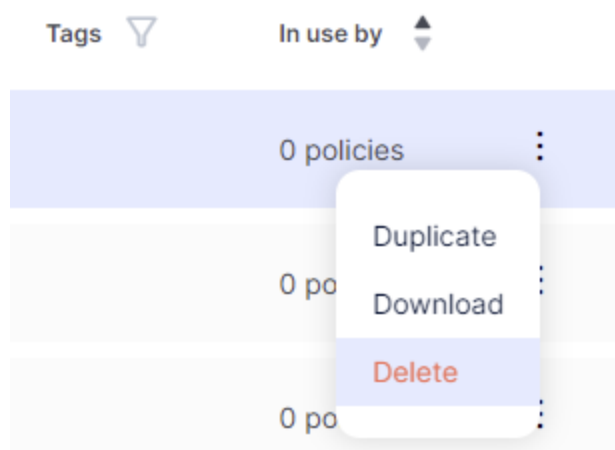

If the asset you are trying to delete is in use by one or more policies, you will be prompted to remove the asset from linked policies before proceeding.

4. In the *Delete asset* dialog box, click *Delete*.

Customizing editable OOB assets

FortiDLP's editable OOB assets fast-track asset creation. These assets already have a name, description, and tags, but their values must be customized by your organization.



For example, FortiDLP provides an editable authorized email domains asset that you can update to include a list of email or corporate account domain names that are approved by your company.

To learn about the editable OOB assets that are available, see the [FortiDLP OOB Policy Assets Reference Guide](#).

How to customize an editable OOB asset

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.
3. Click the row of the relevant asset.



You can quickly find an editable OOB asset by:

- clicking the *Out of box* column and applying the *Out of box (editable)* filter.
- typing the first few letters of its name, tag, or description into the search box.

4. Edit the configuration as needed, referring to [Creating custom assets on page 187](#) for detailed, asset type-specific instructions. The asset name, description, and tags cannot be changed for editable OOB assets.

Authorized email domains

A list of authorized email or corporate account domain names (e.g. company.com).

Asset type: Domain name list Out of box (editable) Asset tags: #domains #email

Asset configuration

Linked policies (0)

☒ List

☐ JSON

5. Click Save.

Duplicating assets


Instead of recreating similar assets from scratch, you can duplicate an existing one—reusing some of the existing values and modifying those you wish to change.

Custom and OOB assets can be duplicated. However, if you duplicate an OOB asset, the copy will be created as a custom asset.

How to duplicate a custom asset

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Policy assets* tab.

- On the row of the relevant asset, click  > *Duplicate*.

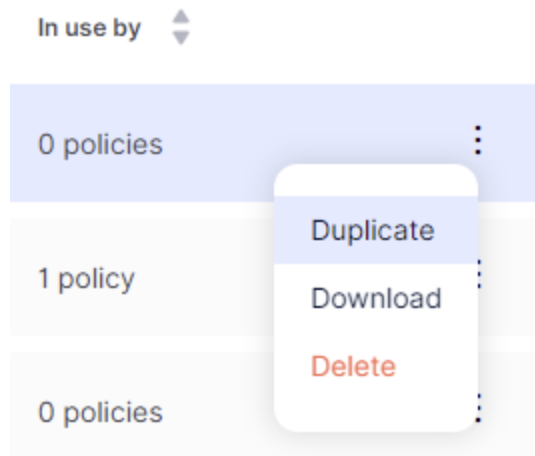

- Click the duplicated asset's name. It will display with the previous asset name, appended with (Copy).
- Edit the configuration as needed, referring to [Creating custom assets on page 187](#) for detailed, asset type-specific instructions.
- Click Save.

Incident sequence rules

Sequence rules streamline investigations by automatically correlating detections triggered by the same entity to a risk-scored incident.

Defined within the *Policies* module, these rules leverage the [MITRE ATT&CK](#) security framework to generate incidents caused by sequences of high-risk activity, such as reconnaissance, data collection, defense evasion, and data exfiltration.

The FortiDLP Console allows you to create custom sequence rules and also provides an out-of-box sequence rule to help you get started.

←  Data exfiltration by high-risk users  <no description>

→  View in incidents + Update stages **Publish rule** 

Include  All entities 

Match type  Match ≥ 2 stages

Mandatory stages  Exfiltration [TA0010]

Risk score  Most severe detection

Time window  24 hours

Operation mode  Enabled

Configured stages

Defense Evasion
21 out of 25 applicable policies enabled

Only include policies with a risk score of at least 70 High

Collection
2 out of 2 applicable policies enabled

Only include policies with a risk score of at least 70 High

Exfiltration **Mandatory**
20 out of 25 applicable policies enabled

Only include policies with a risk score of at least 70 High

Before you begin using sequence detection, familiarize yourself with the following terms.

Sequence detection terms

Term	Definition
<i>Sequence rule</i>	A method for grouping policy detections together to form an incident when a chain of threat activities occurs during a given time window. When this method is used, a single incident will encompass detections for one entity (user/node) only.
<i>Stages</i>	The threat activities, which are mapped to MITRE ATT&CK tactics, that generate an incident for an entity. A sequence rule is made up of two or more stages (for example, <i>Collection</i> and <i>Exfiltration</i>) and each stage has corresponding policies. If a user violates a policy in a stage, that stage is met. If that same user violates at least one policy in each required stage during the time window, an incident is created.
<i>Match type</i>	The method for matching policy violations to stages, where you can require all stages to be met to generate an incident or certain stages to be met to generate an incident. Stages can be optional or mandatory.
<i>Risk score</i>	The score given to a sequence incident to indicate its severity, such as <i>Fixed</i> (which is defined by the sequence rule) or <i>Most severe detection</i> (which is inherited from the detection with the highest risk score).
<i>Time window</i>	The time period during which all required stages must be met by a user to generate an incident. When a time window expires, the incident's <i>Active</i> field will be set to <i>false</i> .
<i>Operation mode</i>	The setting of the sequence rule, such as <i>Enabled</i> , <i>Disabled</i> , or <i>Test</i> . The operation mode does not indicate that the rule has been applied to entities; a rule must also be published.



Note the following:

- A maximum of 10 incident sequence rules can be configured per tenant.
- A maximum of 10 incidents can exist for the same entity and sequence rule at the same time. If this limit is reached, further incidents will not be created for the entity and rule until one or more of the existing incidents are marked as "Resolved" or "In review".

To learn more about creating and managing incident sequence rules, see:

- [Creating incident sequence rules on page 201](#)
- [Publishing incident sequence rules on page 204](#)
- [Editing incident sequence rules on page 205](#)
- [Disabling incident sequence rules on page 206](#)
- [Deleting incident sequence rules on page 206](#).

For information on viewing incidents, see [Incidents](#) in the *FortiDLP Console User Guide*.

Creating incident sequence rules

You can create a maximum of 10 incident sequence rules.

To create a rule, follow the steps below.

How to create an incident sequence rule

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Sequence rules* tab.
3. Click *Create new rule*.
4. In the *New incident rule* dialog box, do the following:
 - a. In the *Name* field, type a rule name.
 - b. *Optionally*, in the *Description* field, type a rule description.
 - c. Click *Next*.
 - d. Select the checkboxes for at least two stages to incorporate into the rule.
 - e. Click *Create*.
5. Set the sequence rule's scope by doing one of the following. Note that the rule will only be applied to the entities you select if the entities have also been assigned policies for the rule's stages.
 - To apply the rule to all entities, leave the default setting and proceed to the next step.
 - To apply the rule to a subset of entities by only selecting labels to include:
 - i. In the *Scope* widget, click .
 - ii. Do one of the following:
 - To include entities that have all of the labels you will choose, in the *Include* menu, select *Entities with all selected labels*.
 - To include entities that have any of the labels you will choose, in the *Include* menu, select *Entities with any selected labels*.
 - iii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
 - iv. In the *Exclude* menu, select *No entities*.
 - v. Click *Save*.



For example, to apply a rule to all entities with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *Entities with any selected labels*. Then, the corresponding label picker, apply the *Sales* and *Finance* labels.
2. In the *Exclude* menu, select *No entities*.

- To apply the rule to a subset of entities by selecting labels to include and exclude:
 - i. In the *Scope* widget, click .
 - ii. Follow the steps above to define the entities to include.
 - iii. Do one of the following:
 - To exclude entities that have all of the labels you will choose, in the *Exclude* menu, select *Entities with all selected labels*.
 - To exclude entities that have any of the labels you will choose, in the *Exclude* menu, select *Entities with any selected labels*.

- iv. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
- v. Click **Save**.



For example, to apply a rule to all entities except those with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *All entities*.
2. In the *Exclude* menu, select *Entities with any selected labels*. Then, in the corresponding label picker, apply the *Sales* and *Finance* labels.

Or, to apply a rule to entities with a "Manager" label and a "Product" label, but not a "Windows" label:

1. In the *Include* menu, select *Entities with all selected labels*. Then, in the label picker, apply the *Manager* and *Product* labels.
2. In the *Exclude* menu, select either *Entities with all selected labels* or *Entities with any selected labels*. Then, in the label picker, apply the *Windows* label.

6. Set the sequence rule's match type and mandatory stages:

- a. In the *Match type / Mandatory stages* widget, click .
- b. Do one of the following:
 - To generate an incident after a policy detection occurs in all of the selected stages, select the *Match all stages* radio button.
 - To generate an incident after a policy detection occurs in a subset of the selected stages, select the *Match $\geq N$ stages (including mandatory)* radio button and then optionally select the checkboxes for any stages you want to be mandatory.



For example, if a rule contains four stages and you select *Match ≥ 2 stages*, an incident will be generated after a policy detection occurs in any two of the four stages during the given time window.

Alternatively, if you select *Match ≥ 2 stages* and make two of the stages mandatory, an incident will be generated after a policy detection occurs in both of the specified stages during the given time window.

- c. Click **Save**.

7. Set the sequence rule's risk score:

- a. In the *Risk score* widget, select $\vee$.
- b. Do one of the following:
 - To use a fixed risk score for the incident, which is applied regardless of the detections it comprises, leave the *Fixed* radio button selected and type a number between 1–100:
 - A risk score of 0 is classified as no severity.
 - A risk score between 1–39 is classified as low severity.
 - A risk score between 40–69 is classified as medium severity.
 - A risk score between 70–89 is classified as high severity.
 - A risk score between 90–100 is classified as critical severity.
 - To use the risk score of the most severe detection the incident comprises, select the *Most severe detection* radio button.
- c. Exit the menu.

8. Set the sequence rule's time window:
 - a. In the *Time window* widget, click $\vee$.
 - b. Select the time window during which policy detections for selected stages must occur for an incident to be generated.
 - c. Exit the menu.
9. Set the sequence rule's operation mode:
 - a. In the *Operation mode* widget, click $\vee$.
 - b. Do one of the following:
 - To disable the rule after configuration, leave the *Disabled* radio button selected.
 - To enable the rule after configuration, select the *Enabled* radio button.



A rule is effective when it is enabled and published, as described later in these instructions.

- To test the rule after configuration, select the *Test* radio button.



Incidents generated in the "Test" operation mode will be shown in the *Incidents* module like other incidents, but can be filtered for rule testing purposes.

- c. Exit the menu.
10. Customize each of the sequence rule's stages:
 - *Optionally*, to define a minimum risk score a policy must have to be included in a stage, type a number between 1–100, referring to the severity scale above. Leave this set to 0 to include all policies in the stage.

The screenshot shows a configuration interface for a sequence rule. At the top, there is a widget for 'Operation mode' with a dropdown arrow and a gear icon, currently set to 'Disabled'. Below this, there is a section for policy filtering. It includes the text 'Only include policies with a risk score of at least' followed by a text input field containing the number '60' and a dropdown arrow. To the right of the input field is an orange button labeled 'Medium'.

- To disable a policy in a stage, turn its *Enabled* toggle off.
 - To configure policy template parameters, click $\rightarrow$ ⓘ . For detailed instructions on this, see [Configuring policy templates on page 163](#).
11. Do one of the following:
 - To publish the rule now, click *Publish rule* and then click *Publish* in the dialog box that displays.
 - To publish the rule later, exit the sequence rule page and see [Publishing incident sequence rules on page 204](#) for instructions when you are ready.

Publishing incident sequence rules

After you configure a sequence rule, you must publish it to make it effective for applicable entities.

You can publish a sequence rule immediately. Alternatively, if you need more time to review your rule before pushing it to entities, you can save a draft and publish the rule later.

The instructions for publishing a sequence rule immediately are described in [Creating incident sequence rules on page 201](#). To publish a draft sequence rule, follow these steps.


How to publish an incident sequence rule draft

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Sequence rules* tab.
3. Do one of the following:
 - To review/update the configuration prior to publishing the rule:
 - i. Click the rule you want to publish.
 - ii. Edit the rule as needed, referring to [Editing incident sequence rules on page 205](#) and [Creating incident sequence rules on page 201](#) for instructions.
 - iii. Verify the *Enabled* toggle is turned on for all the policies you want to include in the rule stages.
 - iv. Verify the *Operation mode* toggle is set to *Enabled* for the rule.




A rule is effective when it is enabled and published.

- v. Click *Publish rule*.

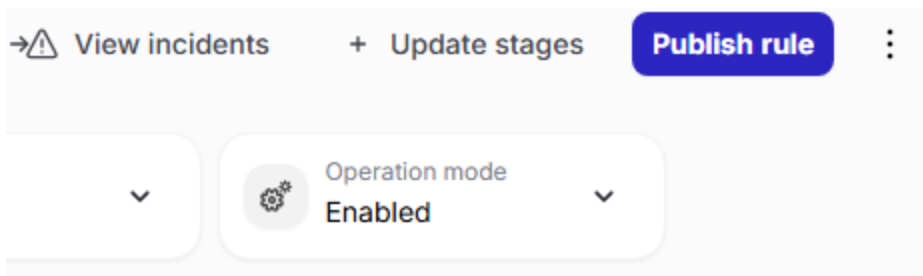

- vi. In the *Publish incident rule* dialog box, click *Publish*.
- To publish the rule without reviewing/updating the configuration:
 - i. On the right-hand side of the row for the relevant rule, click *Publish*.

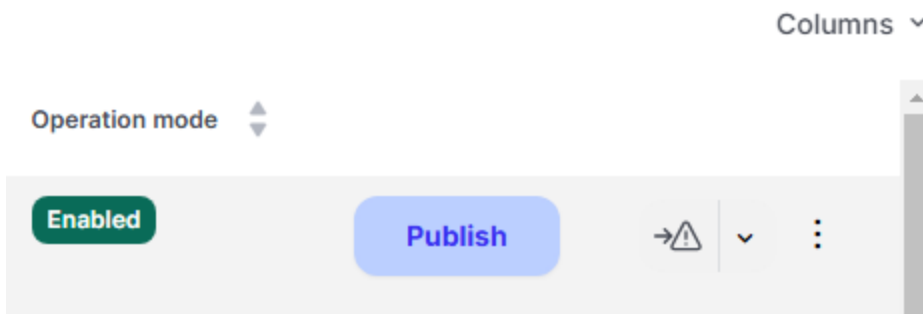

- ii. In the *Publish incident rule* dialog box, click *Publish*.


Editing incident sequence rules

To edit an incident sequence rule, follow these steps.

Changes made to a rule will not be applied to entities until the rule is published.

How to edit an incident sequence rule

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Select the *Sequence rules* tab.
3. Do one of the following:
 - To edit a rule's name and/or description:
 - i. On the right-hand side of the row for the relevant rule, click  > *Edit name and description*.

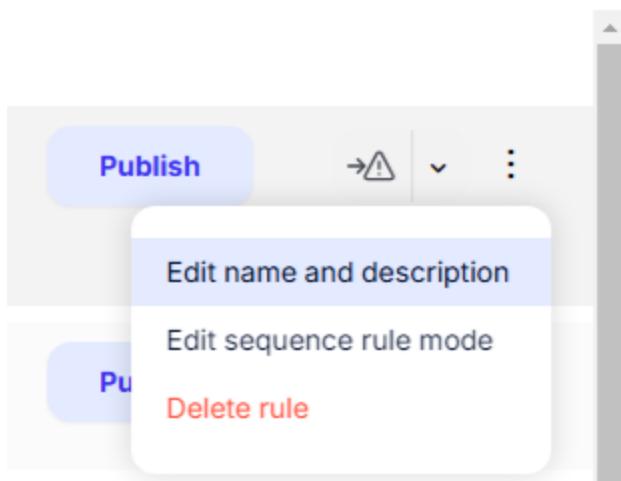

- ii. Modify the rule name and description.
- iii. Click *Submit*.
- To edit a rule's operation mode:
 - i. On the right-hand side of the row for the relevant rule, click  > *Edit sequence rule mode*.
 - ii. In the *Edit incident rule mode* dialog box, select the new operation mode:
 - To disable the rule, select the *Disabled* radio button.
 - To enable the rule, select the *Enabled* radio button.
 - To test the rule, select the *Test* radio button.
 - iii. Click *Save*.
- To edit a rule's configuration:
 - i. Click the rule you want to modify.
 - ii. Update existing values, as detailed in [Creating incident sequence rules on page 201](#). You can also add/remove stages by clicking *Update stages* at the top of the page, selecting/deselecting the corresponding checkboxes, and clicking *Save*.

4. Do one of the following:
 - To publish the rule now, click *Publish* and then click *Publish* again in the dialog box that displays.
 - To publish the rule later, exit the sequence rule page and see [Publishing incident sequence rules on page 204](#) for instructions when you are ready.

Disabling incident sequence rules

To disable an incident sequence rule, follow these steps.

How to disable an incident sequence rule

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. On the right-hand side of the row for the relevant rule, click  > *Edit sequence rule mode*.
3. In the *Edit incident rule mode* dialog box, do the following:
 - a. Select the *Disabled* radio button.

Edit incident rule mode

- ☒ Disabled
- ☐ Enabled
- ☐ Test

Cancel

Save

- b. Click *Save*.
4. Do one of the following:
 - To publish the rule now, click *Publish* and then click *Publish* again in the dialog box that displays.
 - To publish the rule later, exit the sequence rule page and see [Publishing incident sequence rules on page 204](#) for instructions when you are ready.

Deleting incident sequence rules

If you no longer require an incident sequence rule, you can delete it by following these steps.

Previously generated incidents will remain available in the *Incidents* module after a corresponding rule is deleted, however, further detections will not be added to them.