

How to disable a system notification subscription

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *General*, select the *System notifications* tab.
3. In the *Email notifications* table, on the row of the relevant subscription, click  > *Edit*.
4. In the *Edit system notification subscription* dialog box, do the following:
 - a. Turn the *Enabled* toggle off.
 - b. Click *Update*.

Deleting system notification subscriptions

To delete a system notification subscription that you no longer need, follow these steps.

How to delete a system notification subscription

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *General*, select the *System notifications* tab.
3. In the *Email notifications* table, on the row of the relevant subscription, click  > *Delete*.

Microsoft

You can integrate Microsoft with FortiDLP to use the following features:

- [Entra ID users on page 96](#)
- [Microsoft sensitivity labels on page 102](#)
- [Microsoft SharePoint and OneDrive Connector on page 105](#)
- [Microsoft SharePoint and OneDrive policies \(Preview\) on page 110](#).

Each feature requires integration setup via an Entra ID app registration. For more information, see [Microsoft credentials on page 111](#).

Entra ID users

FortiDLP can integrate with Entra ID to sync users and generate directory labels based on their attributes.

FortiDLP provides one-way directory synchronization, so no information from FortiDLP is imported into your Entra ID user directory.

Prior to connecting to an Entra ID server, you must organize your directory so that it contains the appropriate user groups. FortiDLP supports basic query capabilities using Entra ID's `$filter` parameter for identifying users. Refer to the Entra ID documentation [here](#) for the relevant syntax.

Before you configure an Entra ID integration, ensure you understand the following concepts:

- *field mappings*
- *directory label mappings.*

Field mappings

Field mappings define how Entra ID attributes map to user fields that display in the FortiDLP Console or are used by FortiDLP for identification purposes.

The following table describes the supported mappings, which do not require configuration.

Field mappings

Entra ID attribute	FortiDLP field	Description
displayName	<i>Name</i>	The user's first and last name.
mail	<i>Email</i>	The user's email address.
photo	<i>Image</i>	The user's profile picture.
jobTitle	<i>Title</i>	The user's job title.
department	<i>Department</i>	The user's department.
manager.displayName	<i>Manager</i>	The user's line manager's first and last name.
mobilePhone	<i>Mobile phone</i>	The user's mobile phone number.
businessPhones	<i>Office phone</i>	The user's office phone number.
streetAddress	<i>Home address</i>	The user's home address.
officeLocation	<i>Office address</i>	The user's office address.
id	<i>Unique ID</i>	The user's identifier.

Directory label mappings



Prior to reading this section, it is recommended that you read [Labels on page 150](#).

Directory label mappings define how Entra ID attributes map to labels, which FortiDLP uses to associate users with policy groups and Agent configuration groups.



For example, a directory label mapping could be used to assign a label to users that identifies their department within your organization. This would ease configuration, allowing you to select specific departments when enabling policies and Agent functionality.

FortiDLP can create and map directory labels for the following Entra ID attributes:

- *city*
- *country*

- department
- employeeHireDate
- employeeType
- jobTitle
- officeLocation
- memberOf

Resulting directory labels will display in the FortiDLP Console in the format Attribute | Value, such as Department | Sales.

For security purposes, directory label values can be replaced with pseudonyms in the FortiDLP Console for operators with the pseudonymization perspective (for more information about this feature, see [Operator roles on page 24](#)). Further, directory labels can be "flagged" upon creation, meaning these labels will display with a flag symbol in the UI.

Setup

To get started with setting up this feature, see [Adding an Entra ID directory configuration on page 98](#).

Adding an Entra ID directory configuration

FortiDLP can integrate with one or more Entra ID directories.



You must have the following operator permissions to be able to configure an Entra ID integration in FortiDLP:

- *Can edit Entra ID configurations*
 - *Can read Entra ID configurations*
 - *Can sync Entra ID configurations.*
-

Prerequisites

You must first complete the credential setup steps in [Microsoft credentials on page 111](#).

How to add an Entra ID directory

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations > Microsoft*, select *Entra ID*.
3. Click *Add new directory*.
4. In the *Add new directory* modal, do the following:
 - a. Under *Authentication settings*, in the *Credentials* menu, select a set of [credentials](#).
 - b. Under *Details*, type a name to identify the directory sync configuration.

c. *Optionally*, under *User sync*, do the following:

- To filter the users you want to sync, in the *Filter* field, type the search [filter](#).



For example, entering:

- `country eq 'USA'` would filter by users who have USA set as their country of residence.
- `createdDateTime ge 2022-05-09T16:59:09Z` would filter by users whose Entra ID accounts were created after the date and time provided.

- To enable daily auto-syncs, turn the *Enable daily auto-sync toggle* on. For more information, see [Syncing Entra ID directories on page 100](#).
- To enable auto-archiving of users deleted from the directory, turn the *Enable auto-archiving of directory-deleted users toggle* on. For more information, see [Auto-archiving Entra ID directory-deleted users on page 101](#).
- To remove directory labels from auto-archived users who were deleted from the directory, turn the *Remove directory labels from auto-archived users toggle* on.
- To sync users' usernames to the Infrastructure and allow them to be mapped to events that contain a matching username, turn the *Sync username mapping toggle* on. For more information, see [User-event mapping on page 43](#).

d. *Optionally*, under *Label import*, do the following:

- To create labels for user properties and map them to users:
 - i. In the *User properties* list, select one or more user properties.
 - ii. To pseudonymize user property label values, select the corresponding *Pseudonymize values* checkboxes.
 - iii. To assign a *New starter* label to users based on how recently they were created:
 - i. Select the *Hire date* property checkbox.
 - ii. Click > to expand the property configuration.
 - iii. In the *Days* field, type a number of days to apply the label to users who have not been part of the directory for a minimum of that time.

▼ ☒ Hire date ☐ ☐

Apply "New starter" label to users who have been with the company for less than:

30 Days

- To create labels for group memberships and map them to users:
 - i. In the *Group membership* list, select one or more group memberships.
 - ii. To flag group membership labels, select the corresponding *Flag label* checkboxes.
 - iii. To pseudonymize group membership label values, select the corresponding *Pseudonymize values* checkboxes.

e. Click *Add new directory*.

Next steps

You can now use the configuration to sync your users. See [Syncing Entra ID directories on page 100](#).

Syncing Entra ID directories

After you configure an Entra ID integration, you can enable automatic syncing or perform a manual sync to import your users and directory labels.

How to automatically sync an Entra ID directory

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations* > *Microsoft*, select *Entra ID*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable daily auto-sync* toggle on.

User sync

Filter 

country eq 'uk'

Enable daily auto-sync 

Enable auto-archiving of directory-deleted users 



An auto-sync will occur daily, and a message will be shown at the bottom of the sync configuration widget, notifying you of the time of the next auto-sync.



Synced about 4 hours ago



Next scheduled for 26/04/2024, 12:19

If you perform a *manual* sync within 6 hours of the next auto-sync, that auto-sync will be skipped.

5. Click *Save*.

How to manually sync an Entra ID directory

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations* > *Microsoft*, select *Entra ID*.
3. In the widget of the relevant sync configuration widget, click *Sync*.

Sync



The FortiDLP Console will indicate the number of imported users and labels when the sync completes.



You can view your users and labels in the *Users* module by clicking  on the left-hand sidebar.

Auto-archiving Entra ID directory-deleted users

You can enable a rule so that upon each sync, FortiDLP will automatically archive users that have since been deleted from your Entra ID directory.

To enable or disable auto-archiving rules for directory-deleted users, follow these steps.

How to enable auto-archiving of Entra ID directory-deleted users

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations* > *Microsoft*, select *Entra ID*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable auto-archiving of directory-deleted users* toggle on.

User sync

Filter 

country eq 'uk'

Enable daily auto-sync ☐

Enable auto-archiving of directory-deleted users ☒

5. *Optionally*, to additionally remove any directory labels assigned to users archived by this rule, turn the *Remove directory labels from auto-archived users* toggle on.
6. Click *Save*.

How to disable auto-archiving of Entra ID directory-deleted users

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations* > *Microsoft*, select *Entra ID*.
3. Click the relevant sync configuration widget to open the edit modal.

4. Turn the *Enable auto-archiving of directory-deleted users* toggle off.

User sync

Filter ⓘ

country eq 'uk'

Enable daily auto-sync ☐

Enable auto-archiving of directory-deleted users: ☐


5. Click Save.

Deleting Entra ID directory configurations

To delete an unwanted Entra ID directory configuration from FortiDLP, follow these steps.

How to delete an Entra ID directory

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations* > *Microsoft*, select *Entra ID*.
3. In the relevant sync configuration widget, click ⋮ > *Delete directory*.

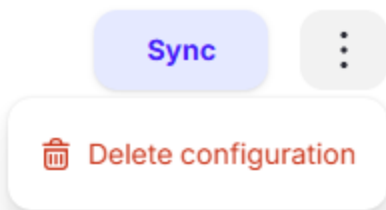

4. In the *Delete directory configuration* dialog box, click *Delete*.

Microsoft sensitivity labels

You can integrate FortiDLP with Microsoft 365 to strengthen data loss protection using sensitivity labels.

By syncing your organization's file and email sensitivity labels with the FortiDLP Infrastructure, you can detect activity on files assigned one or more of your labels. This is available for Agent content inspection policies and SharePoint and OneDrive policies.

Sensitivity label integration version requirements

The version requirements for setting up Microsoft sensitivity label inspection depend on whether you use them with Agent or SharePoint and OneDrive policies.

- *Agent policy requirements:* File sensitivity label inspection is provided for Windows and macOS with all currently supported Agent versions, and on Linux with FortiDLP Agent 12.0.0+ and FortiDLP Policy Templates 8.0.0+. Email sensitivity label inspection is provided for Windows and macOS; the FortiDLP Email Add-in requires FortiDLP Agent 10.4.0+ for email header inspection and FortiDLP Agent 10.1.3+ for email attachment inspection; the FortiDLP Email Plugin (Legacy) is provided for Windows only, with all currently supported Agent versions.
- *Cloud drive policy requirements:* File sensitivity label inspection is provided with FortiDLP Policy Templates 8.4.0+.



The file types supported for sensitivity label inspection are listed [here](#).

Microsoft sensitivity labels must be migrated from Azure to the Microsoft 365 compliance center to be synced with the FortiDLP Infrastructure. For more information, click [here](#).

Once you meet these requirements, you then need to sync your labels to FortiDLP. See [Syncing Microsoft sensitivity labels on page 103](#).

Known limitations

The following limitation applies:

- Sensitivity label inspection is not supported for encrypted files.

Syncing Microsoft sensitivity labels

When you sync your organization's Microsoft sensitivity labels to FortiDLP, a policy asset will be created for each label (see [Assets on page 185](#)), and label names will be added in SharePoint and OneDrive events (see [Microsoft SharePoint and OneDrive Connector on page 105](#)).

To keep your labels up to date, you must regularly sync them manually or via automatic scheduled syncs.



Sensitivity labels must be published in the Microsoft 365 compliance center to be synced with the FortiDLP Infrastructure. Ensure you complete the steps [here](#) before syncing.

Each time a sync occurs, existing labels are updated and new labels are added (if applicable).

The FortiDLP Console will indicate when the sync completes, or if an error occurs during the sync.

You can view synced sensitivity labels from:


- the *Policies* module's *Policy assets* tab, and
- the *Content inspection parameters* section of any content inspection policy template (see the *Microsoft sensitivity labels* list).

Prerequisites

You must first complete credential setup steps in [Microsoft credentials on page 111](#).

How to manually sync sensitivity labels

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Microsoft*, select *Sensitivity labels*.
3. In the *Credentials* menu, select a set of [credentials](#).
4. Click *Sync now*.

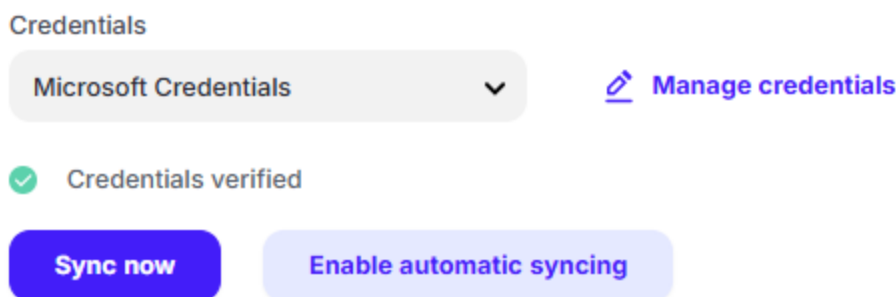


How to enable automatic syncing of Microsoft sensitivity labels

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Microsoft*, select *Sensitivity labels*.
3. In the *Credentials* menu, select a set of [credentials](#).
4. Click *Enable automatic syncing*.

A configuration widget will be added to the *Automatic syncing* section, detailing the name of the credentials, number of labels synced, time passed since the last sync, and date-time of the next sync.

Automatic syncing

Labels will be automatically synced daily using the specified credentials.

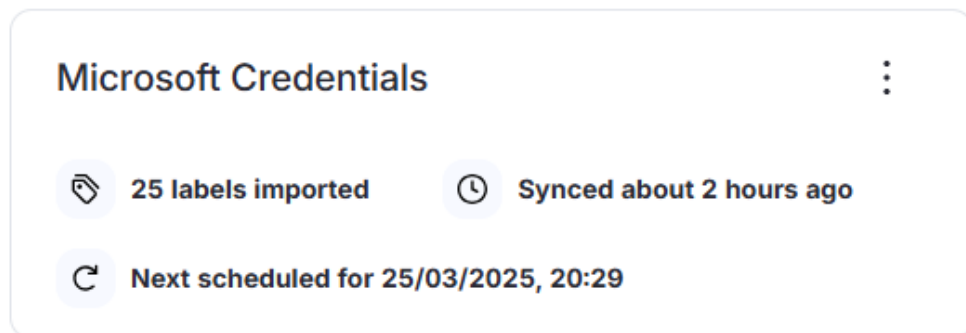

How to disable automatic syncing of Google Drive labels

If you no longer want to automatically sync labels, follow these steps.

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations* > *Google*, select *Drive labels*.
3. Under the *Automatic syncing* section, on the top right of the sync configuration panel, click  > *Remove*.
4. In the dialog box, click *Remove*.

Microsoft SharePoint and OneDrive Connector

FortiDLP's SharePoint and OneDrive integration provides comprehensive visibility into the activity occurring in your organization's corporate cloud drive.

By configuring a SharePoint and OneDrive Connector, events generated by any device used to access the cloud drive will be matched to FortiDLP users who performed the event action. The events are then reported in the *SharePoint & OneDrive* event stream so that they can be investigated.



For example, you can track when a user uploads a file to a shared drive, grants another user access to the file, and when the other user downloads the file.

Once configured, you can then set up policies to detect unauthorized activity based on file properties, such as labels, owner, and sharing destination. For more information, see [Microsoft SharePoint and OneDrive policies \(Preview\)](#) on page 110.

SharePoint and OneDrive event types

The following SharePoint and OneDrive event types are collected by FortiDLP. For more information about them, refer to Microsoft's documentation [here](#).

- COPIED
- FOLDER_COPIED
- DELETED
- FOLDER_DELETED
- RECORD_DELETED
- DOWNLOADED
- MODIFIED*
- FOLDER_MODIFIED
- MOVED
- FOLDER_MOVED
- VIEWED**
- RENAMED
- FOLDER_RENAMED
- RESTORED
- FOLDER_RESTORED
- UPLOADED

- SENSITIVITY_LABEL_APPLIED
- SENSITIVITY_LABEL_REMOVED
- DOCUMENT_SENSITIVITY_MISMATCH
- SHARING_LINK_CREATED
- SHARING_LINK_UPDATED
- SHARING_LINK_DELETED
- SHARING_LINK_USED
- SHARED
- SHARING_UPDATED
- SHARING_REVOKED
- ACCESS_REQUEST_ACCEPTED
- GROUP_ADDED
- GROUP_UPDATED
- GROUP_REMOVED
- ADDED_TO_GROUP
- REMOVED_FROM_GROUP

*On SharePoint, when a PDF is modified, a modify event is not reported, but an upload or download event may be reported instead.

**On SharePoint, a view event is not reported when a PDF file is viewed.



Additional activity originating from other Microsoft services, such as Teams and Office 365 Exchange Online, may also be captured for some event types. File activity that occurs in Teams' File tab will be reported with the "sharepoint" client app because Teams uses the SharePoint API internally.

Device platform information, for example, whether a Windows computer, iPhone, or Android phone was used, is not always provided by Microsoft and therefore may not be reported in an event.

At times, duplicate events may be sent by Microsoft and therefore reported in the event stream.

Microsoft may delay sending events.

Setup

To get started with setting up this feature, see [Enabling the Microsoft SharePoint and OneDrive Connector on page 106](#).

Enabling the Microsoft SharePoint and OneDrive Connector

To enable the Microsoft SharePoint and OneDrive Connector, follow the steps below.



To complete the steps below, your operator account must be assigned the *Global Administrator* or *Administrator* access type.

Prerequisites

You must complete the following prerequisites before setting up the connector in FortiDLP.

Ensure FortiDLP users can be mapped to SharePoint and OneDrive events

In order for a FortiDLP user to be mapped to a cloud event, the primary email address of the user who generated an event in SharePoint or OneDrive must match an email address URI assigned to an existing user in FortiDLP. For information on user-event mappings, see [User-event mapping on page 43](#), and for information on syncing users, see [Users on page 43](#).

Ensure auditing is enabled in your Microsoft 365 org

To receive SharePoint and OneDrive events, auditing must be turned on in your Microsoft 365 org. Follow the instructions below to check whether this is the case and to turn it on if it is off. You can either use the Microsoft Purview compliance portal UI or run PowerShell commands to do this.

- *Compliance portal method:* Refer to the "Compliance portal" instructions 1-2 in Microsoft's documentation [here](#), and check whether a banner is displayed. If no banner is displayed, auditing is turned on, and no further action is required. If a banner is displayed, proceed to step 3 of the "Compliance portal" instructions to turn it on.
- *PowerShell method:* Refer to the "Verify the auditing status for your organization" section in Microsoft's documentation [here](#), and run the PowerShell command. If the value returned is `True`, auditing is turned on, and no further action is required. If the value returned is `False`, proceed to the instructions in the "Use PowerShell to turn on auditing" section [here](#) to turn on auditing.

Create Microsoft credentials

To receive SharePoint and OneDrive events, you must create an Entra ID app registration, retrieve the app's credentials, and then add the credentials to FortiDLP. See steps 1-3 in [Microsoft credentials on page 111](#) to do this.

Setup

Once you have completed the prerequisites above, follow the steps below to enable the connector in FortiDLP.

How to enable the Microsoft SharePoint and OneDrive Connector

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Microsoft*, select *Connectors*.
3. On the top-right corner of the page, click *Add new connector*.
4. In the *Name* field, type a name to identify the connector.
5. In the *Credentials* menu, select a set of credentials (see [Microsoft credentials on page 111](#)).
6. In the *Monitored users* section, do one of the following:
 - To receive events for all users:
 - i. In the *Include* menu, select *All users*.
 - ii. In the *Exclude* menu, select *No users*.

- To receive events for a subset of users by only selecting labels to include:
 - i. Do one of the following:
 - To include users that have all of the labels you will choose, in the *Include* menu, select *Users with all selected labels*.
 - To include users that have any of the labels you will choose, in the *Include* menu, select *Users with any selected labels*.
 - ii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
 - iii. In the *Exclude* menu, select *No users*.



For example, to receive events for all users with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *Users with any selected labels*. Then, in the corresponding label picker, select the *Sales* and *Finance* labels.
 2. In the *Exclude* menu, select *No users*.
-

- To receive events for a subset of users by selecting labels to include and exclude:
 - i. Follow the steps above to define the users to include.
 - ii. Do one of the following:
 - To exclude users that have all of the labels you will choose, in the *Exclude* menu, select *Users with all selected labels*.
 - To exclude users that have any of the labels you will choose, in the *Exclude* menu, select *Users with any selected labels*.
 - iii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.



For example, to receive events for users with a "Manager" label and a "Product" label, but not a "Windows" label:

1. In the *Include* menu, select *Users with all selected labels*. Then, in the corresponding label picker, select the *Manager* and *Product* labels.
 2. In the *Exclude* menu, select either *Users with all selected labels* or *Users with any selected labels*. Then, in the corresponding label picker, select the *Windows* label.
-

Name

Microsoft SharePoint and OneDrive Connector

Authentication

Credentials

Microsoft creds

[Manage credentials](#)

Credentials verified

Monitored users

Include

Users with all selected labels



Manager x

Product x

Exclude

Users with all selected labels



Windows x

7. Click *Create*.

Disabling the Microsoft SharePoint and OneDrive Connector

Disabling the Microsoft SharePoint and OneDrive Connector will stop new events from being collected, but you can still view past events in the *SharePoint & OneDrive* event stream.



If you have requested that this feature be disabled for your tenant, and therefore hidden, you must complete these steps for each connector configuration you have created.

How to disable the Microsoft SharePoint and OneDrive Connector

1. In the FortiDLP Console, on the left-hand sidebar, click
2. Under *Integrations > Microsoft*, select *Connectors*.
3. On the widget of the connector configuration, turn the *Enable connector* toggle off.

Microsoft SharePoint and OneDrive policies (Preview)

Requirements: SharePoint and OneDrive Connector configuration and FortiDLP Policies 8.4.0+.

SharePoint and OneDrive policies detect unauthorized activity—such as file opens, downloads, and sharing—occurring on any device used by a FortiDLP user to access your corporate cloud drive.

You can configure these policies to match files by risk-based properties, such as file classification labels, owner, and sharing destination, to identify the mishandling of sensitive data.

With FortiDLP Policies 8.6.0+, you can respond to this activity in real time by taking remediation actions, such as changing the access permissions of a file and/or sending Slack or Teams messages to users to educate them on your company data sharing rules. See [Cloud drive action types](#).

Prior to enabling the policies, various setup steps must be completed, as described below.

Setup

The following table provides an overview of the required and optional tasks for setting up SharePoint and OneDrive policies.

Setup tasks

Task	Description
1. Map your FortiDLP users to your cloud drive users.	First, you need to sync the users you want to monitor to FortiDLP and ensure they have an email address URI that matches the primary email address they use in SharePoint or OneDrive. For information on how activity is mapped to users, see User-event mapping on page 43 , and for information on how to create users, see Users on page 43 .
2. Add credentials for your Entra ID tenant to FortiDLP.	Next, create an Entra ID app registration, assign it permissions, and add its credentials to FortiDLP. See Microsoft credentials on page 111.  <i>Required.</i> You must add the <code>ActivityFeed.Read</code> and <code>ServiceHealth.Read</code> permissions, which will allow monitoring of SharePoint and OneDrive activity via a connector. <i>Optional.</i> If you want to monitor files assigned specific Microsoft sensitivity labels, you must also add the <code>InformationProtectionPolicy.Read.All</code> and <code>Files.Read.All</code> permissions. <i>Optional.</i> If you want to enable cloud drive actions in response to policy violations, you must also add the <code>Files.ReadWrite.All</code> permission.
3. Enable the SharePoint and OneDrive Connector.	Next, enable the connector in the FortiDLP Console. See Enabling the Microsoft SharePoint and OneDrive Connector on page 106 .
4. <i>Optional.</i> Sync your labels to FortiDLP	If you want to monitor files assigned specific Microsoft sensitivity labels, sync your labels to FortiDLP. This will create a policy asset for each of the labels synced. See Syncing Microsoft sensitivity labels on page 103 .

Task	Description
5. <i>Optional.</i> Integrate FortiDLP with your Slack Workspace and/or Teams org.	If you want to send Slack and/or Teams messages to users who violate policies, add the FortiDLP app to the respective platform. See Messaging apps (Preview) on page 145 .

Next steps

After you have completed the setup tasks, you can then configure and enable SharePoint and OneDrive policies using *SharePoint & OneDrive templates*. For information on configuring and enabling policies, see [Configuring policy templates on page 163](#).

Microsoft credentials

FortiDLP can be integrated with Microsoft to:

- sync users from Entra ID (see [Entra ID users on page 96](#))
- collect user activity events from SharePoint and OneDrive (see [Microsoft SharePoint and OneDrive Connector on page 105](#)), which can be used to detect unauthorized activity based on policies (see [Microsoft SharePoint and OneDrive policies \(Preview\) on page 110](#))
- sync Microsoft sensitivity labels to create Agent or cloud drive policy assets (see [Microsoft sensitivity labels on page 102](#))
- perform remediation actions in response to cloud drive policy violations (see [Change shared file access permissions](#)), and/or
- send Teams messages to users in response to cloud drive policy violations (see [Teams \(Preview\) on page 146](#)).

The following instructions cover adding feature permissions to an Entra ID app.

Setup steps

Step	Description
1. How to register an app in Entra ID app and retrieve its credentials on page 112	First, you need to register an Entra ID application and configure it with integration permissions which correspond to the features you want to enable. This will allow FortiDLP to make authorized calls to Microsoft APIs.
2. How to add Entra ID app credentials to FortiDLP on page 115	Next, you need to add the credentials to the <i>Microsoft credentials</i> modal, accessible from any Microsoft feature configuration section in the FortiDLP Console's <i>Admin settings</i> .
	 Credentials can be shared across each feature, so you only need to add the credentials once.
3. How to integrate Microsoft features with FortiDLP on page 116	Finally, depending on which integration permissions you have added to the app, you need to configure and enable each feature in the relevant section of the FortiDLP Console's <i>Admin settings</i> .




If needed, you can register multiple Entra ID apps and add each set of credentials to FortiDLP.

If you intend to enable cloud drive policy actions, ensure the permissions for this are added to the Entra ID app that was used to create the relevant SharePoint and OneDrive Connector.

Microsoft only allows a single management API webhook to be configured per tenant, so if it is already being used by another third-party integration, FortiDLP will not be able to connect.

1. How to register an app in Entra ID app and retrieve its credentials


1. Log in to the [Microsoft Azure Portal](#).
2. In the portal side menu, select *All services*.

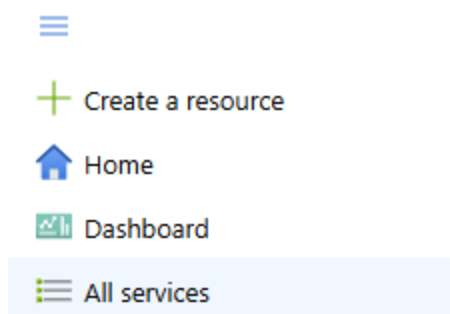

3. In the *Filter services* search box, search for and select *Microsoft Entra ID*.
4. In the page side menu, under *Manage*, click *App registrations*.



5. Click *New registration*.
6. In the *Name* field, type FortiDLP.
7. Click *Register*.
8. When the page refreshes, note the *Application (client) ID* and *Directory (tenant) ID*. You will need these values later.

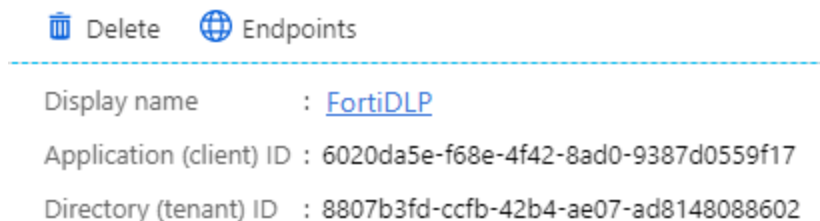

9. In the page side menu, under *Manage*, click *API permissions*.

10. To allow FortiDLP to sync Entra ID users, do the following:
 - a. Click *Add a permission*.
 - b. In the *Request API permissions* panel, do the following:
 - i. Under *Microsoft APIs*, select *Microsoft Graph*.
 - ii. Click *Application permissions*.
 - iii. Do at least one of the following:
 - To allow FortiDLP to sync Entra ID users, search for and select the checkboxes of all of the following permissions:
 - *Group.Read.All*
 - *GroupMember.Read.All*
 - *User.Read.All*.
 - iv. Click *Add permissions*.
11. To allow FortiDLP to collect SharePoint and OneDrive activity events (required for *SharePoint and OneDrive* policy templates), do the following:
 - a. Click *Add a permission*.
 - b. In the *Request API permissions* panel, do the following:
 - i. Select *APIs my organization uses*.
 - ii. Search for and select *Office 365 Management APIs*.
 - iii. Click *Application permissions*.
 - iv. Search for and select the checkboxes of all of the following permissions:
 - *ActivityFeed.Read*
 - *ServiceHealth.Read*
 - v. Click *Add permissions*.

API / Permissions name	Type	Description
> Microsoft Graph (5)		
v Office 365 Management APIs (2)		
ActivityFeed.Read	Application	Read activity data for your organization
ServiceHealth.Read	Application	Read service health information for your organization

12. To allow FortiDLP to report file labels in SharePoint and OneDrive events:
 - a. Click *Add a permission*.
 - b. In the *Request API permissions* panel, do the following:
 - i. Under *Microsoft APIs*, select *Microsoft Graph*.
 - ii. Click *Application permissions*.
 - iii. Search for and select the checkbox for *Files.Read.All*.
 - iv. Click *Add permissions*.



Microsoft sensitivity labels must be synced in order for their names to be included in SharePoint and OneDrive events. Without this, only label identifiers will be reported.

13. To allow FortiDLP to sync Microsoft sensitivity labels, do the following:
 - a. Click *Add a permission*.
 - b. In the *Request API permissions* panel, do the following:
 - i. Under *Microsoft APIs*, select *Microsoft Graph*.
 - ii. Click *Application permissions*.
 - iii. Search for and select the check box of *InformationProtectionPolicy.Read.All*.
 - iv. Click *Add permissions*.
14. To allow FortiDLP to send messages to users in your Teams organization in response to policy violations, do the following:
 - a. Click *Add a permission*.
 - b. In the *Request API permissions* panel, do the following:
 - i. Under *Microsoft APIs*, select *Microsoft Graph*.
 - ii. Click *Application permissions*.
 - iii. Select the checkbox of *User.Read.All*.
 - iv. Click *Add permissions*.
15. To allow FortiDLP to perform cloud drive actions in response to policy violations, do the following:
 - a. Click *Add a permission*.
 - b. In the *Request API permissions* panel, do the following:
 - i. Under *Microsoft APIs*, select *Microsoft Graph*.
 - ii. Click *Application permissions*.
 - iii. Select the checkbox of *Files.ReadWrite.All*.
 - iv. Click *Add permissions*.
16. Under *Configured permissions*, click *Grant admin consent for <your directory>*.
17. In the confirmation dialog that displays at the top of the panel, click *Yes*.
18. In the page side menu, under *Manage*, click *Certificates & Secrets*.
19. Click *New client secret*.
20. In the *Description* field, type FortiDLP secret.
21. In the *Expires* section, select an expiry time frame.

Add a client secret



Description

FortiDLP secret

Expires

730 days (24 months)



22. Click *Add*.
23. In the *Client secrets* section, note the client secret that displays in the *Value* column. You will need this later.



The client secret will only display once. Ensure you save a copy of it for future reference.

2. How to add Entra ID app credentials to FortiDLP

The same *Microsoft credentials* modal is used across all Microsoft features, so credentials only need to be added once from any feature section.

1. In the FortiDLP Console, on the left-hand side bar, click .
2. Do one of the following:
 - To add the credentials to the Entra ID user directory section:
 - i. Do one of the following:
 - Under *Users*, select *Microsoft Entra ID*.
 - Under *Integrations > Microsoft*, select *Entra ID*.
 - ii. On the top-right corner of the page, click *Add new directory*.
 - iii. Under *Authentication settings*, click *Manage credentials*.
 - To add the credentials to the sensitivity labels section:
 - i. Under *Integrations > Microsoft*, select *Sensitivity labels*.
 - ii. Under *Sensitivity labels*, click *Manage credentials*.
 - To add the credentials to the Microsoft SharePoint and OneDrive Connector section:
 - i. Under *Integrations > Microsoft*, select *Connectors*.
 - ii. On the top-right corner of the page, click *Add new connector*.
 - iii. Under *Authentication*, click *Manage credentials*.
3. Click *Create new*.

Microsoft credentials

Details

Name

Microsoft Directory (tenant) ID

Microsoft Application (client) ID

Microsoft Application (client) Secret

4. In the *Name* field, enter a name to identify the credentials, such as "Microsoft credentials".
5. In the *Microsoft Directory (tenant) ID* field, paste the *Directory (tenant) ID* retrieved in [1. How to register an app in Entra ID app and retrieve its credentials on page 112](#).

6. In the *Microsoft Application (client) ID field*, paste the *Application (client) ID* retrieved in [1. How to register an app in Entra ID app and retrieve its credentials on page 112](#).
7. In the *Microsoft Application (client) Secret field*, paste the client secret retrieved in [1. How to register an app in Entra ID app and retrieve its credentials on page 112](#).
8. Click *Verify*.
FortiDLP will indicate whether the connection is successful and what feature permissions are granted.
9. Click *Save*.
10. Click *Cancel* to close the modal.

3. How to integrate Microsoft features with FortiDLP

Depending on which permissions you added to the app registration, do the following:

- To sync users from Entra ID to FortiDLP, follow the instructions in [Adding an Entra ID directory configuration on page 98](#) to complete the integration.
- To sync sensitivity labels to FortiDLP, follow the steps in [Syncing Microsoft sensitivity labels on page 103](#) to complete the integration.
- To collect SharePoint and OneDrive events, follow the instructions in [Enabling the Microsoft SharePoint and OneDrive Connector on page 106](#) to complete the integration.
- To configure SharePoint and OneDrive policies, follow the instructions in [Microsoft SharePoint and OneDrive policies \(Preview\) on page 110](#) to complete the integration.
- To configure a Teams integration, follow the instructions in [Adding a Teams integration \(Preview\) on page 147](#) to complete the integration.

Google

You can integrate Google with FortiDLP to use the following features:

- [Google Workspace users on page 116](#)
- [Google Drive Connector on page 124](#)
- [Google Drive policies \(Preview\) on page 128](#)
- [Google Drive labels on page 122](#)

Each feature requires integration setup via a service account. For more information, see [Google credentials on page 129](#).

Google Workspace users

FortiDLP supports syncing of users from your Google Workspace directory. This is a one-way sync, so no information from FortiDLP is transferred to your workspace.

You can filter the users that you sync to FortiDLP by using Google's filtering syntax, as described in their documentation [here](#).

Field mappings

Field mappings define how Google Workspace fields map to user fields that display in the FortiDLP Console or are used by FortiDLP for identification purposes.

The following table describes the supported mappings. Fields marked with a * can have multiple values in Google, and if this is the case, the value defined as primary in Google will be used.

Field mappings

Google field	FortiDLP field	Description
<code>name.fullName</code>	<i>Name</i>	The user's first and last name.
<code>primaryEmail</code>	<i>Email</i>	The user's email address.
<code>UserPhoto</code>	<i>Photo</i>	The user's profile picture.
<code>organizations[].title *</code>	<i>Title</i>	The user's job title.
<code>organizations[].department *</code>	<i>Department</i>	The user's department.
<code>organizations[].description *</code>	<i>Description</i>	The user's organizational description.
<code>name.fullName</code> of the user's manager, who is defined in the value of <code>relations[].value</code> where <code>relations[].type = "manager"</code> *	<i>Manager</i>	The user's manager's first and last name.
<code>id</code> of the user's manager, who is defined in the value of <code>relations[].value</code> where <code>relations[].type = "manager"</code>	<i>Manager unique ID</i>	The user's manager's unique identifier.
<code>phones[].value</code> where <code>phones[].type = "main"</code> or <code>"mobile"</code> , or where a primary phone number was not classified as a work phone.	<i>Mobile phone number</i>	The user's mobile phone number.
<code>phones[].value</code> where <code>phones[].type = "company_main"</code> , <code>"work"</code> or <code>"work_mobile"</code> *	<i>Office phone number</i>	The user's office phone number.
<code>addresses[].formatted</code> where <code>addresses[].type="home"</code>	<i>Home address</i>	The user's home address.
<code>addresses[].formatted</code> where <code>addresses[].type="office"</code>	<i>Office address</i>	The user's office address.
<code>addresses[].locality</code> where <code>addresses[].type="office"</code>	<i>Office location</i>	The user's office location.

Directory Label mappings



Prior to reading this section, it is recommended that you read [Labels on page 150](#).

Directory label mappings define how Google Workspace fields are mapped to FortiDLP directory labels, which can be used to associate users with policy groups and Agent configuration groups.

FortiDLP can create and map the following directory labels for each user that is synced to FortiDLP:

Label mappings

Google field	Example FortiDLP directory label	Description
<code>addresses[].country</code>	<i>Country Spain</i>	One country label will be mapped from the user's primary address.
<code>addresses[].city</code>	<i>City London</i>	One city label will be mapped from the user's primary address.
<code>organizations[].department</code>	<i>Department Engineering</i>	A department label for each organization the user is part of will be mapped.
<code>organizations[].jobTitle</code>	<i>Job Title Support Engineer</i>	A job title label for each organization the user is part of will be mapped.
<code>addresses[].locality</code>	<i>Office location White City</i>	One location label will be created from the user's primary work address.
<code>memberOf</code>	<i>Group Sales</i>	A label for each Google Group the user is a member of will be mapped.
 This relationship defines whether the user is in the <code>members[]</code> field of a Google Group.		
<code>createdAt</code>	<i>New Starter</i>	A new starter label will be assigned to the user if they were created within a specified time period, such as the last 30 days.

For security purposes, directory label values can be replaced with pseudonyms in the FortiDLP Console for operators with the pseudonymization perspective. (For more information about this feature, see [Operator roles on page 24](#).) Further, directory labels can be "flagged" upon creation, meaning these labels will display with a flag symbol in the UI.

Setup

To get started with setting up this feature, see [Adding a Google Workspace directory configuration on page 119](#).

Adding a Google Workspace directory configuration

Prerequisites

You must first complete credential setup steps in [Google credentials on page 129](#).

How to add a Google Workspace directory

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations* > *Google*, select *Directory*.
3. Click *Add new directory*.
4. In the *Add new directory* modal, do the following:
 - a. Under *Authentication settings*, in the *Credentials* menu, select a set of [credentials](#).
 - b. Under *Details*, type a name to identify the directory sync configuration.
 - c. *Optionally*, under *User sync*, do the following:
 - To filter the users you want to sync, in the *Filter* field, type the search [filter](#).
 - To enable daily auto-syncs, turn the *Enable daily auto-sync toggle* on. For more information, see [Syncing Google Workspace directories on page 120](#).
 - To enable auto-archiving of users deleted from the directory, turn the *Enable auto-archiving of directory-deleted users* toggle on. For more information, see [Auto-archiving Google Workspace directory-deleted users on page 121](#).
 - To remove directory labels from auto-archived directory-deleted users, turn the *Remove directory labels from auto-archived users* toggle on.
 - To sync users' usernames to the Infrastructure and allow them to be mapped to events that contain a matching username, turn on the *Sync username mapping* toggle. For more information, see [User-event mapping on page 43](#).
 - d. *Optionally*, under *Label import*, do the following:
 - To create labels for user properties and map them to users:
 - i. In the *User properties* list, select one or more user properties.
 - ii. To pseudonymize user property label values, select the corresponding *Pseudonymize values* checkboxes.
 - To create labels for group memberships and map them to users:
 - i. In the *Group membership* list, select one or more group memberships.
 - ii. To flag group membership labels, select the corresponding *Flag label* checkboxes.
 - iii. To pseudonymize group membership label values, select the corresponding *Pseudonymize values* checkboxes.
 - e. Click *Add new directory*.

Next steps

You can now use the configuration to sync your users. See [Syncing Google Workspace directories on page 120](#).

Syncing Google Workspace directories

After you configure a Google Workspace integration, you can enable automatic syncing or perform a manual sync to import your users and directory labels.

How to automatically sync a Google Workspace directory

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations* > *Google*, select *Directory*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable daily auto-sync* toggle on.

User sync

Filter 

country eq 'uk'

Enable daily auto-sync 

Enable auto-archiving of directory-deleted users 

5. Click Save.

An auto-sync will occur daily, and a message will be shown at the bottom of the sync configuration widget, notifying you of the time of the next auto-sync.



Synced about 4 hours ago




Next scheduled for 26/04/2024, 12:19

If you perform a *manual* sync within 6 hours of the next auto-sync, that auto-sync will be skipped.

How to manually sync a Google Workspace directory

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations* > *Google*, select *Directory*.

3. In the widget of the relevant sync configuration, click *Sync*.



The FortiDLP Console will indicate the number of imported users and labels when the sync completes.



You can view your users and labels in the *Users* module by clicking  on the left-hand sidebar.

Auto-archiving Google Workspace directory-deleted users

You can enable a rule so that upon each sync, FortiDLP will automatically archive users that have since been deleted from your Google Workspace directory.

To enable or disable auto-archiving rules for directory-deleted users, follow these steps.

How to enable auto-archiving of Google Workspace directory-deleted users

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations* > *Google*, select *Directory*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable auto-archiving of directory-deleted users* toggle on.
5. *Optionally*, to additionally remove any directory labels assigned to users archived by this rule, turn the *Remove directory labels from auto-archived users* toggle on.
6. Click *Save*.

How to disable auto-archiving of Google Workspace directory-deleted users

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations* > *Google*, select *Directory*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable auto-archiving of directory-deleted users* toggle off.
5. Click *Save*.

Deleting Google Workspace directory configurations


To delete an unwanted Google Workspace directory configuration, follow these steps.



This will not delete any synced users. For more information on deleting users, see [Deleting users on page 52](#).

How to delete a Google Workspace directory configuration

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations* > *Google*, select *Directory*.
3. In the relevant sync configuration widget, click ⋮ > *Delete directory*.

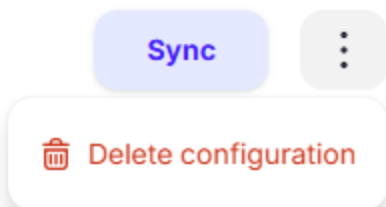

4. In the *Delete directory configuration* dialog box, click *Delete*.

Google Drive labels

Requirements: Google Drive labels must be published in the Google Admin Label Manager.

By syncing your organization's Google Drive file labels with the FortiDLP Infrastructure, you can detect activity on files assigned one or more of these labels using Google Drive policies. This also ensures label names are reported in Google Drive events. For setup instructions, see [Syncing Google Drive labels on page 122](#).

Syncing Google Drive labels

When you sync your organization's Google Drive labels to FortiDLP, a policy asset will be created for each label (see [Assets on page 185](#)), and label names will be added in Google Drive events (see [Google Drive Connector on page 124](#)). To keep your labels up to date, you must regularly sync them manually or via automatic scheduled syncs.



Google Drive labels must be published in the Google Admin Label Manager. Each time a sync occurs, existing labels are updated and new labels are added (if applicable).

The FortiDLP Console will indicate when the sync completes, or if an error occurs during the sync.

Prerequisites

You must first complete credential setup steps in [Google credentials on page 129](#).

How to manually sync Google Drive labels

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Google*, select *Drive labels*.
3. In the *Credentials* menu, select a set of [credentials](#).
4. Click *Sync now*.

Credentials

Google Credentials



Manage credentials



Credentials verified

Sync now

Enable automatic syncing

How to enable automatic syncing of Google Drive labels

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Google*, select *Drive labels*.
3. In the *Credentials* menu, select a set of [credentials](#).
4. Click *Enable automatic syncing*.

A configuration widget will be added to the *Automatic syncing* section, detailing the name of the credentials, number of labels synced, time passed since the last sync, and date-time of the next sync.

Automatic syncing

Labels will be automatically synced daily using the specified credentials.



Google Credentials



15 labels imported



Synced about 6 hours ago



Next scheduled for 25/03/2025, 12:22

How to disable automatic syncing of Google Drive labels

If you no longer want to automatically sync labels, follow these steps.

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Google*, select *Drive labels*.

3. Under the *Automatic syncing* section, on the top right of the sync configuration panel, click ⋮ > *Remove*.
4. In the dialog box, click *Remove*.

Google Drive Connector

FortiDLP's Google Drive integration provides comprehensive visibility into the activity occurring in your organization's corporate cloud drive.

By configuring a Google Drive Connector, events generated by any device used to access the cloud drive will be matched to FortiDLP users who performed the event action. The events are then reported in the *Google Drive* event stream so that they can be investigated.



For example, you can track when a user is granted permissions to share documents and then when they modify a document's sharing permissions to make it publicly available.

Once configured, you can then set up policies to detect unauthorized activity based on file properties, such as labels, owner, and sharing destination. For more information, see [Google Drive policies \(Preview\)](#) on page 128.

Google Drive event types

The following Google Drive event types are collected. For more information about them, refer to Google's documentation [here](#).

- ADDED_TO_FOLDER
- COPIED
- CREATED
- DELETED
- DOWNLOADED
- DRIVE EMAILED_AS_ATTACHMENT
- EDITED
- FORMS_RESPONSES_DOWNLOADED
- LABEL_APPLIED
- LABEL_APPLIED_ON_CREATION
- LABEL_FIELD_VALUE_CHANGED
- MOVED
- VIEWED
- PRINTED
- REMOVED_FROM_FOLDER
- RENAMED
- RESTORED
- UPLOADED
- DOCUMENT_CHANGED_OWNERS
- DRIVE_PUBLISH_STATUS_CHANGED
- EDITOR_SETTINGS_CHANGED
- LINK_SHARING_ACCESS_TYPE_CHANGED

- LINK_SHARING_VISIBILITY_CHANGED
- PUBLISHED_NEW_VERSION
- SHARED_DRIVE_MEMBERSHIP_CHANGED
- SHARED_DRIVE_SETTINGS_CHANGED
- USER_SHARING_PERMISSIONS_CHANGED



At times, duplicate events may be sent by Google and therefore reported in the event stream.
Google may delay sending events.

Setup

To get started with setting up this feature, see [Enabling the Google Drive Connector on page 125](#).

Enabling the Google Drive Connector

To enable the Google Drive Connector, follow the steps below.



To complete the steps below, your operator account must be assigned the *Global Administrator* or *Administrator* access type.

Prerequisites

You must complete the following prerequisites before setting up the connector in FortiDLP.

Ensure FortiDLP users can be mapped to Google Drive events

In order for a FortiDLP user to be mapped to a cloud event, the primary email address of the user who generated an event in Google Drive must match an email address URI assigned to an existing user in FortiDLP. For information on user-event mappings, see [User-event mapping on page 43](#), and for information on syncing users, see [Users on page 43](#).

Create Google credentials

To receive Google Drive events, you must create a Google project, service account, retrieve the service account's credentials, and then add the credentials to FortiDLP. See steps 1-4 in [Google credentials on page 129](#) to do this.

Setup

Once you have completed the prerequisites above, follow the steps below to enable the connector in FortiDLP.

How to enable the Google Drive Connector

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations > Google*, select *Connectors*.
3. On the top-right corner of the page, click *Add new connector*.
4. In the *Name* field, type a name to identify the connector.
5. In the *Credentials* menu, select a set of credentials.
6. In the *Monitored users* section, do one of the following:
 - To receive events for all users:
 - i. In the *Include* menu, select *All users*.
 - ii. In the *Exclude* menu, select *No users*.
 - To receive events for a subset of users by only selecting labels to include:
 - i. Do one of the following:
 - To include users that have all of the labels you will choose, in the *Include* menu, select *Users with all selected labels*.
 - To include users that have any of the labels you will choose, in the *Include* menu, select *Users with any selected labels*.
 - ii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
 - iii. In the *Exclude* menu, select *No users*.



For example, to receive events for all users with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *Users with any selected labels*. Then, in the corresponding label picker, select the *Sales* and *Finance* labels.
2. In the *Exclude* menu, select *No users*.

- To receive events for a subset of users by selecting labels to include and exclude:
 - i. Follow the steps above to define the users to include.
 - ii. Do one of the following:
 - To exclude users that have all of the labels you will choose, in the *Exclude* menu, select *Users with all selected labels*.
 - To exclude users that have any of the labels you will choose, in the *Exclude* menu, select *Users with any selected labels*.
 - iii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.



For example, to receive events for users with a "Manager" label and a "Product" label, but not a "Windows" label:

1. In the *Include* menu, select *Users with all selected labels*. Then, in the corresponding label picker, select the *Manager* and *Product* labels.
2. In the *Exclude* menu, select either *Users with all selected labels* or *Users with any selected labels*. Then, in the corresponding label picker, select the *Windows* label.

Name

Google Drive Connector

Authentication

Credentials

Google Creds

[Manage credentials](#)

Credentials verified

Monitored users

Include

Users with all selected labels



Manager x

Product x

Exclude

Users with all selected labels



Windows x

7. Click *Create*.

Disabling the Google Drive Connector

Disabling the Google Drive Connector will stop new events from being collected, but you can still view past events in the *Google Drive* event stream.



If you have requested that this feature be disabled for your tenant, and therefore hidden, you must complete these steps for each connector configuration you have created.

How to disable the Google Drive Connector

1. In the FortiDLP Console, on the left-hand sidebar, click
2. Under *Integrations > Google*, select *Connectors*.
3. On the widget of the connector configuration, turn the *Enable connector* toggle off.

Google Drive policies (Preview)

Requirements: Google Drive Connector configuration and FortiDLP Policies 8.4.0+.

Google Drive policies detect unauthorized activity—such as file opens, downloads, and sharing—occurring on any device used by a FortiDLP user to access your corporate cloud drive.

You can configure these policies to match files by risk-based properties, such as file classification labels, owner, and sharing destination, to identify the mishandling of sensitive data.

With FortiDLP Policies 8.6.0+, you can respond to this activity in real time by taking remediation actions, such as changing the access permissions of a file and/or sending Slack or Teams messages to users to educate them on your company data sharing rules. See [Cloud drive action types](#).

Prior to enabling the policies, various setup steps must be completed, as described below.

Setup

The following table provides an overview of the required and optional tasks for setting up Google Drive policies.

Setup tasks

Task	Description
1. Map your FortiDLP users to your cloud drive users.	First, you need to sync the users you want to monitor to FortiDLP and ensure they have an email address URI that matches the primary email address they use in Google Drive. For information on how activity is mapped to users, see User-event mapping on page 43 , and for information on how to create users, see Users on page 43 .
2. Add credentials for your Google Workspace tenant to FortiDLP.	Next, create a Google service account, assign it permissions, and add its credentials to FortiDLP. See Google credentials on page 129.  <i>Required.</i> You must add the <code>https://www.googleapis.com/auth/admin.reports.audit.readonly</code> and <code>https://www.googleapis.com/auth/admin.reports.usage.readonly</code> permissions, which will allow monitoring of Google Drive activity via a connector. <i>Optional.</i> If you want to monitor files assigned specific Google Drive labels, you must also add the <code>https://www.googleapis.com/auth/drive.labels.readonly</code> and <code>https://www.googleapis.com/auth/drive.readonly</code> permissions. <i>Optional.</i> If you want to enable cloud drive actions in response to policy violations, you must also add the <code>https://www.googleapis.com/auth/drive.permission</code>.
3. Enable the Google Drive Connector.	Next, enable the connector in the FortiDLP Console. See Enabling the Google Drive Connector on page 125 .

Task	Description
4. <i>Optional.</i> Sync your labels to FortiDLP	If you want to monitor files assigned specific Google Drive labels, sync your labels to FortiDLP. This will create a policy asset for each of the labels synced. See Syncing Microsoft sensitivity labels on page 103 .
5. <i>Optional.</i> Integrate FortiDLP with your Slack Workspace and/or Teams org.	If you want to send Slack and/or Teams messages to users who violate policies, add the FortiDLP app to the respective platform. See Messaging apps (Preview) on page 145 .

Next steps

After you have completed these setup tasks, you can then configure and enable Google Drive policies using *Google Drive templates*. For information on configuring and enabling policies, see [Configuring policy templates on page 163](#).

Google credentials

FortiDLP can be integrated with Google to:

- sync users from Google Workspace (see [Google Workspace users on page 116](#))
- collect user activity events from Google Drive (see [Google Drive Connector on page 124](#)), which can be used to detect unauthorized activity based on policies (see [Google Drive policies \(Preview\) on page 128](#))
- perform remediation actions in response to cloud drive policy violations (see [Change shared file access permissions](#)), and/or
- sync Google Drive labels to create assets for cloud drive policies (see [Google Drive labels on page 122](#)).

The following instructions cover adding feature permissions to a service account.

A summary of the setup steps is as follows:

Setup steps

Step	Description
1. How to create a Google project and service account and retrieve credentials on page 130	First, you need to create a Google Cloud project and service account, and then retrieve the service account's credentials by generating a private key. This will allow FortiDLP to make authorized calls to Google APIs.
2. How to grant the service account API access permissions on page 131	Next, you need to grant the service account permissions which correspond to the features you want to enable.
3. How to enable the Google	Next, you need to enable the Google APIs for your project.

Step	Description
Admin SDK API on page 132	
4. How to add the service account credentials to FortiDLP on page 132	Next, you need to add the credentials to the <i>Google credentials</i> modal, accessible from any Google feature configuration section in the FortiDLP Console's <i>Admin settings</i>.  Credentials can be shared across each feature, so you only need to add the credentials once.
5. How to integrate Google features with FortiDLP on page 134	Finally, depending on which integration permissions you have granted the service account, you need to configure and enable each feature in the relevant section of the FortiDLP Console's <i>Admin settings</i>.



If needed, you can create multiple service accounts and add each set of credentials to FortiDLP.

If you intend to configure a Google Drive Connector, ensure that the Google Cloud project where you create the service account for FortiDLP is not used for other workflows, as events generated by these workflows may be ignored by the connector.

If you intend to enable cloud drive policy actions, ensure the permissions for this are added to the service account that was used to create the relevant Google Drive Connector.

1. How to create a Google project and service account and retrieve credentials

1. Go to <https://console.developers.google.com/iam-admin/serviceaccounts>.
2. In the left-hand panel, click *Service accounts*.
3. Click *Create Project*.
4. In the *New Project* window, type a unique name for the project.
5. In the *Organization list*, if your domain is not already selected, click your domain name.
6. In the *Location list*, if your domain is not already selected, click *Browse* and click your domain name.
7. Click *Create*.
8. On the left-hand side of the menu bar, to the right of your project name, click the downward-pointing arrow icon.
9. In the *Select from* window, make a note of the project *ID* that displays in the right column.
10. Click *Cancel* to close the window.
11. Below the menu bar, click *Create Service Account*.
12. In the *Service account name* field, type a name for the service account.
The *Service account ID* field is automatically populated.
13. In the *Service account description* field, type a description of the service account.
14. Click *Create and continue*.
15. Click *Continue*.
16. Click *Done*.
17. Copy the service account's value displayed in the *Client ID* field in the table, and keep it somewhere safe.

18. In the *Actions* column for the service account, click the three vertical dots icon, and then click *Manage keys*.
19. In the *Add key* drop-down list, select *Create new key*.
20. In the *Create private key for <service account>* dialog, leave the *JSON* radio button selected, and click *Create*.



You must store this file securely. The JSON file contains your service account credentials, which provide access to Google resources.

21. Click *Close*.

2. How to grant the service account API access permissions

1. Go to <http://admin.google.com/ac/owl/domainwidedelegation>.
2. Sign in to your Google super administrator account.
3. Click *Add new*.
4. In the *Client ID* field, paste the service account's *Client ID* retrieved in 1. [How to create a Google project and service account and retrieve credentials on page 130](#).
5. Do at least one of the following:
 - To allow FortiDLP to sync Google Workspace users, in the *OAuth scopes (comma-delimited)* field, paste the following:
 - <https://www.googleapis.com/auth/admin.directory.user.readonly>,
 - <https://www.googleapis.com/auth/admin.directory.group.readonly>
 - To allow FortiDLP to collect Google Drive activity events (required for *Google Drive* policy templates), in the *OAuth scopes (comma-delimited)* field, paste the following:
 - <https://www.googleapis.com/auth/admin.reports.audit.readonly>,
 - <https://www.googleapis.com/auth/admin.reports.usage.readonly>
 - To allow FortiDLP to report file labels and file path information in Google Drive events, in the *OAuth scopes (comma-delimited)* field, paste the following:
 - <https://www.googleapis.com/auth/drive.readonly>



Google Drive labels must be synced in order for their names to be included in Google Drive events. Without this, only label identifiers will be reported.

- To allow FortiDLP to sync Google Drive labels, in the *OAuth scopes (comma-delimited)* field, paste the following:
 - <https://www.googleapis.com/auth/drive.labels.readonly>
 - To allow FortiDLP to perform cloud drive actions in response to policy violations, in the *OAuth scopes (comma-delimited)* field, paste the following:
 - <https://www.googleapis.com/auth/drive>
6. Click *Authorise*.

3. How to enable the Google Admin SDK API

1. Go to console.developers.google.com.
2. From the projects list, select the project you created in [1. How to create a Google project and service account and retrieve credentials on page 130](#).
3. Click *Google Admin API*.
4. Click *Enable*.
5. If you added permissions to sync Google Drive labels, collect Google Drive label and file path information, or perform cloud drive actions:
 - a. Repeat steps 1-2.
 - b. Select *Google Drive API*.
 - c. Click *Enable*.

4. How to add the service account credentials to FortiDLP

The same *Google credentials* modal is used across all Google features, so credentials only need to be added once from any feature section.

1. In the FortiDLP Console, on the left-hand side bar, click .
2. Do one of the following:
 - To add the credentials to the Google Workspace directory section:
 - i. Do one of the following:
 - Under *Users*, select *Google directory*.
 - Under *Integrations > Google*, select *Directory*.
 - ii. Click *Add new directory*.
 - iii. Under *Authentication settings*, click *Manage credentials*.
 - To add the credentials to the Google Drive labels section:
 - i. Under *Integrations*, select *Google*.
 - ii. Under *Drive labels*, click *Manage credentials*.
 - To add the credentials to the Google Drive Connector section:
 - i. Under *Integrations > Google*, select *Connectors*.
 - ii. On the top-right corner of the page, click *Add new connector*.
 - iii. Under *Authentication*, click *Manage credentials*.

3. Click *Create new*.

Google credentials

Details

Name

Admin email

Credentials JSON

Verify credentials



4. In the *Name* field, enter a name to identify the credentials, for example, "Google service account credentials".
5. In the *Admin email* field, enter the email of the super administrator account that was used to grant the service account API access permissions in [2. How to grant the service account API access permissions on page 131](#).
6. In the *Credentials JSON* field, paste the credentials JSON file content retrieved in [1. How to create a Google project and service account and retrieve credentials on page 130](#).
7. Click *Verify*.
FortiDLP will indicate whether the connection is successful and what feature permissions are granted.
8. Click *Create*.
9. Click *Cancel* to close the modal.

5. How to integrate Google features with FortiDLP

Depending on which permissions you added to the service account, do the following:

- To sync users from Google Workspace to FortiDLP, follow the instructions in [Adding a Google Workspace directory configuration on page 119](#) to complete the integration.
- To sync Google Drive labels to FortiDLP, follow the steps in [Syncing Microsoft sensitivity labels on page 103](#) to complete the integration.
- To collect Google Drive events, follow the instructions in [Enabling the Google Drive Connector on page 125](#) to complete the integration.
- To configure Google Drive policies, follow the instructions in [Google Drive policies \(Preview\) on page 128](#) to complete the integration.

Box

You can integrate Box with FortiDLP to use the following features:

- [Box users on page 134](#)
- [Box Connector on page 139](#).

Box users

FortiDLP supports syncing of users from your Box account. This is a one-way sync, so no information from FortiDLP is transferred to Box.



We recommend only using this feature if you do not have an existing user sync method configured, such as Entra ID, as this could result in duplicate users being created.

Field mappings

Field mappings define how Box user fields map to user fields that display in the FortiDLP Console or are used by FortiDLP for identification purposes.

The following table contains the supported mappings.

Field mappings

Box field	FortiDLP field	Description
name	<i>Name</i>	The user's first and last name.
email	<i>Email</i>	The user's email address.
jobTitle	<i>Title</i>	The user's job title.

Box field	FortiDLP field	Description
address	<i>Home address</i>	The user's office address.
phone	<i>Mobile phone number</i>	The user's office phone number.

Box user profile photos, which are not part of Box user fields, are mapped to FortiDLP user photos.

Directory label mappings



Prior to reading this section, it is recommended that you read [Labels on page 150](#).

Directory label mappings define how Box user fields are mapped to FortiDLP directory labels, which can be used to associate users with policy groups and Agent configuration groups.

FortiDLP can create and map the following directory labels to each user that is synced to FortiDLP:

Label mappings

Box data	Example FortiDLP directory label	Description
jobTitle	<i>Job Title Accountant</i>	One job title label will be mapped to the user.
Group	<i>Group Sales</i>	A label for each group the user is part of will be mapped.
createdAt	<i>New Starter</i>	A new starter label will be assigned to the user if they were created within a specified time period, such as the last 30 days.

For security purposes, directory label values can be replaced with pseudonyms in the FortiDLP Console for operators with the pseudonymization perspective. (For more information about this feature, see [Operator roles on page 24](#).) Further, directory labels can be "flagged" upon creation, meaning these labels will display with a flag symbol in the UI.

Setup

To get started with setting up this feature, see [Adding a Box directory configuration on page 135](#).

Adding a Box directory configuration

Prerequisites

You must first complete credential setup steps in [Box credentials on page 143](#).

How to configure a Box directory

1. In the FortiDLP Console, on the left-hand sidebar, click .
 2. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations* > *Box*, select *Directory*.
 3. Click *Add new directory*.
 4. In the *Add new directory* modal, do the following:
 - a. Under *Authentication settings*, in the *Credentials* menu, select a set of [credentials](#).
 - b. Under *Details*, type a name to identify the user sync configuration.
 - c. *Optionally*, under *User sync*, do the following:
 - To enable daily auto-syncs, turn the *Enable daily auto-sync toggle* on (see [Syncing Box directories on page 137](#)).
 - To enable auto-archiving of users deleted from the directory, turn the *Enable auto-archiving of directory-deleted users* toggle on (see [Auto-archiving Box directory-deleted users on page 138](#)).
 - To remove directory labels from users who were auto-archived because they were deleted from the directory, turn the *Remove directory labels from auto-archived users* toggle on.
 - To sync users' usernames to the Infrastructure and allow them to be mapped to events that contain a matching username, turn the *Sync username mapping* toggle on. For more information, see [User-event mapping on page 43](#).
 - d. *Optionally*, under *Label import*, do the following:
 - To create labels for Box user properties and map them to users:
 - i. In the *User properties* list, select one or more user properties.
 - ii. To pseudonymize user property label values, select the corresponding *Pseudonymize values* checkboxes.
 - iii. *Optionally*, to assign a *New starter* label to users based on how recently they were created in Box:
 - i. Select the *Hire date* property checkbox.
 - ii. Click > to expand the property configuration.
 - iii. In the *Days* field, type a number of days to apply the label to users who have not been part of the directory for a minimum of that time.
- e. Click *Add new directory*.

▼ ☒ Hire date ☐ ☐

Apply "New starter" label to users who have been with the company for less than:

Days

Next steps

You can now use the configuration to sync your users. See [Syncing Box directories on page 137](#).

Syncing Box directories

After you configure a Box user integration, you can enable automatic syncing or perform a manual sync to import your users and their directory labels.

How to automatically sync a Box directory

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations > Box*, select *Directory*.
3. Select the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable daily auto-sync* toggle on.
5. Click *Save*.



An auto-sync will occur daily, and a message will be shown at the bottom of the sync configuration widget to notify you of the time of the next auto-sync.



Synced about 4 hours ago



Next scheduled for 26/04/2024, 12:19

If you perform a *manual* sync within 6 hours of the next auto-sync, that auto-sync will be skipped.

How to manually sync a Box directory

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations > Box*, select *Directory*.
3. In the widget of the relevant sync configuration, click *Sync*.

Sync



The FortiDLP Console will indicate the number of imported users and labels when the sync completes.



You can view your users and their labels in the *Users* module by clicking 👤 on the left-hand sidebar.

Auto-archiving Box directory-deleted users

You can enable a rule so that upon each sync, FortiDLP will automatically archive users that have since been deleted from your Box directory.

To enable or disable auto-archiving rules for directory-deleted users, follow these steps.

How to enable auto-archiving of Box directory-deleted users

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations > Box*, select *Directory*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable auto-archiving of directory-deleted users* toggle on.
5. *Optionally*, to additionally remove any directory labels assigned to users archived by this rule, turn the *Remove directory labels from auto-archived users* toggle on.
6. Click *Save*.

How to disable auto-archiving of Box directory-deleted users

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations > Box*, select *Directory*.
3. Click the relevant sync configuration widget to open the edit modal.
4. Turn the *Enable auto-archiving of directory-deleted users* toggle off.
5. Click *Save*.

Deleting Box directory configurations

To delete an unwanted Box user sync configuration, follow these steps.




This will not delete any synced users. For more information on deleting users, see [Deleting users on page 52](#).

How to delete a Box user directory configuration

1. In the FortiDLP Console, on the left-hand sidebar, click ⚙️.
2. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations > Box*, select *Directory*.

3. In the relevant sync configuration widget, click $\vdots$ > *Delete directory*.

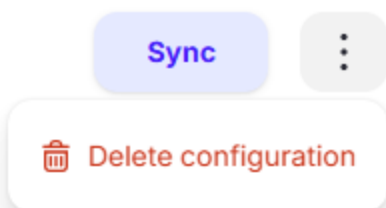

4. In the *Delete directory configuration* dialog box, click *Delete*.

Box Connector

FortiDLP's Box integration provides comprehensive visibility into the activity occurring in your organization's corporate cloud drive.

By configuring a Box Connector, events generated by any device used to access the cloud drive will be matched to FortiDLP users who performed the event action. The events are then reported in the *Box* event stream so that they can be investigated.



For example, you can track when a user is granted permissions to share documents and then when they modify a document's sharing permissions to make it publicly available.



Box's APIs are currently under development. Therefore, event triggers and metadata may be inconsistent.

Box event types

The following Box event types are collected. For information about them, refer to Box's documentation.

- CHANGE_FOLDER_PERMISSION
- COLLABORATION_ACCEPT
- COLLABORATION_EXPIRATION
- COLLABORATION_INVITE
- COLLABORATION_REMOVE
- COLLABORATION_ROLE_CHANGE
- COLLECTION_CREATE
- COLLECTION_DELETE
- COLLECTION_UPDATE
- COLLECTION_ITEM_CREATE
- COLLECTION_ITEM_DELETE
- COLLECTION_ITEM_UPDATE
- CONTENT_ACCESS
- COPY

- DELETE
- DOWNLOAD
- EDIT
- FILE_MARKED_MALICIOUS
- GROUP_ADD_USER
- GROUP_ADMIN_CREATED
- GROUP_ADMIN_DELETED
- GROUP_ADMIN_PERMISSIONS_UPDATED
- GROUP_CREATION
- GROUP_DELETION
- GROUP_EDITED
- GROUP_REMOVE_USER
- ITEM_MODIFY
- ITEM_OPEN
- ITEM_SHARED_UPDATE
- ITEM_SYNC
- ITEM_UNSYNC
- MOVE
- PREVIEW
- RENAME
- SHARE
- SHARE_EXPIRATION
- SHARED_LINK_SEND
- SIGN_DOCUMENT_ASSIGNED
- SIGN_DOCUMENT_CANCELLED
- SIGN_DOCUMENT_COMPLETED
- SIGN_DOCUMENT_CREATED
- SIGN_DOCUMENT_DECLINED
- SIGN_DOCUMENT_EXPIRED
- SIGN_DOCUMENT_SIGNED
- SIGN_DOCUMENT_VIEWED_BY_SIGNER
- SIGNER_FORWARDED
- STORAGE_EXPIRATION
- UNDELETE
- UNSHARE
- UPDATE_COLLABORATION_EXPIRATION
- UPDATE_SHARE_EXPIRATION
- UPLOAD

Setup

To get started with setting up this feature, see [Enabling the Box Connector on page 141](#).

Enabling the Box Connector

To enable the Box Connector, follow the steps below.



To complete the steps below, your operator account must be assigned the *Global Administrator* or *Administrator* access type.

Prerequisites

In order for a FortiDLP user to be mapped to a cloud event, the primary email address of the user who generated an event in Box must match an email address URI assigned to an existing user in FortiDLP. For information on user-event mappings, see [User-event mapping on page 43](#), and for information on syncing users, see [Users on page 43](#).

Additionally you must complete the Box credential setup steps in [Box credentials on page 143](#).

Setup

Once you have completed the prerequisites above, follow the steps below to enable the connector in FortiDLP.

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations* > *Box*, select *Connectors*.
3. On the top-right corner of the page, click *Add new connector*.
4. In the *Name* field, type a name to identify the connector.
5. In the *Credentials* menu, select a set of [credentials](#).
6. In the *Monitored users* section, do one of the following:
 - To receive events for all users:
 - i. In the *Include* menu, select *All users*.
 - ii. In the *Exclude* menu, select *No users*.
 - To receive events for a subset of users by only selecting labels to include:
 - i. Do one of the following:
 - To include users that have all of the labels you will choose, in the *Include* menu, select *Users with all selected labels*.
 - To include users that have any of the labels you will choose, in the *Include* menu, select *Users with any selected labels*.
 - ii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.
 - iii. In the *Exclude* menu, select *No users*.



For example, to receive events for all users with a "Sales" label or a "Finance" label:

1. In the *Include* menu, select *Users with any selected labels*. Then, the corresponding label picker, select the *Sales* and *Finance* labels.
 2. In the *Exclude* menu, select *No users*.
-

- To receive events for a subset of users by selecting labels to include and exclude:
 - i. Follow the steps above to define the users to include.
 - ii. Do one of the following:
 - To exclude users that have all of the labels you will choose, in the *Exclude* menu, select *Users with all selected labels*.
 - To exclude users that have any of the labels you will choose, in the *Exclude* menu, select *Users with any selected labels*.
 - iii. In the label selector box, type a label name and then select it from the list that displays. Repeat as needed.



For example, to receive events for users with a "Manager" label and a "Product" label, but not a "Windows" label:

1. In the *Include* menu, select *Users with all selected labels*. Then, in the corresponding label picker, select the *Manager* and *Product* labels.
2. In the *Exclude* menu, select either *Users with all selected labels* or *Users with any selected labels*. Then, in the corresponding label picker, select the *Windows* label.

Name

Box Connector

Authentication

Credentials

Box creds



[Manage credentials](#)



Credentials verified

Monitored users

Include

Users with all selected labels



Manager x

Product x

Exclude

Users with all selected labels



Windows x

7. Click *Create*.

Disabling the Box Connector

Disabling the Box Connector will stop new events from being collected, but you can still view past events in the *Box* event stream.

How to disable the Box Connector

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations* > *Box*, select *Connectors*.
3. On the widget of the connector configuration, turn the *Enable connector* toggle off.

Box credentials

FortiDLP can be integrated with Box to:

- sync users from Box (see [Box users on page 134](#))
- collect user activity events from Box (see [Box Connector on page 139](#)).

1. How to create and configure a custom Box app

1. In the [Box Developer Console](#), on the left-hand menu, select *My Platform Apps*.
2. Select *Custom App*.
3. In the *Create a Custom App* modal:
 - a. In the *App Name* field, type a name, such as "FortiDLP".
 - b. In the *Purpose* menu, select *Integration*.
 - c. In the *Categories* menu, select *Security & Compliance*.
 - d. In the *Which external system are you integrating with?* field, type "FortiDLP".
 - e. Fill out the rest of the optional fields as needed.
 - f. Click *Next*.
 - g. Under *Authentication Method*, select the *Server Authentication (with JWT)* radio button.
 - h. Click *Create App*.
The custom app will open.

2. How to grant the custom app permissions

1. In the [Box Developer Console](#), click the *Configuration* tab of the custom app you created.
2. In the *App Access Level* section, ensure *App + Enterprise* is selected.
3. Do at least one of the following:
 - To allow FortiDLP to sync Box users, in the *Application Scopes* section, under *Administrative Actions*, select the following checkboxes:
 - *Manage users*
 - *Manage groups*

- To allow FortiDLP to collect Box events:
 - i. In the *Application Scopes* section, under *Administrative Actions*, select the following checkboxes:
 - *Manage users*
 - *.Manage enterprise properties*
 - ii. In the *Advanced Features* section, select the *Make API calls using the as-user header* checkbox.
- 4. In the *Add and Manage Public Keys* section, click *Generate a Public/Private Keypair*.
A file will be automatically downloaded containing the app's credentials.
- 5. Store the downloaded credentials file in a secure location.
- 6. In the *OAuth2.0 Credentials* section, copy the *Client ID* value.

3. How to enable the custom app

1. Log in to the [Box Admin Console](#).
2. On the left-hand menu, select *Integrations*.
3. Click *Platform Apps Manager*.
4. Click the *Add Platform App* button on the top right of the page.
5. In the *Add Platform App* modal, paste the client ID copied at step 6 of [2. How to grant the custom app permissions on page 143](#).
6. Click *Next*.
7. Click *Authorize*.

4. How to add the custom app credentials to FortiDLP

The same *Box credentials* modal is used across all Box features, so credentials only need to be added once from any feature section.

1. In the FortiDLP Console, on the left-hand side bar, click .
2. Do one of the following:
 - To add the credentials from the Box users section:
 - i. Do one of the following:
 - Under *Users*, select *Box directory*.
 - Under *Integrations > Box*, select *Directory*.
 - ii. Click *Add new directory*.
 - iii. Under *Authentication settings*, click *Manage credentials*.
 - To add the credentials from the Box Connector section:
 - i. Under *Integrations > Box*, select *Connectors*.
 - ii. On the top-right corner of the page, click *Add new connector*.
 - iii. Under *Authentication*, click *Manage credentials*.
3. Click *Create new*.
4. In the *Name* field, type a name to identify the credentials.
5. In the *Credentials JSON* field, paste the contents of the credentials file that was downloaded in [2. How to grant the custom app permissions on page 143](#).
6. Click *Verify*. FortiDLP will indicate whether the connection is successful and which feature permissions are granted.
7. Click *Create*.

8. Click *Cancel* to close the modal.

5. How to integrate Box features with FortiDLP

Depending on which permissions you added to the custom app, do the following:

- To sync users from Box to FortiDLP, follow the instructions in [Adding a Box directory configuration on page 135](#).
- To collect Box events, follow the instructions in [Enabling the Box Connector on page 141](#).

Messaging apps (Preview)

FortiDLP can be integrated with the following messaging apps to send messages to users when they violate cloud drive policies.

- [Slack \(Preview\) on page 145](#)
- [Teams \(Preview\) on page 146](#)

For an overview of the policy actions that support this, see [Send message to Slack or Teams](#).


Slack (Preview)

You can integrate FortiDLP with Slack to send messages to users when they violate cloud drive policies. This section covers how to set up the integration for your Slack workspace in *Admin settings*, which must be done before enabling the *Send message* action for Slack in policies.

You can only integrate your FortiDLP tenant with one Slack workspace.

Email address matching

The email address in a user's directory information in the *Users* module must match the email address tied to their Slack account in order for messages to be sent.



Directory information

Email

abby.s.roberts@company.com

An email address is mapped to the *Email* field in a user's directory information when the user is synced to FortiDLP. For information on syncing users, see [Users on page 43](#).

Adding a Slack integration (Preview)

In order for FortiDLP to send messages to your users in your Slack workspace, the FortiDLP app must be installed in the workspace.

How to add the FortiDLP app to your Slack Workspace

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations*, select the *Messaging apps* tab.
3. Under *Slack*, click the *Add integration* button.
A webpage will open, prompting you to log in to your Slack workspace.
4. Log in with your credentials.
A permissions page will display for the FortiDLP app.
5. Click the *Allow* button.
The FortiDLP app will be installed in your Workspace.

Next steps

You can now configure the *Send message* action in cloud drive policies to send messages to users in your Slack organization. See [Configuring policy templates on page 163](#).

Teams (Preview)

You can integrate FortiDLP with Teams to send messages to users when they violate cloud drive policies. This section covers how to set up the integration for your Teams organization in *Admin settings*, which must be done before enabling the *Send message* action for Teams in policies.

You can only integrate your FortiDLP tenant with one Teams organization.

Email address matching

The email address in a user's directory information in the *Users* module must match the email address tied to their Teams account in order for messages to be sent.



Abby S Roberts

Directory information

Email

abby.s.roberts@company.com

An email address is mapped to the *Email* field in a user's directory information when the user is synced to FortiDLP. For information on syncing users, see [Users on page 43](#).

Adding a Teams integration (Preview)


In order for FortiDLP to send messages to users in your Teams organization, FortiDLP must be able to access user directory information, and the FortiDLP app must be preinstalled for the users you want send messages to.

Prerequisites

You must add a set of Microsoft service account credentials for the Entra ID tenant associated with your Teams organization and grant the service account the *User.Read.All* permission. See [Microsoft credentials on page 111](#) for instructions.

How to install and enable the FortiDLP app in Teams

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations*, select the *Messaging* tab.
3. Under *Microsoft Teams*:
 - a. Turn on the *Enable Teams integration* toggle
 - b. In the *Credentials* menu, select the set of [credentials](#) associated with your Teams organization.
 - c. Click *Save*.
4. Log in to the [Microsoft Teams admin center](#).
5. On the left-hand menu, select *Teams apps* > *Manage apps*.
6. On the top right of the apps table, in the *Search by name* field, type *FortiDLP*.

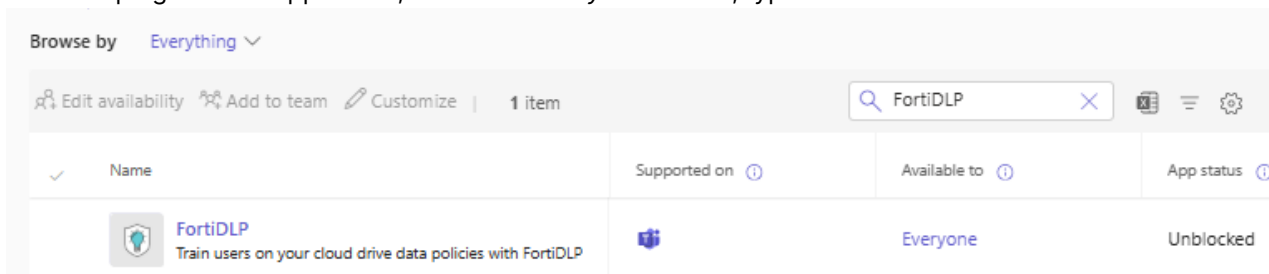


The FortiDLP app will be shown in the search results.

7. Ensure the app is available to everyone and that its status is unblocked.
8. On the left-hand menu, select *Teams apps* > *Setup policies*.

9. Do one of the following:

- To preinstall the app for all users in your organization:
 - i. Under the *Manage policies* tab, select the *Global (Org wide default) policy*.
 - ii. Click *Edit*.

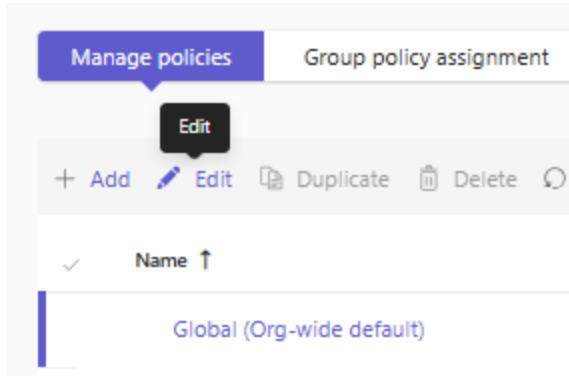

- iii. Under *Installed apps*, click *Add apps*.
 - iv. Search for and select *FortiDLP*, and click *Save*.
 - v. At the bottom of the page, click *Save* to update the policy.
- To preinstall the app for users in a group:
 - i. Under the *Manage policies* tab, click *Add*.
 - ii. In the *Add a name for your app setup policy* field, type a name.
 - iii. Under *Installed apps*, click *Add apps*.
 - iv. Search for and select *FortiDLP*, and click *Save*.
 - v. At the bottom of the page, click *Save* to save the policy.
 - vi. Select the *Group policy assignment* tab.
 - vii. Click *Add*.
 - viii. In the panel that opens:
 - i. In the *Select a group* field, select the group you want to assign the policy to.
 - ii. In the *Select a policy* menu, select the policy you created.
 - iii. Click *Apply*.
 - To preinstall the app for individual users in your organization:
 - i. Under the *Manage policies* tab, click *Add*.
 - ii. In the *Add a name for your app setup policy* field, type a name.
 - iii. Under *Installed apps*, click *Add apps*.
 - iv. Search for and select *FortiDLP*, and click *Save*.
 - v. At the bottom of the page, click *Save* to save the policy.
 - vi. On the left-hand panel, select *Users > Manage users*.
 - vii. For each user you want to assign the policy to:
 - i. Click the user row in the table.
 - ii. On the top left of the table, click *Edit*.
 - iii. In the *Edit settings* panel, in the *App policy setup* menu, select the policy you created.
 - iv. Click *Apply*.

Next steps

You can now configure the *Send message* action in cloud drive policies to send messages to users in your Teams organization. See [Configuring policy templates on page 163](#) for guidance.

Setting your default messaging app (Preview)

If you have integrated FortiDLP with both Slack and Teams, you can set your main or preferred app as your default to simplify configuring cloud drive policies.

How to set your default messaging app

1. In the FortiDLP Console, on the left-hand sidebar, click .
2. Under *Integrations*, select the *Messaging apps* tab.
3. Do one of the following:
 - To set Slack as your default, next to *Slack*, select the *Set as default* radio button.
 - To set Teams as your default, next to *Microsoft Teams*, select the *Set as default* radio button.

Next steps

When configuring the *Send message* action within cloud drive policies, you can now select the *Default* option. See [Configuring policy templates on page 163](#) for guidance.