
Three Mechanisms of Context Rot

Anonymous Author(s)

Affiliation

Address

email

Abstract

1 Long conversations are said to wear language models down, but the standard eval-
2 uations confound *accumulation* (more context) with *dilution* (the answer-bearing
3 tokens becoming a smaller, more distant, more contested fraction of it). We build
4 a harness that separates them: streams of individually localized tasks in which
5 context length, evidence distance, context confusability, and demonstrated answer
6 shape are four independent variables, instrumented with a span-attention clamp
7 that can *set* any span’s post-softmax attention share. Four findings. (1) Accu-
8 mulation alone is free: accuracy and instruction adherence are flat to 90% fill,
9 with bounded nulls. (2) Displacing the evidence costs 0.19–0.21 accuracy, and
10 the cost is *causally mediated by attention mass*: removing the evidence’s share
11 with nothing moved reproduces 114% of the penalty, the mass→accuracy curve
12 is smooth with no threshold, and two separately-run clamp experiments agree to
13 0.004. (3) Near-duplicate context costs 0.085–0.093 accuracy at *unchanged ev-*
14 *idence share* (−0.0003 [−0.0009, +0.0004]). Closing the context’s occurrences
15 of the probe’s own answer candidates at generation time recovers 59% of that
16 penalty (+0.060 [+0.008, +0.112] against a size-matched random-closure con-
17 trol at zero), so competition is attention-mediated too—through the *competitors*,
18 not the evidence. (4) Accumulated filler that demonstrates an *applicable* answer
19 shape erodes an instructed output format completely (0.875 → 0.000 by fill 0.15,
20 accuracy unharmed), while the instruction’s per-token attention is flat-to-rising
21 and its content stays perfectly linearly decodable. Attention mass is still a causal
22 *weight* in that contest: clamping the instruction’s share down collapses compliance
23 where nothing competes, clamping it up restores compliance against 42 counter-
24 exemplars, and restating the instruction restores it without surgery. The same
25 closure that rescues competition restores nothing here: the mode is installed at
26 prefill. Context rot, as measured, is not a decay of competence with length. It
27 is displacement, competition, and precedent, and attention dilution proper is only
28 the first.

29 1 Introduction

30 A recurring worry about long conversations is *context rot*: as turns accumulate, the model is said to
31 degrade. The phenomenology is real. On a repeating multiple-choice task, instruction-tuned models
32 become dramatically more confident as context fills—next-token entropy drops 3–4× on Qwen-2.5-
33 7B and Llama-3.1-8B, in both question orders. The last token’s attention also shifts away from the
34 system prompt and the current query toward the most recent prior cases, and the distribution dif-
35 fuses (at layer 24 of OLMo-2-Instruct: system↔fill −0.93, recent↔fill +0.89, current↔fill −0.71,
36 entropy↔fill +0.95, all monotone in fill). By every visual diagnostic this is a strong effect that
37 grows with context.

38 The tempting reading is that length wears the model down. But almost every context-rot evaluation
39 embeds the answer-bearing information inside *one long task*—a long document, a buried needle, a
40 growing codebase. Longer context then mechanically *dilutes* the relevant tokens among irrelevant

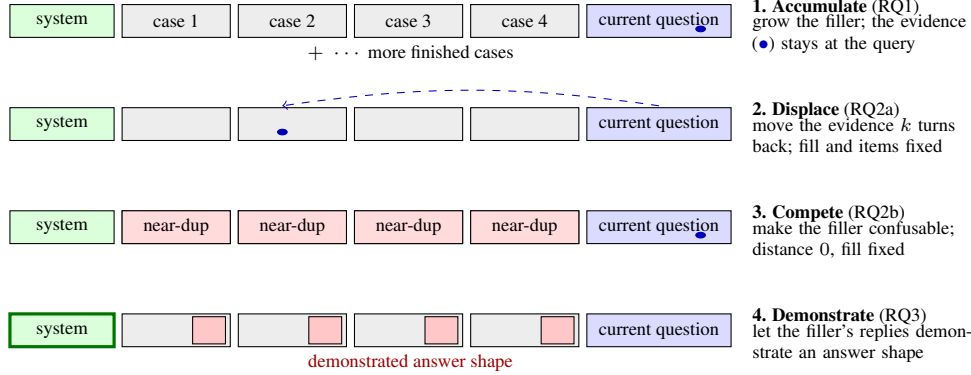


Figure 1: **The localized-stream framework: four independent knobs on one transcript.** Each stream accumulates self-contained cases, so the evidence for the current answer sits at the current question by default and every knob is turned with the others held fixed. The span-attention clamp (§2.3) additionally sets any span’s attention share directly, turning the mediating variable itself.

ones, so a measured degradation conflates the cost of accumulation with the cost of the target being harder to attend to (“lost in the middle,” Liu et al., 2023). The two cannot be told apart in that setup, and the distinction matters in practice: an agent transcript of finished, locally-scoped steps accumulates without diluting, and the two accounts predict opposite outcomes for it. (Appendix A places this work in the literature.)

We separate the candidate causes inside one harness (Fig. 1) and ask three questions:

RQ1 Does accumulation alone—more context, with the evidence for every answer held at the current query—degrade accuracy or instruction adherence?

RQ2 When dilution does cost accuracy, is the cost mediated by the evidence’s attention mass? We split dilution into its two components—the evidence becoming *distant* and the context becoming *confusable*—and test each causally.

RQ3 If adherence survives context fill (§4.1), what erodes instruction-following under accumulation? Dongre et al. (2026) showed that attention from responses to the system prompt closes over accumulated filler and asked whether behavior survives that closure, finding the answer architecture-indexed; our precedent arms take up their question with a graded instrument on one architecture.

The answers: accumulation alone is free (RQ1). Distance costs accuracy through the *evidence’s* attention mass; confusability costs accuracy at constant evidence mass, through attention to the *competing instances* themselves—closing them recovers most of the penalty (RQ2). Instructed output format is lost to a *precedent contest* with demonstrated answer shapes, in which the instruction’s attention mass is a causal weight but not the natural driver: whether behavior survives attention closure is decided by what the filler demonstrates, not by attention (RQ3).

Our contributions are as follows:

- A harness that makes accumulation and dilution independent, by accumulating individually localized tasks whose evidence never moves, and a span-attention clamp that *sets* any span’s post-softmax share with a bit-identical no-op at scale 1 (§2).
- A causal mediation result for displacement: removing the evidence’s attention mass with nothing moved reproduces 114% of the displacement penalty, and the mass→accuracy relationship is smooth and graded with no threshold in it (§4.2).
- A dissociation establishing a *second* mechanism: competition costs accuracy at constant *evidence* mass, yet closing the competitor mentions recovers 59% of the penalty—both accuracy mechanisms are attentional, on different spans, and span-targeted closure tells them apart (§4.3).
- A *third* mechanism at the compliance level: accumulated demonstrations erode an instructed format only when their shape is applicable, immediately and with accuracy unharmed; the erosion is not attention-mediated, yet re-weighting or re-presenting the instruction each fully reverse it (§4.4–§4.5).

76 2 Methodology

77 2.1 The localized-stream framework

78 Our harness accumulates **individually localized tasks**: a stream of self-contained 5-option medical
79 cases (DDXPlus, Tchang et al., 2022) or discrete factual questions (MMLU, Hendrycks et al.,
80 2021). Each answer depends only on the *current* question, which always sits at the end of the
81 context; prior turns are never required to answer it. Accumulation therefore grows the context
82 without diluting the information the current answer needs, and each component of dilution becomes
83 an *independent variable* (Fig. 1). Holding the item, the model, the total fill, and the metric fixed, we
84 can move the evidence k user turns back (*displacement*), replace the filler with near-duplicate cases
85 (*competition*), or let the filler’s replies demonstrate a competing answer shape (*precedent*). Question
86 text is byte-identical across arms, and the filler is identical unless it is the treatment. Distance, fill,
87 confusability, and demonstration—inseparable in a long-document setup—vary independently here.

88 2.2 Span share and enrichment

89 For a token span A (the evidence, the system prompt, a filler answer), its *share* is the final position’s
90 post-softmax attention mass on A , averaged over heads at a reference layer (layer 24 unless stated) or
91 over all 32 layers where noted. A fixed-size span’s raw share falls mechanically as context grows—a
92 48-token system prompt is a shrinking fraction of the key space—so a raw share decline says nothing
93 by itself. We therefore also report *enrichment*: share divided by the span’s token fraction, which is 1
94 for a span attended in proportion to its size. The distinction matters in §4.4: raw system share falls
95 $\sim 10\times$ on the same curve in arms that erode and arms that do not, so it separates nothing. Metrics
96 that aggregate raw attention-to-goal share across a growing context, such as the goal-accessibility
97 ratio of Dongre et al. (2026), build this arithmetic decline in by construction.

98 2.3 The span-attention clamp

99 To intervene on attention rather than position, we use a clamp that *sets* a span’s post-softmax share:
100 a constant bias b added to the span’s key columns in the additive attention mask scales the span’s
101 odds by exactly e^b , and softmax renormalizes. Nothing in the attention forward is reimplemented,
102 so a scale of 1.0 ($b=0$) is bit-identical to the unhooked model. A bisection on b hits any target share
103 at the reference layer to $\sim 10^{-4}$, and scale 0 closes the span outright—the hard-masking intervention
104 of Dongre et al. (2026), recovered as the clamp’s endpoint, so their ablation and our graded doses
105 sit on one dial. The clamp is graded and bidirectional—it can remove a span’s mass or restore it—
106 so mediation can be tested in both directions rather than only ablated. It is uniform across heads
107 and, unless stated, applied at every layer; per-head structure is measured separately (Appendix F).
108 Unlike attention-steering methods aimed at improving compliance (Zhang et al., 2024), the clamp
109 is a measurement instrument: its no-op is exact, its dose is solvable, and its near-ablation regime is
110 excluded from interpretation (§4.2). Validation is in Appendix B.

111 2.4 Residual probes and mode-vector steering

112 To ask what the residual stream represents while behavior changes, we train linear probes (Standard-
113 Scaler $\rightarrow$ PCA(≤ 50) $\rightarrow$ LDA) on the final pre-generation position across all 33 stack rows, with
114 leave-one-out cross-validation at episode level and 200-shuffle permutation nulls at peak layers—
115 a protocol comparable to recent residual-probing work on multi-turn degradation (Dongre et al.,
116 2026). To test what a decodable direction *does*, we steer: mean-difference vectors added at the final
117 prefill position and every decode step (never the context), always against a norm-matched random-
118 vector control at the same dose, and projection-erasure of fitted directions at every position and step.
119 Details in Appendix H.

120 3 Experimental design

121 **Streams and probes.** All causal experiments run on OLMo-2-7B-Instruct at seed 42, greedy de-
122 coding. A 4–32k window holds only tens of cases, so we pool many independent accumulation
123 sessions; a reversed-question-order control removes difficulty-ordering confounds. Probe options

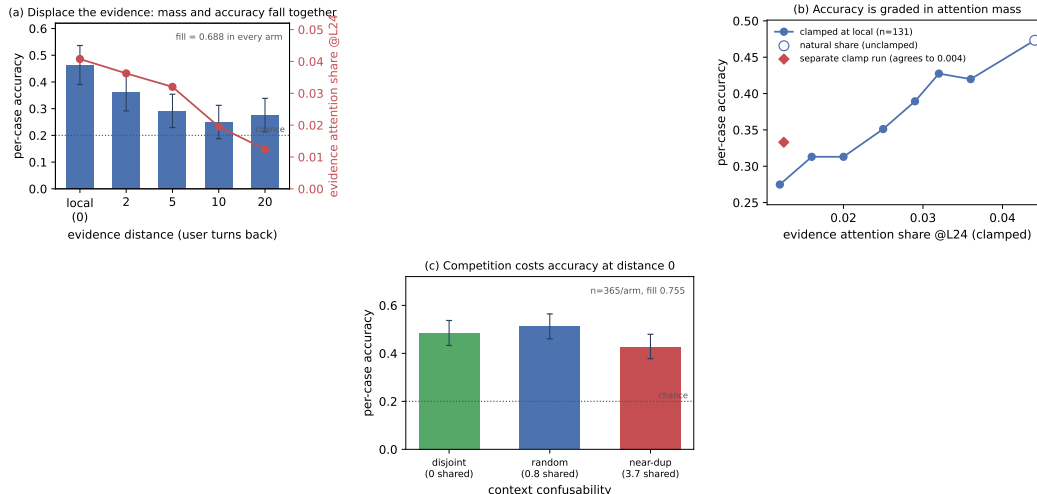


Figure 2: **Dilution costs accuracy; accumulation does not.** (a) Moving the evidence k user turns back, at identical fill and byte-identical questions, drains its attention mass and costs accuracy together. (b) Setting that mass directly, with the evidence left in place, reproduces the penalty and traces a smooth graded dose-response—no threshold. The diamond is an independently-run clamp experiment measuring the same endpoint cut; the two agree to 0.004. (c) At distance 0 and fixed fill, near-duplicate accumulated context costs a further 0.085. Bootstrap CIs resample cases throughout.

are shuffled per item and items with fewer than 5 options are excluded (DDXPlus lists differentials in rank order, so unshuffled gold letters are 71% “A”—a letter-bias trap for any arm comparison; Appendix C).

Compliance instrumentation. For RQ3 the system prompt carries a clinical answer template (ANSWER: letter, then SUPPORTING: with at least two vignette findings) and every reply is graded separately for compliance and accuracy by a rule-based checker; simpler canary instructions (a reply prefix and suffix) instrument adherence in the accumulation and clamp arms. Grader rules, filler construction, and the three filler streams’ demonstrated shapes are specified in Appendix C.

Statistics. Per-condition n is bounded by the context window, so every clamp experiment is paired over shared items and analysed with a paired bootstrap resampling *cases* (10,000 draws), never heads or turns; resampling arms independently inflates intervals about $2.5\times$. An overflow guard skips rather than truncates every item that would not fit whole—truncating a long item near the window edge manufactures exactly the late-window cost under study—and reports per-arm skip counts (Appendix E).

4 Results

4.1 Accumulation is free

Per-case accuracy does not fall as context fills; it is worst at the cold start and warms up ($\text{corr}(\text{correct}, \text{fill}) = +0.11$ Instruct, $+0.07$ DPO). A homogeneous repeating task could let in-context learning mask a hidden decay, so we remove that possibility: in a *random-subject* stream each question is drawn uniformly from all 56 MMLU subjects, so prior context carries no predictive information about the next question—only the answer *format* is learnable. Accuracy is still flat (random: $\text{corr} = -0.02$ $[-0.10, +0.05]$, $n=699$; coherent single-subject: $\text{corr} = +0.01$, $n=1001$). These nulls are *bounded*: the 95% interval on upper-minus-lower-half accuracy excludes declines beyond 4.1 points (coherent) and 9.4 (random). Checkable instruction adherence—the canary instructions—stays at ceiling throughout ($\text{corr}(\text{violation}, \text{fill}) = 0$). The canaries were easy, so this null bounds rather than proves; §4.4 shows what it does and does not mean. Accumulation does drive the *current query*’s attention share down to exactly the level at which clamping the same share starts to cost points (Appendix G); that accuracy nonetheless stays flat is itself evidence that in-context learning is actively holding it up.

Table 1: **Distance is the variable that matters** (OLMo-2-Instruct, $n=192$ per arm, chance = 0.200, fill 0.688 in every arm). Evidence attention share is measured at layer 24 on the same forwards. Case-resampled bootstrap 95% CIs.

arm	local	back_2	back_5	back_10	back_20
accuracy	0.464	0.359	0.292	0.250	0.276
cost vs local	—	+0.104	+0.172	+0.214	+0.188
95% CI	—	[+.005, +.203]	[+.073, +.266]	[+.120, +.307]	[+.094, +.281]
evidence share @L24	0.0408	0.0363	0.0320	0.0195	0.0124

4.2 Displacement acts through attention mass

We now vary only *where the answer-bearing evidence sits*. Each DDXPlus probe’s vignette is placed k user turns before its question; mean fill is 0.688 in every arm, the question text is byte-identical, and the overflow guard skipped 0 of 192 probes (an example transcript with its generations is in Appendix D). Every gap’s CI excludes zero (Table 1, Fig. 2a). In a joint fit of accuracy on fill and distance, **distance carries the coefficient** ($\beta = -0.00761$ $[-0.01173, -0.00346]$, significant) and **fill carries none** ($\beta = -0.00725$ $[-0.21006, +0.18658]$). Within the *local* arm—the one that reproduces the accumulation design—accuracy is flat with fill ($\beta = -0.294$ $[-0.767, +0.184]$). The effect survives restriction to parsed responses and is then fully monotone ($0.524 \rightarrow 0.413 \rightarrow 0.397 \rightarrow 0.343 \rightarrow 0.338$). One qualification: the decline saturates by $k \approx 10$ rather than deepening to $k=20$, and those two arms are not distinguishable from each other. So the same model, on the same items at the same fill, degrades when the evidence is displaced and does not degrade when it is not. The localized null is not a ceiling artifact: these items *can* show degradation, and do, as soon as dilution is reintroduced.

Distance and attention drain move together by construction, so Table 1 is consistent with dilution but does not establish it—a purely positional account predicts the same table. Four interventions separate them.

Observational correlations. Evidence share falls $0.0408 \rightarrow 0.0124$ across the ladder ($r = -0.83$ with distance) while the *question*’s share stays flat, confirming only the evidence moved. One caution: *within* an arm, higher evidence share predicts *lower* accuracy ($\beta = -11.2$ $[-20.0, -2.6]$, stronger controlling for vignette length). Attention there tracks item difficulty—the model looks harder at confusing vignettes—and has the *opposite sign* to the causal effect below. Reading share–accuracy correlations off this data without intervening yields the wrong sign.

Mass removal. Keeping the evidence at *local* and clamping its share down to the *same item*’s *own back_20* share costs $+0.202$ $[+0.138, +0.267]$ (paired $n=174$) and lands at 0.333 against *back_20*’s 0.365—a difference of -0.025 $[-0.083, +0.035]$, indistinguishable. **Mass removal alone reproduces 114% of the displacement penalty, with nothing moved.**

Dose-response. Sweeping the evidence’s share at fixed position over seven levels (common subset $n=131$ present at every level) gives a monotone decline from 0.473 at the natural share (0.0441) to 0.275 at 0.012 (Fig. 2b). Six of the seven levels differ significantly from the natural share—including a cut of less than a fifth of the mass—and no step is a threshold: the largest adjacent step is 0.053 and the decline is smooth throughout. The endpoint contrast, $+0.198$ $[+0.115, +0.282]$, matches the independently-run clamp experiment’s $+0.202$ $[+0.138, +0.267]$ for the same share change: agreement to 0.004 across two separate runs, the strongest internal consistency check in the program. An earlier draft of this work read a *threshold* into two flat contrasts; the sweep refutes it. The relationship is *graded*: a slope, not a cliff.

Mass restoration. The converse is only partial: clamping the displaced evidence’s share back *up* to its *local* level—share-matched across all 32 layers, not indexed to one—recovers a real but small 0.28 $[0.07, 0.61]$ of the penalty ($+0.047$ $[+0.010, +0.083]$ of $+0.167$ $[+0.099, +0.240]$), leaving most of it in place. Our uniform clamp can strip mass faithfully but cannot reconstruct *which* heads should carry the restored mass. Full sufficiency with partial necessity is the signature of an instrument faithful in one direction and crude in the other, and we report it as that rather than as a second mechanism. A pattern-matched, per-head clamp would settle it. The drain itself is positional

196 in *tokens*, not *turns*—a 64% mass cut from token distance alone costs at most 9.4 points—consistent
197 with RoPE decay rather than conversation structure (Appendix G).

198 4.3 Competition acts through the competitors, at constant evidence mass

199 Burying a needle varies two things at once: the evidence becomes distant *and* it becomes surrounded
200 by plausible alternatives. We isolate the second by holding the evidence at the current query and
201 fill fixed, and varying only how *confusable* the accumulated context is. Every arm accumulates
202 eight prior DDXPlus cases, each answered in the transcript with its gold letter, so format and in-
203 context-learning affordance are constant. The arms differ only in how much the accumulated cases’
204 differentials overlap the current probe’s (disjoint 0 shared options, random 0.80, near_dup 3.75
205 of 5, always with a *different* gold, so the context never displays the probe’s answer as correct).
206 Paired over $n=365$ probes, accuracy is random 0.512, disjoint 0.485, near_dup 0.427 (Fig. 2c;
207 an example transcript with its generations is in Appendix D).

208 Near-duplicate context costs -0.085 $[-0.140, -0.030]$ against the natural stream and -0.058
209 $[-0.112, -0.006]$ against disjoint context. In a joint fit within this experiment, **option overlap**
210 **carries the coefficient** ($\beta = -0.021$ $[-0.039, -0.003]$) and **fill carries none** ($\beta = -0.284$
211 $[-0.640, +0.075]$)—the same shape as the distance result, on a different variable. Two controls
212 hold. The low-competition arms land on §4.2’s local accuracy of 0.464 $(+0.049$ $[-0.037, +0.134]$
213 and $+0.021$ $[-0.065, +0.107])$, and context length does not order the arms: disjoint is the *longest*
214 and mid-accuracy while near_dup is the shortest, so length biases against the result. Restricted to
215 parsed responses only, random – near_dup = $+0.082$ $[+0.025, +0.138]$ survives. The effect is
216 *not* monotone in confusability: random sits above disjoint, not below it, though not significantly
217 $(+0.027$ $[-0.019, +0.074])$. We therefore claim that near-duplicate context is costly, *not* that cost
218 rises with overlap—one significant step, not a gradient.

219 **The dissociation on mass.** Repeating the sweep with attention capture (same probes, same seeds)
220 and measuring all 32 layers separates the two mechanisms on mass. Averaged over all layers, dis-
221 placement removes 0.0455 of the evidence’s attention share and competition removes 0.0022, while
222 costing 0.188 and 0.085 accuracy respectively. Competition is therefore far cheaper in mass per
223 point of accuracy—but it is *not* mass-neutral, and the layer chosen decides how it looks: at layer
224 24 the headline contrast moves the evidence’s share by -0.00027 $[-0.00088, +0.00035]$, indistin-
225 guishable from zero, while at layer 17 it moves it by -0.0186 . The two drain profiles are *negatively*
226 correlated across layers ($r = -0.32$): displacement bites hardest at layers 0–3 and 16, competition
227 at 17–18. The same accuracy contrast having opposite attention signatures at different layers is
228 evidence for two mechanisms that no single-layer measurement could supply. Per-head structure—
229 including the null result that no head hides a large countervailing move—is in Appendix F.

230 **The competitor-closure test.** Constant evidence mass rules out starvation; it does not rule out the
231 other attentional route, in which the filler’s (arm-constant) mass lands on *instances of the probe’s*
232 *own answer candidates* and reading them is what misleads. We test this directly: closing every con-
233 text occurrence of the probe’s option names at generation time (scale 0; 30.0 spans, 127.9 tokens,
234 union share 0.0077 per probe) recovers **59%** of the competition penalty $(+0.055$ $[+0.006, +0.104]$,
235 paired $n=365$; $+0.060$ $[+0.008, +0.112]$ against a size-matched random-closure control that lands
236 at zero, -0.006 $[-0.036, +0.025])$, and the residual gap to random no longer excludes zero $(+0.038$
237 $[-0.011, +0.088])$. The rescue survives restriction to parsed responses $(+0.058$ $[+0.003, +0.113])$.
238 **So competition is attention-mediated after all—through the competitors, not the evidence:** less
239 than 1% of the attention distribution carries the effect, and removing it removes most of the cost.
240 Both accuracy mechanisms are therefore attentional, on different spans: displacement removes mass
241 from the evidence, competition directs mass onto the competitors, and the evidence-mass measure-
242 ment dissociates them because it is blind to the second by construction. What remains open is
243 whether the $\sim 40\%$ residual is prefill-borne interference or instrument slack (closure covers verba-
244 tim option-name mentions only).

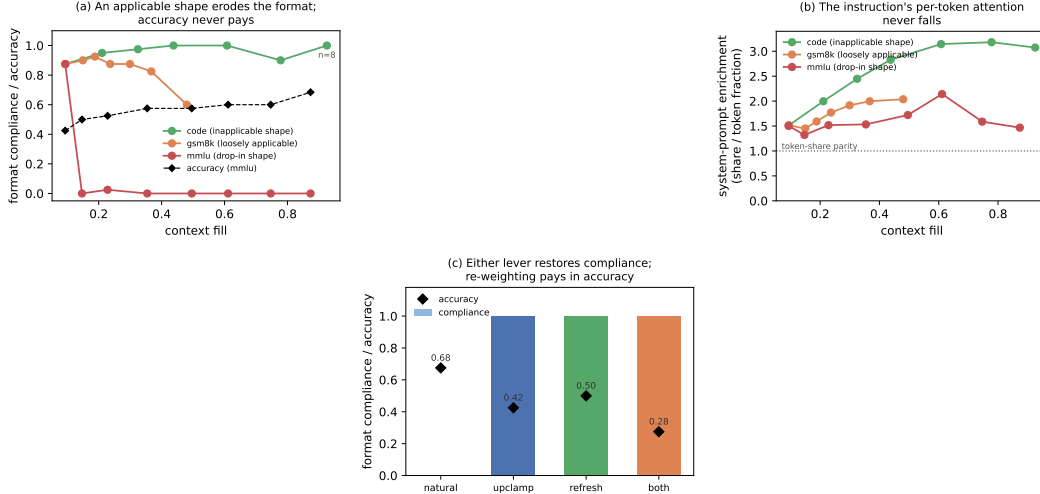


Figure 3: **Format erosion is a precedent contest, not attention starvation.** (a) Compliance by fill for three filler streams whose demonstrated answer shapes differ only in applicability to the probe; mmlu accuracy (dashed) is unharmed through its total collapse. (b) The instruction’s per-token enrichment is flat-to-rising in every arm, collapse included. (c) At depth 42, clamping the system span’s share back up and restating the policy each restore compliance fully; forced mass is paid for in accuracy (zero-sum), restatement is nearly free.

245 4.4 Precedent: instructions lose to applicable demonstrations

246 The costs so far are to accuracy. A third mechanism costs *compliance*: not whether the model can
 247 still solve the task, but whether it answers in the instructed form (§3; $n=40$ probes per depth, one
 248 accumulation snapshotted at every depth, so depth is the only mover).

249 **The instruction’s attention is causally necessary—and demonstration masks it.** Accumulation
 250 drives the system span’s share down $8\times$ within eight turns ($0.166 \rightarrow 0.021$). In a context containing
 251 no assistant turn, clamping that share from 0.165 to 0.050 collapses compliance from 0.99 to 0.03 (a
 252 suffix canary flips on 120 of 120 items) while accuracy moves $0.525 \rightarrow 0.467$ ($[-0.017, +0.133]$) at
 253 parse rate 0.967: compliance is destroyed and competence is not. The clamp level is one accumula-
 254 tion passes on its own between two and four turns (-2.6 nats), well clear of the near-ablation regime
 255 excluded in §4.2. This confirms Dongre et al. (2026)’s ablation finding that system-prompt attention
 256 is causally necessary, and sharpens it: the collapse needs no masking, only a graded clamp to a share
 257 accumulation reaches by itself. But one *compliant* example in context pins compliance at ceiling at
 258 every clamp level, and one bare-letter example pins it at floor even unclamped—replies byte-copy
 259 the previous assistant turn’s format, with zero length variance across 720 generations per arm (Ap-
 260 pendix H). The instruction governs behaviour only when the transcript is silent. This re-reads §4.1’s
 261 adherence null: that null accumulates *compliant* history, so it shows compliance survives compliant
 262 precedent, not accumulation.

263 **Erosion tracks applicability, not attention.** Three filler streams differ in what their answers
 264 demonstrate: code (request→Python function; no shape applicable to a 5-option probe), gsm8k
 265 (worked prose; loosely applicable), mmlu (MCQ→bare letter; a drop-in replacement). code never
 266 erodes (compliance 0.875 at cold start, 1.00 at matched fill 0.5, 0.90 at fill 0.78). gsm8k erodes
 267 late and partially (0.600 at fill 0.48, replies drifting into the filler’s worked-solution style). mmlu
 268 collapses completely and immediately: $0.875 \rightarrow 0.000$ at three filler turns (fill 0.147), never recover-
 269 ing through fill 0.87 (Fig. 3a). At matched fill ≈ 0.5 the arms order 1.00/0.60/0.00. Accuracy on
 270 the same replies is unharmed everywhere (0.425 shallow, 0.500–0.684 deep): the model still solves
 271 the case—it answers in the demonstrated style. The system prompt’s attention does not carry the
 272 difference: its raw share falls on the same arithmetic curve in every arm, its per-token enrichment
 273 is flat-to-rising in all three (Fig. 3b), and code holds full compliance at half the raw share at which
 274 mmlu has already collapsed. This answers the survival question of Dongre et al. (2026) on an axis
 275 their fixed-filler design cannot see: the same model at the same near-zero share survives or collapses
 276 depending on what the filler demonstrates.

277 **Reversal is total, by either lever.** At depth 42 (natural compliance 0.000, accuracy 0.675), clamping the system span back to its cold-start share restores compliance to 1.000 at an accuracy cost of 278 0.675 $\rightarrow$ 0.425: mass forced onto a 48-token span is taken from everything else, §4.2’s zero-sum 279 arithmetic. Restating the instruction in the latest user turn also restores 1.000, at accuracy 0.500 and 280 with no intervention on the model (both at once: 1.000 at 0.275; Fig. 3c). Natural dilution therefore 281 does not cause the erosion—it is identical in the arm that never erodes; an applicable competing 282 template does. The outcome is a contest in which attention mass is a causal *weight*: clamp the in- 283 struction down and it loses unopposed, clamp it up and it wins against 42 counter-exemplars, leave it 284 natural and the demonstrated template beats it. Re-presenting beats re-weighting, though both work. 285

286 4.5 The mode: readable, installable, not erasable

287 Where is the demonstrated format, if not in attention? The demonstrated answer spans *are* preferen- 288 tially read exactly where erosion occurs (per-token enrichment of filler answers over filler questions: 289 +1.28 in mmlu, +0.34 in gsm8k, negative in code—the erosion ordering). But reading them is not 290 what sustains the erosion: masking every exemplar answer’s key columns at generation time restores 291 nothing (0.000 compliant; a size-matched random-masking control is equally null). The privileged 292 reading is a side effect of the template’s installation at prefill, task-vector style (Hendel et al., 2023). 293 The contrast with §4.3 is the sharpest dissociation in the paper: the *same* scale-0 closure that recov- 294 ers 59% of the competition penalty restores nothing here. Competition is generation-time *reading*; 295 precedent is prefill *installation*. One intervention, opposite outcomes, two mechanisms.

296 Residual-stream probes (§2.4) complete a three-level dissociation. The instruction’s presence re- 297 mains perfectly linearly decodable at every depth (transfer AUC 1.000, permutation $p=0.000$) while 298 it has zero behavioral force: read, represented, overruled. Whether the upcoming reply will comply 299 is decodable *before the first token* (leave-one-out AUC 0.822 at layer 21) within cells matched on 300 depth, fill, and filler. The mode is installable by direction: adding the mean-difference vector at 301 decode time to a demonstration-free context destroys the instructed format (0.000 vs. 0.525 under a 302 norm-matched random vector), with replies reproducing the demonstrated styles verbatim. But no 303 linear direction we tried *erases* it—mean-difference at one layer and at eleven, and the probe’s own 304 reader direction, all with clean controls (Appendix H)—even though two fitted projections drive the 305 layer’s linear code to chance. The code is low-rank, not redundant; the behavioral decision does not 306 consume the linearly decodable component.

307 This asymmetry carries a methodological caution beyond this paper. Behavior modes are increas- 308 ingly localized in compact linear structure: rank-1 adapters that capture reasoning behavior with 309 interpretable directions (Ward et al., 2025), task and function vectors (Hendel et al., 2023; Todd 310 et al., 2024), and near-perfect residual decodability of goal information after attention has closed 311 (Dongre et al., 2026). Our mode is exactly such an object on the read and write sides—and still no 312 readable direction is its carrier. Decodability and installability license no inference to necessity: the 313 probe reads a correlate of the mode, not its carrier.

314 4.6 Why context rot gets reported: the signatures

315 If the entropy collapse behind the context-rot reports were a generic depth effect it should survive 316 on heterogeneous dialogue. It does not. On 150 organic WildChat conversations (Zhao et al., 2024) 317 (Qwen-2.5-7B, teacher-forced over the real history), within-conversation entropy is flat with depth: 318 median late/early ratio 0.99, and 52% of conversations trend down—a coin flip. Partitioning Wild- 319 Chat by its *own* inter-turn homogeneity isolates the driver: homogeneous conversations collapse 320 (0.897 late/early) while heterogeneous ones are flat (1.001), and the entropy slope correlates with 321 homogeneity (partial $r = -0.151$ controlling for length). Because homogeneous conversations 322 are *longer*, length works against the effect (Fig. 4b). Across OLMo-2’s (OLMo Team, 2024) post- 323 training chain the collapse is mostly a downward *level shift* in baseline entropy installed by align- 324 ment (1.06 $\rightarrow$ 0.20 across base $\rightarrow$ SFT $\rightarrow$ DPO $\rightarrow$ Instruct), not a steeper collapse slope (Appendix I).

325 The residual hazard in the localized case is *calibration*, not competence. On the DDXPlus streams 326 logging per-token confidence ($n=154$ pooled cases, two models, both question orders), answer con- 327 fidence rises 0.85 $\rightarrow$ 0.95 with fill ($r = +0.72$ [+0.64, +0.79]) at flat accuracy—and equally on 328 *wrong* answers (0.86 $\rightarrow$ 0.95; $r = +0.69$ [+0.57, +0.78]). The confidently-wrong gap therefore

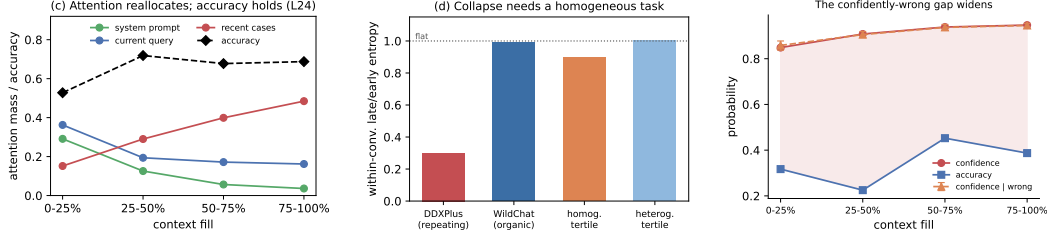


Figure 4: **The signatures track task homogeneity, and the residual hazard is calibration.** (a) Attention reallocates monotonically off the system prompt and current query with fill while accuracy holds. (b) The entropy collapse appears only with a homogeneous repeating task, not on organic WildChat dialogue, and tracks homogeneity rather than length. (c) Confidence rises with fill on wrong answers as much as right, at flat accuracy.

329 widens by ~ 10 points over a session (Fig. 4c), most consequential exactly where a homogeneous
 330 high-stakes stream makes the model surest.

331 5 Conclusion

332 With accumulation, displacement, competition and precedent separated inside one harness: accu-
 333 mulation produces a real, monotone reallocation of attention and a real collapse of *confidence*, but
 334 no loss of accuracy and no loss of instruction adherence. Displacing the evidence produces a large
 335 accuracy cost that is causally mediated by its attention mass, graded in that mass, and positional in
 336 tokens. Making the context confusable produces a further cost at constant evidence mass, carried
 337 instead by attention to the competing instances themselves—under 1% of the distribution, and closing
 338 it recovers most of the cost. Accumulating an applicable demonstrated answer shape erodes not
 339 accuracy but *compliance*, in a precedent contest the instruction loses with its attention intact—and
 340 which either re-weighting or re-presenting the instruction wins back completely. The literature’s
 341 central claim is therefore correct but misattributed, and under-counted. Context rot is not a de-
 342 cay with length. It is three mechanisms with different signatures—displacement, competition, and
 343 precedent—of which length is merely the usual way of causing all three at once, and of which only
 344 the first is attention dilution proper. The test we would run next is the pattern-matched, per-head
 345 clamp that would settle whether displacement’s partial necessity is an instrument limitation or a
 346 second channel within displacement itself.

347 6 Limitations

348 Per-condition n is bounded by the context window, so every interval here depends on the paired
 349 analysis of §3; resampling the arms independently inflates each one about $2.5\times$, enough to report
 350 a real effect as null. The necessity direction of the mediation is only partially established and is
 351 plausibly instrument-limited, since the clamp is uniform across heads. The competition result is
 352 one significant step rather than a gradient: mild overlap is indistinguishable from none, and we
 353 do not claim cost rises with confusability. The competitor-closure rescue is substantial, not total.
 354 Its residual is not distinguishable from zero, but the point estimate leaves $\sim 40\%$ of the gap unex-
 355 plained, closure covers verbatim option-name mentions only, and the parsed-only contrast against
 356 the random-closure control sits exactly at the interval boundary. The instruction-canary null is a
 357 floor effect, the WildChat figures are summary values from teacher-forced analyses, and the causal
 358 program runs on one model family. The precedent results use one instruction family, graded by a
 359 rule-based checker at $n=40$ per cell. The carrier of the demonstrated-format mode is unidentified:
 360 it is decodable and installable, but no linear direction we tried erases it, so we localize the deci-
 361 sion neither to a layer nor to a direction. The accuracy null holds for localized tasks; genuinely
 362 length-dependent single-task settings are where dilution is the point, and are out of scope by design.

363 References

- 364 R. Agarwal et al. Many-shot in-context learning. *NeurIPS*, 2024.
 365 C. Anil et al. Many-shot jailbreaking. *NeurIPS*, 2024.

366 A. Camassa and B. Shiller. Do as I say, not as I do: instruction-induction conflict in LLMs. *arXiv:2605.20382*,
367 2026.

368 F. Cuconasu et al. The power of noise: redefining retrieval for RAG systems. *SIGIR*, 2024.

369 G. Davidson, T. Gureckis, B. Lake, and A. Williams. Do different prompting methods yield a common task
370 representation in language models? *NeurIPS*, 2025.

371 V. Dongre et al. When attention closes: how LLMs lose the thread in multi-turn interaction. *arXiv:2605.12922*,
372 2026.

373 R. Hendel, M. Geva, and A. Globerson. In-context learning creates task vectors. *Findings of EMNLP*, 2023.

374 D. Hendrycks et al. Measuring massive multitask language understanding. *ICLR*, 2021.

375 K. Hong, A. Troynikov, and J. Huber. Context rot: how increasing input tokens impacts LLM performance.
376 Chroma technical report, 2025.

377 C.-Y. Hsieh et al. Found in the middle: calibrating positional attention bias improves long context utilization.
378 *Findings of ACL*, 2024.

379 P. Laban, H. Hayashi, Y. Zhou, and J. Neville. LLMs get lost in multi-turn conversation. *arXiv:2505.06120*,
380 2025.

381 M. Levy, A. Jacoby, and Y. Goldberg. Same task, more tokens: the impact of input length on the reasoning
382 performance of large language models. *ACL*, 2024.

383 N. F. Liu et al. Lost in the middle: how language models use long contexts. *TACL*, 2023.

384 T. Lieberum et al. Gemma Scope: open sparse autoencoders everywhere all at once on Gemma 2. 2024.

385 N. Mu et al. A closer look at system prompt robustness. *arXiv:2502.12197*, 2025.

386 OLMo Team. OLMo 2: open language models with a full post-training recipe. 2024.

387 F. Shi et al. Large language models can be easily distracted by irrelevant context. *ICML*, 2023.

388 A. Fansi Tchango et al. DDXPlus: a new dataset for automatic medical diagnosis. *NeurIPS Datasets and
389 Benchmarks*, 2022.

390 E. Todd et al. Function vectors in large language models. *ICLR*, 2024.

391 C. Wang and Y. Sun. Unable to forget: proactive interference reveals working memory limits in LLMs beyond
392 context length. *ICML Workshop on Long-Context Foundation Models*, 2025.

393 J. Ward, P. Riechers, and A. Shai. Rank-1 LoRAs encode interpretable reasoning signals. *NeurIPS Workshop
394 on Mechanistic Interpretability*, 2025.

395 J. Wei et al. Larger language models do in-context learning differently. *arXiv:2303.03846*, 2023.

396 Q. Zhang et al. Tell your model where to attend: post-hoc attention steering for LLMs. *ICLR*, 2024.

397 W. Zhao et al. WildChat: 1M ChatGPT interaction logs in the wild. *ICLR*, 2024.

398 A Background and related work

399 **Length as the suspected cause.** Most evidence for context rot comes from setups where the
400 answer-bearing information sits inside a single long input. Liu et al. (2023) showed that accuracy de-
401 pends strongly on *where* in the context the relevant passage sits, dipping when it falls in the middle.
402 Levy et al. (2024) held a reasoning task fixed and padded the input with task-irrelevant text, find-
403 ing degradation well before the models’ advertised context limits. Hong et al. (2025) ran a broad
404 sweep over 18 models and found that reliability falls with input length even on tasks as simple as
405 retrieval and replication, and that the fall is not uniform: it depends on how similar the needle is to
406 the question, and on whether distractors are present. Laban et al. (2025) report a large multi-turn
407 degradation, but locate its cause in the model committing early to a wrong reading and failing to
408 recover—not in length as such.

Confusable context as a separate suspect. A second literature manipulates the *content* of the surrounding context rather than its length. Shi et al. (2023) insert an irrelevant sentence into grade-school math problems and observe a sharp accuracy drop. In retrieval-augmented generation, Cucinasu et al. (2024) find that documents retrieved as relevant but not containing the answer act as distractors and degrade accuracy. Wang and Sun (2025) show accuracy declining log-linearly as interfering similar updates accumulate, independent of raw context length—the nearest neighbor to our competition result, with no attention instrumentation. Our contribution is to locate the cost: it runs at held-constant *evidence* attention mass and is carried by attention to the competing instances themselves (§4.3).

Instructions versus demonstrations. Demonstrations can override a model’s trained priors (Wei et al., 2023) and, at scale, its safety training (Anil et al., 2024); the same lever is framed as pure benefit in many-shot prompting (Agarwal et al., 2024). Hardcoded assistant turns exhibiting a competing pattern flip instruction-following into pattern-following (Camassa and Shiller, 2026), system-prompt adherence fails under conflicting or adversarial user turns (Mu et al., 2025), and instruction-derived and demonstration-derived task representations are measurably distinct (Davidson et al., 2025). Our eroding pressure differs from all of these: it is benign, self-generated, and contains no conflicting directive anywhere—precedent, not conflict or attack—and we identify the contest’s causal weight and both of its reversals.

Attention as measurement and lever. Closest to our mechanistic question, Dongre et al. (2026) track attention from responses to the system prompt declining over 50 filler turns across four model families, show that hard-masking the instruction out of the window collapses compliance, and decode goal information from the residual stream at high AUC after attention has “closed”. Three differences matter. Their goal-accessibility metric aggregates raw share, which falls by arithmetic as context grows (§2.2); our token-normalized enrichment removes that decline entirely, and the corrected quantity is flat in eroding and non-eroding arms alike. Their causal arm is total ablation—attention necessary, which our system-span clamp confirms—while our clamp is graded and bidirectional, and the restoration direction (compliance recovered against 42 counter-exemplars) is an arm ablation cannot supply. And their filler is always inapplicable; our applicability ladder shows the same model at the same near-zero share surviving or collapsing depending on what the filler demonstrates, a content dependence invisible to fixed-filler designs. On the steering side, Zhang et al. (2024) boost attention on profiled head subsets to improve compliance and Hsieh et al. (2024) recalibrate a static positional attention bias globally; our clamp is the measurement-grade counterpart—bit-identical no-op, solvable dose, span-targeted in accumulating multi-turn context—used to establish when attention mass is and is not the mediating variable.

Compact task representations. In-context demonstrations compress into residual task vectors (Hendel et al., 2023) transported by identifiable heads (Todd et al., 2024), and reasoning capability elicited by finetuning can be captured in a rank-1 adapter whose directions are interpretable (Ward et al., 2025). These are the no-attention-signature channel our precedent mechanism appears to use (§4.5), and our erase-null results bound what such compact readable structure can be assumed to do causally.

449 B Instrument validation

Attention capture. Shares are read from a reconstruction of each layer’s attention at the final position (QK-norm where the architecture applies it, then RoPE, then the additive mask, then softmax), which avoids materializing $N \times N$ attention matrices. The reconstruction matches the framework’s own output_attentions rows to max $|\Delta| = 1.5 \times 10^{-8}$ on OLMo-2 and exactly 0.0 on a GQA architecture (Qwen-2). The capture applies the additive attention mask, which is what makes it valid *under* a mask-based intervention: a capture that ignores the mask still matches on plain forwards (a causal mask’s last query row is all zeros) while silently reporting unclamped attention during a clamp.

Clamp. At scale 1.0 the clamp is bit-identical to the unhooked model (max $|\Delta|$ logits = 0.0), because it adds $b=0$ to the existing mask rather than reimplementing attention. The bias is uniform across heads, so a span’s aggregate share is hit by bisection on b ; all solved levels in this paper land

461 within $\sim 10^{-4}$ of target. Setting a span’s scale to 0 fills its key columns with the mask minimum—
462 closure, the same operation as a causal mask. Interpretation is restricted to biases well clear of
463 near-ablation: levels requiring -4.7 to -6.1 nats produce degenerate behavior (the model answers
464 “A” 110/110) and are excluded.

465 C Task and filler specifications

466 **Probe construction.** DDXPlus probes are 5-option differentials with the vignette as evidence.
467 Options are shuffled per probe: DDXPlus lists the differential in rank order, so unshuffled gold is
468 the letter “A” in 71.4% of probes, and arms that differ in letter bias then differ in accuracy for free.
469 Items with fewer than 5 options are excluded (26.7% of raw cases; some are answerable from a
470 single option without the vignette). Generation runs at 256 new tokens: shorter caps truncate the
471 reply component that formats put last, biasing exactly the metric under study.

472 **Format instruction and grader.** The clinical template requires ANSWER: with a letter and
473 SUPPORTING: with at least two findings quoted from the vignette. Compliance requires the tem-
474 plate; accuracy is scored separately and more permissively (a letter offered in prose, or alone on
475 the reply’s first line, is scoreable for accuracy while remaining non-compliant). The grader was vali-
476 dated against real generations from every condition; graders written against imagined output formats
477 systematically mis-score exactly the conditions where the treatment changes the output format.

478 **Filler streams.** code: 30 synthetic request→Python-function tasks on one fixed template. gsm8k:
479 grade-school math answered in the model’s own worked prose. mmlu: 4-option MCQ (medical
480 subjects excluded) answered with a bare letter. Filler replies are the model’s own (up to 200 tokens;
481 mmlu answers truncated to the letter), so each arm demonstrates the shape the model itself produces
482 for that stream. The arms are compared at matched fill, not matched depth: mmlu accumulates
483 ~ 0.018 fill per turn against code’s ~ 0.056 .

484 **Canaries.** The adherence and system-clamp arms use a three-part canary instruction (reply prefix
485 marker, suffix tag, and a forbidden phrase); the forbidden-phrase canary is satisfied trivially by short
486 replies, so two canaries are informative.

487 D Example transcripts and generations

488 Both examples are the first probe of their committed runs, reconstructed byte-exactly from the run’s
489 seed and validated against the stored artifacts (token counts, pathology, gold); the generations are
490 quoted verbatim from each run’s stored turns.csv, truncated where the 32-token generation cap
491 truncated them. Transcripts are abridged; [...] marks elided text.

492 **Displacement (§4.2).** Session 0’s first depth-21 probe: gold D (acute pulmonary edema), fill 0.50
493 in every arm. The transcript accumulates 21 answered MMLU filler exchanges; the vignette and the
494 question are byte-identical across arms and only the vignette’s position differs—in local it is the
495 user turn directly before the question, in back_10 the same turn sits ten filler exchanges earlier.

496 [user] You are answering a mixed stream of questions. Some are multiple-choice knowl-
497 edge questions; some describe a patient. Answer each one as it arrives.

498 [assistant] Understood.

499 [user] Which of the following ions CANNOT be used as a dopant in germanium to make
500 an n-type semiconductor? A) As B) P C) Sb D) B. Reply with only the letter. . .

501 [assistant] D

502 [...] 19 more filler exchanges . . .]

503 [user] Patient: 76-year-old Female. Chief complaint: Are your symptoms worse when
504 lying down and alleviated while sitting up. Symptoms: pain (tedious, sensitive, heavy) in
505 the lower and posterior chest, intensity 9, radiating to biceps, chin, jaw, shoulders; shortness
506 of breath; bouts of choking that wake you up at night; swelling in ankles, calves, tibia [...] History: fluid in the lungs; dialysis; high blood pressure; heart attack or angina; heart
507 failure [...] failure [...]

509 [assistant] Noted.

510 [user] For the patient described earlier, most likely diagnosis: A) Pulmonary embolism

511 B) Possible NSTEMI / STEMI C) Anaphylaxis D) Acute pulmonary edema E) Pericarditis.

512 Answer:

513 In back_10 the vignette turn and its Noted. sit above ten of the filler exchanges instead of none.

514 The generations for this item:

515 local: "D" (parsed, correct)

516 back_10: "Given the symptoms described for the patient, such as sudden onset of severe

517 chest pain that is worse when lying down and alleviated by sitting up, shortness of" (un-

518 parsed, wrong)

519 The displaced reply paraphrases the vignette accurately—the model is not blind to the evidence—but

520 never commits to a letter; back_2, back_5 and back_20 fail the same way on this item. This is the

521 unparsed failure mode whose rate rises with fill; the ladder survives restriction to parsed responses

522 (§4.2), where the failures are wrong letters instead.

523 **Competition (§4.3).** Probe 0: gold E (viral pharyngitis). Every arm holds the vignette at the

524 current query (distance 0) and accumulates eight answered DDXPlus cases; only option overlap

525 differs. A representative near_dup context case—four of its five options are the probe’s, its gold is

526 not:

527 [user] Patient: 64-year-old Male [...] Symptoms: [...] diffuse muscle pain; loss of

528 appetite; nasal congestion or a clear runny nose; a cough. History: smokes cigarettes;

529 is immunosuppressed [...] Most likely diagnosis: A) Influenza B) Bronchitis C) Viral

530 pharyngitis D) HIV (initial infection) E) URTI. Answer:

531 [assistant] A

532 [...] 7 more such cases [...]

533 [user] Patient: 13-year-old Male. Chief complaint: nasal congestion or a clear runny

534 nose. Symptoms: burning pain in both tonsils, thyroid cartilage, pharynx, under the jaw,

535 intensity 4; fever; nasal congestion; a cough. History: contact with a person with similar

536 symptoms; lives with 4 or more people; is immunosuppressed [...]

537 [assistant] Noted.

538 [user] For the patient described earlier, most likely diagnosis: A) Bronchitis B) Acute

539 laryngitis C) Influenza D) URTI E) Viral pharyngitis. Answer:

540 The generations for this item:

541 disjoint: "E" (correct)

542 random: "E" (correct)

543 near_dup: "D The patient’s symptoms include a cough, fever, and nasal congestion,

544 which are common in upper respiratory tract infections (URTIs). The fact that the" (parsed,

545 wrong)

546 Under near-duplicate context the model picks URTI—an option that recurs in six of the eight con-

547 text cases—over the gold, and justifies it from symptoms the context’s cases share; with the same

548 vignette over disjoint or random context it answers correctly.

549 E Statistical procedures

550 All intervals are case-resampled bootstrap 95% CIs at 10,000 draws. Clamp and arm contrasts are

551 *paired* over shared items; the paired analysis cuts interval half-widths $\sim 2.5\times$ against independent

552 resampling on the same data. Joint fits are linear probability models (accuracy in percentage points

553 is the quoted scale) with case-resampled coefficient intervals. Probe analyses use leave-one-out

554 cross-validation at episode level with 200-shuffle permutation nulls. The overflow guard skips items

555 that would not fit whole (prompt + generation headroom) and reports per-arm counts: 0/192 in the

556 distance sweep, 4 skipped +15 starved in competition (and the identical panel in the competitor-

557 closure run), 2 in the mmlu erosion arm, and 32—all at the deepest depth, leaving $n=8$ there—in

558 the code arm, whose ladder is therefore interpreted to depth 12 (fill 0.78).

F Per-layer and per-head structure

Attention share is a mean over a layer’s 32 heads, and a mean can hold still while heads cancel, so we measured all 1,024 heads under both accuracy-costing mechanisms.

Under displacement at layer 24, **every head loses evidence mass** from `local` to `back_20`, each significant at Bonferroni, so nothing is hidden by averaging. The loss is close to uniform in proportion—mean fractional drain 0.689 (sd 0.147), uncorrelated with how much mass a head held ($r=0.08$)—and a single uniform odds-scale reproduces 58% of the per-head pattern, which weakens (without eliminating) the reading of §4.2’s partial necessity as pure instrument limitation.

Under competition at the same layer the net is 0.0003 while heads move 0.0026 against a paired sign-flip null of 0.0004 ($p \leq 0.0005$, 2,000 permutations), with 19 of 32 heads individually significant: a small reallocation, about 6% of the evidence’s local share, rather than inaction. Finally, heads that concentrate on the evidence do exist—255 of 1,024 attend it more than its token share warrants, up to 0.626 for one head on a span that is 0.102 of the context—but none of them are at layer 24, whose mean evidence share (0.0408) is among the lowest in the model (vs 0.183 at layer 3 and 0.143 at layer 16). Conclusions about head specialisation drawn from a single layer do not generalise, and we draw none.

G Additional displacement analyses

Tokens versus turns. A partial 2×2 in (gap turns) $\times$ (filler length), total context equalized by padding, dissociates them: two arms matched on *tokens* have effectively identical evidence share (0.0104 vs 0.0108) despite a $4 \times$ difference in turn count, while at matched turns share falls $0.0288 \rightarrow 0.0104$ as the gap grows $446 \rightarrow 1684$ tokens—a 64% cut in the evidence’s attention that costs at most 9.4 accuracy points ($+0.026 [-0.042, +0.094]$). Share regresses significantly on gap tokens and not on gap turns. Attention drain is a function of token distance, as RoPE decay predicts; conversation structure is not what drains it.

The current query’s floor. Accumulation drives the *current query*’s share from ≈ 0.35 down to ≈ 0.15 , and it is natural to ask whether that stops short of a harmful level. It does not. Clamping the query span on cold-start contexts, accuracy is flat from the natural share (0.258, accuracy 0.545) down through 0.20 (0.509), then costs 16.4 points at 0.15 ($+0.164 [+0.036, +0.291]$)—exactly the share accumulation reaches. Accumulation stops *at* the edge of the flat region, not short of it. (Levels below 0.15 require -4.7 to -6.1 nats, near-ablation rather than points on a dose-response, and are excluded from interpretation.) That accuracy nonetheless stays flat under accumulation, while the same share reached by clamping costs points, is itself evidence that in-context learning is actively holding accuracy up.

H Precedent details

The system span’s natural trajectory. Measured in the clamp experiment’s own setup, the system span’s share as prior cases accumulate is 0.166 (0 cases), 0.081 (1), 0.060 (2), 0.037 (4), 0.028 (6), 0.021 (8): an $8 \times$ decline in eight turns from accumulation alone. Clamp ladders must be derived from the setup they are applied to; a share imported from a different context put two arms above natural, which were skipped rather than silently clamped upward.

One contrary example overrides the instruction entirely. With a single prior case whose answer exhibits the canaries, compliance is 3.00/3 at every clamp level down to share 0.021; with a single bare-letter answer, 1.00/3 at every level including unclamped. 720 generations per arm, zero variance in reply length (8 characters in one arm, 1 in the other): the model reproduces the previous assistant turn’s format exactly. Both arms are pinned—one at ceiling because the format is available from the transcript, one at floor because the contrary example already won—so the clamp has nothing to move. Only the neutral condition (no assistant turn anywhere) exposes the instruction’s causal necessity reported in §4.4. A “no demonstration” arm whose prior turn answers with a bare letter is not an absence of demonstration; it is a counter-demonstration.

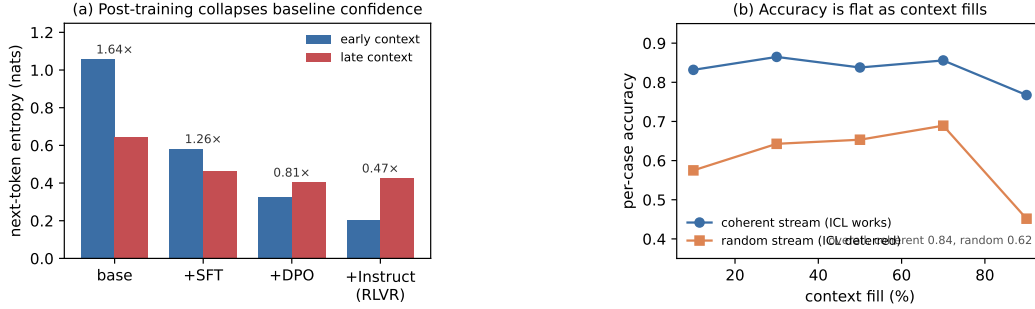


Figure 5: **Signature details.** (a) OLMo-2’s post-training chain collapses baseline confidence stage by stage; the within-context ratio *falls* across stages, so alignment installs a level shift, not a steeper slope. (b) Accuracy is flat with fill in both the coherent and the random-subject stream; the random stream is lower throughout (harder subjects), not sloped.

607 **Exemplar closure.** At depth 42, closing the demonstrated answer spans’ key columns at genera-
 608 tion time (scale 0; §2.3): all-answer closure 0.000 compliant, dose-matched partial closure 0.000,
 609 filler-question closure 0.132 (consistent with pure renormalization of the surviving spans, the sys-
 610 tem’s included), size-matched random-token closure 0.000. Accuracy moves within noise. Reading
 611 the exemplars at generation time is not what sustains the erosion.

612 **Probes.** Probe 1 (instruction presence): trained at depth 0 to separate the format system prompt
 613 from a token-length-matched neutral twin; transfer AUC 1.000 at every mmlu depth $0 \rightarrow 42$ (per-
 614 mutation nulls 0.49–0.50, $p=0.000$, $n=80/76$). The only depth trend is concentration: mean-over-
 615 layers AUC $0.985 \rightarrow 0.791$, peak layer drifting L1–2 $\rightarrow$ L11–14. Probe 2 (upcoming compliance):
 616 within gsm8k’s mixed cells (same depth, fill, and filler; only the outcome differs; $n=80$), LOO-AUC
 617 0.822 at stack layer 21 (null 0.485, $p=0.000$), crossing 0.8 from layer 18. Vector geometry: the
 618 mmlu and gsm8k mode vectors (deep minus shallow mean differences) have median cosine $+0.746$
 619 across layers—two textually opposite demonstrated styles shift the residual stream in largely the
 620 same direction, with the caveat that generic deep-context components are common to both.

621 **Steering and erasure.** Install: the mean-difference vector at stack layer 21, applied at the fi-
 622 nal prefill position and every decode step at matched norm, destroys the instructed format in a
 623 demonstration-free context (0.000 vs 0.525 compliant under the norm-matched random control; nat-
 624 ural 0.875), with replies reproducing the demonstrated registers verbatim; the collateral accuracy
 625 cost (0.175 vs 0.375) is consistent with deep-context components inside the mean-difference vec-
 626 tor. A $3\times$ dose breaks generation for real and random alike—controls must be matched per dose.
 627 Erase: four strategies all null with clean controls—the mean-difference direction projected out at one
 628 layer and at eleven (the eleven-layer projection actively harms while its random control is harmless),
 629 and Probe 2’s own reader direction projected out at its own layer, both in-distribution and trans-
 630 ferred. Iterative re-probing on the captured states shows the layer-21 linear code is rank- ≈ 2 (AUC
 631 $0.822 \rightarrow 0.619$ after one fitted projection, 0.505 after two), so the erase nulls are not redundancy;
 632 the behavioral decision does not consume the linearly decodable component.

633 I Signature details

634 **Post-training chain.** Replaying one probe across OLMo-2-7B’s base $\rightarrow$ SFT $\rightarrow$ DPO $\rightarrow$ Instruct
 635 chain (identical cases and orders) shows early-context entropy collapsing monotonically, $1.06 \rightarrow$
 636 $0.58 \rightarrow 0.33 \rightarrow 0.20$, with the largest single drop at base $\rightarrow$ SFT (Fig. 5a). The “collapses as context
 637 fills” framing is mostly a base-model ICL effect plus a floor: the within-context ratio *falls* across
 638 stages ($1.64 \rightarrow 0.47$), because aligned models start near a confidence floor.

639 **WildChat.** Median within-conversation $\text{corr}(\text{entropy}, \text{depth})$ is -0.02 on organic dialogue. The
 640 homogeneity partition (tertiles of inter-turn similarity) gives late/early ratios 0.897 (homogeneous)
 641 vs 1.001 (heterogeneous), partial $r = -0.151$ controlling for length.

642 **A proposed mechanism that fails causally.** Clamping the boundary-detector SAE feature
643 (Gemma Scope F90871, Lieberum et al., 2024) back to its clean level on held-out fatigued cases
644 moves entropy the *wrong* way ($0.442 \rightarrow 0.465$ vs clean 0.293), leaves accuracy flat, and a random
645 feature of similar magnitude perturbs entropy at least as much.

646 **Attention and errors point the other way.** Conditioning on fill, the cases OLMo-2 answers
647 *wrong* have *higher* current-query attention than the ones it gets right (pooled $\Delta = +0.045$
648 $[-0.003, +0.097]$, $n=115$; sign positive in every fill bin and at every probed layer). Errors are asso-
649 ciated with *fixating* on the query; correct answers spread attention onto the accumulated cases—the
650 per-case fingerprint of the in-context learning that keeps accuracy up. The “rot” and the within-
651 context predictor of a correct answer point in opposite directions.