
Context Rot Is Two Mechanisms: Displacement Acts Through Attention Mass, Competition Does Not

Anonymous Author(s)

Affiliation

Address

email

Abstract

Long conversations are said to wear language models down. The phenomenology is easy to elicit—as context fills, output entropy collapses several-fold and the last token’s attention drifts off the system prompt and the current query onto recent text—but the causal claim behind it has never been tested inside a single harness, because the standard setups confound *accumulation* (more context) with *dilution* (the answer-bearing tokens becoming a smaller, more distant fraction of it). We separate them. Accumulating **individually localized** tasks, where the evidence for the current answer always sits at the current query, we reproduce the full signature battery across four model families and find **no accuracy cost** and no loss of instruction adherence. Holding items, model, fill and metric fixed and moving only *where the evidence lives*, the cost appears at once: displacing it costs 0.19–0.21 accuracy, and in a joint fit distance carries the coefficient ($\beta = -0.0076$ [$-0.0117, -0.0035$]) while fill carries none. We then show this cost is **causally mediated by attention mass**. Clamping the evidence’s attention share at its original position, with nothing moved, reproduces **114%** of the displacement penalty ($+0.202$ [$+0.138, +0.267$], landing indistinguishably on the displaced arm); a dose-response sweep over the share recovers the same effect to within 0.004 and shows the mass→accuracy curve is smooth and graded, with no threshold anywhere in it. The drain itself is positional in *tokens*, not turns. Holding distance and fill fixed and varying only how *confusable* the accumulated context is isolates a *second and separate* cost: near-duplicate context is worth -0.085 [$-0.140, -0.030$] while leaving the evidence’s attention mass untouched (-0.0003 [$-0.0009, +0.0004$], where the measured dose-response predicts 2% of the observed effect). So context rot is two mechanisms, not one—displacement acts through attention mass and competition does not—and needle benchmarks vary both at once, which is why they have not been told apart. Meanwhile the signatures are in-context comfort: the entropy collapse vanishes on organic WildChat dialogue and tracks conversation homogeneity, not length, and across OLMo-2’s post-training chain it is a baseline-confidence level shift installed mostly by SFT. Context rot, as measured, is not a decay of competence with length: accumulation alone is free, and what costs accuracy is the evidence being displaced or contested—one of which is attention dilution and one of which is not. *We also withdraw a positive result from an earlier version of this work (§4).*

1 Introduction

A recurring worry about long conversations is *context rot*: as turns accumulate, the model is said to degrade. The phenomenology is real. On a repeating multiple-choice task, instruction-tuned

Table 1: **Distance is the variable that matters** (OLMo-2-Instruct, $n=192$ per arm, chance = 0.200, fill 0.688 in every arm). Evidence attention share is measured at layer 24 on the same forwards. Case-resampled bootstrap 95% CIs.

arm	local	back_2	back_5	back_10	back_20
accuracy	0.464	0.359	0.292	0.250	0.276
cost vs local	—	+0.104	+0.172	+0.214	+0.188
95% CI	—	[+.005, +.203]	[+.073, +.266]	[+.120, +.307]	[+.094, +.281]
evidence share @L24	0.0408	0.0363	0.0320	0.0195	0.0124

models become dramatically more confident as context fills—next-token entropy drops 3–4 $\times$ on Qwen-2.5-7B and Llama-3.1-8B, in both question orders—and the last token’s attention shifts systematically away from the system prompt and the current query toward the most recent prior cases, with the distribution diffusing (at layer 24 of OLMo-2-Instruct: system $\leftrightarrow$ fill -0.93 , recent $\leftrightarrow$ fill $+0.89$, current $\leftrightarrow$ fill -0.71 , entropy $\leftrightarrow$ fill $+0.95$, all monotone in fill). By every visual diagnostic this is a strong effect that grows with context.

The tempting reading is that the model is being worn down by length. But almost every context-rot evaluation embeds the answer-bearing information inside *one long task*—a long document, a buried needle, a growing codebase. There, longer context mechanically *dilutes* the relevant tokens among irrelevant ones, so a measured degradation conflates the cost of accumulation per se with the cost of the target being harder to attend to (“lost in the middle,” Liu et al., 2023). These cannot be told apart in that setup, and the distinction matters practically: an agent transcript of finished, locally-scoped steps accumulates without diluting, and the two accounts make opposite predictions about it.

In this paper we separate them inside one harness. We accumulate **individually localized** tasks, so that context length and the dilution of the answer-bearing evidence become independent knobs, and we intervene on each in turn. Accumulation alone costs nothing. Moving the evidence k turns back, at identical fill and byte-identical questions, costs 0.19–0.21 accuracy (Table 1).

That cost is *causally mediated by attention mass*. A clamp that sets a span’s post-softmax attention share lets us remove the evidence’s mass while leaving it exactly where it is: doing so reproduces 114% of the displacement penalty, and a dose-response sweep over the share recovers the same endpoint to within 0.004 across two separately-run experiments.

A second cost is not mediated that way at all. Holding the evidence at the current query and varying only how *confusable* the accumulated context is, near-duplicate context costs a further 0.085 accuracy while the evidence’s attention share does not move measurably—2% of what the measured dose-response would require. Taken together, context rot is two mechanisms with different signatures, and a needle-in-a-haystack benchmark varies both at once, which is why they have not been told apart.

Our contributions are as follows:

- A harness that makes accumulation and dilution independent, by accumulating individually localized tasks whose evidence never moves. In it, accumulation alone costs no accuracy and no instruction adherence, with bounded nulls rather than point estimates.
- A causal mediation result for displacement: removing the evidence’s attention mass with nothing moved reproduces 114% of the displacement penalty, and the mass $\rightarrow$ accuracy relationship is smooth and graded with no threshold in it.
- A dissociation establishing a *second* mechanism: competition costs accuracy at constant attention mass, so “attention dilution” is the right account of displacement and the wrong account of competition.

2 Preliminaries

Localized task streams. Our harness accumulates **individually localized tasks**: a stream of self-contained 5-option medical cases (DDXPlus, Tchango et al., 2022) or discrete factual questions (MMLU, Hendrycks et al., 2021). Each answer depends only on the *current* question, which always sits at the end of the context; prior turns are never required to answer it. Accumulation therefore grows the context without ever diluting the information the current answer needs. A reversed-question-order

control removes difficulty-ordering confounds. Because a 4–32k window holds only tens of cases, we pool many independent accumulation sessions.

The dilution knob. The design’s real value is that dilution becomes an *independent knob*. Holding the item, the model, the total fill and the metric fixed, we can move the evidence k user turns back into the accumulated transcript, with the question text byte-identical across arms and the same filler in every arm. Distance and fill, welded together in a long-document setup, move independently here. All causal experiments run on OLMo-2-7B-Instruct at layer 24, seed 42, with an overflow guard that skips rather than truncates every item that would not fit whole—truncating a long item near the window edge manufactures exactly the late-window cost under study.

The attention-mass clamp. To intervene on attention rather than position, we add a clamp that *sets* a token span’s post-softmax attention share: a constant bias on the span’s key columns scales its odds, and softmax renormalizes, so nothing in the attention forward is reimplemented and a scale of 1.0 is bit-identical to the unhooked model. The clamp is uniform across heads.

Analysis. Per-condition n is bounded by the context window, so every clamp experiment is paired over shared items and analysed with a paired bootstrap resampling *cases* (10,000 draws), never heads or turns.

3 Two mechanisms, separated

3.1 Accumulation alone costs nothing

Per-case accuracy does not fall as context fills; it is worst at the cold start and warms up ($\text{corr}(\text{correct}, \text{fill}) = +0.11$ Instruct, $+0.07$ DPO). The obvious objection is that a homogeneous repeating task lets in-context learning mask a hidden decay, so we remove that crutch: in a *random-subject* stream each question is drawn uniformly from all 56 MMLU subjects, so prior context carries no predictive information about the next question—only the answer *format* is learnable. Accuracy is still flat (random: $\text{corr} = -0.02$ $[-0.10, +0.05]$, $n=699$; coherent single-subject: $\text{corr} = +0.01$, $n=1001$). These nulls are *bounded*: the 95% interval on upper-minus-lower-half accuracy excludes declines beyond 4.1 points (coherent) and 9.4 (random). Checkable instruction adherence—a canary system instruction to begin every reply with a marker and end with a tag—stays at ceiling throughout ($\text{corr}(\text{violation}, \text{fill}) = 0$), an honest null that bounds rather than proves, since the canaries were easy.

3.2 Displacement costs accuracy, and attention mass mediates it

We now vary only *where the answer-bearing evidence lives*. Each DDXPlus probe’s vignette is placed k user turns before its question; mean fill is 0.688 in every arm, the question text is byte-identical, and the overflow guard skipped 0 of 192 probes. Every gap’s CI excludes zero (Table 1, Fig. 1a). In a joint fit of accuracy on fill and distance, **distance carries the coefficient** ($\beta = -0.00761$ $[-0.01173, -0.00346]$, significant) and **fill carries none** ($\beta = -0.00725$ $[-0.21006, +0.18658]$). Within the local arm—the one that reproduces the paper’s original design—accuracy is flat with fill ($\beta = -0.294$ $[-0.767, +0.184]$). The effect survives restriction to parsed responses and is then fully monotone ($0.524 \rightarrow 0.413 \rightarrow 0.397 \rightarrow 0.343 \rightarrow 0.338$). One honest qualification: the decline saturates by $k \approx 10$ rather than deepening to $k=20$, and those two arms are not distinguishable from each other. So the same model, on the same items at the same fill, degrades when the evidence is displaced and does not degrade when it is not. The localized null is not a ceiling artifact: these items *can* show degradation, and do, as soon as dilution is reintroduced.

Distance and attention drain move together by construction, so Table 1 is consistent with dilution but does not establish it—a purely positional account predicts the same table. Four interventions separate them.

The drain is real, and observational correlations invert it. Evidence share falls $0.0408 \rightarrow 0.0124$ across the ladder ($r = -0.83$ with distance) while the *question’s* share stays flat, confirming only the evidence moved. A trap worth recording: *within* an arm, higher evidence share predicts *lower* accuracy ($\beta = -11.2$ $[-20.0, -2.6]$, stronger controlling for vignette length). Attention there tracks item difficulty—the model looks harder at confusing vignettes—and has the *opposite sign* to

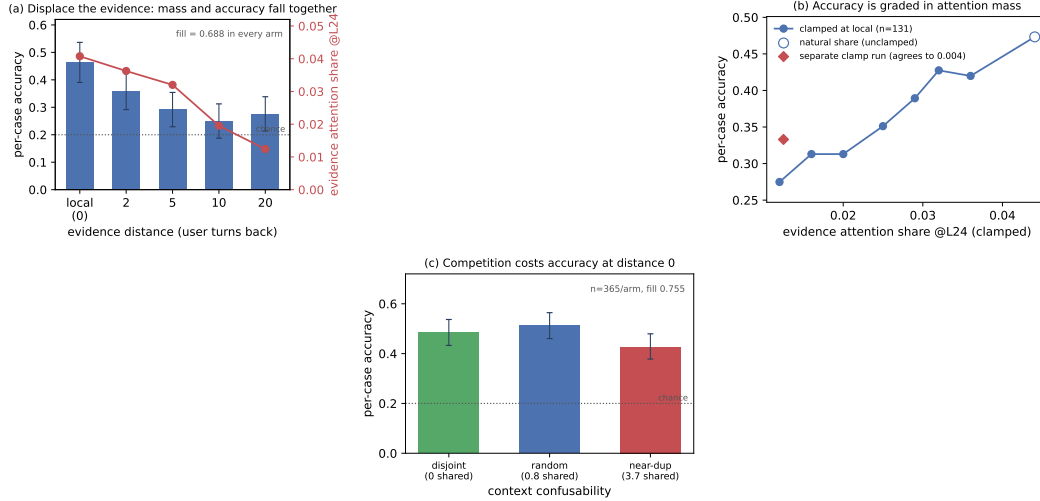


Figure 1: **Dilution costs accuracy; accumulation does not.** (a) Moving the evidence k user turns back, at identical fill and byte-identical questions, drains its attention mass and costs accuracy together. (b) Setting that mass directly, with the evidence left in place, reproduces the penalty and traces a smooth graded dose-response—no threshold. The diamond is an independently-run clamp experiment measuring the same endpoint cut; the two agree to 0.004. (c) At distance 0 and fixed fill, near-duplicate accumulated context costs a further 0.085. Bootstrap CIs resample cases throughout.

the causal effect below. Anyone reading share-against-accuracy correlations off this data without intervening will conclude the reverse of the truth.

Removing the mass is sufficient. Keeping the evidence at `local` and clamping its share down to the *same item's own* `back_20` share costs $+0.202$ [$+0.138, +0.267$] (paired $n=174$) and lands at 0.333 against `back_20`'s 0.365—a difference of -0.025 [$-0.083, +0.035$], indistinguishable. **Mass removal alone reproduces 114% of the displacement penalty, with nothing moved.**

The dose-response is smooth, and replicates itself. Sweeping the evidence's share at fixed position over seven levels (common subset $n=131$ present at every level) gives a monotone decline from 0.473 at the natural share (0.0441) to 0.275 at 0.012 (Fig. 1b). Six of the seven levels differ significantly from the natural share—including a cut of less than a fifth of the mass—and no step is a threshold: the largest adjacent step is 0.053 and the decline is smooth throughout. The endpoint contrast, $+0.198$ [$+0.115, +0.282$], matches the independently-run clamp experiment's $+0.202$ [$+0.138, +0.267$] for the same share change—agreement to 0.004 across two separate runs, which is the strongest internal consistency check in the program. An earlier draft of this work read a *threshold* into two flat contrasts; the sweep refutes it. The relationship is *graded*: a measured slope, not a cliff.

Restoring the mass is not sufficient—probably the instrument. The converse is only partial: clamping the displaced evidence's share back *up* to its `local` level recovers a real but small 32% of the penalty ($+0.055$ [$+0.017, +0.098$]), leaving a significant residual ($+0.123$ [$+0.054, +0.193$]). Our uniform clamp can strip mass faithfully but cannot reconstruct *which* heads should carry the restored mass. Full sufficiency with partial necessity is the signature of an instrument that is faithful in one direction and crude in the other, and we report it as one rather than as a second mechanism. A pattern-matched, per-head clamp is the test that would settle it.

The drain is positional in tokens, not turns. A partial 2×2 in (gap turns) $\times$ (filler length), total context equalized by padding, dissociates them: two arms matched on *tokens* have effectively identical evidence share (0.0104 vs 0.0108) despite a $4 \times$ difference in turn count, while at matched turns share falls $0.0288 \rightarrow 0.0104$ as the gap grows $446 \rightarrow 1684$ tokens—a 64% cut in the evidence's attention that costs at most 9.4 accuracy points ($+0.026$ [$-0.042, +0.094$]). Share regresses significantly on gap tokens and not on gap turns. Attention drain is a function of token distance, as RoPE decay predicts; conversation structure is not what drains it.

157 **On the current query, there is no headroom.** Accumulation drives the *current query*’s share from
158 ≈ 0.35 down to ≈ 0.15 , and it is natural to ask whether that stops short of a floor. It does not. Clamping
159 the query span on cold-start contexts, accuracy is flat from the natural share (0.258, accuracy 0.545)
160 down through 0.20 (0.509), then costs 16.4 points at 0.15 (+0.164 [+0.036, +0.291])—which is
161 exactly the share accumulation reaches. Accumulation does not stop far short of the shoulder; it
162 stops *at* it. (Levels below 0.15 require -4.7 to -6.1 nats, near-ablation rather than points on a
163 dose-response—the model answers “A” 110/110—and are excluded from interpretation.) That
164 accuracy nonetheless stays flat under accumulation, while the same share reached by clamping costs
165 points, is itself evidence that in-context learning is actively holding accuracy up.

166 3.3 Competition costs accuracy at constant attention mass

167 Burying a needle varies two things at once: the evidence becomes distant *and* it becomes surrounded
168 by plausible alternatives. So far we have isolated distance. We isolate the other half by holding the
169 evidence at the current query and fill fixed, and varying only how *confusable* the accumulated context
170 is. Every arm accumulates eight prior DDXPlus cases, each answered in the transcript with its gold
171 letter, so format and in-context-learning affordance are constant; the arms differ only in how much
172 the accumulated cases’ differentials overlap the current probe’s (disjoint 0 shared options, random
173 0.80, near_dup 3.75 of 5, always with a *different* gold, so the context never displays the probe’s
174 answer as a correct one). Paired over $n=365$ probes, accuracy is random 0.512, disjoint 0.485,
175 near_dup 0.427.

176 Near-duplicate context costs -0.085 $[-0.140, -0.030]$ against the natural stream and -0.058
177 $[-0.112, -0.006]$ against disjoint context; in a joint fit within this experiment, **option overlap**
178 **carries the coefficient** ($\beta = -0.021$ $[-0.039, -0.003]$) and **fill carries none** ($\beta = -0.284$
179 $[-0.640, +0.075]$)—the same shape as the distance result, on a different variable. Two controls
180 matter: the low-competition arms must land on §3.2’s local accuracy of 0.464, and both do (+0.049
181 $[-0.037, +0.134]$ and +0.021 $[-0.065, +0.107]$); and context length does not order the arms, since
182 disjoint is the *longest* and mid-accuracy while near_dup is the shortest, so length biases against
183 the result. Restricted to parsed responses only, random $-$ near_dup = +0.082 $[+0.025, +0.138]$
184 survives. The effect is *not* monotone in confusability: random sits above disjoint, not below it,
185 though not significantly (+0.027 $[-0.019, +0.074]$). Mild topical overlap plausibly supplies useful
186 priming over the option space while near-duplication supplies competitors that actively mislead; only
187 the second is large enough to measure here. We therefore claim that near-duplicate context is costly,
188 *not* that cost rises with overlap—one significant step, not a gradient.

189 **And it is a second mechanism, not more dilution.** Repeating the sweep with attention capture
190 instead of generation (same probes, same seeds) shows the headline contrast moves accuracy 8.5
191 points with **no detectable change in the evidence’s attention mass**: random $-$ near_dup =
192 -0.00027 $[-0.00088, +0.00035]$ in evidence share at layer 24. The dose-response above is 6.29
193 accuracy per unit share ($R^2=0.97$), so that share difference predicts an accuracy gap of 0.0017—**2%**
194 **of what is measured**, and 6.5% even at the CI’s upper end. Reproducing this cost through mass
195 would need a share change 50 $\times$ larger. The two contrasts even run opposite ways: random $-$
196 disjoint has a significant *share* difference and no accuracy difference, while random $-$ near_dup
197 has a significant *accuracy* difference and no share difference. **Displacement costs accuracy by**
198 **draining attention mass; competition costs accuracy while leaving it intact.** “Attention dilution”
199 is the right account of the first and the wrong account of the second—and a needle-in-a-haystack
200 benchmark varies both at once, which is precisely why they have not been told apart before.

201 3.4 The confidence signatures are in-context comfort

202 If the entropy collapse were a generic depth effect it should survive on heterogeneous dialogue. It does
203 not. On 150 organic WildChat conversations (Zhao et al., 2024) (Qwen-2.5-7B, teacher-forced over
204 the real history), within-conversation entropy is flat with depth: median late/early ratio 0.99, median
205 within-conversation corr(entropy, depth) -0.02 , and 52% of conversations trend down—a coin
206 flip. Partitioning WildChat by its *own* inter-turn homogeneity isolates the driver: the entropy slope
207 correlates with homogeneity (partial $r = -0.151$ controlling for length), homogeneous conversations
208 collapse (0.897 late/early) while heterogeneous ones are flat (1.001), and because homogeneous
209 conversations are *longer*, length works against the effect.

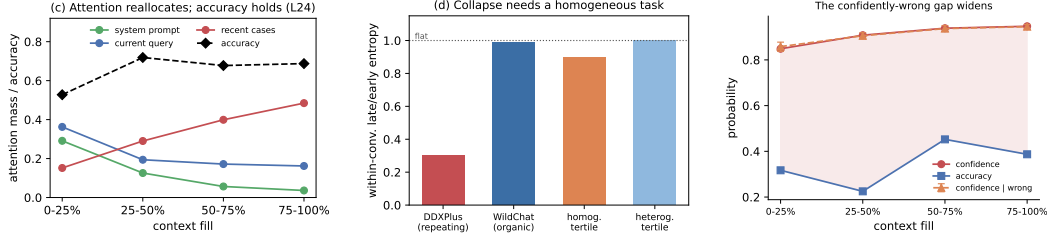


Figure 2: **The signatures are in-context comfort, and the residual hazard is calibration.** (a) Attention reallocates monotonically off the system prompt and current query with fill while accuracy holds. (b) The entropy collapse appears only with a homogeneous repeating task, not on organic WildChat dialogue, and tracks homogeneity rather than length. (c) Confidence rises with fill on wrong answers as much as right, at flat accuracy.

Replaying one probe across OLMo-2-7B’s (OLMo Team, 2024) base→SFT→DP0→Instruct chain (identical cases and orders) shows early-context entropy collapsing monotonically, $1.06 \rightarrow 0.58 \rightarrow 0.33 \rightarrow 0.20$, with the largest single drop at base→SFT. But the “collapses as context fills” framing is mostly a base-model ICL effect plus a floor: the within-context ratio *falls* across stages ($1.64 \rightarrow 0.47$), because aligned models start near a confidence floor. Post-training is a downward *level shift* in baseline entropy, not a steeper collapse slope. Finally, the mechanistic story proposed for the collapse does not survive a causal test: clamping the boundary-detector SAE feature (Gemma Scope F90871, Lieberum et al., 2024) back to its clean level on held-out fatigued cases moves entropy the *wrong* way ($0.442 \rightarrow 0.465$ vs. clean 0.293), leaves accuracy flat, and a random feature of similar magnitude perturbs entropy at least as much.

Consistently, conditioning on fill, the cases OLMo-2 answers *wrong* have *higher* current-query attention than the ones it gets right (pooled $\Delta = +0.045 [-0.003, +0.097]$, $n=115$; sign positive in every fill bin and at every probed layer). Errors are associated with *fixating* on the query; correct answers spread attention onto the accumulated cases—the per-case fingerprint of the in-context learning that keeps accuracy up. The “rot” and the within-context predictor of a correct answer point in opposite directions.

4 Conclusion and Outlook

Limitations. We withdraw a positive result from an earlier version of this work. That version reported a late-window accuracy dip on the random-subject stream at $\geq 80\%$ fill ($-0.141 [-0.249, -0.031]$, $n=91$), read as accumulation finally outrunning in-context learning. Re-running the protocol, our driver turned out to present the *identical* questions as the committed run (per-item agreement 1.000 over 344 items, accuracy 0.6221 both), so the harness is bit-identical and any disagreement is sample composition. Finer bins locate the effect: accuracy is 0.625 at 0.80–0.85 fill ($n=40$), **0.419** at 0.85–0.88 ($n=31$), and 0.703 at 0.88–0.93 ($n=37$). The original run’s maximum fill was 0.8784, so its entire top bin *is* that one trough. Extending the same sessions to 93% gives -0.097 (n.s.); 14 fresh sessions give $+0.090$ (opposite sign); all 26 pooled give $+0.005 [-0.105, +0.092]$. Overflow-guard selection (1/781 skipped) and item length are ruled out. A clamp-based rescue arm was null but too weak an instrument to carry weight. The explanandum does not exist, and the account here no longer needs it. Beyond that: an earlier analysis of these same runs resampled the arms independently rather than pairing over shared items, inflating each interval about $2.5\times$ and reporting one real effect as null. The necessity direction of the mediation is only partially established and is plausibly instrument-limited, since the clamp is uniform across heads. The competition result is one significant step rather than a gradient—mild overlap is indistinguishable from none, and we do not claim cost rises with confusability. The instruction-canary null is a floor effect, the WildChat figures are summary values from teacher-forced analyses, and the causal program runs on one model family. The accuracy null holds for localized tasks; genuinely length-dependent single-task settings are where dilution is the point, and are out of scope by design.

With accumulation, displacement and competition separated inside one harness: accumulation produces a real, monotone reallocation of attention and a real collapse of *confidence*, but no loss of accuracy and no loss of instruction adherence. Displacing the evidence produces a large accuracy cost that is causally mediated by its attention mass, graded in that mass, and positional in tokens.

251 Making the context confusable produces a further cost that is *not* mediated by that mass at all. The
252 literature’s central claim is therefore *correct but misattributed, and under-counted*: context rot is not
253 a decay with length, it is displacement and competition, two mechanisms with different signatures, of
254 which length is merely the usual way of causing both at once.

255 The residual hazard in the localized case is *calibration*, not competence: on the DDXPlus streams
256 logging per-token confidence ($n=154$ pooled cases, two models, both question orders), answer
257 confidence rises $0.85 \rightarrow 0.95$ with fill ($r = +0.72 [+0.64, +0.79]$) at flat accuracy—and equally on
258 *wrong* answers ($0.86 \rightarrow 0.95$; $r = +0.69 [+0.57, +0.78]$)—so the confidently-wrong gap widens by
259 ~ 10 points over a session (Fig. 2c), most consequential exactly where a homogeneous high-stakes
260 stream makes the model surest. The test we would run next is the pattern-matched, per-head clamp
261 that would settle whether the partial necessity above is an instrument limitation or a second channel
262 within displacement itself.

263 References

- 264 D. Hendrycks et al. Measuring massive multitask language understanding. *ICLR*, 2021.
- 265 N. F. Liu et al. Lost in the middle: how language models use long contexts. *TACL*, 2023.
- 266 T. Lieberum et al. Gemma Scope: open sparse autoencoders everywhere all at once on Gemma 2. 2024.
- 267 OLMO Team. OLMO 2: open language models with a full post-training recipe. 2024.
- 268 A. Fansi Tchango et al. DDXPlus: a new dataset for automatic medical diagnosis. *NeurIPS Datasets and*
269 *Benchmarks*, 2022.
- 270 W. Zhao et al. WildChat: 1M ChatGPT interaction logs in the wild. *ICLR*, 2024.