

Chapter recap


Last updated April 2024

Nice work!

Going back to the code from the first challenge:

```
function getFinalAmount(price: number, applyDiscount: boolean) {  
  if (!applyDiscount) {  
    return price;  
  }  
  
  const amount = price - (price * 10 / 100);  
  return amount;  
}
```

TypeScript here helps you with a useful autocomplete experience when you write `getFinalAmount`, as you will get a useful autocomplete showing you the arguments you should provide:

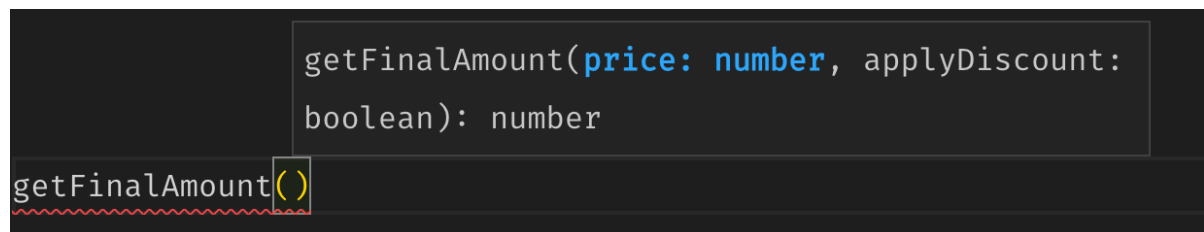

Also, it prevents bugs if you accidentally provide incorrect argument types, for example:

```
getFinalAmount(50, "25%");
```

Argument of type 'string' is not assignable to parameter of type 'boolean'.

In the next chapter, we'll learn about union types. This will finally let us work with more complex and useful examples. See you there!

Learn TypeScript

Chapter recap

- JavaScript has **seven** primitive types: `string`, `number`, `boolean`, `undefined`, `null`, `bigint`, and `symbol`.
- TypeScript provides a type for each of those primitive types.
- You can annotate variable declarations using the same syntax you're used to. The type annotation has to come before the assignment (`=`) sign, for example, `const username: string = "Alex";`
- TypeScript can often infer the type of variable declarations by looking at the assigned value. In those cases, you don't have to write the type as it can be automatically deduced.

Was this helpful?

