



```
i_size = 3072  
i_addr[0] = 50  
i_addr[1] = 58  
i_addr[2] = 76
```

struct sp\_inode  
for the root directory

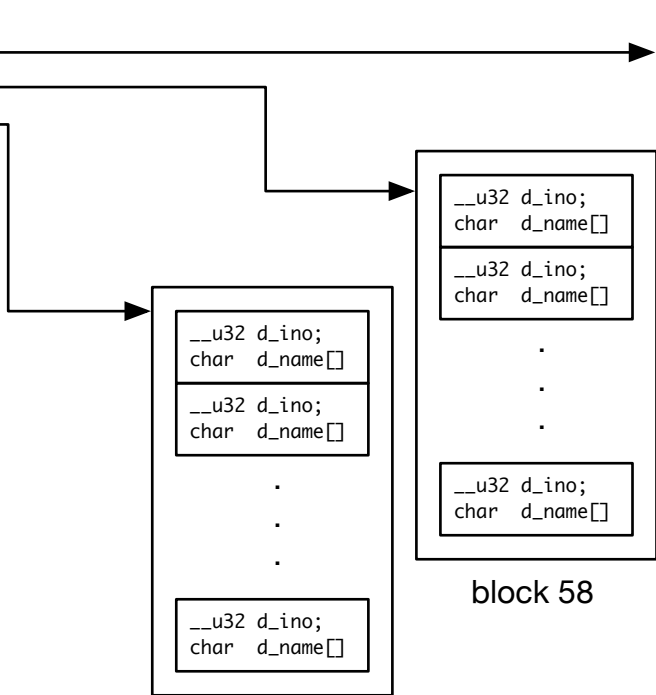

32 entries  
of 32 bytes

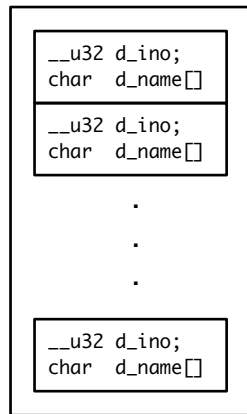

block 50

block 58

block 76