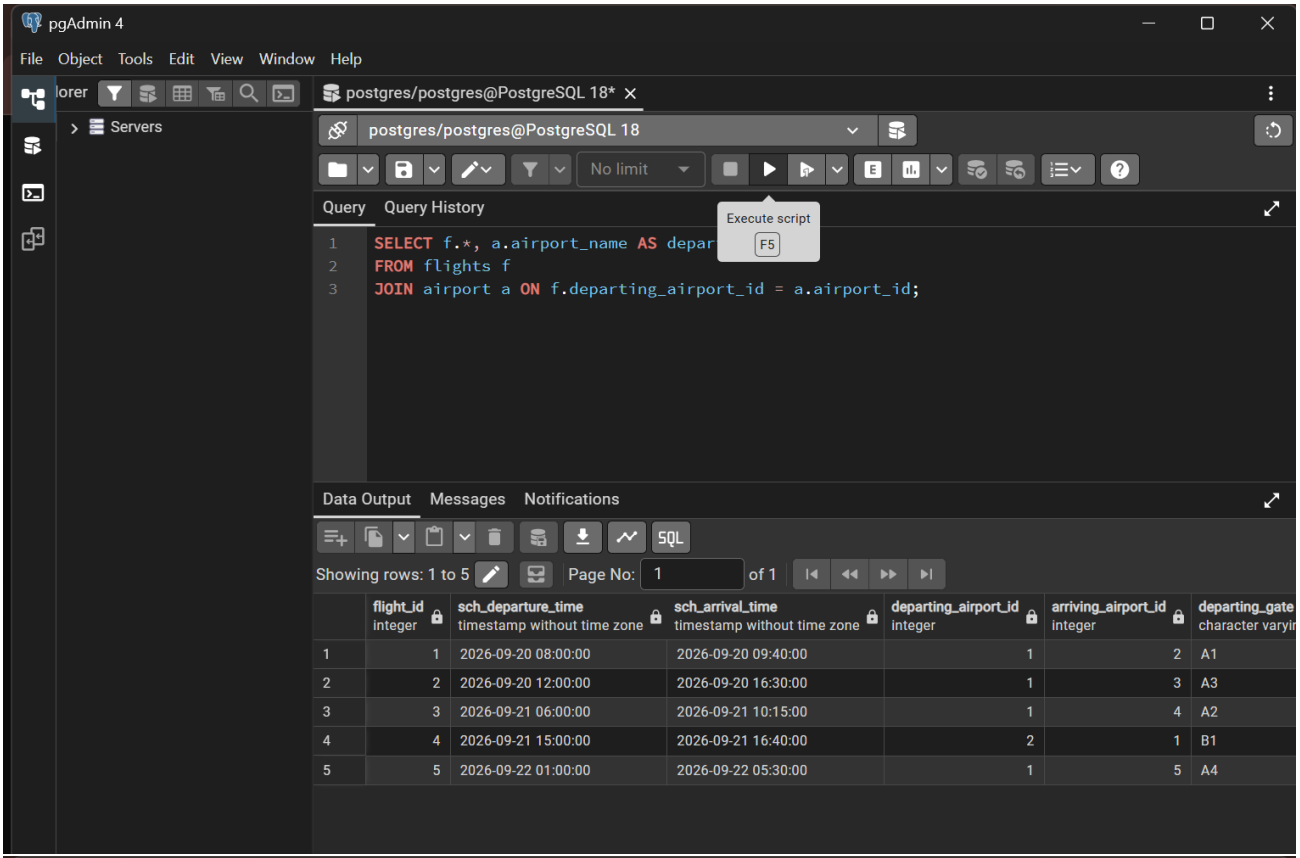
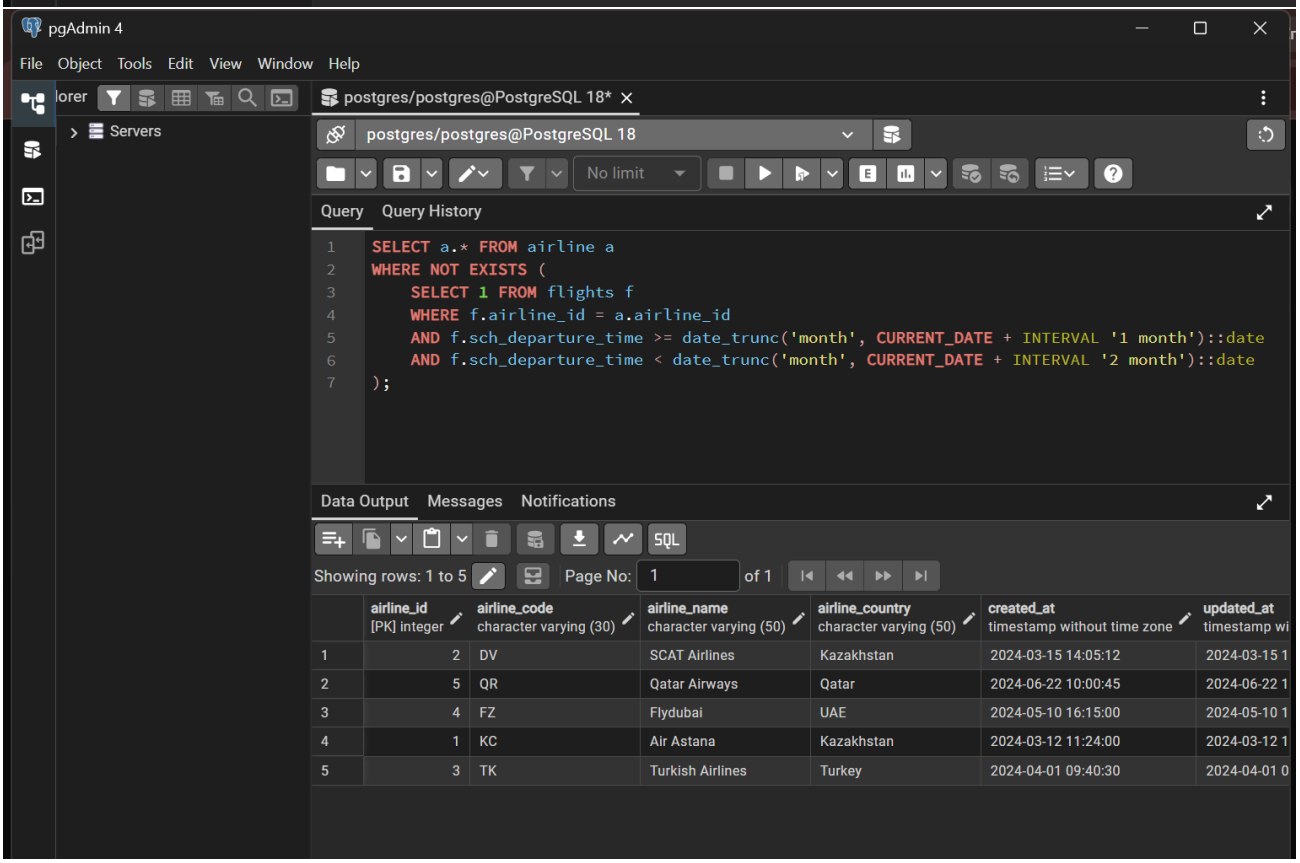
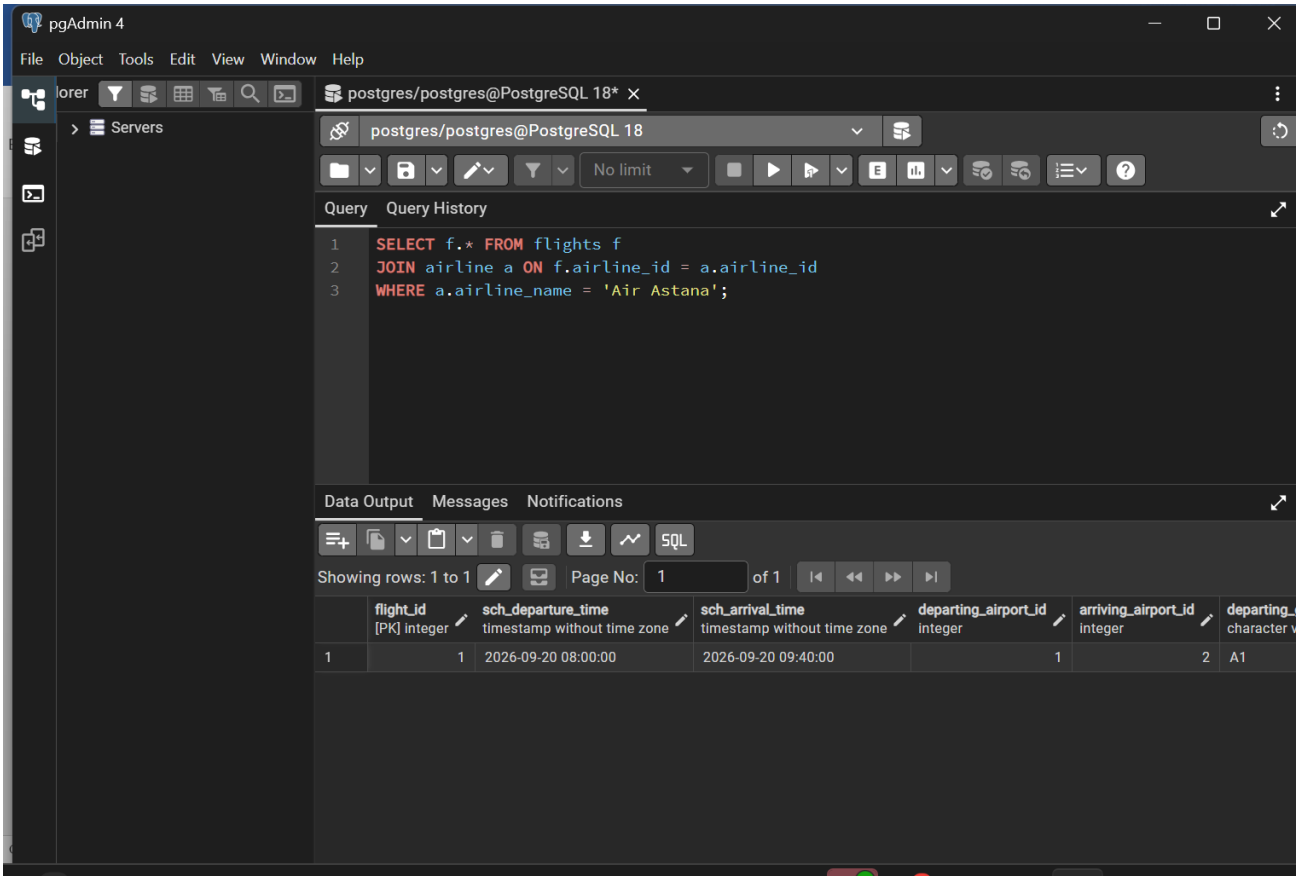
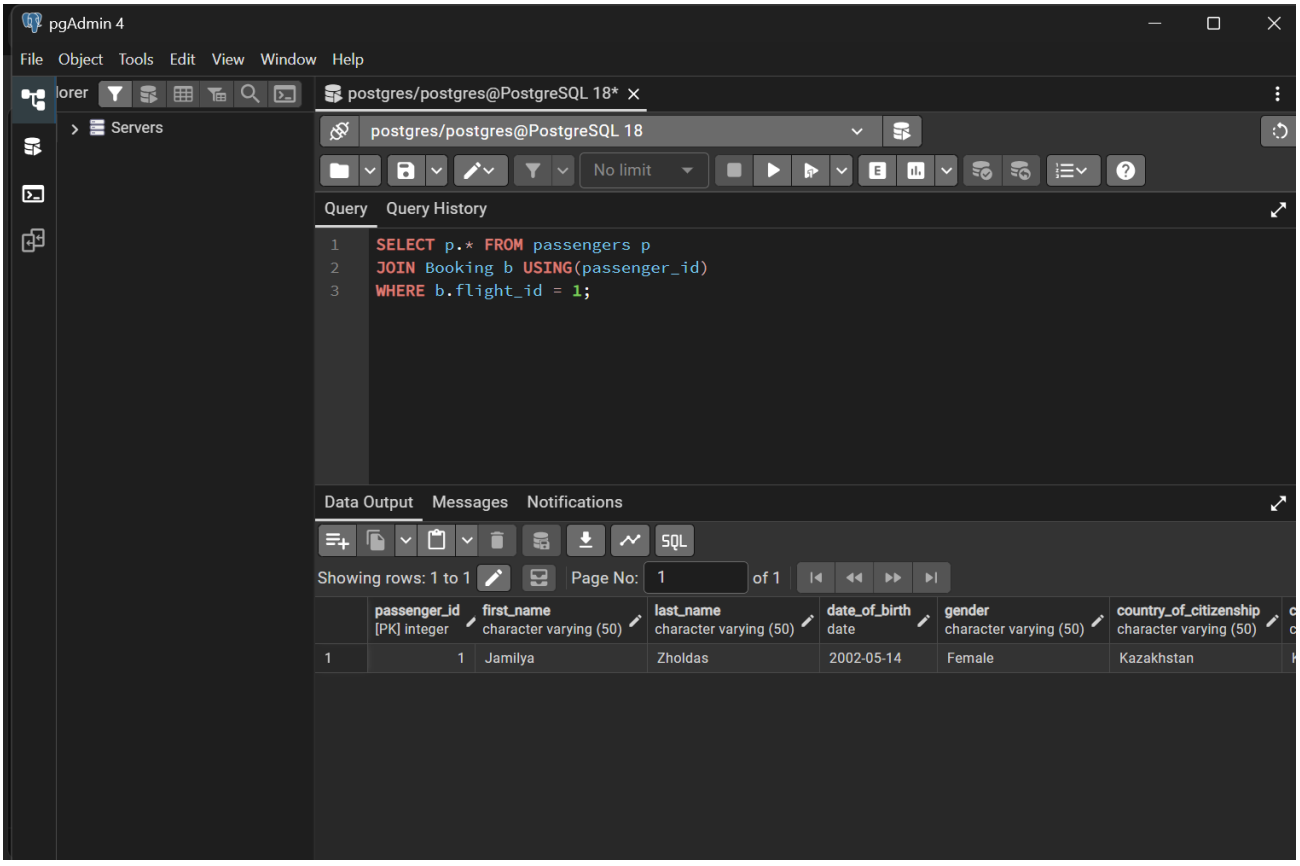
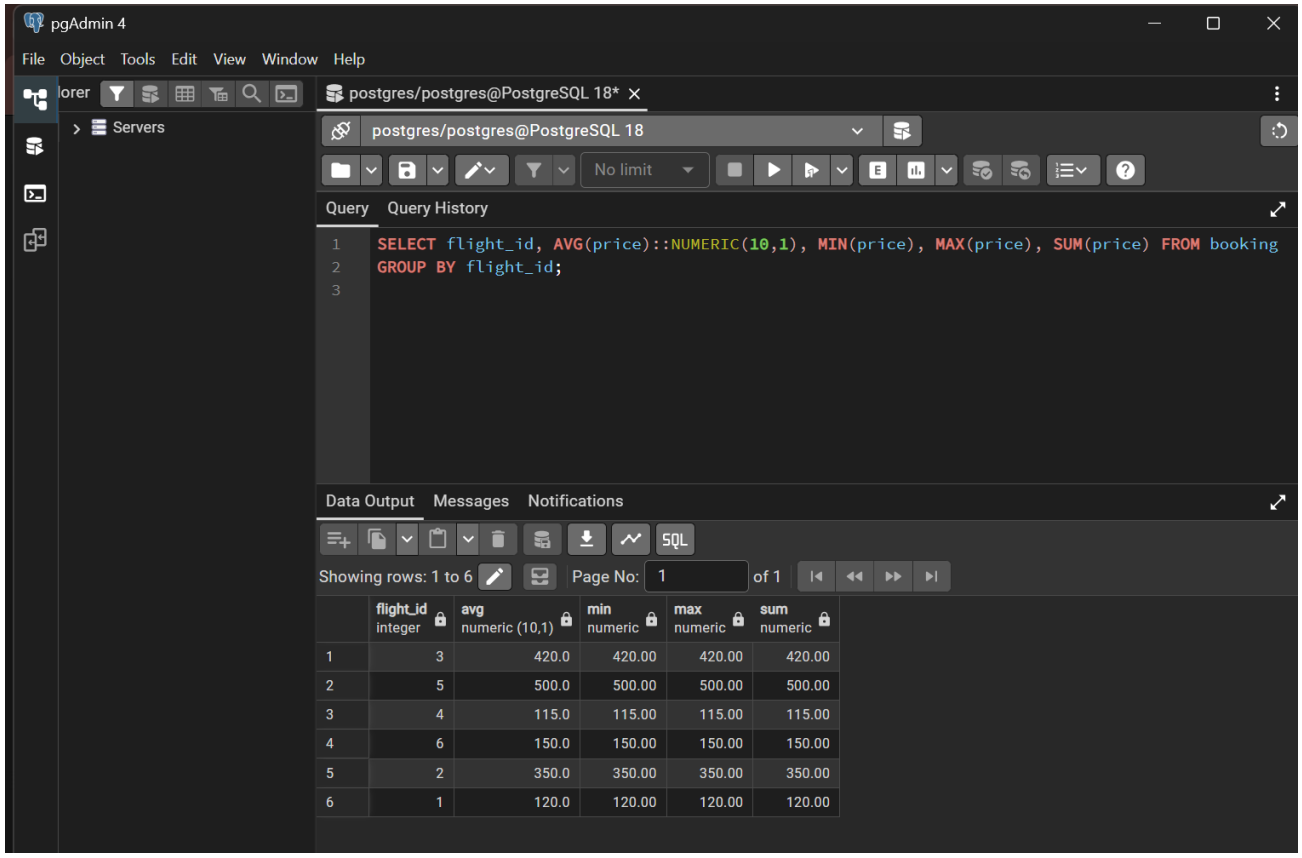
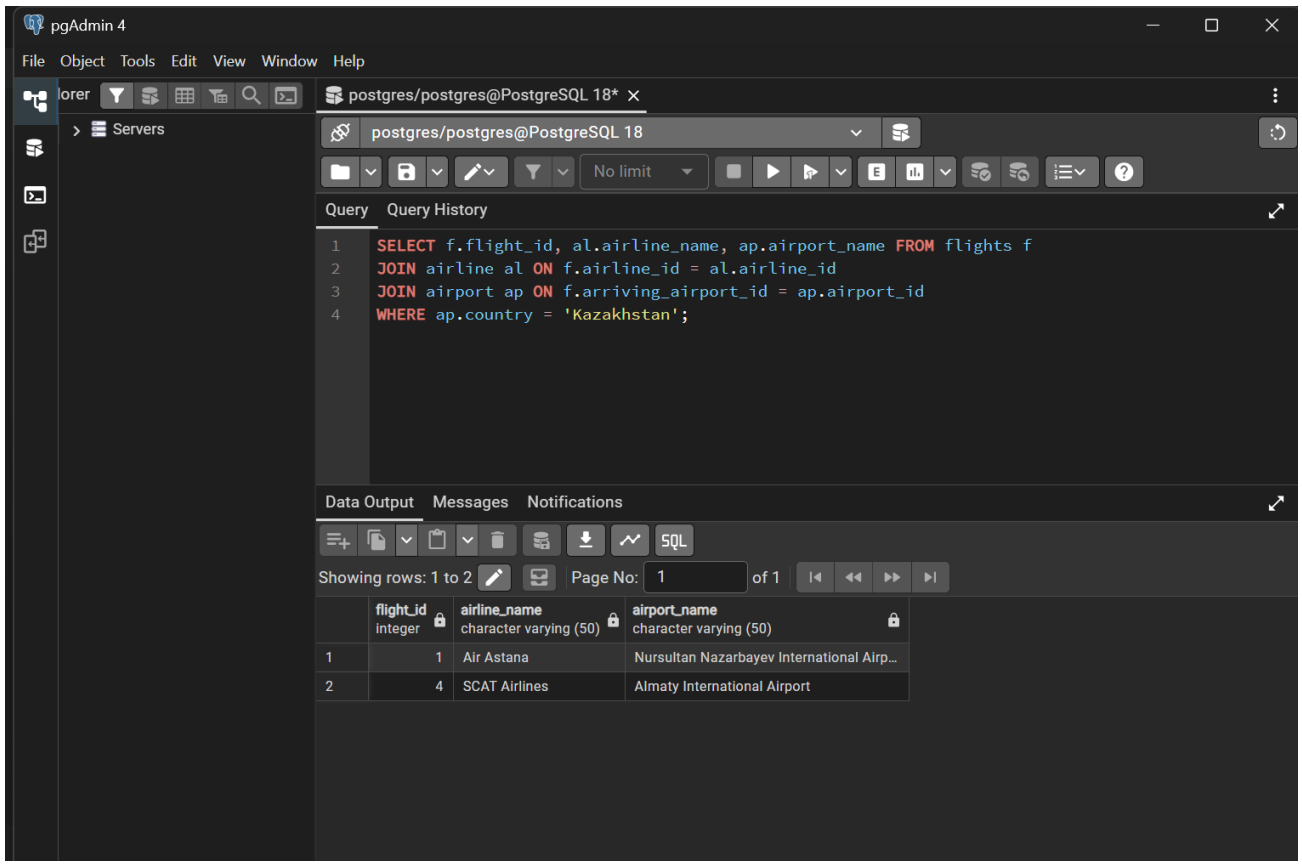

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
Execute script
F5
SELECT f.*, a.airport_name AS depar
FROM flights f
JOIN airport a ON f.departing_airport_id = a.airport_id;
Data Output Messages Notifications
SQL
Showing rows: 1 to 5
Page No: 1 of 1
flight_id integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
departing_gate character varyi
1 1 2026-09-20 08:00:00 2026-09-20 09:40:00 1 2 A1
2 2 2026-09-20 12:00:00 2026-09-20 16:30:00 1 3 A3
3 3 2026-09-21 06:00:00 2026-09-21 10:15:00 1 4 A2
4 4 2026-09-21 15:00:00 2026-09-21 16:40:00 2 1 B1
5 5 2026-09-22 01:00:00 2026-09-22 05:30:00 1 5 A4

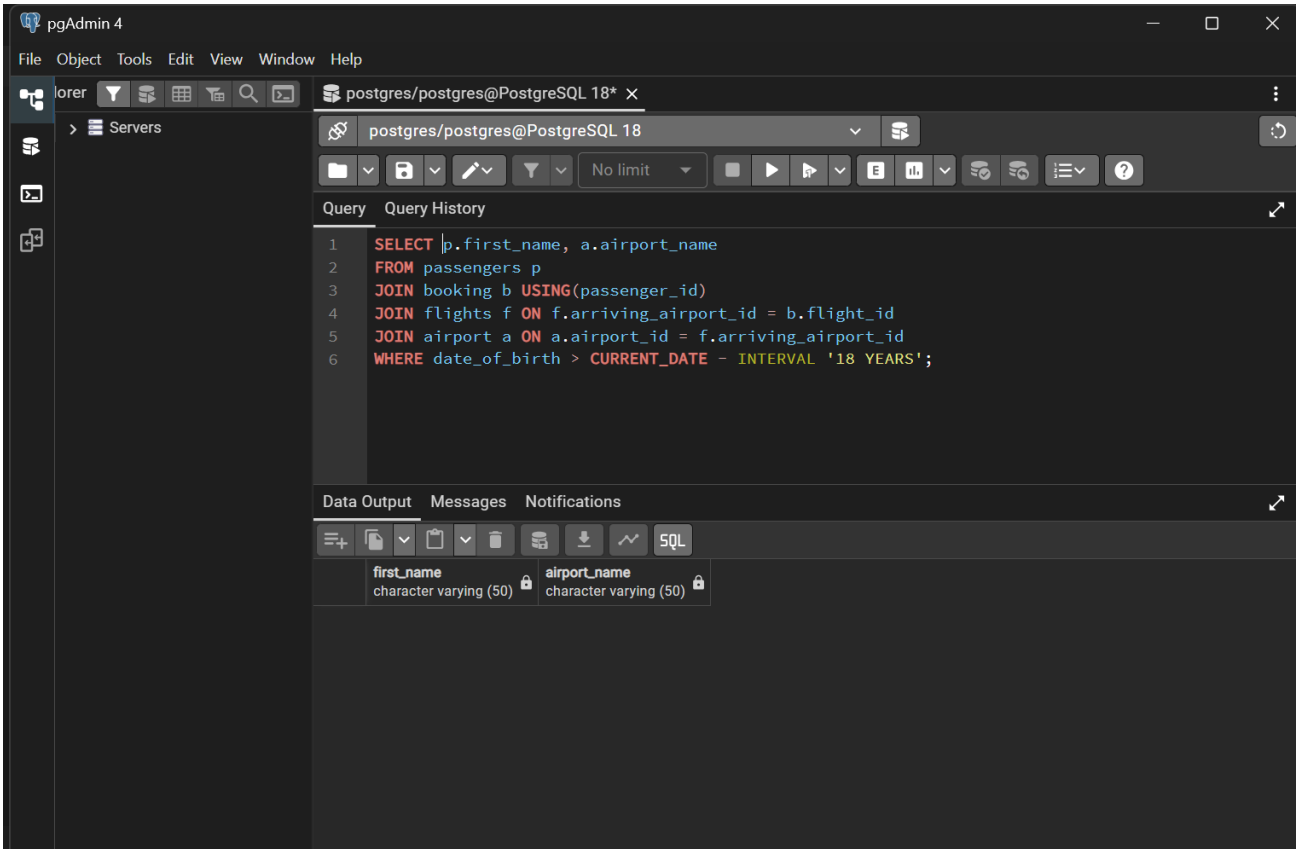

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
SELECT a.* FROM airline a
WHERE NOT EXISTS (
SELECT 1 FROM flights f
WHERE f.airline_id = a.airline_id
AND f.sch_departure_time >= date_trunc('month', CURRENT_DATE + INTERVAL '1 month')::date
AND f.sch_departure_time < date_trunc('month', CURRENT_DATE + INTERVAL '2 month')::date
);
Data Output Messages Notifications
SQL
Showing rows: 1 to 5
Page No: 1 of 1
airline_id [PK] integer
airline_code character varying (30)
airline_name character varying (50)
airline_country character varying (50)
created_at timestamp without time zone
updated_at timestamp wi
1 2 DV SCAT Airlines Kazakhstan 2024-03-15 14:05:12 2024-03-15 1
2 5 QR Qatar Airways Qatar 2024-06-22 10:00:45 2024-06-22 1
3 4 FZ Flydubai UAE 2024-05-10 16:15:00 2024-05-10 1
4 1 KC Air Astana Kazakhstan 2024-03-12 11:24:00 2024-03-12 1
5 3 TK Turkish Airlines Turkey 2024-04-01 09:40:30 2024-04-01 0

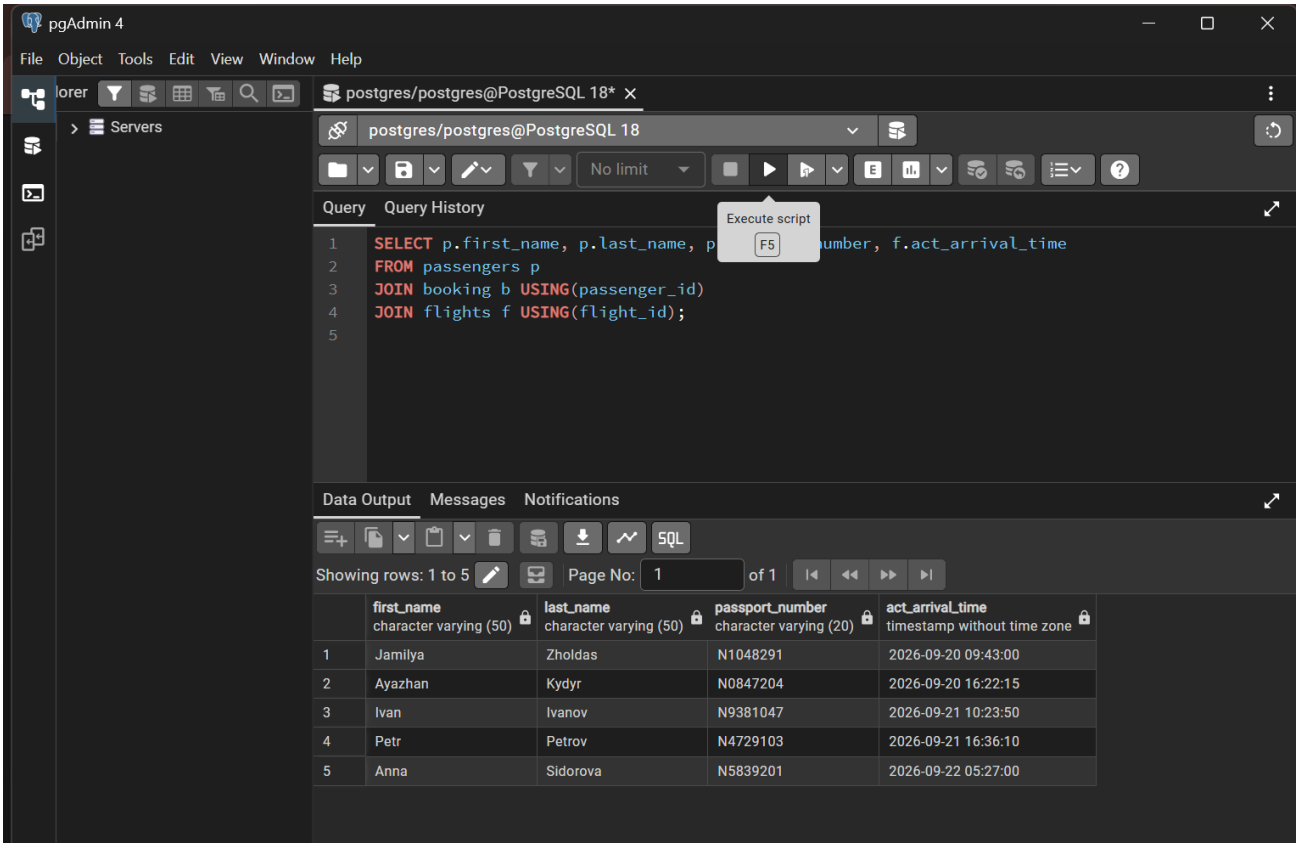

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
SELECT f.* FROM flights f
JOIN airline a ON f.airline_id = a.airline_id
WHERE a.airline_name = 'Air Astana';
Data Output Messages Notifications
SQL
Showing rows: 1 to 1
Page No: 1 of 1
flight_id [PK] integer
sch_departure_time timestamp without time zone
sch_arrival_time timestamp without time zone
departing_airport_id integer
arriving_airport_id integer
1 1 2026-09-20 08:00:00 2026-09-20 09:40:00 1 2 A1

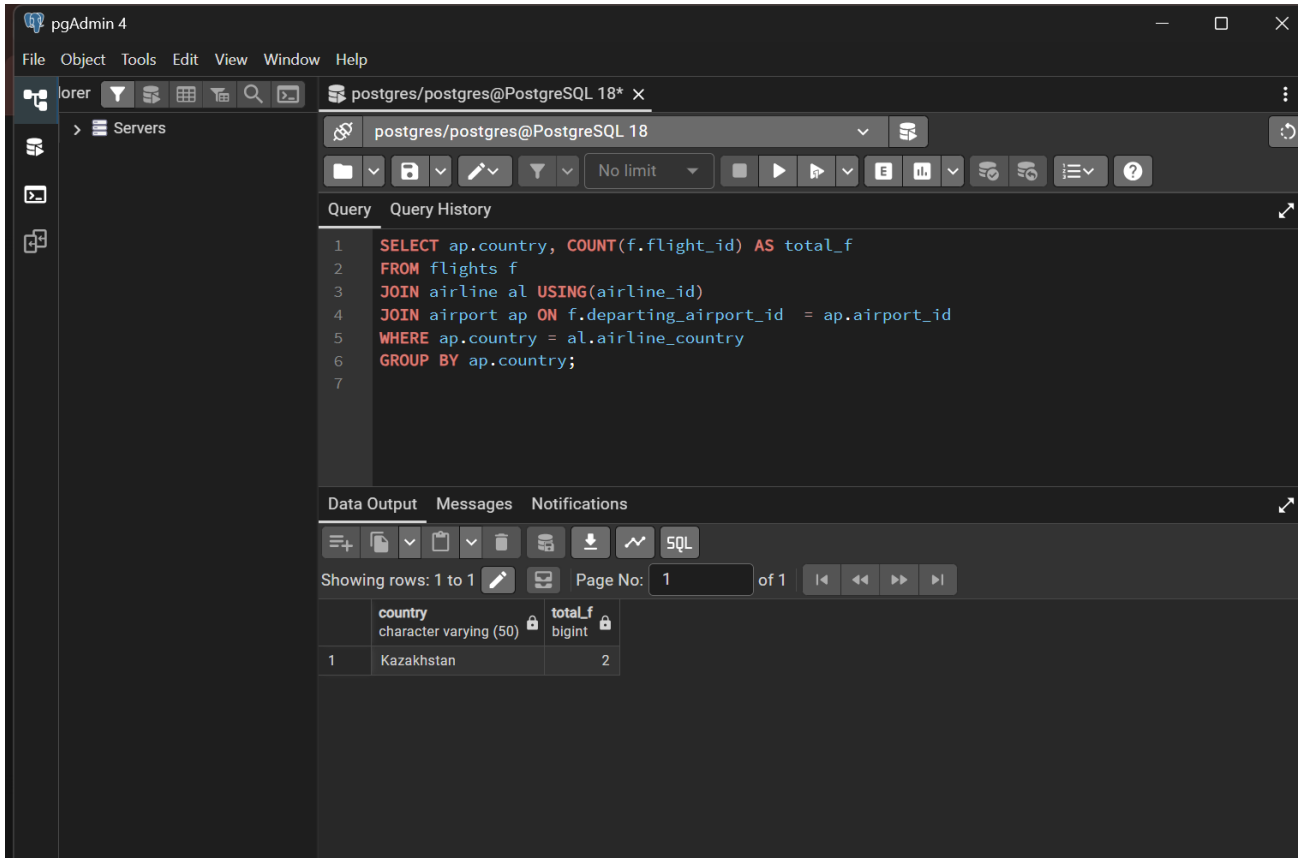

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
SELECT p.* FROM passengers p
JOIN Booking b USING(passenger_id)
WHERE b.flight_id = 1;
Data Output Messages Notifications
SQL
Showing rows: 1 to 1
Page No: 1 of 1
passenger_id [PK] integer
first_name character varying (50)
last_name character varying (50)
date_of_birth date
gender character varying (50)
country_of_citizenship character varying (50)
1 1 Jamilya Zholdas 2002-05-14 Female Kazakhstan

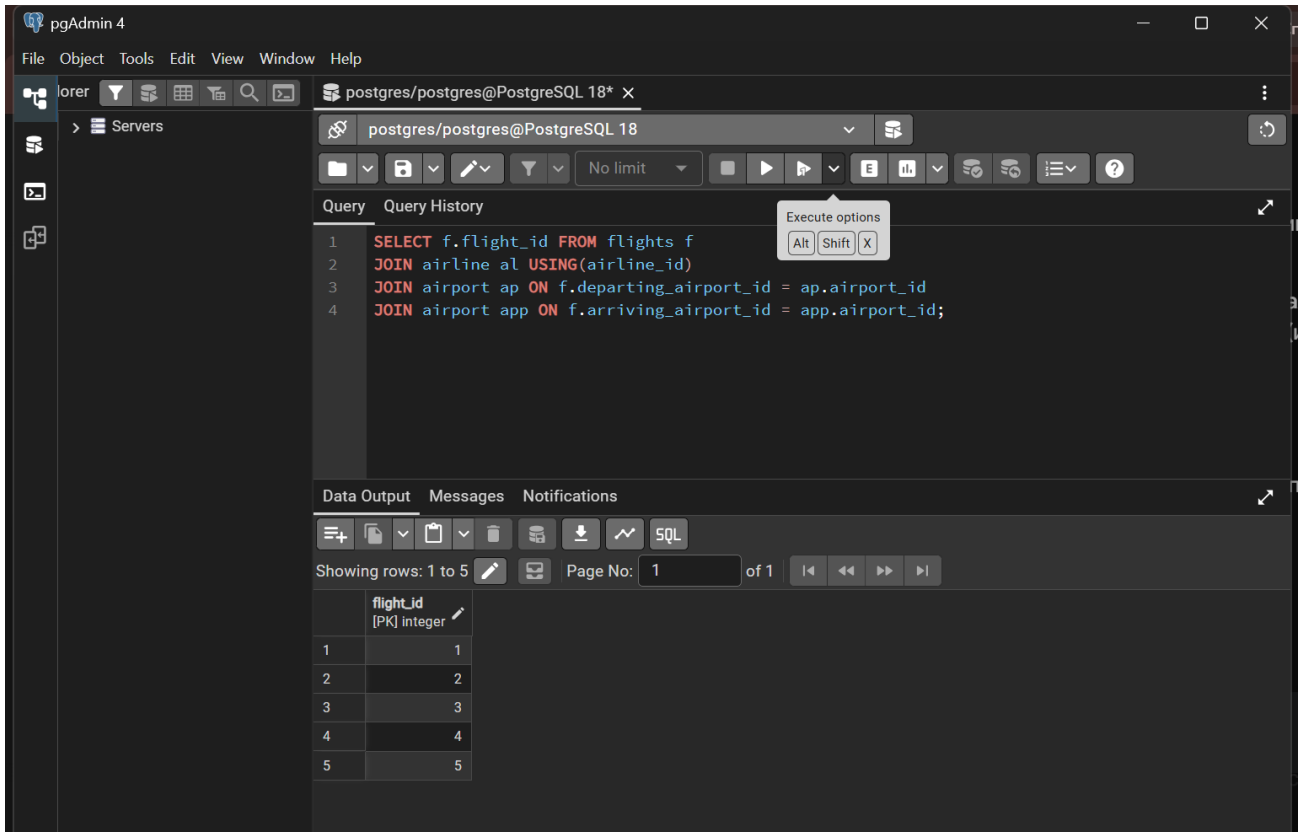

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
SELECT flight_id, AVG(price)::NUMERIC(10,1), MIN(price), MAX(price), SUM(price) FROM booking
GROUP BY flight_id;
Data Output Messages Notifications
SQL
Showing rows: 1 to 6
Page No: 1 of 1
flight_id integer
avg numeric (10,1)
min numeric
max numeric
sum numeric
1 3 420.0 420.00 420.00 420.00
2 5 500.0 500.00 500.00 500.00
3 4 115.0 115.00 115.00 115.00
4 6 150.0 150.00 150.00 150.00
5 2 350.0 350.00 350.00 350.00
6 1 120.0 120.00 120.00 120.00

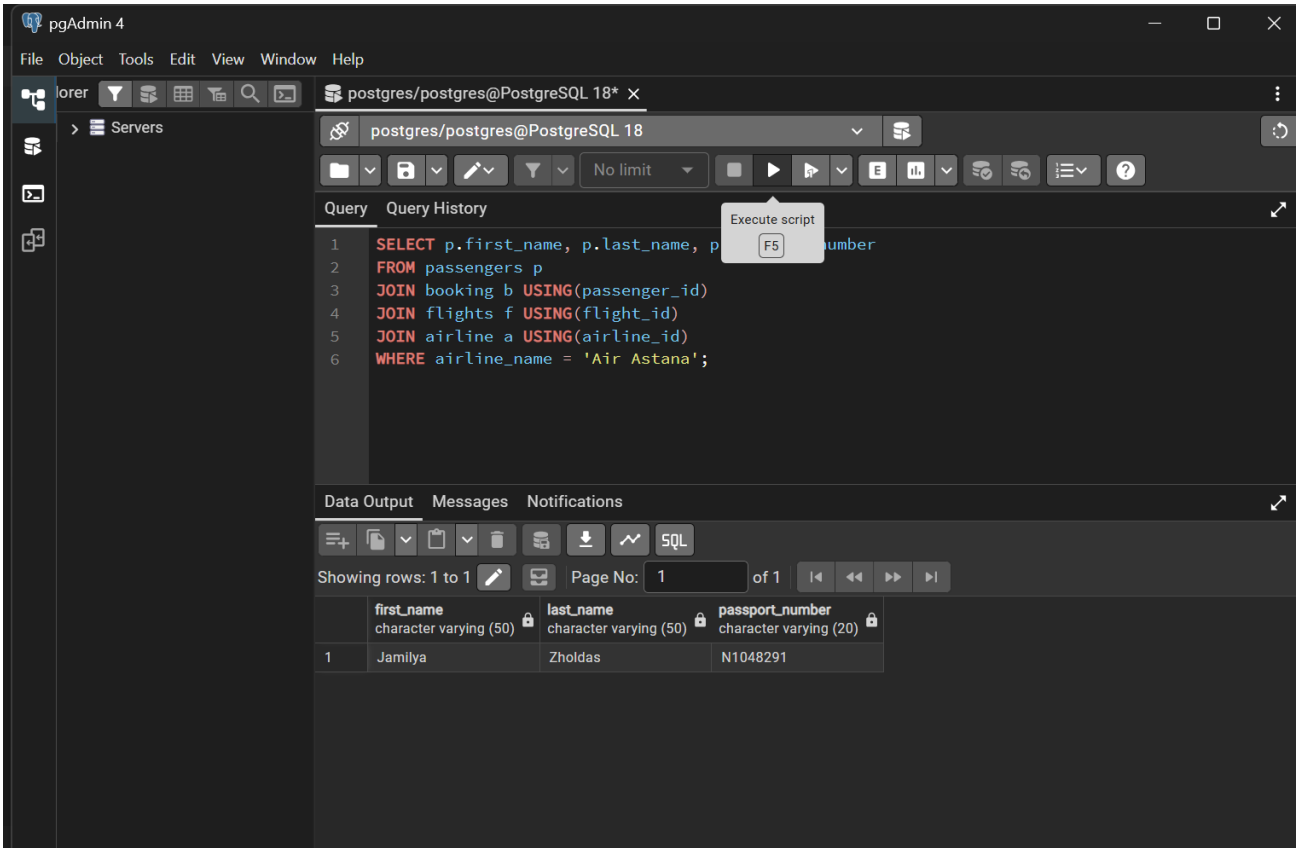

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
SELECT f.flight_id, al.airline_name, ap.airport_name FROM flights f
JOIN airline al ON f.airline_id = al.airline_id
JOIN airport ap ON f.arriving_airport_id = ap.airport_id
WHERE ap.country = 'Kazakhstan';
Data Output Messages Notifications
SQL
Showing rows: 1 to 2
Page No: 1 of 1
flight_id integer
airline_name character varying (50)
airport_name character varying (50)
1 1 Air Astana Nursultan Nazarbayev International Airp...
2 4 SCAT Airlines Almaty International Airport

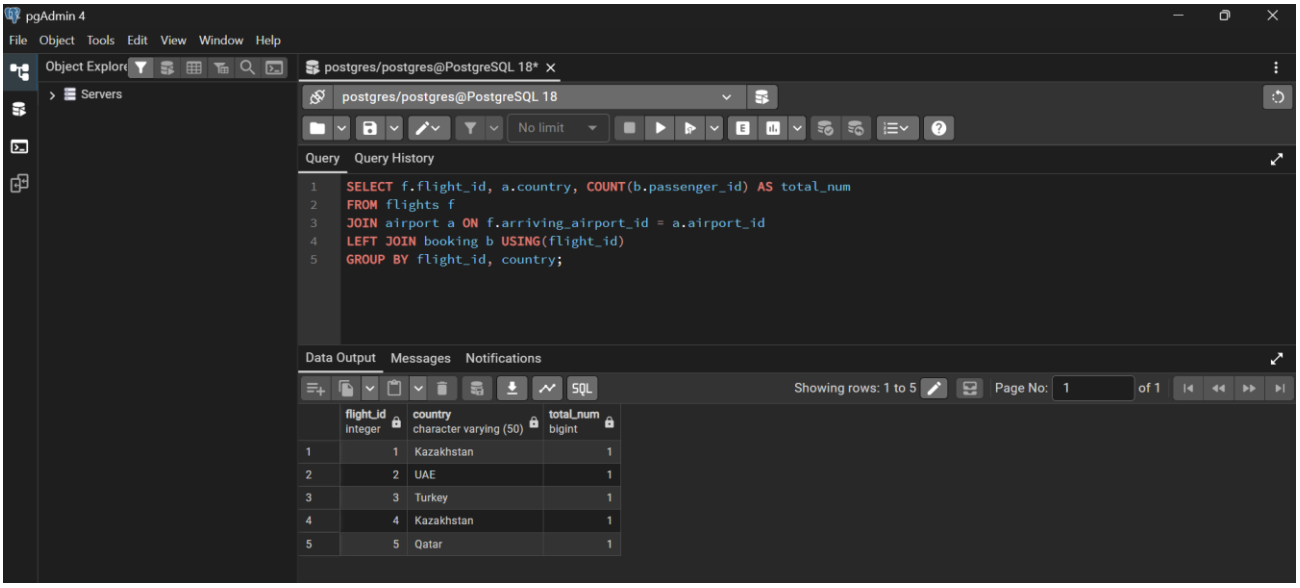

pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
1 SELECT p.first_name, a.airport_name
2 FROM passengers p
3 JOIN booking b USING(passenger_id)
4 JOIN flights f ON f.arriving_airport_id = b.flight_id
5 JOIN airport a ON a.airport_id = f.arriving_airport_id
6 WHERE date_of_birth > CURRENT_DATE - INTERVAL '18 YEARS';
Data Output Messages Notifications
SQL
first_name
character varying (50)
airport_name
character varying (50)


pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
Execute script
F5
1 SELECT p.first_name, p.last_name, p umber, f.act_arrival_time
2 FROM passengers p
3 JOIN booking b USING(passenger_id)
4 JOIN flights f USING(flight_id);
5
Data Output Messages Notifications
SQL
Showing rows: 1 to 5
Page No: 1 of 1
first_name
character varying (50)
last_name
character varying (50)
passport_number
character varying (20)
act_arrival_time
timestamp without time zone
1 Jamilya Zholdas N1048291 2026-09-20 09:43:00
2 Ayazhan Kydyr N0847204 2026-09-20 16:22:15
3 Ivan Ivanov N9381047 2026-09-21 10:23:50
4 Petr Petrov N4729103 2026-09-21 16:36:10
5 Anna Sidorova N5839201 2026-09-22 05:27:00


pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
1 SELECT ap.country, COUNT(f.flight_id) AS total_f
2 FROM flights f
3 JOIN airline al USING(airline_id)
4 JOIN airport ap ON f.departing_airport_id = ap.airport_id
5 WHERE ap.country = al.airline_country
6 GROUP BY ap.country;
7
Data Output Messages Notifications
SQL
Showing rows: 1 to 1
Page No: 1 of 1
country character varying (50)
total_f bigint
1 Kazakhstan 2


pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
Execute options
Alt Shift X
1 SELECT f.flight_id FROM flights f
2 JOIN airline al USING(airline_id)
3 JOIN airport ap ON f.departing_airport_id = ap.airport_id
4 JOIN airport app ON f.arriving_airport_id = app.airport_id;
Data Output Messages Notifications
SQL
Showing rows: 1 to 5
Page No: 1 of 1
flight_id [PK] integer
1 1
2 2
3 3
4 4
5 5


pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
Execute script
F5
1 SELECT p.first_name, p.last_name, p umber
2 FROM passengers p
3 JOIN booking b USING(passenger_id)
4 JOIN flights f USING(flight_id)
5 JOIN airline a USING(airline_id)
6 WHERE airline_name = 'Air Astana';
Data Output Messages Notifications
SQL
Showing rows: 1 to 1
Page No: 1 of 1
first_name character varying (50)
last_name character varying (50)
passport_number character varying (20)
1 Jamilya Zholdas N1048291


pgAdmin 4
File Object Tools Edit View Window Help
Servers
postgres/postgres@PostgreSQL 18*
postgres/postgres@PostgreSQL 18
No limit
Query Query History
1 SELECT f.flight_id, a.country, COUNT(b.passenger_id) AS total_num
2 FROM flights f
3 JOIN airport a ON f.arriving_airport_id = a.airport_id
4 LEFT JOIN booking b USING(flight_id)
5 GROUP BY flight_id, country;
Data Output Messages Notifications
SQL
Showing rows: 1 to 5
Page No: 1 of 1
flight_id integer
country character varying (50)
total_num bigint
1 1 Kazakhstan 1
2 2 UAE 1
3 3 Turkey 1
4 4 Kazakhstan 1
5 5 Qatar 1