





ROBERT v 2.1.0 2026/05/20 15:26:33

How to cite: Dalmau, D.; Alegre Requena, J. V. WIREs Comput Mol Sci. 2024, 14, e1733.**Section A. ROBERT Score***This score is designed to evaluate the models using different metrics.***No PFI (standard descriptor filter) · Score 4**

Model = NN · CV (train+valid.):test = 81:19

Points(train+validation):descriptors = 30:10

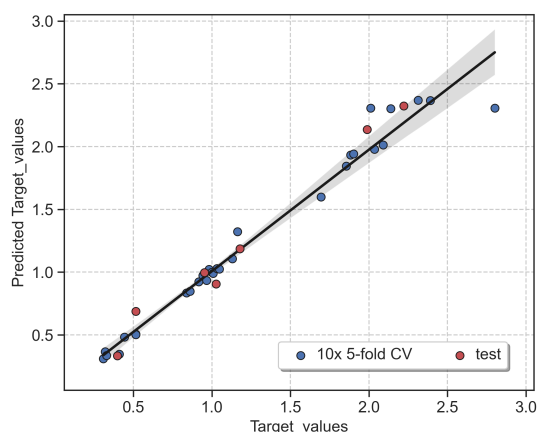
**WEAK**

10x 5-fold CV : $R^2 = 0.83$, MAE = 0.2, RMSE = 0.3
 Test : $R^2 = 0.98$, MAE = 0.094, RMSE = 0.11

PFI (only important descriptors) · Score 5

Model = NN · CV (train+valid.):test = 81:19

Points(train+validation):descriptors = 30:6

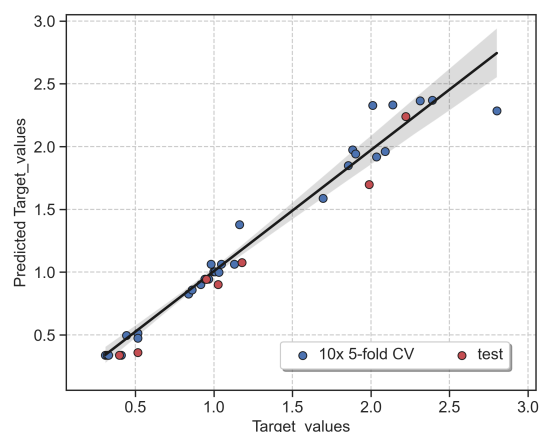**WEAK**

10x 5-fold CV : $R^2 = 0.86$, MAE = 0.18, RMSE = 0.27
 Test : $R^2 = 0.98$, MAE = 0.11, RMSE = 0.14

Severe warnings

- Failing required tests (Section B.1)

Moderate warnings

- Slightly uneven y distribution (Section C)
- Moderately correlated features (Section D)

Overall assessment

- The model is unreliable

Severe warnings

- Failing required tests (Section B.1)

Moderate warnings

- Slightly uneven y distribution (Section C)







Overall assessment

- The model is unreliable



Section D. Feature Importances

This section presents feature importances measured using the validation set.

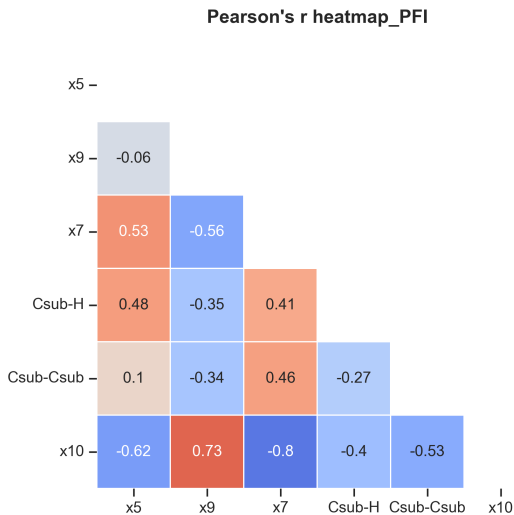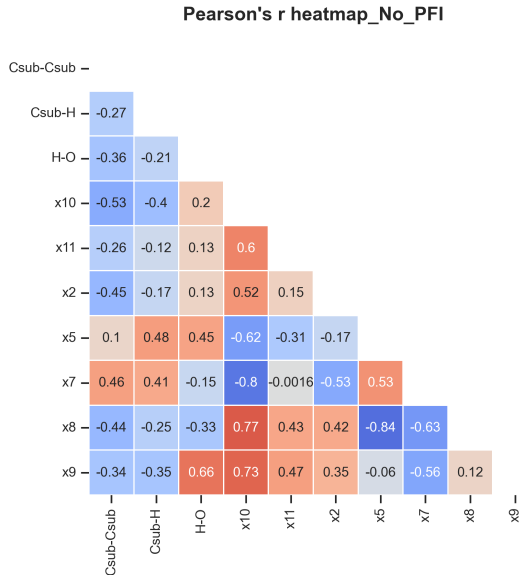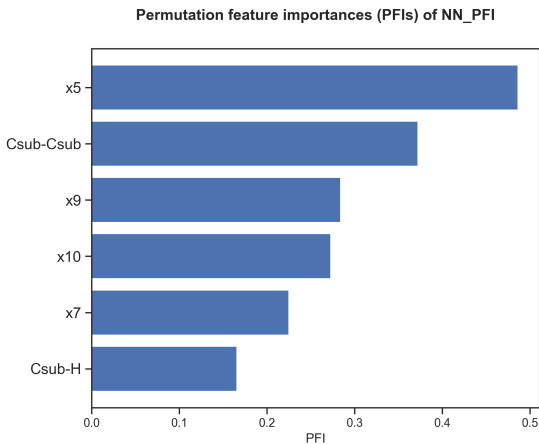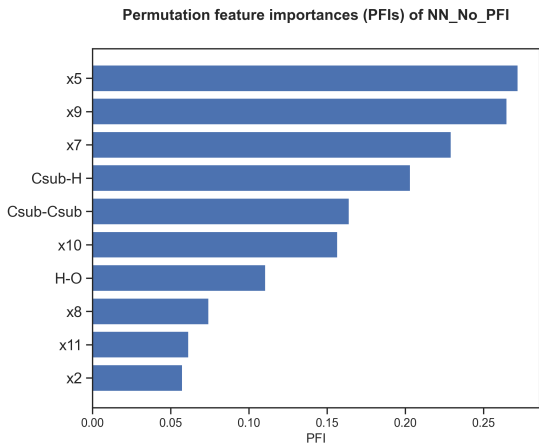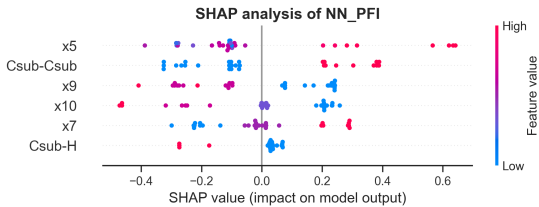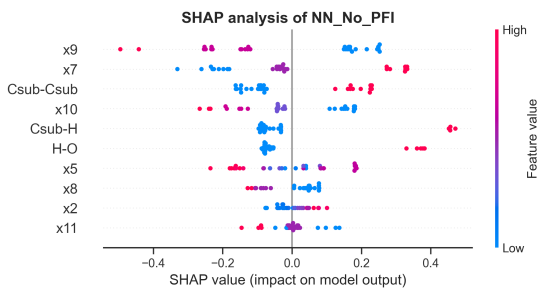

Correlation analysis

x WARNING! Noticeable correlations observed (up to $r = -0.84$ or $R^2 = 0.7$, for x5 and x8)

Correlation analysis


o Correlations between variables are acceptable

Section E. Outlier Analysis

This section detects outliers using the standard deviation (SD) of errors from the training set.


No PFI (standard descriptor filter):

Outliers (max. 10 shown)
Train: 2 outliers out of 30 datapoints (6.7%)
- 23 (2.3 SDs)
- 21 (4.3 SDs)
Test: 0 outliers out of 7 datapoints (0.0%)

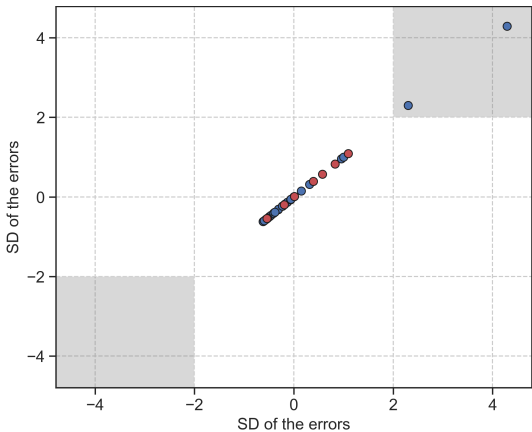


PFI (only important descriptors):

Outliers (max. 10 shown)
Train: 2 outliers out of 30 datapoints (6.7%)
- 23 (2.2 SDs)
- 21 (4.0 SDs)
Test: 0 outliers out of 7 datapoints (0.0%)

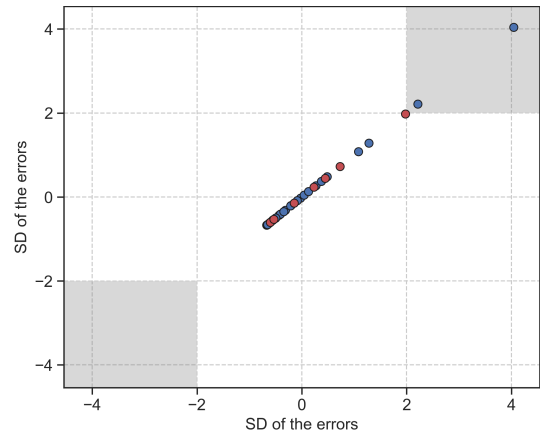

Section F. Model Screening

This section compares different combinations of hyperoptimized algorithms and partition sizes. The combined error is calculated as the product of the training error, validation error, and cross-validation error.

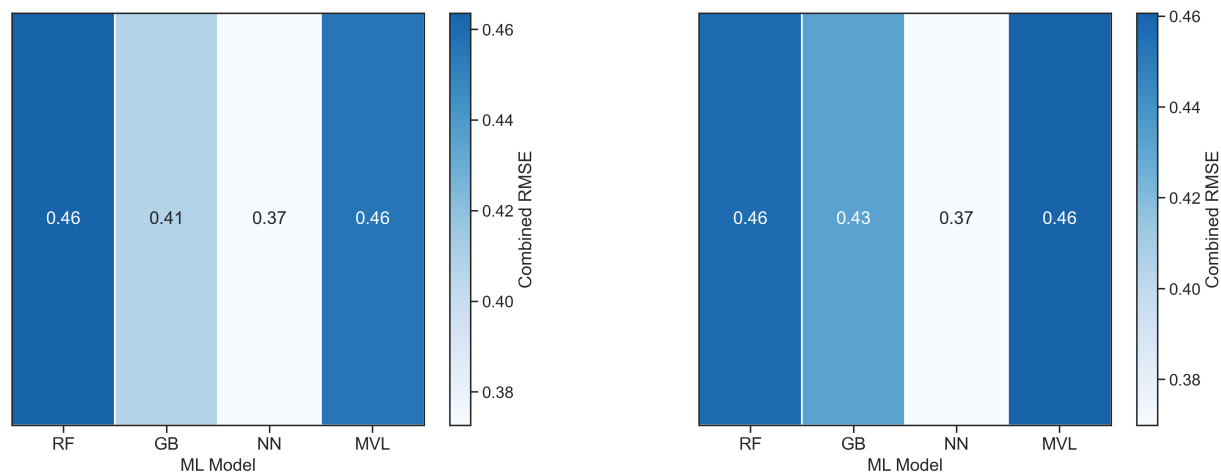

Section G. Reproducibility

This section provides all the instructions to reproduce the results presented.

1. Download these files (the authors should have uploaded the files as supporting information!):

- CSV database (Robert_example.csv)

2. Install and adjust the versions of the following Python modules:

- Install ROBERT and its dependencies: `conda install -y -c conda-forge robert`
- Adjust ROBERT version: `pip install robert==2.1.0`
- numpy: `pip install numpy==2.3.4`
- pandas: `pip install pandas==2.3.3`
- scipy: `pip install scipy==1.15.0`
- scikit-learn: `pip install scikit-learn==1.7.2`
- xgboost: `pip install xgboost==2.1.4`
- bayesian-optimization: `pip install bayesian-optimization==3.1.0`
- numba: `pip install numba==0.62.1`
- shap: `pip install shap==0.49.1`
- rdkit: `pip install rdkit==2025.9.1`
- PyYAML: `pip install PyYAML==6.0.3`
- matplotlib: `pip install matplotlib==3.10.0`
- weasyprint: `pip install weasyprint==63.1`
- scikit-learn-intelex: `pip install scikit-learn-intelex==2025.2.0`

3. Run ROBERT using this command line in the folder with the CSV database:

```
python -m robert --names "Name" --y "Target_values" --csv_name "Robert_example.csv"
```

4. Execution time, Python version and OS:

Originally run in Python 3.11.15 using Linux #117~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Thu May 7 22:17:46 UTC

Total execution time: 589.73 seconds (*the number of processors should be specified by the user*)



Section H. Transparency

This section contains important parameters used in scikit-learn models and ROBERT.

1. Parameters of the scikit-learn models (same keywords as used in scikit-learn):

No PFI (standard descriptor filter):

sklearn model: MLPRegressor
 hidden_layer_1: 4
 hidden_layer_2: 7
 max_iter: 347
 alpha: 0.03835251520205356
 tol: 3.7949457516132075e-05
 random_state: 0
 solver: lbfgs

PFI (only important descriptors):

sklearn model: MLPRegressor
 hidden_layer_1: 4
 hidden_layer_2: 7
 max_iter: 347
 alpha: 0.03835251520205356
 tol: 3.7949457516132075e-05
 random_state: 0
 solver: lbfgs

2. ROBERT options, including prediction type (REG or CLAS), folds and repeats used for CV, etc:

No PFI (standard descriptor filter):

type: reg
 kfold: 5
 repeat_kfolds: 10
 seed: 0
 error_type: rmse
 split: even

PFI (only important descriptors):

type: reg
 kfold: 5
 repeat_kfolds: 10
 seed: 0
 error_type: rmse
 split: even



Section I. Abbreviations

Reference section for the abbreviations used.

ACC: accuracy	KN: k-nearest neighbors	REG: Regression
ADAB: AdaBoost	MAE: root-mean-square error	RF: random forest
CSV: comma separated values	MCC: Matthew's correl. coefficient	RMSE: root mean square error
CLAS: classification	ML: machine learning	RND: random
CV: cross-validation	MVL: multivariate lineal models	SHAP: Shapley additive explanations
F1 score: balanced F-score	NN: neural network	VR: voting regressor
GB: gradient boosting	PFI: permutation feature importance	
GP: gaussian process	R2: coefficient of determination	
XGB: extreme gradient boosting		

Miscellaneous

General tips to improve the models and instructions to predict new values.

Some general tips to improve the score

1. Adding meaningful datapoints might help to improve the model. Also, using a uniform population of datapoints across the whole range of y values usually helps to obtain reliable predictions across the whole range. More information about the range of y values used is available in Section C.
2. Adding meaningful descriptors or replacing/deleting the least useful descriptors used might help. Feature importances are gathered in Section D.

How to predict new values with these models?

1. Create a CSV database with the new points, including the necessary descriptors.
 2. Place the CSV file in the parent folder (i.e., where the module folders were created)
 3. Run the PREDICT module as 'python -m robert --predict --csv_test FILENAME.csv'.
 4. The predictions will be shown at the end of the resulting PDF report and will be stored in the last column of two CSV files called MODEL_SIZE_test(_No)_PFI.csv, which are in the PREDICT folder.
-