

# Analysis of a genome annotation table

Probabilities and statistics for biology (STAT1)

*Jacques van Helden*

*2019-10-03*

## Contents

Goal of this practical . . . . .	1
Expected report . . . . .	1
Expectation for the code . . . . .	2
Expected content for the interpretation report . . . . .	2
Historical example: yeast genome . . . . .	2
Analysis of the length of the baker's yeast genes . . . . .	2
Tutorial . . . . .	2
The path to the home (manual) . . . . .	3
The path to the home (automatic) . . . . .	3
Creating a folder for the TP . . . . .	3
Downloading the GTF file from EnsemblGenomes . . . . .	4
Loading a data table . . . . .	4
Exploring the content of a data table . . . . .	5
Selection of subsets from a table . . . . .	6
Selection of a subset of rows based on the content of a column . . . . .	7
Count by value . . . . .	8
Exercises . . . . .	9
1. GTF format specifications . . . . .	9
2. Creating a local folder for the TP . . . . .	9
3. Locating the annotation file . . . . .	9
4. Downloading a file from an ftp website . . . . .	9
5. Loading a data table in R . . . . .	9
6. Compute the length of coding genes . . . . .	9
6. Histogram of gene length . . . . .	10
7. Descriptive parameters . . . . .	14
8. Intervalle de confiance . . . . .	15
9. Distribution of gene length . . . . .	16
10. Randomly expected distribution for gene length . . . . .	16
11. Before finishing : keep track of your session . . . . .	16

## Goal of this practical

During this practical session, you will run the following tasks:

1. Handle a table containing annotated features of the yeast genome.
2. Select a subset of the data by filtering rows based on a given criterion (annotation type, chromosome, ...)
3. Generate graphics to represent different aspects of the data.
4. Compute estimators of central tendency and dispersion.
5. Compute a confidence interval around the mean.

## Expected report

At the end of the practical you will be asked to submit two documents

1. Your **R code**. Each question must be explicitly formulated before presenting the results that answer it and giving an interpretation of these results.
2. UA **synthetic report**, which will include a presentation of the main results (figures, descriptive stats, tables) as well as your interpretation of the result.

### Expectation for the code

1. The code must be **readable and undestandable**: choose variable names that explicitly indicate what they represent.
2. The code must be properly documented (the # symbol starts a comment, either at the beginning or in the middle of a line of code).
  - Before each chunk of code, explain what this code is supposed to do, what it serves to.
  - Don't hesitate to occasionally add some comment words to justify the chosen approach.
  - Each time you define a variable, add a comment on the same line to indicate what this variable represents.
3. The code must be **portable**: other people should be able to download it and run it on their computer. For this practical, I will systematically test whether your code can run on my computer. hard-coded absolute paths of a file on your machine should thus always be avoided (we will indicate hereafter how to define relative paths relative to the root of your user account).

### Expected content for the interpretation report

Your report must be synthetic (1 text page max + as many figures and table as you wish)

Each question must be explicitly formulated before presenting the results that answer it and then interpreting those results.

Each figure or table must be documented with a legend that allows a naive reader to understand what it represents. The interpretation of the results displayed on a figure or table will be found in the main text (with a reference to the figure or table number).

### Historical example: yeast genome

- 1992: publication of the first complete eukaryotic chromosome, the 3rd yeast chromosome.
- 1996: publication of the complete genome.

On the base of the genes of the 3rd chromosome (sample) we can estimate the average size of a yeast gene.

#### Questions:

- (a) Would the sample mean (chromosome III) be sufficient to predict the population mean (complete genome) ?

To answer this question, we will imagine that we came back in 1992, and will use all the genes of chromosome III (considered here as a sample of the genome) to estimate the average size of genes for the whole genome (the "population" of genes).

- (b) Can this sample be described as "simple and independent" ?

### Analysis of the length of the baker's yeast genes

#### Tutorial

Before moving to the exercises, we show you here some basic elements about reading, manipulating and writing data tables with R.

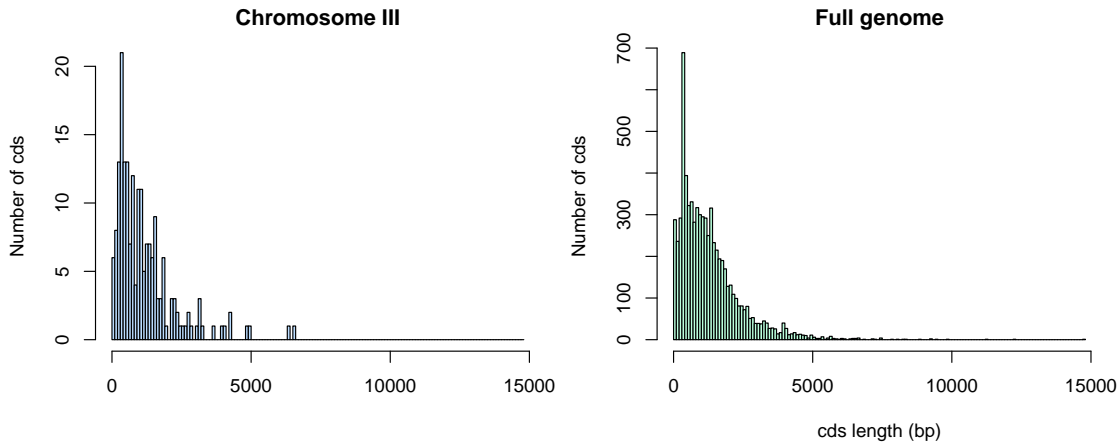


Figure 1: Distribution of cds lengths for *Saccharomyces cerevisiae*.

### The path to the home (manual)

We will create a folder for this tutorial, starting from the root of our account.

First possibility (**quick but not very elegant**): enter (manually) the path from the root of your account in a variable

```
dir.home <- /the/path/to/the/home
```

- Advantage: fast and convenient
- Disadvantage: not portable, will only work on your computer

### The path to the home (automatic)

A more general solution: use the **R** command `Sys.getenv()`.

- Invoked without parameters, this command lists all environment variables (your system configuration).
- The output can be restricted to a given environment variable, for example `Sys.getenv("HOME")` returns the path to the root of your account.

**Note:** equivalent writing with Linux: the tilde symbol `~` also indicates the path to the root of your account.

```
## Identify the home directory
## by getting the environment variable HOME
dir.home <- Sys.getenv("HOME")
print(dir.home)
```

```
[1] "/Users/jvanheld"
```

### Creating a folder for the TP

```
## Define a variable containing the path of the results for this tutorial
dir.tuto <- file.path(dir.home, "stat1", "TP2")

print(dir.tuto)
```

```
[1] "/Users/jvanheld/stat1/TP2"
```

```
## Create the directory for this tutorial
dir.create(path = dir.tuto, showWarnings = FALSE, recursive = TRUE)
```

```
## Go to the tutorial directory
setwd(dir.tuto)

## List the files already present in the folder (if any)
list.files()

[1] "3nt_genomic_Saccharomyces_cerevisiae-ovlp-1str.tab"
[2] "chrom_sizes.tsv"
[3] "Saccharomyces_cerevisiae.R64-1-1.37.gtf.gz"
```

## Downloading the GTF file from EnsemblGenomes

**Tips:** before downloading the annotation file (GTF) from EnsemblGenomes to our computer, we will check if it is already present (and in this case we do not re-download it).

```
## Define the URL of the annotation file (GTF-formatted)
gtf.URL <- "ftp://ftp.ensemblgenomes.org/pub/release-37/fungi/gtf/saccharomyces_cerevisiae/Saccharomyces_cerevisiae.R64-1-1.37.gtf.gz"

## Define the path where the local copy will be stored
local.GTF <- file.path(dir.tuto, "Saccharomyces_cerevisiae.R64-1-1.37.gtf.gz")

## If the local file already exists, skip the download
if (file.exists(local.GTF)) {
  message("GTF file already exists in the tutorial folder: ", local.GTF)
} else {
  ## Download annotation table in GTF format
  download.file(url = gtf.URL, destfile = local.GTF)
}
```

## Loading a data table

R has several types of tabular structures (matrix, data.frame, table).

The most commonly used structure is the `data.frame`, which consists of an array of values (numeric or strings) whose rows and columns are associated with names.

The function `read.table()` allows you to read a text file containing a data table, and store the content in a variable.

Several functions derived from `read.table()` make it easier to read different types of formats:

- `read.delim()` for files whose columns are delimited by a particular character (usually the tab, represented by `"\t"`).
- `read.csv()` for files “comma-separated values”.

1. Download the following file to your computer:

- `Saccharomyces_cerevisiae.R64-1-1.37.gtf`

2. Load it using the `read.table` function (for this you must replace the path below by that of your computer).

```
## Read a GTF file with yeast genome annotations

## Load the feature table
feature.table <- read.table(
  local.GTF,
  comment.char = "#",
  sep="\t",
  header=FALSE,
```

```

row.names=NULL)

## The bed format does not contain any column header,
## so we set it manually based on the description of the format,
## found here:
##   http://www.ensembl.org/info/website/upload/gff.html
names(feature.table) <- c("seqname", "source", "feature", "start", "end", "score", "strand", "frame", "gene_id")

```

## Exploring the content of a data table

The first thing to do after loading a data table is to check its dimensions.

```
dim(feature.table) ## Dimensions of the table
```

```
[1] 43028      9
```

```
nrow(feature.table) ## Number of rows
```

```
[1] 43028
```

```
ncol(feature.table) ## Number of columns
```

```
[1] 9
```

The display of the complete annotation table would not be very readable, since it contains tens of thousands of lines.

We can display the first lines with the function `head()`.

**Note:** the last column is particularly heavy (it contains a lot of information). We will see later how to select a subset of the columns to simplify the display.

```
## Display the 5 first rows of the feature table
head(feature.table, n = 5)
```

	seqname	source	feature	start	end	score	strand	frame
1	IV	SGD	gene	1802	2953	.	+	.
2	IV	SGD	transcript	1802	2953	.	+	.
3	IV	SGD	exon	1802	2953	.	+	.
4	IV	SGD	CDS	1802	2950	.	+	0
5	IV	SGD	start_codon	1802	1804	.	+	0

```

1
2                                     gene_id YDL248W; transcript_id YDL248W; gene_name COS7;
3               gene_id YDL248W; transcript_id YDL248W; exon_number 1; gene_name COS7; gene_source SGD;
4 gene_id YDL248W; transcript_id YDL248W; exon_number 1; gene_name COS7; gene_source SGD; gene_biotype protein_coding;
5               gene_id YDL248W; transcript_id YDL248W; exon_number 1; gene_name COS7; gene_source SGD; gene_biotype protein_coding;

```

The function `tail()` displays the last few lines:

```
## Display the 5 last rows of the feature table
tail(feature.table, n = 5)
```

	seqname	source	feature	start	end	score	strand	frame
43024	Mito	SGD	transcript	85554	85709	.	+	.
43025	Mito	SGD	exon	85554	85709	.	+	.
43026	Mito	SGD	CDS	85554	85706	.	+	0
43027	Mito	SGD	start_codon	85554	85556	.	+	0
43028	Mito	SGD	stop_codon	85707	85709	.	+	0

```

43024                                     gene_id Q0297; transcript_id Q0297; gene_sour
43025                                gene_id Q0297; transcript_id Q0297; exon_number 1; gene_source SGD; gene_biot
43026 gene_id Q0297; transcript_id Q0297; exon_number 1; gene_source SGD; gene_biotype protein_coding;
43027                                gene_id Q0297; transcript_id Q0297; exon_number 1; gene_sour
43028                                gene_id Q0297; transcript_id Q0297; exon_number 1; gene_sour

```

If you are using the **RStudio** environment, you can display the table in a dynamic viewer pane with the function `View()`.

```
## In RStudio, display the table in a separate tab
View(feature.table)
```

## Selection of subsets from a table

Selection of a line specified by its index.

```
feature.table[12,]
```

```

      seqname source    feature start  end score strand frame
12      IV    SGD stop_codon  3834 3836      .      +      0

```

```
12 gene_id YDL247W-A; transcript_id YDL247W-A; exon_number 1; gene_source SGD; gene_biotype protein_coding;
```

Selection of a column specified by its index (display of the first values only).

```
head(feature.table[,3])
```

```

[1] gene      transcript exon      CDS      start_codon stop_codon
Levels: CDS exon gene start_codon stop_codon transcript

```

Selection of a cell by combining row and column indices.

```
feature.table[12, 3]
```

```

[1] stop_codon
Levels: CDS exon gene start_codon stop_codon transcript

```

Selection of a column and/or row set.

```
feature.table[100:105, 1:6]
```

```

      seqname source    feature start  end score
100      IV    SGD      CDS 34240 36477      .
101      IV    SGD start_codon 36475 36477      .
102      IV    SGD stop_codon  34237 34239      .
103      IV    SGD      gene  36797 38173      .
104      IV    SGD transcript  36797 38173      .
105      IV    SGD      exon  36797 38173      .

```

Selection of specific columns (here, the genomic coordinates of each feature): chromosome, beginning, end, strand.

```
feature.table[100:105, c(1,4,5,7)]
```

```

      seqname start  end strand
100      IV 34240 36477      -
101      IV 36475 36477      -
102      IV 34237 34239      -
103      IV 36797 38173      +
104      IV 36797 38173      +
105      IV 36797 38173      +

```

Select a column based on its name.

```
## Select the "start" column and print the 100 first results
head(feature.table$start, n=100)
```

```
[1] 1802 1802 1802 1802 1802 2951 3762 3762 3762 3762 3762
[12] 3834 5985 5985 5985 5985 5985 7812 8683 8683 8683 8686
[23] 9754 8683 11657 11657 11657 11660 13358 11657 16204 16204 16204
[34] 16204 16204 17224 17577 17577 17577 17580 18564 17577 18959 18959
[45] 18959 18959 18959 19310 20635 20635 20635 20635 20635 21004 22471
[56] 22471 22471 22474 22606 22471 22823 22823 22823 22823 22823 25874
[67] 26403 26403 26403 26406 28773 26403 28985 28985 28985 28988 30452
[78] 28985 30657 30657 30657 30657 30657 31827 32296 32296 32296 32296
[89] 32296 33232 33415 33415 33415 33418 33916 33415 34237 34237 34237
[100] 34240
```

```
## Print the 20 first values of the "feature" field, which indicates the feature type
head(feature.table$feature, n=20)
```

```
[1] gene      transcript exon      CDS      start_codon
[6] stop_codon gene      transcript exon      CDS
[11] start_codon stop_codon gene      transcript exon
[16] CDS      start_codon stop_codon gene      transcript
Levels: CDS exon gene start_codon stop_codon transcript
```

Selection of several columns based on their names.

```
## Select the "start" column and print the 100 first results
feature.table[100:106, c("seqname", "start", "end", "strand")]
```

```
      seqname start  end strand
100      IV 34240 36477      -
101      IV 36475 36477      -
102      IV 34237 34239      -
103      IV 36797 38173      +
104      IV 36797 38173      +
105      IV 36797 38173      +
106      IV 36797 38170      +
```

**Note:** Selection of several columns based on their names. It is also possible to name the rows of a data.frame but the GTF table does not support this. We will see more examples later.

### Selection of a subset of rows based on the content of a column

The function `subset()` allows you to select a subset of the rows of a data.frame based on a condition applied to one or more columns.

We can apply it to select the subset of rows in the annotation table corresponding to coding sequences (CDS).

```
## Select subset of features having "cds" as "feature" attribute
cds <- subset(feature.table, feature=="CDS")

nrow(feature.table) ## Count the number of features
```

```
[1] 43028
```

```
nrow(cds) ## Count the number of cds
```

```
[1] 7050
```

## Count by value

The function `table()` allows you to count the occurrences of each value in a vector or array. Some examples of use below.

```
## Count the number of features per chromosome
table(feature.table$seqname)
```

```
  I   II  III   IV   IX Mito   V   VI  VII VIII   X   XI  XII XIII  XIV
759 2912 1210 5374 1567  327 2159  946 3856 2054 2617 2231 3789 3311 2774
 XV  XVI
3846 3296
```

```
## Count the number of features per type
table(feature.table$feature)
```

```
      CDS      exon      gene start_codon stop_codon transcript
7050      7872      7445         6700         6516         7445
```

Contingency tables can be calculated by counting the number of combinations between 2 vectors (or 2 columns of a table).

```
## Table with two vectors
table(feature.table$feature, feature.table$seqname)
```

```
      I   II  III   IV   IX Mito   V   VI  VII VIII   X   XI  XII XIII
CDS    122 492 194 895 255   59 345 151 619  346 422 361 615  544
exon   137 525 224 961 288   94 400 180 710  373 480 404 698  610
gene   132 494 213 914 274   62 383 167 676  349 458 388 658  573
start_codon 119 464 185 853 243  28 328 143 593  325 406 348 586  514
stop_codon 117 443 181 837 233  22 320 138 582  312 393 342 574  497
transcript 132 494 213 914 274   62 383 167 676  349 458 388 658  573
```

```
      XIV  XV XVI
CDS     458 623 549
exon    500 689 599
gene    475 665 564
start_codon 438 607 520
stop_codon 428 597 500
transcript 475 665 564
```

```
## Same result with a 2-column data frame
table(feature.table[, c("feature", "seqname")])
```

```
      seqname
feature  I   II  III   IV   IX Mito   V   VI  VII VIII   X   XI  XII XIII
CDS     122 492 194 895 255   59 345 151 619  346 422 361 615  544
exon    137 525 224 961 288   94 400 180 710  373 480 404 698  610
gene    132 494 213 914 274   62 383 167 676  349 458 388 658  573
start_codon 119 464 185 853 243  28 328 143 593  325 406 348 586  514
stop_codon 117 443 181 837 233  22 320 138 582  312 393 342 574  497
transcript 132 494 213 914 274   62 383 167 676  349 458 388 658  573
```

```
      seqname
feature  XIV  XV XVI
CDS     458 623 549
```



exon	500	689	599
gene	475	665	564
start_codon	438	607	520
stop_codon	428	597	500
transcript	475	665	564

## Exercises

### 1. GTF format specifications

Read the GTF format specifications.

- Ensembl (<http://www.ensembl.org/info/website/upload/gff.html>)
- UCSC (<https://genome.ucsc.edu/FAQ/FAQformat.html#format4>)

### 2. Creating a local folder for the TP

Create a local folder (for example: `stat1/TP_yeast` from the root of your account). We suggest you to use the following functions:

- `Sys.getenv("HOME")` (Linux and Mac OS X), to get the root of your user account;
- `file.path()` to build a path;
- `dir.create()` to create the folder for the TP. Read carefully the options of this function with `help(dir.create)`

### 3. Locating the annotation file

Locate the yeast genome annotation file in GTF format in this local folder.

- Site Ensembl Fungi: <http://fungi.ensembl.org/>
- Click “Downloads” to access the ftp website
- In the search box, type “*saccharomyces cerevisiae*” and follow the link “GTF”
- Copy the address (URL) of the file `Saccharomyces_cerevisiae.R64-1-1.37.gtf.gz`

### 4. Downloading a file from an ftp website

Suggested functions:

- `download.file()` (read the help to know the arguments)

### 5. Loading a data table in R

Write a script that loads the data table into a variable named `feature.table`, using the function `R.read.delim()`.

Be sure to ignore the comment lines (which start with a character #).

### 6. Compute the length of coding genes

- Add to the annotation table (`feature.table`) a column entitled “length” which indicates the length of each annotated genomic feature.

```
## Add a column with feature lengths
feature.table[, "length"] <- feature.table[, "end"] - feature.table[, "start"] + 1

## Add a column with feature lengths: equivalent result with simpler notation
feature.table$length <- feature.table$end - feature.table$start + 1
```

- Count the number of rows in the table corresponding to each type of annotation (3rd column of the GTF, “feature”).

```

- fonction table()
~table(feature.table$feature)

```

- Select the lines corresponding to coding regions (“CDS”)

```

- fonction subset()

```

- Count the number of CDS per chromosome.

```

- fonction table()

```

I	II	III	IV	IX	Mito	V	VI	VII	VIII	X	XI	XII	XIII	XIV
122	492	194	895	255	59	345	151	619	346	422	361	615	544	458
XV	XVI													
623	549													

- Load the chromosome size table `chrom_sizes.tsv`, and calculate the gene density for each chromosome (number of genes per Mb).


```

[1] 316617


```

## 6. Histogram of gene length

By using the function `hist()`, draw a histogram representing the length distribution of the CDS.

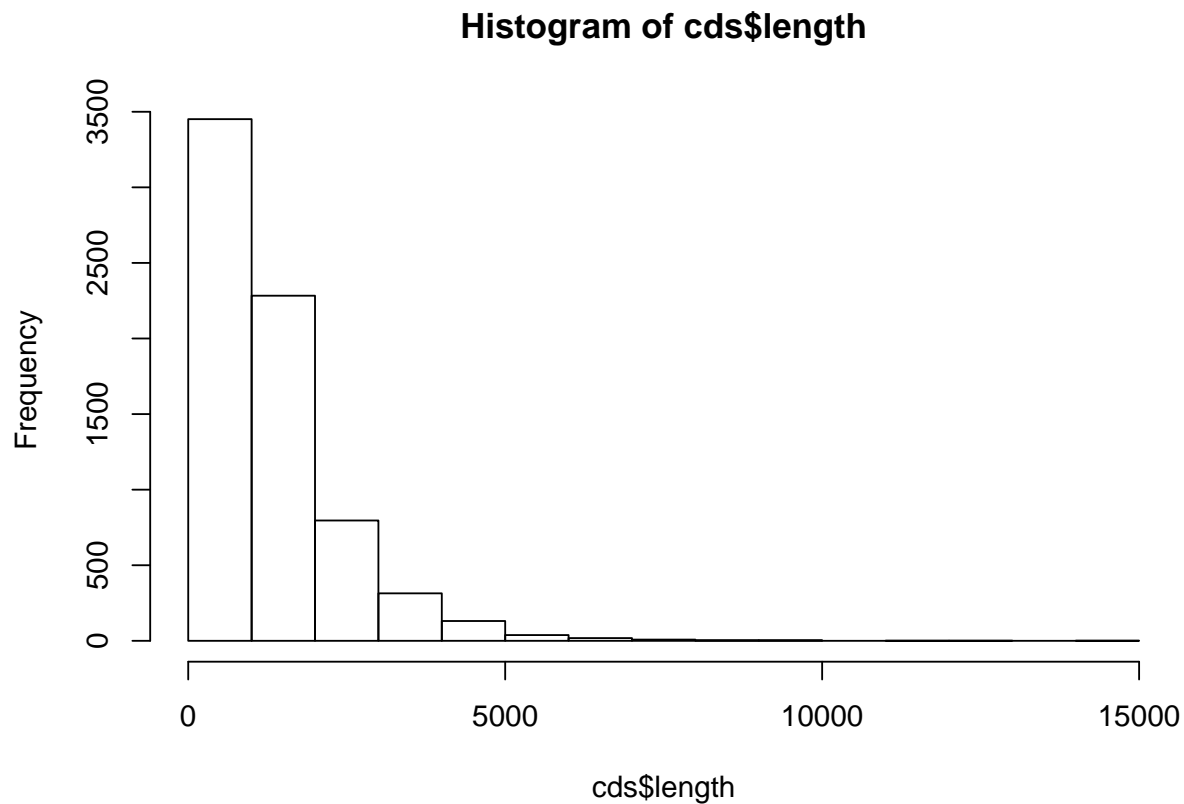


Choose the class intervals in a way that the histogram is informative (neither too large nor too few classes).

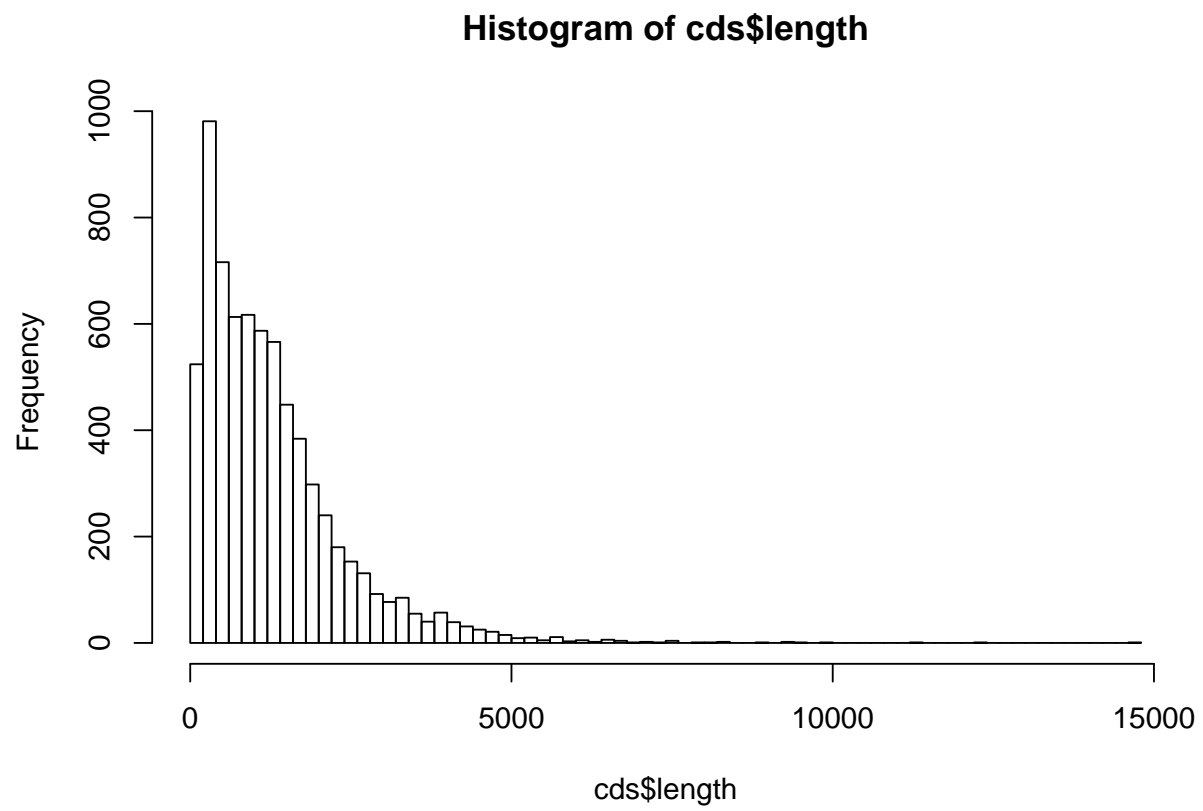

Retrieve the result of `hist()` in a variable named `cds.length.hist`.

## Histogram of cds\$length

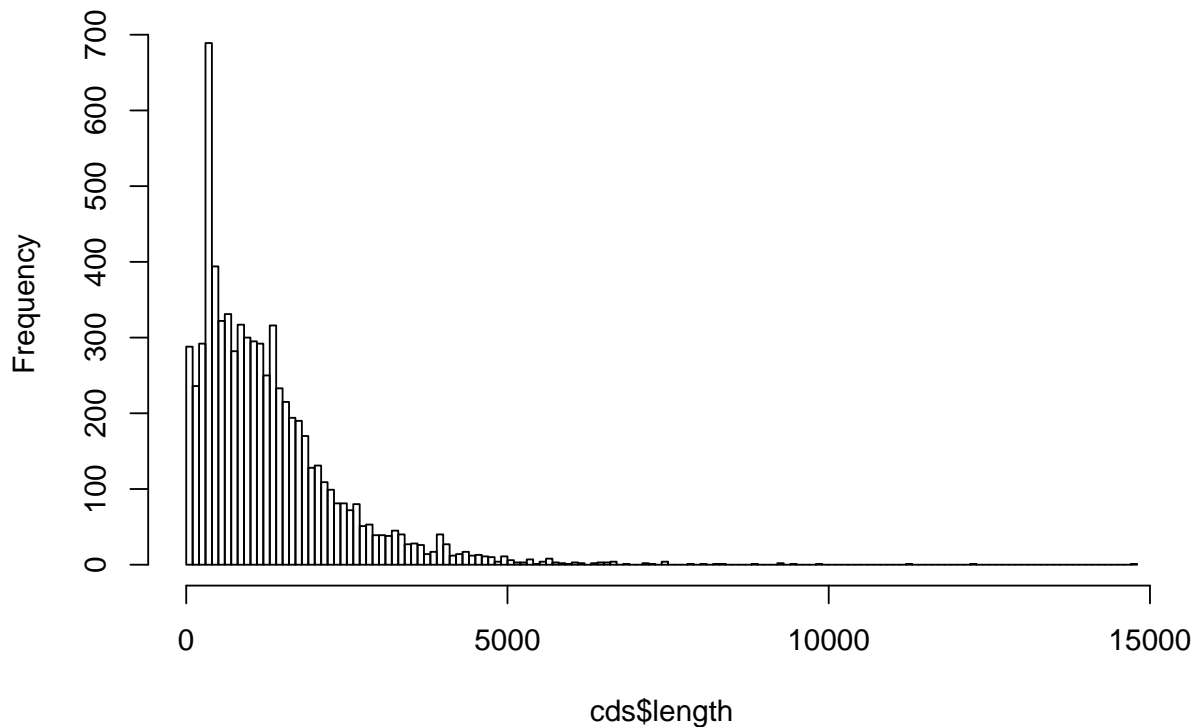

Print the result on the screen (`print()`) and analyze the structure of the variable `cds.length.hist` (this is a list variable).

Useful functions:

`$breaks`

[1]	0	100	200	300	400	500	600	700	800	900	1000
[12]	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
[23]	2200	2300	2400	2500	2600	2700	2800	2900	3000	3100	3200
[34]	3300	3400	3500	3600	3700	3800	3900	4000	4100	4200	4300
[45]	4400	4500	4600	4700	4800	4900	5000	5100	5200	5300	5400
[56]	5500	5600	5700	5800	5900	6000	6100	6200	6300	6400	6500
[67]	6600	6700	6800	6900	7000	7100	7200	7300	7400	7500	7600
[78]	7700	7800	7900	8000	8100	8200	8300	8400	8500	8600	8700
[89]	8800	8900	9000	9100	9200	9300	9400	9500	9600	9700	9800
[100]	9900	10000	10100	10200	10300	10400	10500	10600	10700	10800	10900
[111]	11000	11100	11200	11300	11400	11500	11600	11700	11800	11900	12000
[122]	12100	12200	12300	12400	12500	12600	12700	12800	12900	13000	13100
[133]	13200	13300	13400	13500	13600	13700	13800	13900	14000	14100	14200
[144]	14300	14400	14500	14600	14700	14800					

`$counts`

[1]	288	236	292	689	394	322	331	282	317	300	295	292	250	316	233	215	194
[18]	190	170	128	131	109	99	81	81	72	80	51	53	39	39	38	45	40
[35]	27	28	26	14	17	40	27	12	14	17	12	13	11	10	4	11	6
[52]	3	3	7	1	4	8	3	2	1	3	2	0	2	3	3	4	0

[69]	1	0	0	2	1	0	4	0	0	0	1	0	1	0	1	1	0
[86]	0	0	0	1	0	0	0	2	0	1	0	0	0	1	0	0	0
[103]	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
[120]	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
[137]	0	0	0	0	0	0	0	0	0	0	0	1					

\$density

[1]	4.085106e-04	3.347518e-04	4.141844e-04	9.773050e-04	5.588652e-04												
[6]	4.567376e-04	4.695035e-04	4.000000e-04	4.496454e-04	4.255319e-04												
[11]	4.184397e-04	4.141844e-04	3.546099e-04	4.482270e-04	3.304965e-04												
[16]	3.049645e-04	2.751773e-04	2.695035e-04	2.411348e-04	1.815603e-04												
[21]	1.858156e-04	1.546099e-04	1.404255e-04	1.148936e-04	1.148936e-04												
[26]	1.021277e-04	1.134752e-04	7.234043e-05	7.517730e-05	5.531915e-05												
[31]	5.531915e-05	5.390071e-05	6.382979e-05	5.673759e-05	3.829787e-05												
[36]	3.971631e-05	3.687943e-05	1.985816e-05	2.411348e-05	5.673759e-05												
[41]	3.829787e-05	1.702128e-05	1.985816e-05	2.411348e-05	1.702128e-05												
[46]	1.843972e-05	1.560284e-05	1.418440e-05	5.673759e-06	1.560284e-05												
[51]	8.510638e-06	4.255319e-06	4.255319e-06	9.929078e-06	1.418440e-06												
[56]	5.673759e-06	1.134752e-05	4.255319e-06	2.836879e-06	1.418440e-06												
[61]	4.255319e-06	2.836879e-06	0.000000e+00	2.836879e-06	4.255319e-06												
[66]	4.255319e-06	5.673759e-06	0.000000e+00	1.418440e-06	0.000000e+00												
[71]	0.000000e+00	2.836879e-06	1.418440e-06	0.000000e+00	5.673759e-06												
[76]	0.000000e+00	0.000000e+00	0.000000e+00	1.418440e-06	0.000000e+00												
[81]	1.418440e-06	0.000000e+00	1.418440e-06	1.418440e-06	0.000000e+00												
[86]	0.000000e+00	0.000000e+00	0.000000e+00	1.418440e-06	0.000000e+00												
[91]	0.000000e+00	0.000000e+00	2.836879e-06	0.000000e+00	1.418440e-06												
[96]	0.000000e+00	0.000000e+00	0.000000e+00	1.418440e-06	0.000000e+00												
[101]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[106]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[111]	0.000000e+00	0.000000e+00	1.418440e-06	0.000000e+00	0.000000e+00												
[116]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[121]	0.000000e+00	0.000000e+00	1.418440e-06	0.000000e+00	0.000000e+00												
[126]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[131]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[136]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[141]	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00	0.000000e+00												
[146]	0.000000e+00	0.000000e+00	1.418440e-06														

\$mids

[1]	50	150	250	350	450	550	650	750	850	950	1050						
[12]	1150	1250	1350	1450	1550	1650	1750	1850	1950	2050	2150						
[23]	2250	2350	2450	2550	2650	2750	2850	2950	3050	3150	3250						
[34]	3350	3450	3550	3650	3750	3850	3950	4050	4150	4250	4350						
[45]	4450	4550	4650	4750	4850	4950	5050	5150	5250	5350	5450						
[56]	5550	5650	5750	5850	5950	6050	6150	6250	6350	6450	6550						
[67]	6650	6750	6850	6950	7050	7150	7250	7350	7450	7550	7650						
[78]	7750	7850	7950	8050	8150	8250	8350	8450	8550	8650	8750						
[89]	8850	8950	9050	9150	9250	9350	9450	9550	9650	9750	9850						
[100]	9950	10050	10150	10250	10350	10450	10550	10650	10750	10850	10950						
[111]	11050	11150	11250	11350	11450	11550	11650	11750	11850	11950	12050						
[122]	12150	12250	12350	12450	12550	12650	12750	12850	12950	13050	13150						
[133]	13250	13350	13450	13550	13650	13750	13850	13950	14050	14150	14250						
[144]	14350	14450	14550	14650	14750												

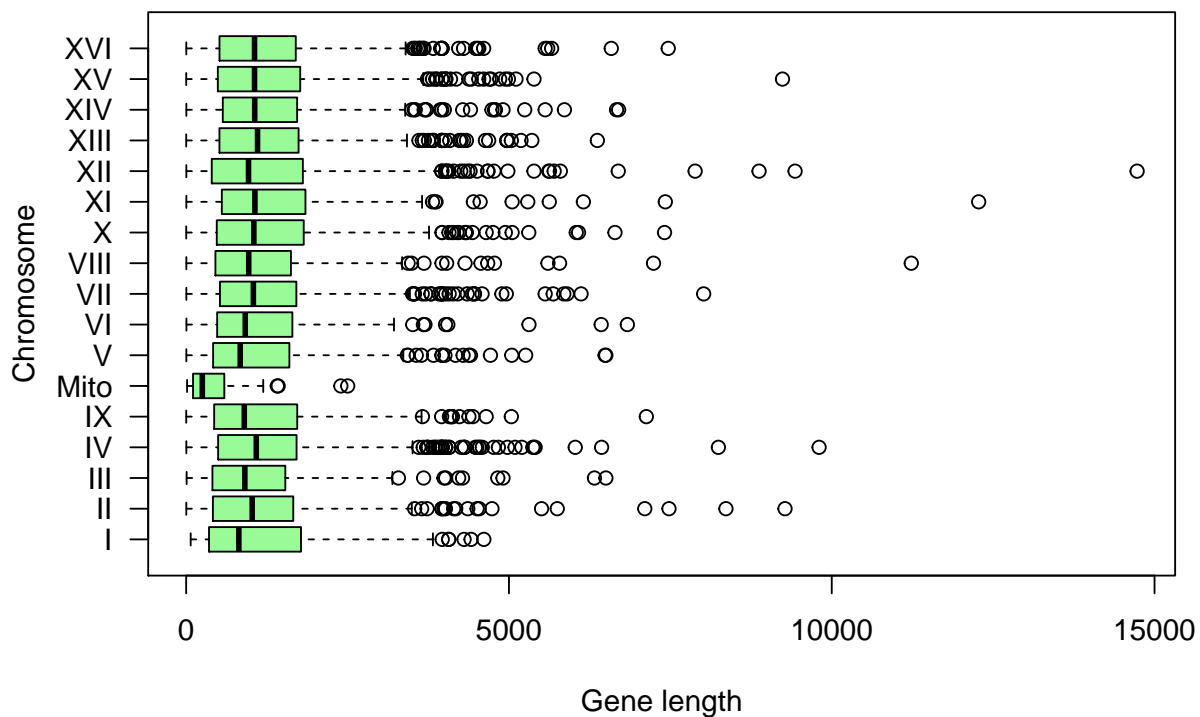


Figure 2: Boîte à moustache indiquant la distribution de longueur des gènes par chromosome.

```
$xname
[1] "cds$length"

$equidist
[1] TRUE

attr("class")
[1] "histogram"

• class(cds.length.hist)
• attributes(cds.length.hist)
```

Other types of graphs allow you to explore the distribution of a set of data. In particular, box plots display, for a series of data, the median, the quarterfinal range, a confidence interval and outliers.

## 7. Descriptive parameters

Calculate the parameters of central tendency (mean, median, mode) and dispersion (variance, standard deviation, inter-quarterly deviation)

- for the genes of chromosome III;
- for all yeast genes.

```
[1] 194 1
```

```
[1] "data.frame"
[1] "numeric"
length1 length2 length3 length4 length5 length6
      741   1845   1374    780    630    525
[1] "Chromosome III contains 194 CDS"
[1] 1169.521
```

**Ah ah! (skeptical tone)** The R function `sd()` does **not** compute the standard deviation of the input numbers ( $s$ ), but the **estimate of the standard deviation of the population** ( $\hat{\sigma}$ )

Display these parameters on the histogram of gene length, using the function `arrows()`


## 8. Intervalle de confiance

From genes of chromosome III (considered as the sample available in 1992), calculate a confidence interval around the mean, and formulate the interpretation of this confidence interval. Then evaluate whether or not this confidence interval covered the average population (all genes in the yeast genome, which became available 4 years after chromosome III).

$$\bar{x} \pm \frac{\hat{\sigma}}{\sqrt{n}} \cdot t_{1-\alpha/2}^{n-1}$$

```
[1] -1.972332
```

Draw a polygon of frequencies indicating the number of genes per class (class medium).

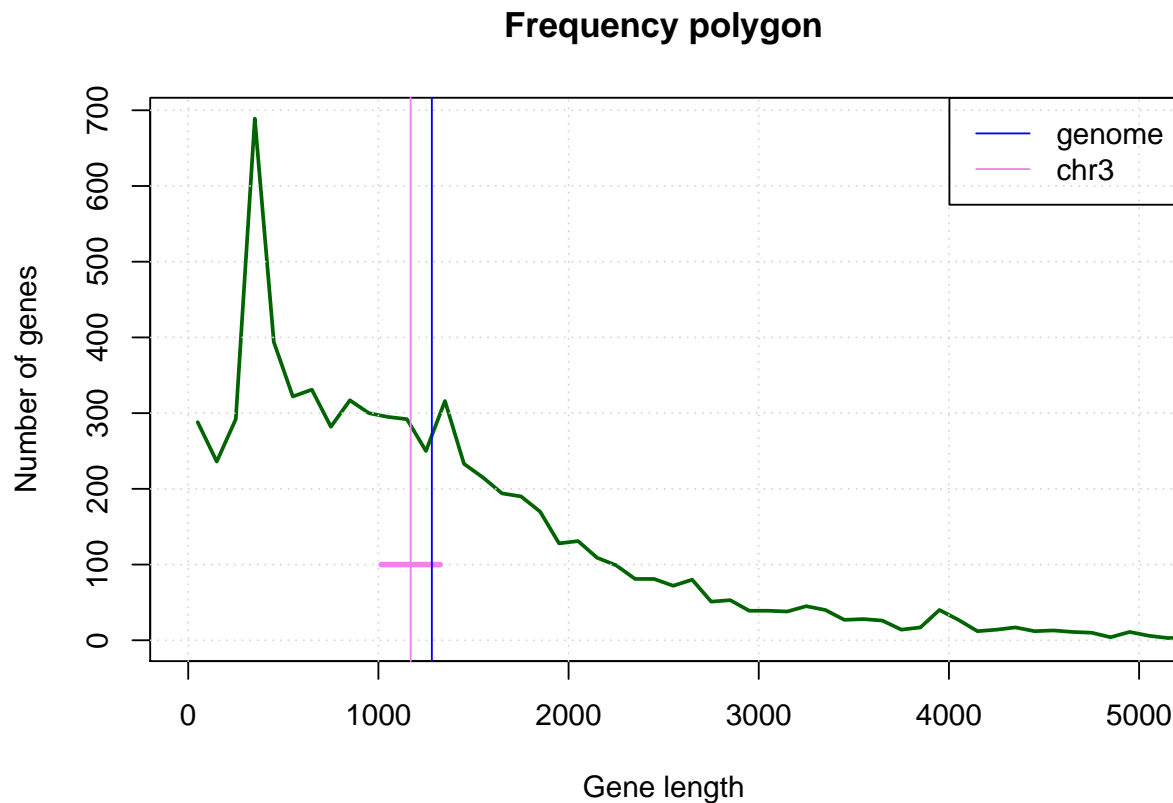

## 9. Distribution of gene length

- From the result of `hist()`, retrieve an array (in a variable of type `data.frame`) indicating the absolute frequencies (`count`) according to the median class size (`mids`),
- Add to this table a column indicating the relative frequency of each class of gene length.
- Add columns to this table indicating the **empirical distribution function** gene lengths (number of genes of a size less than or equal to each observed  $x$  value, and relative frequency of this number).
  - basic function: `cumsum()`
  - advanced function: `ecdf()`
- by using the functions `plot()` and `lines()`, draw a graph representing the absolute frequency per class (medians of classes in  $X$ , counts in  $Y$ ), and the empirical distribution function.
  - suggestion: superposez les ??utilisez le type de lignes “h” pour les fréquences de classe, et “l” ou “s” pour la fonction de répartition.

## 10. Randomly expected distribution for gene length

Based on the genome size (12.156.679 bp) and codon genomic frequencies defined below, calculate the random expected gene length distribution, and add it to the graph.

You can download the genomic frequencies of all polynucleotides here: `3nt_genomic_Saccharomyces_cerevisiae-ovlp-1str.tab`

Alternative: create a variable `freq.3nt` and manually assign the values for the 4? required polynucleotides from the table below.

sequence	frequency	occurrences
AAA	0.0394	478708
ATG	0.0183	221902
TAA	0.0224	272041
TAG	0.0129	156668
TGA	0.0201	244627

## 11. Before finishing : keep track of your session

Tractability is an essential issue in science. The function `R sessionInfo()` provides a summary of the conditions of a work session: version of R, operator system, libraries of functions used.

```
sessionInfo()
```

```
R version 3.6.1 (2019-07-05)
```

```
Platform: x86_64-apple-darwin15.6.0 (64-bit)
```

```
Running under: macOS Mojave 10.14.6
```

```
Matrix products: default
```

```
BLAS: /Library/Frameworks/R.framework/Versions/3.6/Resources/lib/libRblas.0.dylib
```

```
LAPACK: /Library/Frameworks/R.framework/Versions/3.6/Resources/lib/libRlapack.dylib
```

```
locale:
```

```
[1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8
```

```
attached base packages:
```

```
[1] stats      graphics  grDevices utils      datasets  methods   base
```



other attached packages:

[1] knitr\_1.23

loaded via a namespace (and not attached):

[1]	compiler_3.6.1	magrittr_1.5	tools_3.6.1	htmltools_0.3.6
[5]	yaml_2.2.0	Rcpp_1.0.2	stringi_1.4.3	rmarkdown_1.14
[9]	highr_0.8	stringr_1.4.0	xfun_0.8	digest_0.6.20
[13]	evaluate_0.14			