


# How to use package MultEdu

(How to prepare interesting and attractive teaching material)



$A \rightarrow B$

$C \rightarrow D$

zzzzzz

János Végh



General

Introduction  
Installing  
Structure  
Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

1 General information

2 Sectioning document

3 Preparing program listings

4 Inserting figures

5 Customizing document

6 Compiling document

7 Utilizing supplements

## 1 General information

### Introduction

Installing and utilizing MultEdu

Structure of MultEdu

The MultEdu distribution kit

General

**Introduction**

Installing

Structure

Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements



The today's education needs the course material in various forms: in the lecture room for the projected picture well organized text with many pictures are needed, which also serve as a good guide for the lecturer, too. To prepare for the exams, the explanation provided by the lecturer when projecting the slides is also needed.

The present document is a demo and test at the same time. It attempts to describe the many features, and also tests if the features really work. Because of the many features, and their interference, this job needs a lot of work and time, so the documentation does not always match the actual features, especially in this initial phase.



The macro package can be used at (at least) three different levels. Even the lowest level assumes some familiarity with  $\text{\LaTeX}$ . At the very basic level, you might just take the package, replace and modify files in the distribution. At the advanced level (this assumes reading the User's manual ☺) the user learns the facilities provided in the package, and prepares his/her courses actively using those facilities. Power users might add their own macros (preferably uploaded to the distribution), i.e. take part in the development.

General

**Introduction**

Installing

Structure

Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements



## 1 General information

Introduction

Installing and utilizing MultEdu

Structure of MultEdu

The MultEdu distribution kit

General

Introduction

**Installing**

Structure

Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements



Multedu, as any package based on  $\text{\LaTeX}$ , assumes that the user has experiences with using  $\text{\LaTeX}$ . I.e. some  $\text{\LaTeX}$  distribution must already be installed on the system of the user. If you want to use the batch processing facility, the CMake system must also be installed.

For the simplicity of utilization and starting up, the best way is to create a main directory for your family of projects and a subdirectory for your first project, as described below. The quickest way is to copy `./Workstuff` (after deleting and renaming some files) and to prepare your own "Hello World" program. Making minor changes to that source you may experience some features of the package. Then, it is worth at least to skim the user's manual, to see what features you need. After that, you may start your own development. At the beginning text only, later you can learn the advanced possibilities.



# 1 General information

Introduction

Installing and utilizing MultEdu

Structure of MultEdu

Subdirectory `common`

Subdirectory `Workstuff`

Generated files

The MultEdu distribution kit

General

Introduction

Installing

Structure

**common**  
**Workstuff**

Generated

Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements





The MultEdu system is assumed to be used with the directory structure below. It comes with two main subdirectories: `./common` comprises all files of the MultEdu system, and `./Workstuff` models the users subdirectory structure.

```
.  
|-- common  
|-- WorkStuff
```

You may add your project groups stuff like

```
.  
|-- Exams  
|-- Labs  
|-- Lectures  
|-- Papers
```

which directories have a subdirectory structure similar to that of

```
-- WorkStuff
```

## General

Introduction

Installing

Structure

common

Workstuff

Generated

Distribution

## Sectioning

Listings

Figures

Customizing

Compiling

Supplements



Subdirectory `./common` comprises some special subsubdirectories and general purpose macro files.

```
.  
|-- common  
| |-- defaults  
| |-- formats  
| |-- images
```

Subsubdirectory `./defaults` contains some default text, like copyright.

Subsubdirectory `./formats` contains the possible format specification macros, here you can add your own format macros.

Subsubdirectory `./images` contains some images, partly the ones which are used as defaults.

## General

Introduction

Installing

Structure

**common****Workstuf**

Generated

Distribution

## Sectioning

Listings

Figures

Customizing

Compiling

Supplements



Subdirectory `./Workstuff` contains the files of the present demo, and serves as an example of using the system (a kind of User's Guide). It contains a sample project `./Workstuff/Demo`, which has three main files.

```
|-- WorkStuff
| |-- Demo
| . |-- CMakeLists.txt
| . |-- Demo.tex
| . |-- Main.tex
```

The real main source file is `Main.tex`, and `Demo.tex` is a lightweight envelope to it. (if you want to use UseLATEX, you need to use the file with name `Main.tex`, the envelop must be concerted with the `CMakeLists.txt` file)



```
|-- WorkStuff
| |-- Demo
| . |-- build
| . . . |-- build
| . |-- dat
| . |-- fig
| . |-- lst
| . |-- src
```

The file `Main.tex` inputs files in the sub-subdirectories.

Subsubdirectory

```
| . |-- src is the place for the user's source files,
| . |-- fig for the images.
| . |-- lst for the program source files,
| . |-- dat for the other data .
```

General

Introduction

Installing

Structure

common  
Workstuff

Generated

Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements



It is also possible to use CMake package UseLATEX for compiling your text to different formats and languages in batch mode; producing the documents in different languages and formats in one single step. File `CMakeLists.txt` serves for that goal.

Subsubdirectories

```
|-- build and  
| . . |-- build
```

are only needed if using CMake.

General

Introduction

Installing

Structure

common  
Workstuf

Generated

Distribution

Sectioning

Listings

Figures

Customizing

Compiling

Supplements



During compilation,  $\text{\LaTeX}$  generates a number of different working files. These will unfortunately pollute the project base directory. As shown in section 2, only 3 files are needed for the operation, the rest can be deleted any time.

Compilation in batch mode also prepares some `.tex` files, which can be removed also any time, or even can be compiled manually. Do not forget to edit file `src/Defines.tex` before compiling, if you use them for that goal.

## General

Introduction

Installing

Structure

common  
Workstuf

Generated

Distribution

## Sectioning

Listings

Figures

Customizing

Compiling

Supplements



## 1 General information

Introduction

Installing and utilizing MultiEdu

Structure of MultiEdu

The MultiEdu distribution kit

General

Introduction

Installing

Structure

**Distribution**

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

The MultEdu package come with full source (and full faith). The author is rather power user than  $\text{\LaTeX}$  expert. Many of the macros are adapted from ideas and solution on the Internet. The source contains references to the original publisher, but the users' guide does not waste space for acknowledgement. However, the author acknowledges the contribution of all respective authors both for the code and the support on different user communities.

The package contains also some `.pdf` files in different output formats and languages. The file name do not contain the version number (their title page does). The purpose of those files (in addition to serving as users' guide) to allow the potential users to decide at a glance, whether they like the provided features.





The package MultEdu is provided 'as is'. It is developed continuously and in a non-uniform way. I myself can develop course materials with it. Both macros and documentation keep developing, but it requires (lot of) time. Reports on faults in operation or errors in documentation is evaluated as help in the development, even I might consider feature requests.

1 General information

2 Sectioning document

3 Preparing program listings

4 Inserting figures

5 Customizing document

6 Compiling document

7 Utilizing supplements

General

Sectioning

Units

Dual language  
sources

Chapter  
illustration

Slides and printed  
Floating objects

Listings

Figures

Customizing

Compiling

Supplements

## 2 Sectioning document

### Document units

Frames

Chapter

Section and below

Dual language sources

Chapter illustration

Concerting text on slides and printed output

Floating objects

General

Sectioning

**Units**

Frames

Chapter

Section and  
below

Dual language  
sources

Chapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements

Basically, the document must be organized as 'beamer' needs it, but to print it in a book-like form, the sectioning must be changed, and also the package 'beamerarticle' must be used. In order to provide a uniform wrapper around sectioning, MultEdu introduces its own sectioning units.

General

Sectioning

**Units**

Frames

Chapter

Section and  
belowDual language  
sourcesChapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements



These units actually correspond to the ones used in format 'book', and MultEdu transforms them properly when preparing slides.

Usage:

```
\MEframe[keys]{subtitle}{content}
```

Legal keys are

```
shrink=true|false and plain=true|false
```

By default, both are false.

General

Sectioning

Units

**Frames**

Chapter

Section and  
below

Dual language  
sources

Chapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements



Correspondingly, the biggest unit is the 'chapter'. (As mentioned, for slides it is transformed to 'section'.) Usage:

```
\MEchapter[short title]{long title}
```

General

Sectioning

Units

Frames

**Chapter**Section and  
belowDual language  
sourcesChapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements



The next, smaller unit is the 'section'. (As mentioned, for slides it is transformed to 'subsection'.) Usage:

```
\MEsection[short title]{long title}
```

In a similar way, there exists

```
\MEsubsection[short title]{long title} and
```

```
\MEsubsubsection[short title]{long title}; the latter one is  
transformed for slides to \paragraph.
```

General

Sectioning

Units

Frames

Chapter

**Section and  
below**Dual language  
sourcesChapter  
illustrationSlides and printed  
Floating objects

Listings

Figures

Customizing

Compiling

Supplements



## 2 Sectioning document

Document units

Dual language sources

Switching between languages

Frames

Chapter

Section and below

Chapter illustration

Concerting text on slides and printed output

Floating objects

General

Sectioning

Units

**Dual language  
sources**

Switching  
between  
languages

Frames

Chapter

Section and  
below

Chapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements





It happens, that I teach the same course in my mother tongue for my domestic students, and in English, for foreign students. The course material is the same, and it must be developed in parallel. Obviously it is advantageous, if they are located in the same source file, side by side; so they can be developed in the same action. The `\UseSecondLanguage` macro supports this method.

The macros introduced above have a version with prefix 'MED' rather than 'ME' only, which takes double argument sets (arguments for both languages). Depending on whether `\UseSecondLanguage` is defined, the first or the second argument set is used.

Usage:

`\UseSecondLanguage{YES}`

where the argument `{}` is not relevant, only if this macro is defined or not.

The two kinds of macros can be mixed, but only the 'D' macros are sensitive to changing the language.

General

Sectioning

Units

Dual language  
sources**Switching  
between  
languages**

Frames

Chapter

Section and  
belowChapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements



In dual language documents, usually

```
\MEDframe[keys]{subtitle, first language} {content, first  
language } {subtitle, second language} {content, second  
language}
```

is used. I.e. the user provides titles and contents in both languages, and for preparing the output, selects one of them with `\UseSecondLanguage`.

General

Sectioning

Units

Dual language  
sourcesSwitching  
between  
languages**Frames**

Chapter

Section and  
belowChapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements



Correspondingly, the biggest unit in a dual language document is the 'Dchapter'. (As mentioned, for slides it is transformed to 'Dsection'.)

Usage:

```
\MEDchapter[short title1]{long title1}{short title2}{long  
title2}
```

which is transformed to

```
\MEchapter[short title1]{long title1} or
```

```
\MEchapter[short title2]{long title2} calls,  
depending on whether \UseSecondLanguage is or is not defined.
```

General

Sectioning

Units

Dual language  
sourcesSwitching  
between  
languages

Frames

**Chapter**Section and  
belowChapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements



The usage of the lower units is absolutely analogous.

General

Sectioning

Units

Dual language  
sources

Switching  
between  
languages

Frames

Chapter

**Section and  
below**

Chapter  
illustration

Slides and printed

Floating objects

Listings

Figures

Customizing

Compiling

Supplements

- 2 Sectioning document
  - Document units
  - Dual language sources
  - Chapter illustration**
  - Concerting text on slides and printed output
  - Floating objects

General

Sectioning

Units

Dual language  
sources

**Chapter  
illustration**

Slides and printed  
Floating objects

Listings

Figures

Customizing

Compiling

Supplements



Some book styles also allow presenting some illustration at the beginning of the chapters.

Usage:

`\MEchapterillustration{file}`

For slides, the illustration appears in a 'plain' style style. For books, the picture is placed at the beginning of the chapter. If the file name is empty, a 'fig/DefaultIllustration.png' file is searched. If the file not found, no illustration generated.

If macro `\DisableChapterIllustration` is defined, no picture generated.

General

Sectioning

Units

Dual language  
sources**Chapter  
illustration**Slides and printed  
Floating objects

Listings

Figures

Customizing

Compiling

Supplements



- 2 Sectioning document
  - Document units
  - Dual language sources
  - Chapter illustration
  - Concerting text on slides and printed output
  - Floating objects

General

Sectioning

Units

Dual language  
sources

Chapter  
illustration

**Slides and printed  
Floating objects**

Listings

Figures

Customizing

Compiling

Supplements





The printed outputs usually contain much more text, than the slides. This extra text can be placed in the source file inside an `\ao{text}` (article only) macro, where the extra text appears inside the macro. That text appears only in the printed output, and is not visible on the slides. Take case, the text must be reasonable in both version; especially if used within a sentence.

General

Sectioning

Units

Dual language  
sourcesChapter  
illustration**Slides and printed**  
Floating objects

Listings

Figures

Customizing

Compiling

Supplements



## 2 Sectioning document

Document units

Dual language sources

Chapter illustration

Concerting text on slides and printed output

Floating objects

General

Sectioning

Units

Dual language  
sources

Chapter  
illustration

Slides and printed  
**Floating objects**

Listings

Figures

Customizing

Compiling

Supplements



L<sup>A</sup>T<sub>E</sub>X might handle objects like figures, tables, program listings, etc. as "floating objects, i.e. they might appear at a place, where L<sup>A</sup>T<sub>E</sub>X thinks to be optimal. This place is not necessarily the place in the printed materials, what you expect based on the referece point in the source but they do on the slides. Because of this, do not refer to the listings like 'In the following listing'. Instead, using something like

'In listing `\ref{lst:hello.cpp}`' is suggested.

In contrast, on the slides the lobject appears in the right place, but has no number. Because of this the really good method of referencing is something like 'In listing `\ao{\ref{lst:hello.cpp}}`' is the really good one. Take care of the meaning in the sentence, both on slides and printed output.



- 1 General information
- 2 Sectioning document
- 3 Preparing program listings
- 4 Inserting figures
- 5 Customizing document
- 6 Compiling document
- 7 Utilizing supplements

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements

When teaching programming, it is a frequent need to display program listings. Through using package 'listings', MultEdu can implement this in very good quality. For details not described here see documentation of package 'listings'.

Notice that here the ratio of the listings within the text is unusually high, so it is very hard for the compiler to find good positioning. In the case of real texts, the page is much more aesthetic.

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements



### 3 Preparing program listings

#### Setting appearance

Displaying inline fragments

Displaying program listings

Decorations on listings

Other related macros

Extra program languages

General

Sectioning

Listings

**Appearance**

Code fragments

Full code

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements

Package 'listings' allows to set up the style of displaying program listings according to our taste (and the requirements). MultEdu pre-sets some style and allows to modify it as much as you like.

Macro

`\MSESetStandardListingFormat` sets up a default appearance, and no programming language. Macro

`\MSESetListingFormat[options]{language}`  
sets the language, the same appearance as macro

`\MSESetStandardListingFormat`  
and also allows to overwrite parameters of 'listings' through 'options'.

General

Sectioning

Listings

**Appearance**

Code fragments

Full code

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements



- 3 Preparing program listings
  - Setting appearance
  - Displaying inline fragments
  - Displaying program listings
  - Decorations on listings
  - Other related macros
  - Extra program languages

General

Sectioning

Listings

Appearance

**Code fragments**

Full code

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements





A typical task is to display a shorter fragment, like a line or a keyword. It is possible using `\lstinline|code|`.

The LaTeX commands appearing in this documentation are produced in such a way that at the beginning of the chapter commands

```
\MSESetListingFormat{TeX}
```

```
\lstset{basicstyle= \ttfamily\color{black}\normalsize}
```

or

```
\MSESetListingFormat[basicstyle=  
\ttfamily\color{black}\normalsize]{TeX}
```

are issued (otherwise the character size of the program text will be too small).

[General](#)[Sectioning](#)[Listings](#)[Appearance](#)[Code fragments](#)[Full code](#)[Decorations](#)[Other](#)[Program  
languages](#)[Figures](#)[Customizing](#)[Compiling](#)[Supplements](#)

### 3 Preparing program listings

Setting appearance

Displaying inline fragments

Displaying program listings

Decorations on listings

Other related macros

Extra program languages

General

Sectioning

Listings

Appearance

Code fragments

**Full code**

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements

Program listings can be displayed using macro

`\MSourceFile[keys] {filename} {caption} {label}{scale}.`

Possible keys: `wide,decorations`.

"Hello World" – a C++ way

Listing 1: "Hello World" – a C++ way

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

The command used to display Listing was

```
\MSourceFile[language={ [ISO]C++}] {lst/HelloWorld.cpp} {A
"Hello World"- C++ program} {lst:hello.cpp}{}
```

Many times one needs wider program listings. In the case of the two-column printing, the listing shall fill the width of the two columns. In the case of one-column printing, the narrow list extend to 70% of the text width, while the wide lists

The wide listings can be placed even hardly on the printed page (the first proper place, relative to the appearance of the macro is the top of the next page), and in addition, the orders of normal and wide listings cannot be changed. Because of this, the place where the listing appears, might be relatively far from the place of referencing it.

General

Sectioning

Listings

Appearance

Code fragments

**Full code**

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements



A "Hello World"- C++ program, wide

Listing 2: A "Hello World"- C++ program, wide

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

The command used to display Listing :

```
\MESourceFile[language={ [ISO]C++ },wide]
{lst/HelloWorld.cpp} {A "Hello World"- C++ program, wide}
{lst:Whello.cpp}{}
```

General

Sectioning

Listings

Appearance

Code fragments

**Full code**

Decorations

Other

Program  
languages

Figures

Customizing

Compiling

Supplements

### 3 Preparing program listings

Setting appearance

Displaying inline fragments

Displaying program listings

Decorations on listings

Highlighting lines

Commenting highlighted lines

Commenting source lines

Numbered balls to listing

Figure to listing

Other related macros

Extra program languages

General

Sectioning

Listings

Appearance

Code fragments

Full code

**Decorations**

Highlighting

Commenting

Commenting

Balls

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements

Different decorations can be placed on top of listings. To do so, one has to use the keyword `decorations`, and to insert as arguments the macros presented in this section.

The general form:

```
\MEXSourceFile[options, decorations={ list of decorations }  
] {source file} {caption} {label}{}  
where the list of decorations may contain any of the decoration macros  
presented in the section. In options any option, used by package 'listings'  
applies.
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

**Decorations**

Highlighting

Commenting

Commenting

Balls

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements

To highlight a program body in listing the macro

```
\MESourceFile[language={ [ISO]C++}, decorations={
\MESourcelinesHighlight {HelloBalloon} {lst:HLhello.cpp}
{6}{8} } ] {lst/HelloWorld.cpp} {"Hello World" -- a C++
way, kiel~Olt} {lst:HLhello.cpp}{}
```

shall be used.

"Hello World" – a C++ way, highlighted

Listing 3: "Hello World" – a C++ way, highlighted

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

**Highlighting**

Commenting

Commenting

Balls

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements



The highlighting box can also be commented. Using macro

```
\MESourceBalloonComment[keys]{BallonName} {ShiftPosition}  
{Comment} {CommentShape}
```

allows to comment the balloon created previously. Here `BallonName` is the first argument of `\MESourcelinesHighlight`, `ShiftPosition` is the shift of the comment box, `Comment` is the comment text. Possible keys, with defaults are:

`width[=3cm]` and `color[=deepeach]`.

Listing is produced using macro

```
\MESourceFile[language={[ISO]C++},wide, decorations={
\MESourcelinesHighlight {HelloBalloon} {lst:HLChello.cpp}
{6}{8} \MESourceBalloonComment{HelloCBalloon} {0cm,0cm}
{This is the body} {CommentShape} } ] {lst/HelloWorld.cpp}
{"Hello World" -- a C++ way, commenting highlighted}
{lst:HLhello.cpp}{}
```

"Hello World" – a C++ way, remark to the highlighting

Listing 4: "Hello World" – a C++ way, remark to the highlighting

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

This is the body

The individual source lines can also be commented, see Listing. To produce it, the command was:

```
\MESourceFile[language={ [ISO]C++ },wide, decorations={
\MESourcelineComment{lst:Chello.cpp} {6} {0cm,0cm} {This
is a comment} {CommentShape} } ]{lst/HelloWorld.cpp}
{"Hello World" -- a C++ way, commenting source lines}
{lst:Chello.cpp}{}
```

"Hello World" – a C++ way, commenting source lines

Listing 5: "Hello World" – a C++ way, commenting source lines

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

This is a comment

On the program listing numbered balls can also be located, for referencing the lines from the text. This can be done using macro


```
\MESourcelineListBalls[keys]{ListingLabel}{List of lines}
```

which puts a numbered ball at the end of the listed lines. Here

`ListingLabel` is the label of the listing, `List of lines` is the list of sequence numbers of the lines to be marked. Possible key, with defaults: `color[=orange]` and `number[=1]`.

Notes:

- When making slides, the balls will be put to separated slides.
- The positioning using geometrical positions, does not consider 'firstline'.

The marked lines can then be referenced through the balls like '(Listing 6  is the return instruction'. It can be produced using

```
\MEBall{Listing~\ref{lst:LBhello.cpp}}{2}
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Highlighting

Commenting

Commenting

**Balls**

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements



To produce Listing, the macro

```
\MESourceFile[language={ [ISO]C++}, decorations={
\MESourcelineListBalls{lst:LBhello.cpp}{3,8,5} } ]
{lst/HelloWorld.cpp} {"Hello World" -- a C++ way, with
balls} {lst:LBhello.cpp}{}
```

has been used

"Hello World" – a C++ way, with balls

Listing 6: "Hello World" – a C++ way, with balls

```
#include <iostream>
using namespace std;
int 1
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Highlighting

Commenting

Commenting

**Balls**

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements

To produce Listing, the macro

```
\MESourceFile[language={ [ISO]C++}, decorations={
\MESourceLineListBalls{lst:LBhello.cpp}{3,8,5} } ]
{lst/HelloWorld.cpp} {"Hello World" -- a C++ way, with
balls} {lst:LBhello.cpp}{}
```

has been used

"Hello World" – a C++ way, with balls

Listing 7: "Hello World" – a C++ way, with balls

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0; 2
}
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Highlighting

Commenting

Commenting

**Balls**

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements

To produce Listing, the macro

```
\MESourceFile[language={ [ISO]C++}, decorations={
\MESourceLineListBalls{lst:LBhello.cpp}{3,8,5} } ]
{lst/HelloWorld.cpp} {"Hello World" -- a C++ way, with
balls} {lst:LBhello.cpp}{}
```

has been used

"Hello World" – a C++ way, with balls

Listing 8: "Hello World" – a C++ way, with balls

```
#include <iostream>
using namespace std;
int
main ( int argc, char ** argv )
{
    // print welcome message
    cout << "Hello World" << endl;
    return 0;
}
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Highlighting

Commenting

Commenting

**Balls**

Figures

Other

Program

languages

Figures

Customizing

Compiling

Supplements

Sometimes one might need to insert figures into the listing. The macro is

```
\MESourcelineFigure[keys] {SourceLabel} {LineNo}  
{ShiftPosition} {GraphicsFile}.
```

Possible key is `width[=3cm]`

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Highlighting

Commenting

Commenting

Balls

**Figures**

Other

Program

languages

Figures

Customizing

Compiling

Supplements



To produce Listing, macro

```
\MESourceFile[language={Verilog},wide, decorations={
\MESourceLineFigure[width=5.2cm] {lst:forloops.v}{8}
{3.0,-.3} {fig/forloops} } ] {lst/forloops.v}
{Implementing \citetext{for} loop with repeating HW}
{lst:forloops.v}{}
```

was used.

Implementing for loop with repeating HW

Listing 9: Implementing for loop with repeating HW

```
// for == repeat HW
```

```
always @(A or B)
```

```
begin
```

```
  G = 0;
```

```
  for (I = 0; I < 4; I = I + 1)
```


```
  begin
```

```
    F[I] = A[I] & B[3-I];
```

```
    G = G ^ A[I];
```

```
  end
```

```
end
```



### 3 Preparing program listings

Setting appearance

Displaying inline fragments

Displaying program listings

Decorations on listings

Other related macros

Comparing source files

Source with output

Extra program languages

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

**Other**

Comparing source  
files

Output

Program  
languages

Figures

Customizing

Compiling

Supplements

Sometimes it is worth to compare source files, side by side. The macro for this is

```
\MSourceFileCompare[keys]{source file1} {source file2}  
{caption} {label}
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

**Comparing source  
files**

Output

Program

languages

Figures

Customizing

Compiling

Supplements



The command to produce Listing is

```
\MESourceFileCompare[language={[ANSI]C}] {lst/lower1.c}
{lst/lower2.c} {Comparing two routines for converting
string to lower case} {lst:lower12.c}
```

#### Comparing two routines for converting string to lower case

```
/* Convert string to lowercase: slow */
void lower1(char *s)
{
    int i;

    for (i = 0; i < strlen(s); i++)
        if (s[i] >= 'A' && s[i] <= 'Z')
            s[i] -= ('A' - 'a');
}
```

```
/* Convert string to lowercase: faster */
void lower2(char *s)
{
    int i;
    int len = strlen(s);
    for (i = 0; i < len; i++)

        if (s[i] >= 'A' && s[i] <= 'Z')
            s[i] -= ('A' - 'a');
}
```

The macro does not touch the source files. In the figure, the empty lines, allowing to compare the source files with easy, were inserted manually.

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

**Comparing source  
files**

Output

Program

languages

Figures

Customizing

Compiling

Supplements



It is also useful sometimes to show the source file with its output. The macro

```
\MESourceFileWithResult [keys]{source file} {result file}
{caption} {label}
```

allows to do that.

For producing Listing the command

```
\MESourceFileWithResult [language=C++,wide,decorations={
\MESourcelineListBalls {lst:calculatorwithresult}
{13,14,16,18,19} }] {lst/expensive_calculator.cpp}
{lst/calculatorresult.txt} {The calculator program with
its result} {lst:calculatorwithresult}
was used.
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Comparing source  
files**Output**

Program

languages

Figures

Customizing

Compiling

Supplements



## The calculator program with its result

```
// Expensive Calculator
// Demonstrates built-in arithmetic operators

#include <iostream>
using namespace std;

int main()
{
    cout << "7 + 3 = " << 7 + 3 << endl;
    cout << "7 - 3 = " << 7 - 3 << endl;
    cout << "7 * 3 = " << 7 * 3 << endl;

    cout << "7 / 3 = " << 7 / 3 << endl;
    cout << "7.0 / 3.0 = " << 7.0 / 3.0 << endl;

    cout << "7 % 3 = " << 7 % 3 << endl;

    cout << "7 + 3 * 5 = " << 7 + 3 * 5 << endl;
    cout << "(7 + 3) * 5 = " << (7 + 3) * 5 << endl;

    return 0;
}
```

```
7 + 3 = 10
7 - 3 = 4
7 * 3 = 21
7 / 3 = 2
7.0 / 3.0 = 2.33333
7 % 3 = 1
7 + 3 * 5 = 22
(7 + 3) * 5 = 50
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Comparing source  
files

Output

Program  
languages

Figures

Customizing

Compiling

Supplements



## The calculator program with its result

```
// Expensive Calculator
// Demonstrates built-in arithmetic operators

#include <iostream>
using namespace std;

int main()
{
    cout << "7 + 3 = " << 7 + 3 << endl;
    cout << "7 - 3 = " << 7 - 3 << endl;
    cout << "7 * 3 = " << 7 * 3 << endl;

    cout << "7 / 3 = " << 7 / 3 << endl;
    cout << "7.0 / 3.0 = " << 7.0 / 3.0 << endl;

    cout << "7 % 3 = " << 7 % 3 << endl;

    cout << "7 + 3 * 5 = " << 7 + 3 * 5 << endl;
    cout << "(7 + 3) * 5 = " << (7 + 3) * 5 << endl;

    return 0;
}
```

```
7 + 3 = 10
7 - 3 = 4
7 * 3 = 21
7 / 3 = 2
7.0 / 3.0 = 2.33333
7 % 3 = 1
7 + 3 * 5 = 22
(7 + 3) * 5 = 50
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Comparing source  
files

Output

Program  
languages

Figures

Customizing

Compiling

Supplements



## The calculator program with its result

```
// Expensive Calculator
// Demonstrates built-in arithmetic operators

#include <iostream>
using namespace std;

int main()
{
    cout << "7 + 3 = " << 7 + 3 << endl;
    cout << "7 - 3 = " << 7 - 3 << endl;
    cout << "7 * 3 = " << 7 * 3 << endl;

    cout << "7 / 3 = " << 7 / 3 << endl;
    cout << "7.0 / 3.0 = " << 7.0 / 3.0 << endl;

    cout << "7 % 3 = " << 7 % 3 << endl;

    cout << "7 + 3 * 5 = " << 7 + 3 * 5 << endl;
    cout << "(7 + 3) * 5 = " << (7 + 3) * 5 << endl;

    return 0;
}
```

```
7 + 3 = 10
7 - 3 = 4
7 * 3 = 21
7 / 3 = 2
7.0 / 3.0 = 2.33333
7 % 3 = 1
7 + 3 * 5 = 22
(7 + 3) * 5 = 50
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Comparing source  
files

Output

Program  
languages

Figures

Customizing

Compiling

Supplements





## The calculator program with its result

```
// Expensive Calculator  
// Demonstrates built-in arithmetic operators
```

```
#include <iostream>  
using namespace std;
```

```
int main()  
{  
    cout << "7 + 3 = " << 7 + 3 << endl;  
    cout << "7 - 3 = " << 7 - 3 << endl;  
    cout << "7 * 3 = " << 7 * 3 << endl;  
  
    cout << "7 / 3 = " << 7 / 3 << endl;  
    cout << "7.0 / 3.0 = " << 7.0 / 3.0 << endl;  
  
    cout << "7 % 3 = " << 7 % 3 << endl;  
  
    cout << "7 + 3 * 5 = " << 7 + 3 * 5 << endl;  
    cout << "(7 + 3) * 5 = " << (7 + 3) * 5 << endl;  
  
    return 0;  
}
```

```
7 + 3 = 10  
7 - 3 = 4  
7 * 3 = 21  
7 / 3 = 2  
7.0 / 3.0 = 2.33333  
7 % 3 = 1  
7 + 3 * 5 = 22  
(7 + 3) * 5 = 50
```

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Comparing source  
files

Output

Program  
languages

Figures

Customizing

Compiling

Supplements



## The calculator program with its result

```
// Expensive Calculator
// Demonstrates built-in arithmetic operators

#include <iostream>
using namespace std;

int main()
{
    cout << "7 + 3 = " << 7 + 3 << endl;
    cout << "7 - 3 = " << 7 - 3 << endl;
    cout << "7 * 3 = " << 7 * 3 << endl;

    cout << "7 / 3 = " << 7 / 3 << endl;
    cout << "7.0 / 3.0 = " << 7.0 / 3.0 << endl;

    cout << "7 % 3 = " << 7 % 3 << endl;

    cout << "7 + 3 * 5 = " << 7 + 3 * 5 << endl;
    cout << "(7 + 3) * 5 = " << (7 + 3) * 5 << endl;

    return 0;
}
```

```
7 + 3 = 10
7 - 3 = 4
7 * 3 = 21
7 / 3 = 2
7.0 / 3.0 = 2.33333
7 % 3 = 1
7 + 3 * 5 = 22
(7 + 3) * 5 = 50
```

5

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

Comparing source  
files

Output

Program  
languages

Figures

Customizing

Compiling

Supplements



### 3 Preparing program listings

Setting appearance

Displaying inline fragments

Displaying program listings

Decorations on listings

Other related macros

Extra program languages

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

**Program  
languages**

Figures

Customizing

Compiling

Supplements



For my own goals, in addition to the programming languages defined in package 'listings', some further languages have been defined:

- diff
- [DIY]Assembler
- [ARM]Assembler
- [x64]Assembler
- [y86]Assembler

General

Sectioning

Listings

Appearance

Code fragments

Full code

Decorations

Other

**Program  
languages**

Figures

Customizing

Compiling

Supplements



1 General information

2 Sectioning document


3 Preparing program listings

4 Inserting figures

5 Customizing document

6 Compiling document

7 Utilizing supplements

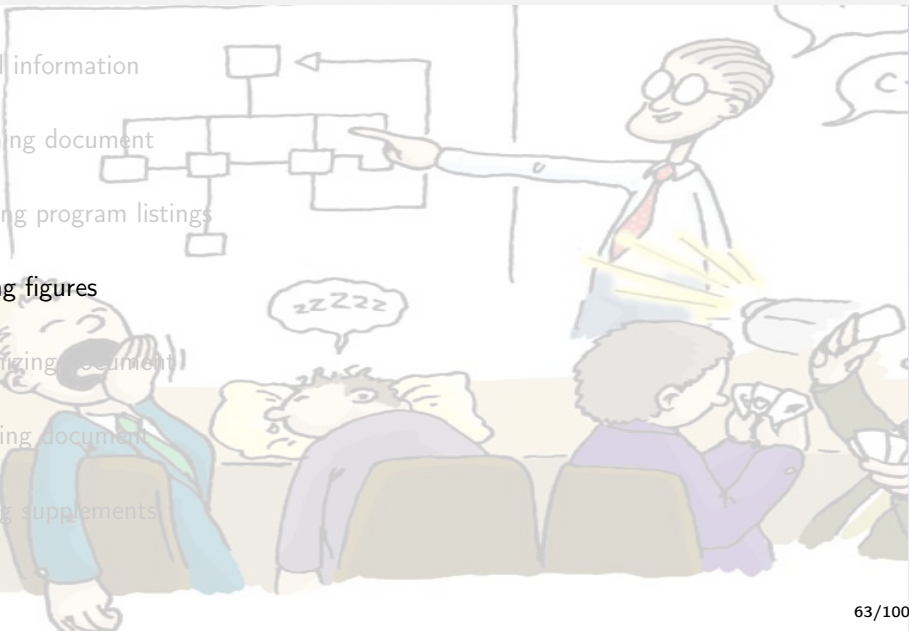

## 4 Inserting figures

### Traditional figures

General

Sectioning

Listings

Figures

**Traditional**

Customizing


Compiling

Supplements

Traditional figures can be displayed using macro

`\MEfigure[keys]{image file} {caption} {label} {copyright}`  
`{ScaleFactor}`. Possible keys:  
`wide`.

©2011 <http://pinterest.com>



On slides, the single-width figures are placed in 'columns'

When new and old phones meet

The command used to display Figure was

`\MEfigure{fig/phone_ancestors} {When new and old phones meet} {fig:phonenachestors} {2011 http://pinterest.com}{.8}`

1 General information

2 Sectioning document


3 Preparing program listings

4 Inserting figures

5 Customizing document

6 Compiling document

7 Utilizing supplements

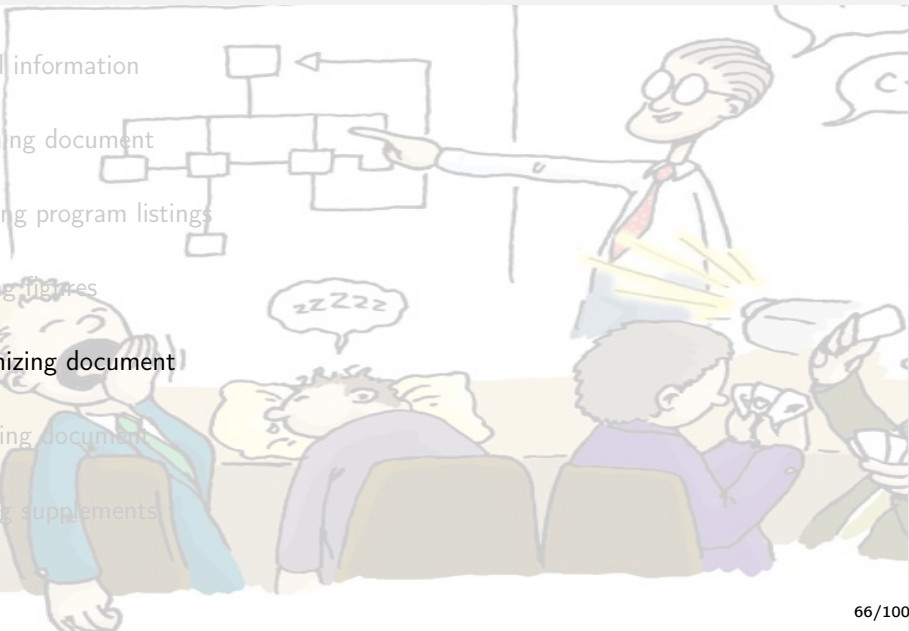



The MultEdu system works perfectly with its default settings, but it cannot read your mind. The settings can be changed using definitions of form `\def{\xxx}`. The place where the settings can be changed, depends on the compilation mode, as described in chapter 6. The default values of the settings is given at the individual settings. The sections in this chapter provide a detailed description of the possible settings.

General

Sectioning

Listings

Figures

Customizing

Defaults

Options

Files

Compiling

Supplements



## 5 Customizing document

### Default settings

Options for using package MultEdu

Files for package MultEdu

General

Sectioning

Listings

Figures

Customizing

**Defaults**

Options

Files

Compiling

Supplements

The MultEdu system can interpret as an intention to change the default behavior either the presence of a file at a predefined file with a predefined name, or the thesence of definition of form `\def{Option{Value}}`. In the absence of such occurrences, Multedu uses the default settings when generating the output file.

General

Sectioning

Listings

Figures

Customizing

**Defaults**

Options

Files

Compiling

Supplements



## 5 Customizing document

Default settings

Options for using package MultEdu

Options for Beamer-based formats

Files for package MultEdu

General

Sectioning

Listings

Figures

Customizing

Defaults

**Options**

Beamer

Files

Compiling

Supplements

Multedu allows to utilize two popular screen widths. The default is the spreading format with aspect ratio 16:9. To set ratio 4:3, use

```
{\def\DisableWideScreen{YES}}
```

General

Sectioning

Listings

Figures

Customizing

Defaults

Options

**Beamer**

Files

Compiling

Supplements



Sometimes (mainly in the case of short presentations) the table of contents is not necessary at all. It can be disabled through defining

```
{\def\DisableTOC{YES}}
```

It might also happen, that chapter-level TOC is still needed, but the section level not. This can be reached through defining

```
{\def\DisableSectionTOC{YES}}
```

## 5 Customizing document

Default settings

Options for using package MultiEdu

Files for package MultiEdu

src/Heading

General

Sectioning

Listings

Figures

Customizing

Defaults

Options

**Files**

Heading

Compiling

Supplements

The files affecting the appearance of your documents must fit the overall structure of files, as described in section 2. It is a good policy to change files only in your project subdirectory, since the commonly used files of the package are overwritten when using batch compile.



Some kind of heading usually belongs to the document. As an example see file `src/Heading.tex` of this user's guide.

General

Sectioning

Listings

Figures

Customizing

Defaults

Options

Files

**Heading**

Compiling

Supplements

Line `\def\LectureAuthor{J\'anos V\'egh}` defines the author, lines `\def\LectureTitle{How to use package MultEdu}` and `\def\LectureSubtitle{(How to prepare interesting and attractive teaching material)}` the main title and its subtitle. Also a university name or conference name can be defined in `\def\LecturePublisher{University or conference}` line. It is good practice to define `\def\LectureRevision{V\Version\ (using \MERevision) \at year.mm.dd}`, too.

When using dual-language source files, one has to prepare the source in a form which allows to select source lines depending on the language. To prepare dual-language documents, the definitions should be put in frame like `\ifthenelse{\equal{\LectureLanguage}{english}}`  
`{% in English`  
`}% true`  
`{% NOT english`  
`}`

Also here you can give e-mail address

```
\def\LectureEmail{Janos.Vegh\at unideb.hu}
```

Furthermore, one can provide BibTeX, even conditionally, depending on the language or the presence of some files

```
\IfFileExists{src/Bibliographyhu}
```

```
{\def\LectureBibliography{src/Bibliography  
,src/Bibliographyhu}}
```

```
{\def\LectureBibliography{src/Bibliography}}
```

General

Sectioning

Listings

Figures

Customizing

Defaults

Options

Files

**Heading**

Compiling

Supplements



1 General information

2 Sectioning document


3 Preparing program listings

4 Inserting figures

5 Customizing document

6 Compiling document

7 Utilizing supplements

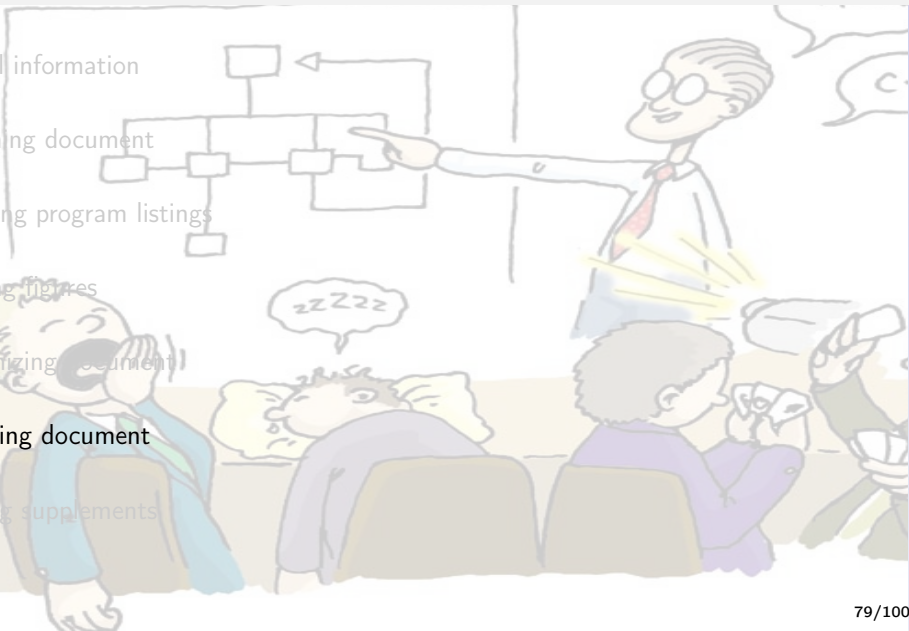

- 6 Compiling document
  - Manual mode compiling
  - Batch mode compiling
  - Changing default settings

General  
Sectioning  
Listings  
Figures  
Customizing  
Compiling

- Manual**
- Batch**
- Settings**

Supplements

File Main.tex is the common part of the dual compilation system. This contains the real source code. Any setting in this file (as well as in the included files) overwrites the settings, in both the manual and the batch mode, so it is better not to use any settings here. The best policy is to collect all the settings in a separate file, which is then included in the envelope file.

General

Sectioning

Listings

Figures

Customizing

Compiling

**Manual****Batch****Settings**

Supplements



Developing course materials is best to do using an editor, integrated into an IDE. You need to read the envelope file (corresponding to `Demo.tex`) into the editor and mark it as your main document. In the file `Main.tex` you should insert references to the chapters of your course material. Those chapter files should be placed in subdirectory `src`, following the structure of the demonstrational material.

General

Sectioning

Listings

Figures

Customizing

Compiling

**Manual**

Batch

Settings

Supplements





The settings file should be placed in subdirectory `src`, its reasonable name can be `Defines.tex`. The task of the wrapper file `Demo.tex` is only to input the setting file and the main file.

The batch compilation generates a file `Defines.tex`, which goes into subdirectory `build/build/src`. (You may use it to 'cheat', what settings and how should be utilized.) The batch compilation also generates a template file `Defines.tex.in` in subdirectory `src`. The content of this file corresponds to the last pass of the batch compilation.

General

Sectioning

Listings

Figures

Customizing

Compiling

**Manual****Batch****Settings**

Supplements





## Compiling document

Manual mode compiling

Batch mode compiling

Changing default settings

General

Sectioning

Listings

Figures

Customizing

Compiling

Manual

**Batch**

**Settings**

Supplements



Batch processing serves (mainly) the goal to generate the output from the common source in the different formats and languages.

From technical reasons, MultEdu prepares a private copy from the MultEdu files, in the subdirectory `common` of the project. You may safely experiment with this copy or also delete it; the next batch compile will recreate it. (I.e. one should save the valuable developments; possibly in subdirectory `../../common` if you want to use it also by the other project groups.)

General

Sectioning

Listings

Figures

Customizing

Compiling

Manual

**Batch**

Settings

Supplements



6

## Compiling document

Manual mode compiling

Batch mode compiling

Changing default settings

Versioning

Languages

General

Sectioning

Listings

Figures

Customizing

Compiling

Manual

Batch

**Settings**

Versioning

Languages

Supplements



Settings of MultEdu can be defined using `\def{OptionName}` macros. If the compiler does not find the corresponding macro, the default setting will be used. The settings differ in the cases of manual and batch compiling. During batch processing the compiler uses settings from file `build/build/src/Defines.tex`, which is newly created based on the settings in `CMakeFiles.txt`. During manual compilation, the settings from fájl `src/Defines.tex` are used. These two setting files should have the same (or at least similar) content, but the latter one is only handled by the user.



Multedu uses three-level version numbering (major, minor and patch). The course materials prepared with MultEdu have two kinds of version numbers: the user maintains his/her own version numbers, and the developer maintains version of MultEdu.

Version number of MultEdu is located in file

`../../common/MEMacros.tex`; better not to change it. The own course material version number is held in file `CMakeFiles.txt`, and that setting will be refreshed in the generated source files (through file `Defines.tex`) when batch compiling. The version number of the course material appears also in the name of the generated file, so it is worth to use it in a consequent way.

Usage:

```
\def\Version{major.minor.patch}
```



MultEdu can handle single- and dual-language documents. Different spelling, section name, captions belong to the different languages. In the settings file the language must be specified, like using setting `\LectureLanguage{english}` (this is the default). The name of the selected language appears also in the name of the result file.

General

Sectioning

Listings

Figures

Customizing

Compiling

Manual

Batch

Settings

Versioning

**Languages**

Supplements



In the dual-language documents, a first and second language co-exist, meaning in which order the texts in the different languages appear in the document. This allows to develop course material in both languages simultaneously, one below the other. Selecting the proper language one can generate output in either language. If `\UseSecondLanguage{}` is defined, then the text appearing in the second position will be processed, using the language features defined by `\LectureLanguage{}`.

When using batch compilation, the options `FirstLanguage` and `SecondLanguage` must be provided (that defines the language found in the dual-language macros in the first and second position, respectively). If option `NEED_BOTH_LANGUAGES` is on, the output file will be produced in both languages. If it is switched off, option `USE_SECOND_LANGUAGE` decides which language to use.





1 General information

2 Sectioning document

3 Preparing program listings

4 Inserting figures

5 Customizing document

6 Compiling document

7 Utilizing supplements

## 7 Utilizing supplements

### Acronyms and glossary

How to use acronyms and glossary

How to define acronyms and glossary

How to utilize acronyms and glossary

### Indices

### Using bibliography

General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

**Glossaries**

Utilization

Definition

Utilization

Indices

Bibliography



Especially in the case of technical courses, frequently occur abbreviations, mosaic words, unique interpretations of a term, etc. MultEdu can help you with using the `glossaries` package, to provide your students with a hyperlinked facility, to use those terms consequently.

Such elements should be used in the text like `\gls{ref}`. Here `ref` is a reference label, and in the text the short name of the referenced item appears. In the case of acronyms, the expansion also appears at the first occurrence of that acronym. Some examples are given below; for more explanation see package `glossaries`.



Especially in the case of technical courses, frequently occur abbreviations, mosaic words, unique interpretations of a term, etc. MultEdu can help you with using the `glossaries` package, to provide your students with a hyperlinked facility, to use those terms consequently.

References to such elements should be used in the text as `\gls{ref}`.

Here `ref` is a reference label, and in the text the short name of the referenced item appears at that place. In the case of acronyms, the expansion also appears at the first occurrence of that acronym. Some examples are given below; for more explanation see package `glossaries`.

When as a sample you use the term computer, where Central Processing Unit (CPU) és Direct Memory Access (DMA) also happens; in the text

`\gls{sampleone}` you use the term, `\gls{computer}` where `\gls{CPU}` and `\gls{DMA}` also happens should appear.

Multedu then appends chapters [Acronyms](#) and [Glossary](#) to the end of the document, and clicking on those hyperlinked words, you are taken to the explanation of the terms. When there, you might click on the page number after the term, to go back.



MultEdu expects that (if you want to use this facility) your project contains a file `src/Glossary.tex`, where the expansion of the referred to items can be found. The entries corresponding to the items used in the sample can be coded like

```
\ifthenelse{\equal{\LectureLanguage}{english}} {
\newglossaryentry{computer} { name={computer},
description={is a programmable machine that receives
input, stores and manipulates data, and provides output in
a useful format} }
\newglossaryentry{sampleone}{name={sample},description={a
little example}} \newacronym{CPU}{CPU}{Central Processing
Unit} \newacronym{DMA}{DMA}{Direct Memory Access} } {}
```

General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

Glossaries

Utilization

**Definition**

Utilization

Indices

Bibliography



These facilities can of course be only reasonably used in printable formats. Formats based on `beamer` do not generate such a list of terms, but the `\gls{ref}` are of course usable.

General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

Glossaries

Utilization

Definition

**Utilization**

Indices

Bibliography



## 7 Utilizing supplements

- Acronyms and glossary
- Indices**
- Using bibliography

General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

Glossaries

**Indices**

Bibliography





## 7 Utilizing supplements

- Acronyms and glossary
- Indices
- Using bibliography

General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

Glossaries

Indices

**Bibliography**



General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

Glossaries

Indices

**Bibliography**



General

Sectioning

Listings

Figures

Customizing

Compiling

Supplements

Glossaries

Indices

**Bibliography**

