

Idea of AI Stock Modeling

1. use boolinger line to determine long/short points(max:long, min:short value)
2. smooth (9, 15) all data, use the smoothed data as close[array]
3. calculate vilocity for all points(array)
4. calculate accelerate for all points(array)
5. use a window find stock input smooth data
6. create datasets: a. input(close, vilocity, accelerate, weekdays, time, volume) b. output(long, short)
7. create model
8. use the model to test training data

Create datasets

- [create datasets from stock raw data](#)

save and load datasets from file

- better file format

```
long,short,[(weekdays,time,close,slope,accelerate,volume),(...)]
0.1,0.2,0.3,0.4,0.5,0.6,0.7
0.2,0.3,0.4,0.5,0.6,0.8,0.9
0.3,0.4,0.5,0.6,0.7,0.5,0.4
...
```

velocity and acceleration

$v_i = \frac{c_{i+1} - c_{i-1}}{t_{i+1} - t_{i-1}}$ i.e. the velocity at t_i equals the difference of the "close" at t_{i+1} and t_{i-1} . same as accelerate as below: $a_i = \frac{v_{i+1} - v_{i-1}}{t_{i+1} - t_{i-1}}$

Training and test data design

- csv file format

```
long,short,weekdays,time,price,volume,velocity,acceleration,...
1,0,2.0,10.0,503.039,2.3,0.12,1232,2.0,10.123,503.3,2.1,0.3,1354,...
1,0,2.0,10.0,503.039,2.3,0.12,1232,2.0,10.123,503.3,2.1,0.3,1354,...
... ..
```

[sample data file](#) Sample format:

```
long,short,weekday,time,price,volume,velocity,acceleration,... ..
1,0,4.0000,10.1167,513.3700,230304.0000,-0.0600,0.1100,4.0000,10.1333,513.2700,389
610.0000,-0.1000,-0.0400,4.0000,10.1500,513.2300,116196.0000,-0.0400,0.0600,4.0000
```

```
,10.1667,513.0700,125490.0000,-0.1600,-0.1200,4.0000,10.1833,512.9400,308380.0000,
-0.1300,0.0300,4.0000,10.2000,512.8300,153775.0000,-0.1100,0.0200,4.0000,10.2167,5
12.9300,191395.0000,0.1000,0.2100,4.0000,10.2333,512.7600,186673.0000,-0.1700,-0.2
700,4.0000,10.2500,512.5800,243147.0000,-0.1800,-0.0100,4.0000,10.2667,512.3400,22
2841.0000,-0.2400,-0.0600
1,0,5.0000,15.1167,509.5700,91117.0000,-0.0400,-0.0500,5.0000,15.1333,509.5500,153
922.0000,-0.0200,0.0200,5.0000,15.1500,509.4800,136941.0000,-0.0700,-0.0500,5.0000
,15.1667,509.5900,115541.0000,0.1100,0.1800,5.0000,15.1833,509.5900,146988.0000,0.
0000,-0.1100,5.0000,15.2000,509.5700,122923.0000,-0.0200,-0.0200,5.0000,15.2167,50
9.4300,163968.0000,-0.1400,-0.1200,5.0000,15.2333,509.3400,110492.0000,-0.0900,0.0
500,5.0000,15.2500,509.2600,243777.0000,-0.0800,0.0100,5.0000,15.2667,509.2000,151
465.0000,-0.0600,0.0200
...
0,1,4.0000,11.2333,503.6100,50585.0000,0.0400,0.0500,4.0000,11.2500,503.7300,16816
1.0000,0.1200,0.0800,4.0000,11.2667,503.8700,92983.0000,0.1400,0.0200,4.0000,11.28
33,503.9000,221729.0000,0.0300,-0.1100,4.0000,11.3000,503.8400,129542.0000,-0.0600
,-0.0900,4.0000,11.3167,503.7500,130294.0000,-0.0900,-0.0300,4.0000,11.3333,503.82
00,84013.0000,0.0700,0.1600,4.0000,11.3500,503.9100,49237.0000,0.0900,0.0200,4.000
0,11.3667,503.9600,259312.0000,0.0500,-0.0400,4.0000,11.3833,503.9700,92385.0000,0
.0100,-0.0400
0,1,4.0000,15.4333,499.7100,180733.0000,0.0600,0.0000,4.0000,15.4500,499.7700,1307
63.0000,0.0600,0.0000,4.0000,15.4667,499.8200,110770.0000,0.0500,-0.0100,4.0000,15
.4833,499.7900,105657.0000,-0.0300,-0.0800,4.0000,15.5000,499.8400,224877.0000,0.0
500,0.0800,4.0000,15.5167,499.9200,147421.0000,0.0800,0.0300,4.0000,15.5333,499.97
00,269021.0000,0.0500,-0.0300,4.0000,15.5500,500.0700,131807.0000,0.1000,0.0500,4.
0000,15.5667,500.1400,149343.0000,0.0700,-0.0300,4.0000,15.5833,500.2500,164901.00
00,0.1100,0.0400
```

- training dataset format `trainingDataset.shape = [18,6,10]`

```
outputs_tensor = torch.tensor(outputs).reshape(18,2)
inputs_tensor = torch.tensor(inputs).reshape(18,1,6,10)
```

where

1. 18 is total number of training data.
2. 2 in `outputs_tensor` is 1 demension 2 items array, ['long', 'short'].
3. 6 in `inputs_tensor` is 6 columns as (weekdays,time,close,velocity,acceleration,volume).
4. 10 in `inputs_tensor` is window size, which means we start from current time backwards for 10 data.

Sample input tensor

```
tensor([[[ 4.0000e+00,  1.0117e+01,  5.1337e+02, ...,  1.0133e+01,
           5.1327e+02,  3.8961e+05],
         [-1.0000e-01, -4.0000e-02,  4.0000e+00, ...,  6.0000e-02,
           4.0000e+00,  1.0167e+01],
         [ 5.1307e+02,  1.2549e+05, -1.6000e-01, ...,  3.0838e+05,
          -1.3000e-01,  3.0000e-02],
```

```

[ 4.0000e+00, 1.0200e+01, 5.1283e+02, ..., 1.0217e+01,
  5.1293e+02, 1.9140e+05],
[ 1.0000e-01, 2.1000e-01, 4.0000e+00, ..., -2.7000e-01,
  4.0000e+00, 1.0250e+01],
[ 5.1258e+02, 2.4315e+05, -1.8000e-01, ..., 2.2284e+05,
  -2.4000e-01, -6.0000e-02]],

[[ 5.0000e+00, 1.5117e+01, 5.0957e+02, ..., 1.5133e+01,
  5.0955e+02, 1.5392e+05],
[-2.0000e-02, 2.0000e-02, 5.0000e+00, ..., -5.0000e-02,
  5.0000e+00, 1.5167e+01],
[ 5.0959e+02, 1.1554e+05, 1.1000e-01, ..., 1.4699e+05,
  0.0000e+00, -1.1000e-01],
[ 5.0000e+00, 1.5200e+01, 5.0957e+02, ..., 1.5217e+01,
  5.0943e+02, 1.6397e+05],
[-1.4000e-01, -1.2000e-01, 5.0000e+00, ..., 5.0000e-02,
  5.0000e+00, 1.5250e+01],
[ 5.0926e+02, 2.4378e+05, -8.0000e-02, ..., 1.5146e+05,
  -6.0000e-02, 2.0000e-02]],

[[ 2.0000e+00, 1.0483e+01, 5.0329e+02, ..., 1.0500e+01,
  5.0327e+02, 2.2177e+05],
[-2.0000e-02, 9.0000e-02, 2.0000e+00, ..., 2.0000e-02,
  2.0000e+00, 1.0533e+01],
[ 5.0323e+02, 1.0411e+05, -4.0000e-02, ..., 2.6403e+05,
  -8.0000e-02, -4.0000e-02],
[ 2.0000e+00, 1.0567e+01, 5.0315e+02, ..., 1.0583e+01,
  5.0307e+02, 9.7668e+04],
[-8.0000e-02, -8.0000e-02, 2.0000e+00, ..., -1.0000e-01,
  2.0000e+00, 1.0617e+01],
[ 5.0271e+02, 2.7079e+05, -1.8000e-01, ..., 1.4372e+05,
  -3.0000e-02, 1.5000e-01]],

...,

[[ 3.0000e+00, 1.4600e+01, 5.0168e+02, ..., 1.4617e+01,
  5.0171e+02, 7.9677e+04],
[ 3.0000e-02, 1.3000e-01, 3.0000e+00, ..., 9.0000e-02,
  3.0000e+00, 1.4650e+01],
[ 5.0207e+02, 9.1089e+04, 2.4000e-01, ..., 9.8564e+04,
  3.2000e-01, 8.0000e-02],
[ 3.0000e+00, 1.4683e+01, 5.0288e+02, ..., 1.4700e+01,
  5.0323e+02, 4.1820e+05],
[ 3.5000e-01, -1.4000e-01, 3.0000e+00, ..., -1.0000e-02,
  3.0000e+00, 1.4733e+01],
[ 5.0372e+02, 2.0590e+05, 1.5000e-01, ..., 2.3435e+05,
  1.8000e-01, 3.0000e-02]],

[[ 4.0000e+00, 1.1233e+01, 5.0361e+02, ..., 1.1250e+01,
  5.0373e+02, 1.6816e+05],
[ 1.2000e-01, 8.0000e-02, 4.0000e+00, ..., 2.0000e-02,
  4.0000e+00, 1.1283e+01],
[ 5.0390e+02, 2.2173e+05, 3.0000e-02, ..., 1.2954e+05,
  -6.0000e-02, -9.0000e-02],

```

```
[ 4.0000e+00, 1.1317e+01, 5.0375e+02, ..., 1.1333e+01,
 5.0382e+02, 8.4013e+04],
[ 7.0000e-02, 1.6000e-01, 4.0000e+00, ..., 2.0000e-02,
 4.0000e+00, 1.1367e+01],
[ 5.0396e+02, 2.5931e+05, 5.0000e-02, ..., 9.2385e+04,
 1.0000e-02, -4.0000e-02]],

[[ 4.0000e+00, 1.5433e+01, 4.9971e+02, ..., 1.5450e+01,
 4.9977e+02, 1.3076e+05],
[ 6.0000e-02, 0.0000e+00, 4.0000e+00, ..., -1.0000e-02,
 4.0000e+00, 1.5483e+01],
[ 4.9979e+02, 1.0566e+05, -3.0000e-02, ..., 2.2488e+05,
 5.0000e-02, 8.0000e-02],
[ 4.0000e+00, 1.5517e+01, 4.9992e+02, ..., 1.5533e+01,
 4.9997e+02, 2.6902e+05],
[ 5.0000e-02, -3.0000e-02, 4.0000e+00, ..., 5.0000e-02,
 4.0000e+00, 1.5567e+01],
[ 5.0014e+02, 1.4934e+05, 7.0000e-02, ..., 1.6490e+05,
 1.1000e-01, 4.0000e-02]]])
```

sample training output tensor

```
tensor([[1., 0.],
        [1., 0.],
        [1., 0.],
        [1., 0.],
        [1., 0.],
        [1., 0.],
        [1., 0.],
        [1., 0.],
        [1., 0.],
        [0., 1.],
        [0., 1.],
        [0., 1.],
        [0., 1.],
        [0., 1.],
        [0., 1.],
        [0., 1.],
        [0., 1.],
        [0., 1.]])
```

index=0, 表明该窗口数据属于long类。index=1, 表明该窗口数据属于short类。

预测结果实例：predict=[-0.27,3.45] 由于index=1的数字更大，表明该输入数据被认定为short。

- test dataset format test datasets 和training datasets两者的输入结构是相同的，但是输出的结构是不同的。对于训练用的数据，输出部分也是一个二维矩阵（见上面的实际例子），表示该给定窗口数据的分类，或者是long，或者是short，用[1,0]表示设定为long，用[0,1]设定为short。而test数据的输出，只是一个一维矩阵，包含每个窗口的正确结果所处的位置（index）。对于上面给出的18行的数据，测试

Tensor看起来应该是这样的：[0,0,0,0,0,0,0,0,1,1,1,1,1,1,1] 他表示前8行属于0类，也就是long类；后8行属于1类，也就是short类。在我们的程序中是通过下面的程序段达到这样的效果。

```
test_output_tensor = torch.tensor([int(y == 1.0) for x, y in outputs])
```

这里巧妙地应用了将bool数据转换成整数的方法，也就是int(True)为1，int(False)为0。还要注意到我们的long和short是相关的，x=1则y=0,反之亦然。所以程序中只使用了y的值，就得到了正确的测试输出数组。

👉 😊 **Conclusion** 运行

- [read stock data, build model, save model to a file](#)

```
Epoch 19*****  
loss: 0.544636 [ 3/ 18]  
Test Error:  
Accuracy: 50.0%, Avg loss: 0.706054
```

```
Epoch 20*****  
loss: 0.545041 [ 3/ 18]  
Test Error:  
Accuracy: 50.0%, Avg loss: 0.705978
```


```
Epoch 19*****  
loss: 0.922012 [ 3/ 18]  
Test Error:  
Accuracy: 72.2%, Avg loss: 0.509617
```

```
Epoch 20*****  
loss: 0.922241 [ 3/ 18]  
Test Error:  
Accuracy: 72.2%, Avg loss: 0.509605
```

✗ 😞 仅仅得到50%的精准度，表明这样的数据结构和NN模型是完全不能够预测股票走势的。

[use model file to predict stock data\(which is same as the training data\)](#)


Training Model

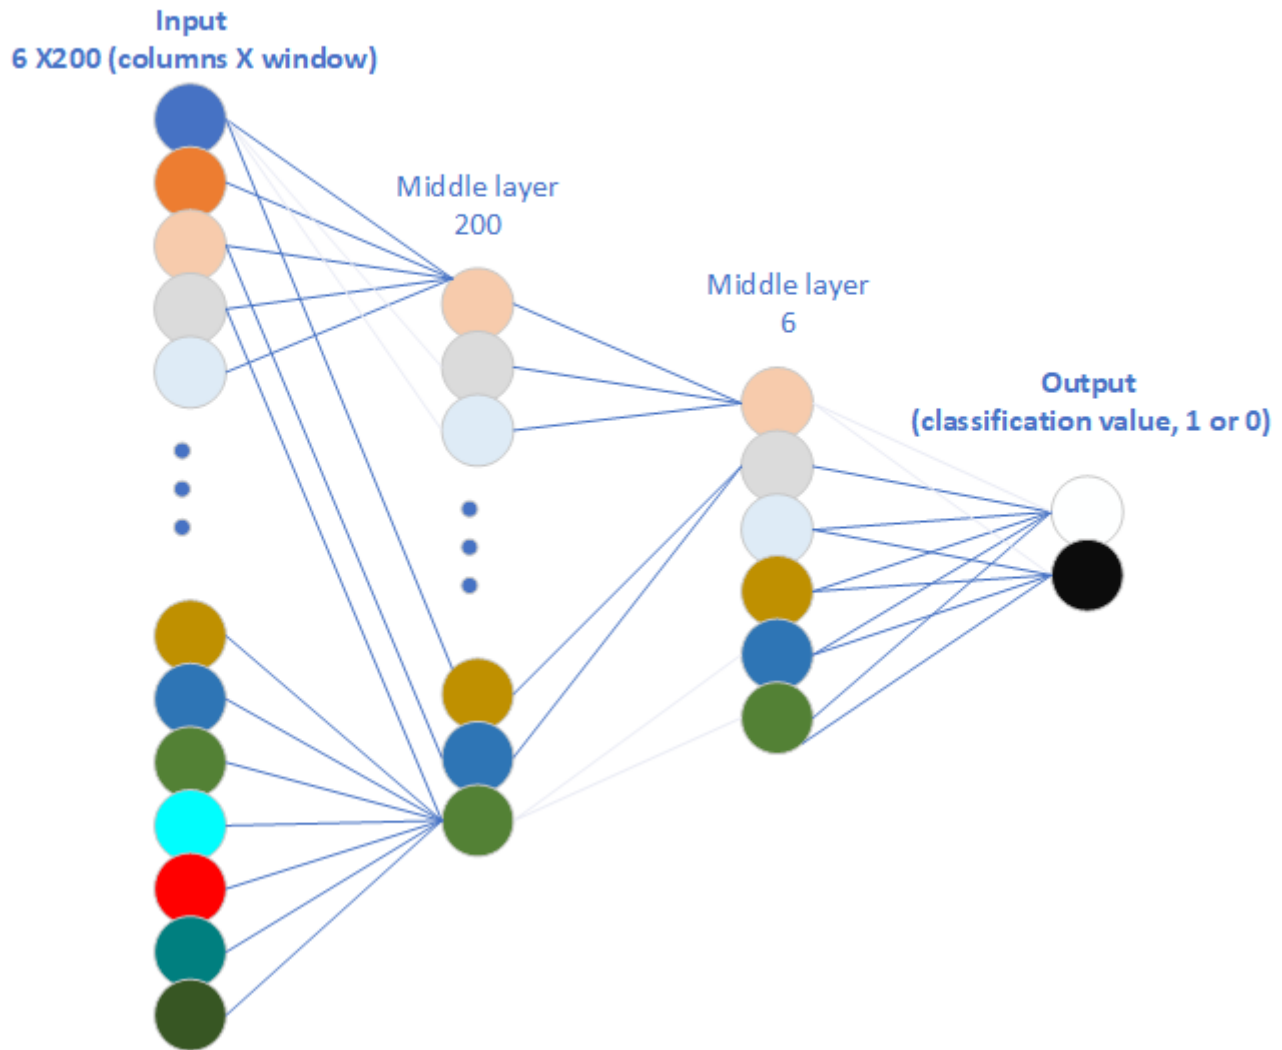

```
tensor([[1., 0., 0],  
        [1., 0., 0],  
        [1., 0., 0],  
        [0., 0., 1],  
        [0., 1, 0.],  
        ...  
        [0., 1.]])
```

- load model from file built by stock.py, use the model to test

- plot one window data with Velocity or Acceleration

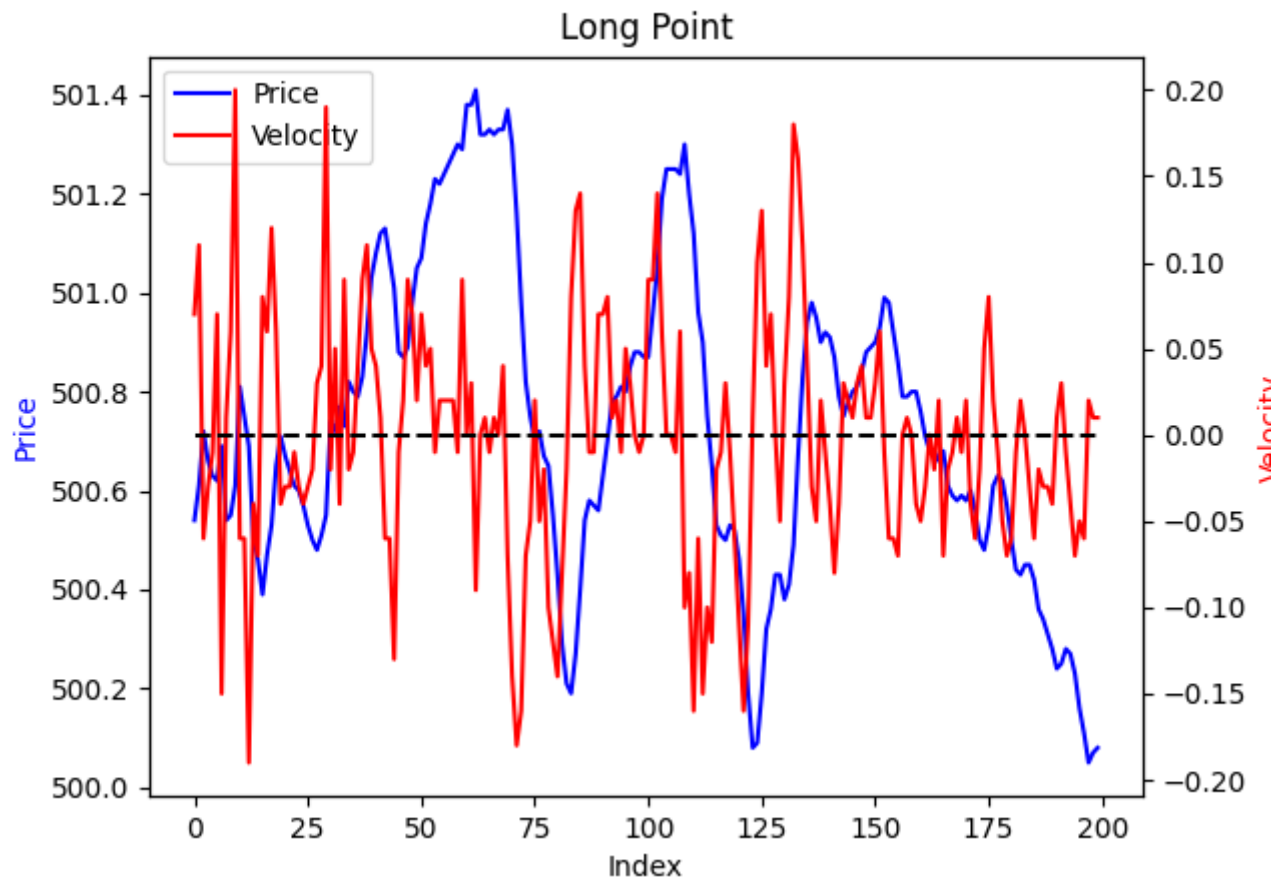


- read training and testing data separately

Add Weights on Data


- add linear weights on Data
- add exponential weights on Data

- [comparison of linear and exponential weights](#)

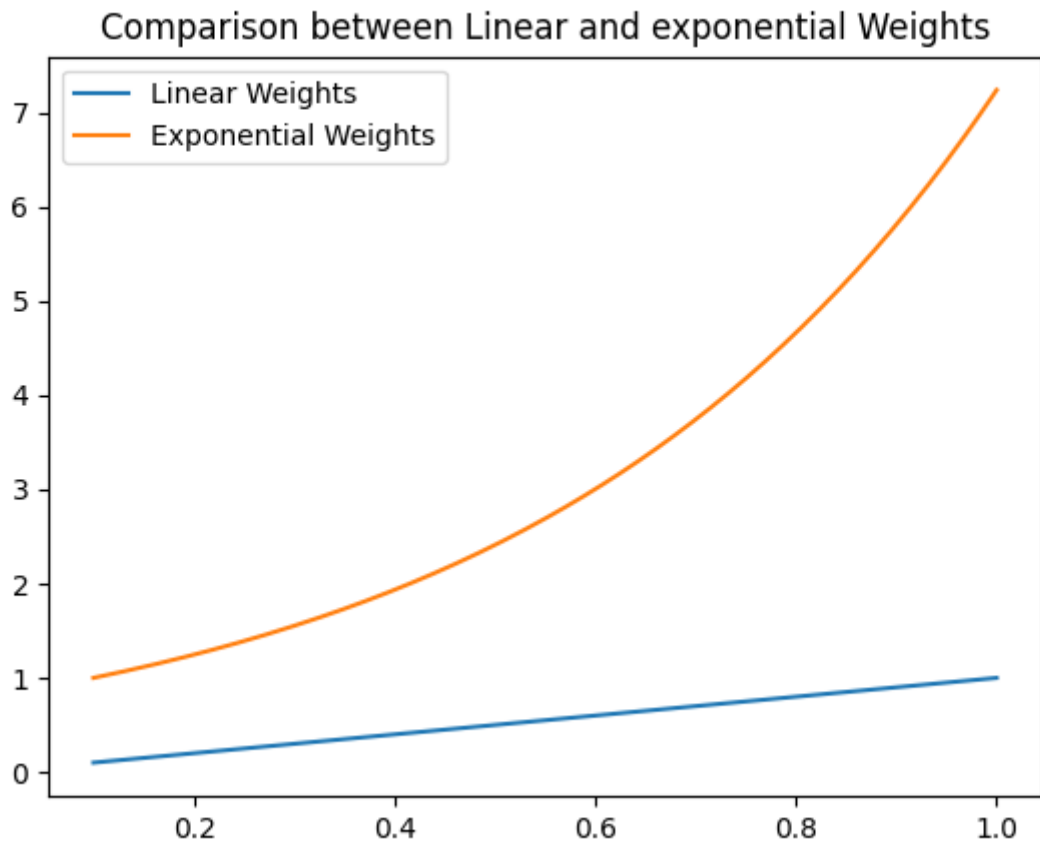

Add hold as output as [long, hold, short]

Training Model

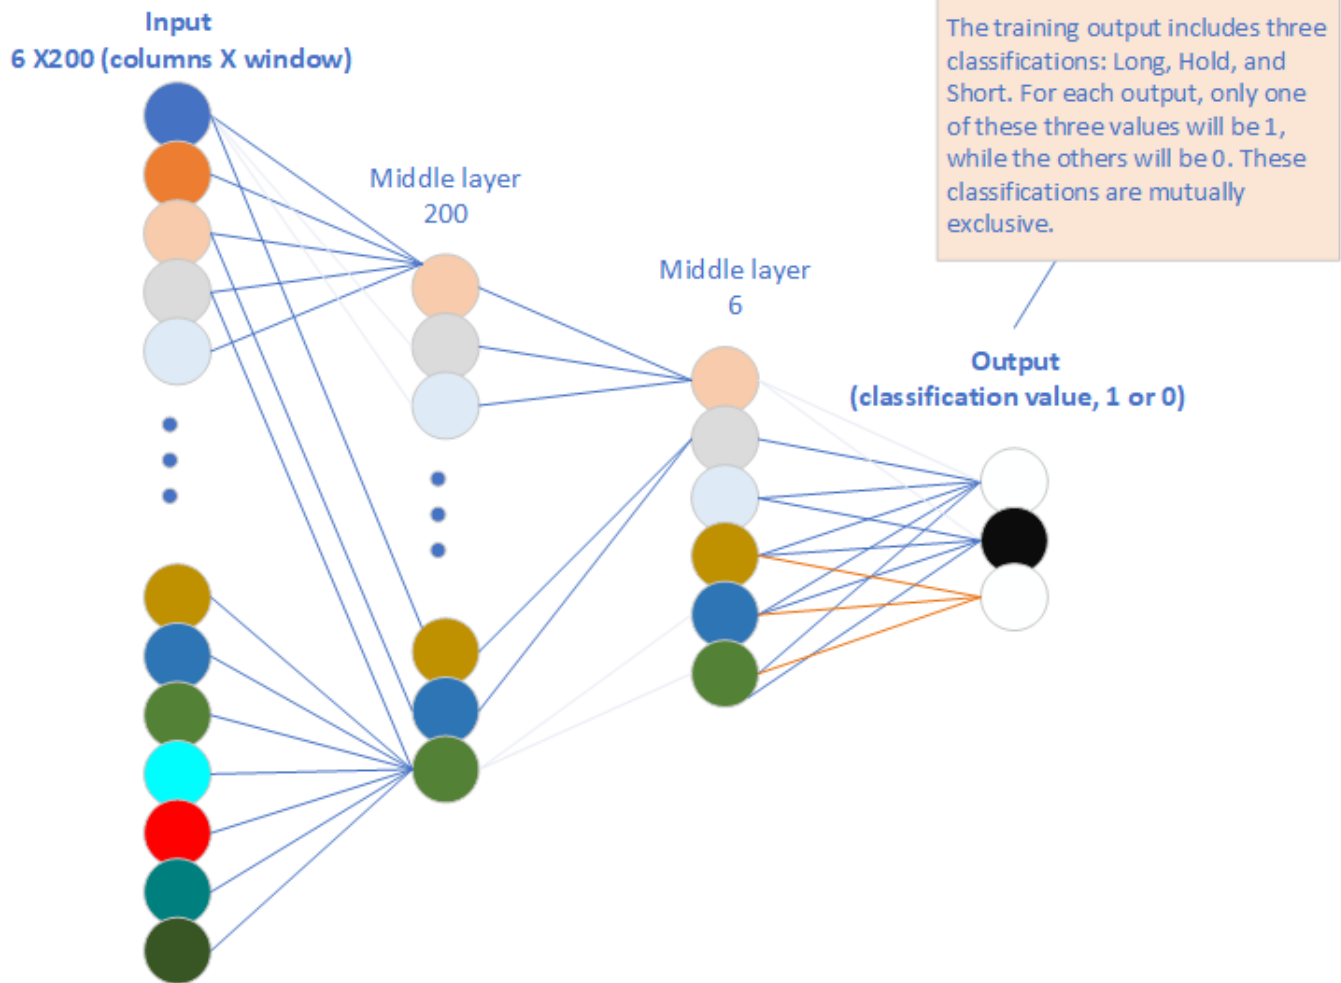

- add hold to classify long and short