

1 Winding Number Algorithm

The winding number algorithm was the algorithm that we first built to test insideness. Let C represent a polygon with n vertices. Let V_i be a vertex of C where $1 \leq i \leq n$. We define the winding number as a function $W(P, C)$ where P is a point and C is a polygon.

$$W(P, C) = \frac{1}{2\pi} \sum_{i=1}^{n-1} \arccos \frac{(V_i - P) \cdot (V_{i+1} - P)}{|V_i - P| |V_{i+1} - P|}.$$

A point P is inside the polygon C , if $W(P, C) \neq 0$. The winding number has a simple implementation from a coding perspective and is very accurate. Issues arise with speed, the winding number requires the use of *arccos* which is computationally expensive.

2 Ray Casting Algorithm

The ray casting algorithm at its core works by taking a given point Q and extending that point in the positive x direction. Let us refer to that ray \vec{Q} . If $Q = (a, b)$, then $\vec{Q} = \{a + x \mid x \geq 0, x \in \mathbb{R}\}$ where $x \in \mathbb{R}$. Let C be a polygon with n vertices, each line segment formed by connecting vertices we consider to be edges. If Q lies outside the polygon, the \vec{Q} will either not intersect the polygon at all, or there will be at least two intersections. To keep track of how many times a point passes through a polygon we increment the intersection index. We define the intersection index I as a iterator of how many times an extended ray \vec{Q} intersects the polygon C .

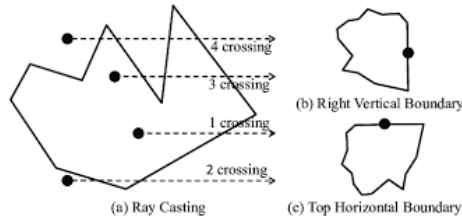


Figure 1: Visualization of the crossings

If I is even the point is outside the polygon. If I is odd the point is inside the polygon. By example, I is displayed in figure 1.

2.1 Crossing Number Implementation of Ray-Casting

The crossing number algorithm and all other ray-casting inspired algorithms are considered applicable to all polygons [1]. The winding number depends on floating point numbers to perform the calculations [1]. This could be considered

a weakness as the variable typings create more memory than they should. I will discuss this weakness of the winding number in the optimization section. For now, let us define the crossing number algorithm.

The first thing we are going to define is the mathematical significance of the crossing number. To begin, let us discuss the similarities between the Ray Casting Algorithm and the Crossing Number algorithm. They both use this idea of extending a point into a ray. Let $P = (a, b)$ be a point in euclidean space such that $a, b \in \mathbb{R}$. Let us now define a function CN that takes an edge of the curve E_i and P as inputs. Let $E_i = (V_i, V_{i+1})$ where V_i are vertices from the polygon C . We reference the points that define the edge like $E_i.V_2$ and $E_i.V_1$. Firstly, we check to see if $P.y$ or $P.x$ are within greater than the mins and less than the maxs. If that statement is true, we test to see if it crosses the particular edge,

$$\text{Let } d = \frac{P.y - E_i.V_1.y}{E_i.V_2.y - E_i.V_1.y}.$$

$$CN(E_i, P) = \begin{cases} 0 & P.x \geq E_i.V_1.x + d * (E_i.V_2.x - E_i.V_1.x) \\ 1 & P.x < E_i.V_1.x + d * (E_i.V_2.x - E_i.V_1.x) \end{cases}$$

. For each vertex of the arbitrary polygon C the crossing number is computed for each vertex. The insideness of the point is determined by the intersection index. The intersection index I is also slightly different to the definition that ray-casting uses.

$$I = \sum_{i=1}^{n-1} CN(P, E_i) + CN(P, E_{i+1})$$

P is inside the polygon if I is an odd number and is outside the polygon if I is even. The idea of ray-casting stays the same amongst the crossing number. What I mean is, crossing number and ray-casting “cancel” out edges based on how \vec{Q} collides with C . We choose to calculate the collisions \vec{Q} makes with the polygon by incorporating a sense of direction of the ray. There are other implementations that sum I differently depending on the circumstances of the polygon.

2.2 Optimization of the Crossing Number

We discussed earlier the bounding box implementation. To summarize, the bounding box implementation we discussed counts the amount of entries vs the amount exits and determines if the point is inside the space or not. If the number is an even number of crossings, the point is outside the polygon. If there is an odd number of crossings, the point is inside the figure. When we say “crossings”, we are talking about the amount of times that a ray extends in the positive x-axis from the point give intersects the polygon. The bounding box and crossing number in general, the same. So what are the differences? The main differences stem from their implementations. Firstly lets look both algorithms in the python code.

```

@njit(parallel=True)
def bounding_box_algorithm(domain, p, prior_intersections, min_max):
    intersections = prior_intersections
    left_int = False
    right_int = False
    last_intersection = 0
    x_max = min_max[0]
    y_max = min_max[1]
    x_min = min_max[2]
    y_min = min_max[3]
    y_tolerance = .00000001

    if p[0] < x_min or p[1] < y_min:
        return None

    if p[0] > x_max or p[1] > y_max:
        return None

    for pos in range(0, len(domain)):
        if pos < len(domain)-1:
            point_1 = domain[pos]
            point_2 = domain[pos+1]

            w = point_1
            v = point_2

            w_v = (w[0]-v[0], w[1]- v[1])
            p_v = (v[0]-p[0], v[1]-p[1])
            p_w = (w[0]-p[0], w[1]-p[1])

            dot_prod = float(w_v[0] * p_v[0] + w_v[1]*p_v[1])

            # if not_rad > 170 and dot_prod < 1 and dot_prod > -1:
            #     continue

            if v[1] <= p[1] and p[1] < w[1] and dot_prod > 0:
                intersections += 1

            elif w[1] <= p[1] and p[1] < v[1] and dot_prod <= 0:
                intersections -=1

    return intersections

```

```

@njit(parallel=True)
def crossing_number(domain, p, cn):

    for i in range(0, len(domain)-1):
        edge = (domain[i], domain[i+1])

```

```

    if (edge[0][1] <= p[1] and edge[1][1] > p[1]) or (edge[0][1] >
        p[1] and edge[1][1] <= p[1]):
        vt = float(p[1] - edge[0][1]) / float(edge[1][1] - edge[0][1])
        if p[0] < edge[0][0] + vt * (edge[1][0] - edge[0][0]):
            cn += 1

    return cn

```

The difference in length is staggering, especially because they are in a sense the same thing. What I want to focus on here is how in the bounding box implementation we use rays rather directly. Whereas, with the crossing number, we don't do as many operations. We just compare and divide floats given to the function. We also do not subtract intersections. The subtracting of intersections could have been one of the causes for the inaccuracies of the algorithm. I believe that the main cause was the handling of the numbers. In the bounding box algorithm we also define a lot of variables, these definitions could have impacted the accuracy of the numbers.

Before we can discuss the inaccuracies of the numbers we need to discuss what the Njit line above the functions mean. That line is called a decorator. A decorator tells the compiler to reinterpret the function based on what the decorator has in store. In our case, the Njit line dictates to the compiler that the functions are set to be compiled in a more C fashion. In other words, typings are now enforced. Typing is used to tell the compiler how many bits each variable will need. In C types are supposed to be explicitly defined before using the variables the user defines. Whereas, in python, that concept does not exist. Python defines the typing of variables based on the context of the code. It's a very impressive technique, many languages have adopted this methodology for compiling their variables. Without typing, code can be written in a more abstract way. The extra layer of abstraction makes programming simpler and faster to do. As nice as it sounds, there are drawbacks. The biggest one being speed. If the compiler handles all of the typings of variables, they have to almost guess. The fact they have to pretty much guess, means there are a lot of checks as to what variable will work. To make sure they are absolutely sure, the compiler does a lot of tests at runtime before running the code. If the cannot figure out what the variable is, the user will get an error while running the code. This is suppose to act as a check to ensure we don't break the code. Typing variables is important to programmers as it determines how many bits the variable will need to be represented. Having more control over variables puts more responsibility on the programmer to know what they are doing. Typing also allows for the code to run faster. What I mean is there are less safety checks at runtime, less checking allows for code to be executed much faster. So, Njit allows use to take advantage the speed of C while retaining the abstractness python inherently gives.

How does Njit impact the numbers within our algorithms? Njit doesn't know if a number is an integer or a double. This is important because doubles

use more bits than integers. If you notice, the bounding box algorithm does many more operations with given values. This means there are more chances where the compiler misinterprets the numbers for being different things. If the compiler interprets the output of multiplication of an integer and a double as a integer, we lose a lot of data the double once held. Therefore, the bounding box algorithm has more of a change to lose data.

References

- [1] Kai Hormann and Alexander Agathos. The point in polygon problem for arbitrary polygons. *Computational Geometry*, 20(3):131 – 144, 2001.