Fantasy Football Recommender

V1 architecture | modular backend | scheduled refresh | beginner-friendly explanations

01 INTERACTIVE REQUEST | HTTPS / JSON

Requests read the last published snapshot. External provider fetches run separately.

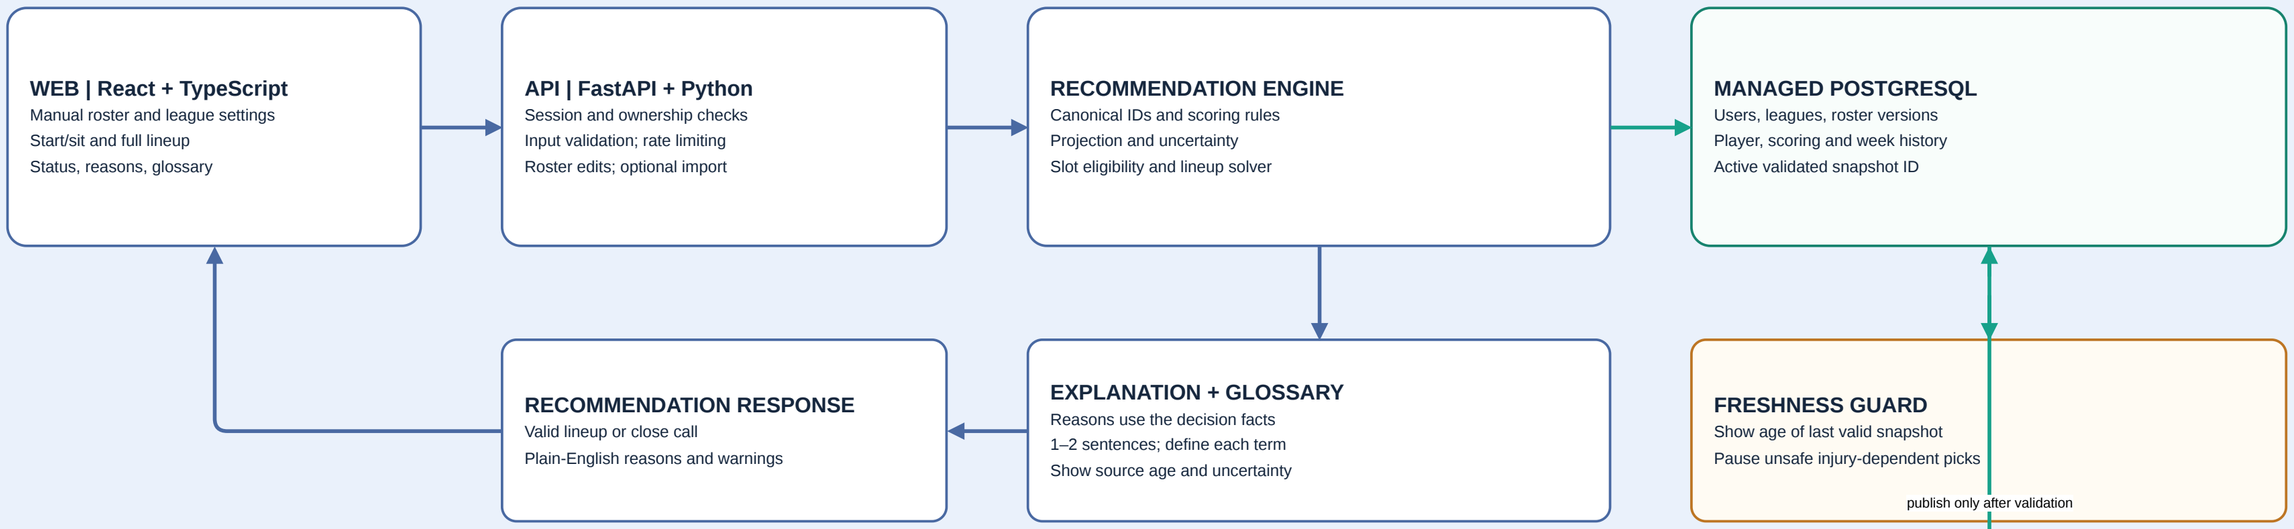

02 SCHEDULED REFRESH | INDEPENDENT OF USER REQUESTS

External sources are candidates. Confirm terms, commercial rights, field coverage, and freshness.

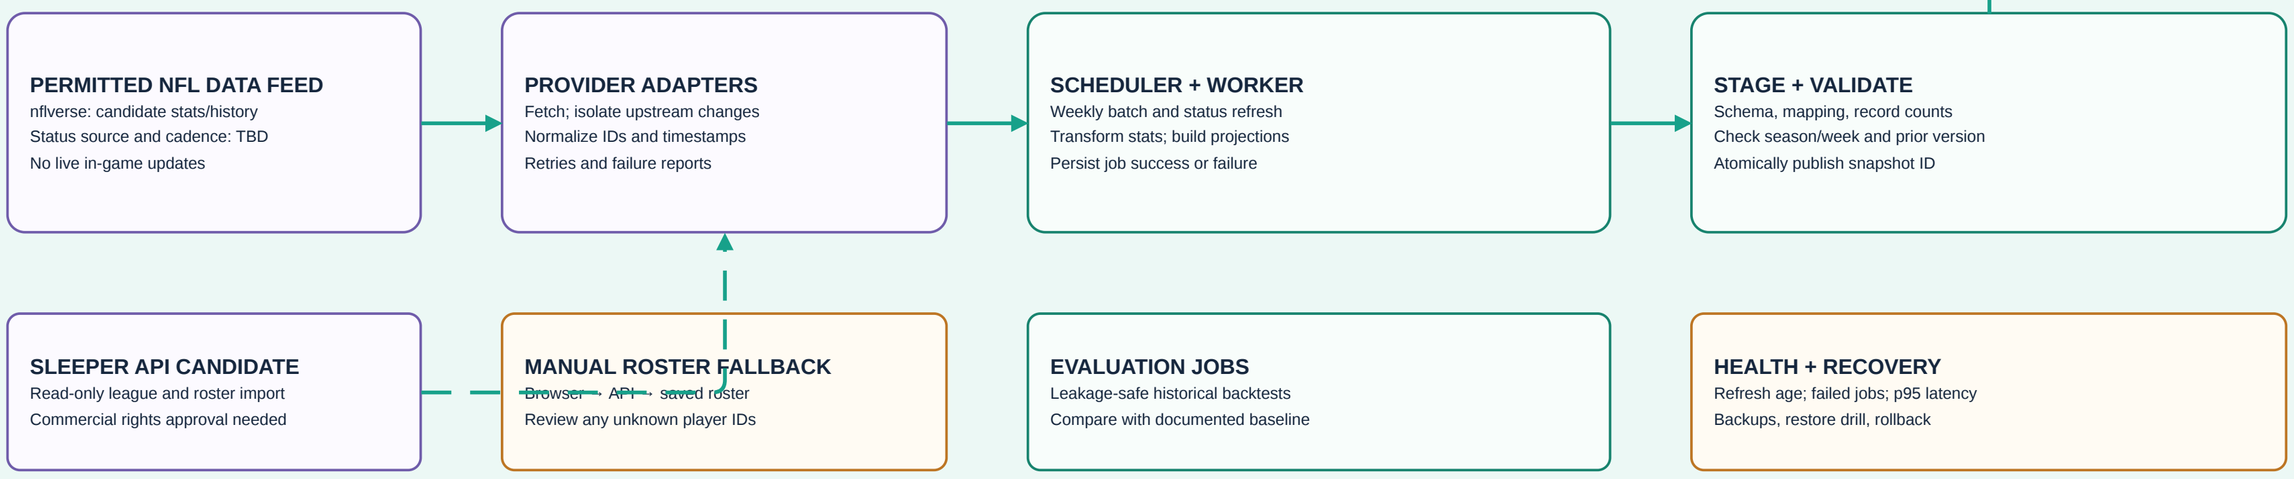

DESIGN GUARDRAILS
Import needs provider permission. Requests never wait for external feeds. Partial snapshots are never served.
Waivers/trades are later modules. Redis, queues, and multiple API instances follow measured need.

Blue: interactive request Green: refresh and storage Dashed: optional or conditional path