

# BLIS CODE USER'S MANUAL

JOHN M. NEUBERGER, NÁNDOR SIEBEN, AND JAMES W. SWIFT

## 1. BACKGROUND

This is a user's manual for the MATLAB code available at GitHub <https://github.com/jswift/BLIS/>. It approximate solutions to the system of  $n$  equations

$$(1) \quad F(u, s)_i := f(u_i, s) - (Mu)_i = 0, \quad i \in \{1, 2, \dots, n\}$$

for the components of  $u \in \mathbb{R}^n$ , with  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$  and  $F : \mathbb{R}^{2n} \times \mathbb{R} \rightarrow \mathbb{R}^{2n}$ .

The notation is slightly different from that in the BLIS paper, which is

$$F(s, x)_i := f(s, x_i) - (Mx)_i = 0, \quad i \in \{1, 2, \dots, n\}$$

for the components of  $x \in \mathbb{R}^n$ , with  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$  and  $F : \mathbb{R} \times \mathbb{R}^{2n} \rightarrow \mathbb{R}^{2n}$ . Note that the parameter  $s$  is in a different place in the paper and the MATLAB code.

A description of the algorithm is in the BLIS paper. To run the code download BLIS\_2023b.m (or the updated MATLAB file) and the directories P3 and diamond. Put these all in the same directory, double click on the .m file, and say that yes, you want to change the current directory (if it asks).

## 2. CODE

Part of the MATLAB code on the gitHub repository is reproduced below. The parameters chosen here compute a bifurcation diagram very similar to Figure 5 in the paper.

This is the only part of the code that needs to be changed to produce different bifurcation diagrams. The line numbers do not agree with the code you will run. The actual MATLAB code has approximately 34 lines (subject to change) before the first line listed here.

```
1 % frequently changed parameters
2 graphName = ['diamond'];
3
4 SaveThisRun = false; % saves .txt of Command Window and .pdf of figure.
5                       % Answer "y" in command window to really save files.
6
7 speed = .1;          % distance between computed points in bifurcation diagram
8
9 maxLevel = 14; % Follow daughters to this level. (First branch is level 0.)
10
11 plot_bifpoints = true;
12 plot_foldpoints = false;
13 plot_branch_as_line = true; % false useful for setting speed
14
15 smin = -4; smax = 4.5;          % bifurcation parameter window
16 ymax = 2; %default 1000. Needed with asymptotically linear nonlinearity
17
18 maxNumBranches = 50; % Default is 50
19
20 verbosity = 1; % output control: 0 is minimal, 1 gives more
21              % info about daughters, 2 gives lots of info
22 print_plist = false; % print s y MI newton_its at end of branch
```

2000 *Mathematics Subject Classification.* 34C15, 34C23, 34A34, 37C80.

*Key words and phrases.* coupled cell networks, synchrony, bifurcation.

August 15, 2023.

```

23
24 startWithTrivialBranch = true;
25 if startWithTrivialBranch
26     sInit = smin; % default
27     %sInit = 70; % un-comment this line to set sInit != smin
28     usInit = [sInit]; vsInit = [1]; jInit = 1; % trivial branch
29     % Needs sInit >= smin with vsInit = [1] (going right).
30     % or sInit <= smax with vsInit = [-1] (going left).
31
32 else
33     %usInit = [0.9003; -1.63; 2]; vsInit = [-1; -1; 3]; jInit = 6; %diamond
34     usInit = [1.732; -3]; vsInit = [-1; 3]; jInit = 2; % diamond
35
36     % must be used if f(0,s) != 0. Start with any approx or exact solution
37     % in the invariant subspace W_jInit with dimension d
38     % usInit is the (approximate) initial solution [u1; ... ud; s]
39     % vsInit is the (approximate) tangent vector [v1; ... vd; s] pointing
40     % into the plotting region
41 end
42
43 % The following parameters are more spread out
44
45 % You can change the label for the schematic function, using LaTeX.
46 % If you do, search for 'switch y' and change those y strings.
47 % The value of those y strings needs to agree with the y defined here.
48
49 % CHOOSE SCHEMATIC FUNCTION WITH THE NEXT LINE
50 switch 4 % change integer to get desired schematic function y vs. s
51     % don't change the case statements unless you know what you're doing
52     % Many schematice functions put two branches on top of each other.
53     % Choice "switch 6" makes sure branches don't lie on top of each other.
54
55     % Don't change the numbers below this line!
56     case 1 % This defines y in case the line above is "switch 1"
57         y = 'u_1';
58
59     case 2
60         y = 'u_N';
61
62     case 3
63         y = '\frac 1 N \|u\|_2^2';
64
65     case 4
66         y = '\frac 1 N \|u\|_1';
67
68     case 5
69         y = '\frac 1 {\sqrt N} \|u\|_2';
70
71     case 6 % this one separates branches.
72         y = '\displaystyle{\sum_{i=1}^N \sin(i) x_i}';
73
74     case 7
75         y = '\|u\|_{\infty}';
76
77     case 8

```

```

78     y = 'N u_N';
79
80
81 end
82
83 % the derivatives fp = D_1 f and dfds = D_2 f need to be input by hand.
84 % Usually f(u, s) = s*u + nonlinearity(u)
85
86 % CHOOSE NONLINEARITY WITH THE NEXT LINE
87 switch 1 % Change integer and possibly c5 or c2 to get desired nonlinearity
88
89     case 1 % f is odd, this is for "switch 1" in the previous line
90         c5 = 0; % coefficient of degree 5 term.
91         % Constant branch has fold at s = -1/4 * 1/c5 = -1/(4 c5)
92         f = @(u,s) s*u + u.^3 - c5 * u.^5;
93         fp = @(u,s) s + 3*u.^2 - 5 * c5 * u.^4;
94         dfds = @(u,s) u;
95
96     case 2 % f is not odd if c2 ~= 0
97         c2 = 0; % coef of degree 2 term.
98         % Constant branch has fold at s = -c2^2/4
99         f = @(u,s) s*u - u.^3 + c2*u.^2;
100        fp = @(u,s) s - 3*u.^2 + 2*c2*u;
101        dfds = @(u,s) u;
102
103     case 3 % f(0, s) ~= 0
104         f = @(u,s) s*u + u.^3 + 1.;
105         fp = @(u,s) s + 3*u.^2;
106         dfds = @(u,s) u;
107
108     case 4 % df/ds(0,s) ~= u
109         f = @(u,s) (s*s-1)*u - u.^3;% - 1/2*u.^5;
110         fp = @(u,s) (s*s-1) - 3*u.^2;% - 5/2* u.^4;
111         dfds = @(u,s) 2*s*u;
112
113     case 5 % f us asymptotically linear
114         cs = -1; % This gives vertical asymptote at s = lambda + cs
115         f = @(u,s) s*u + cs*(tanh(u) - u);
116         fp = @(u,s) s + cs*(sech(u).^2 - 1);
117         dfds = @(u,s) u;
118
119     case 6 % gives non-BLIS bifurcation
120         f = @(u,s) s*s - u.^2;
121         fp = @(u,s) -2*u;
122         dfds = @(u,s) 2*s;
123 end
124
125
126 %%%% end of parameters %%%%%%%%%%%

```

- Line 2 indicates the name of a directory (i.e. `diamond/`) that has the 4 files described in the next section. A few such directories are included at the `github` repository.
- Line 4 allows a `txt` file and a `pdf` of the run to be saved. They are saved in the `graphName` directory with the date and time to the minute. If you do 2 runs in the same minute the first will be overwritten. I usually save these files to a subdirectory called something like `diamond/savedRuns`.

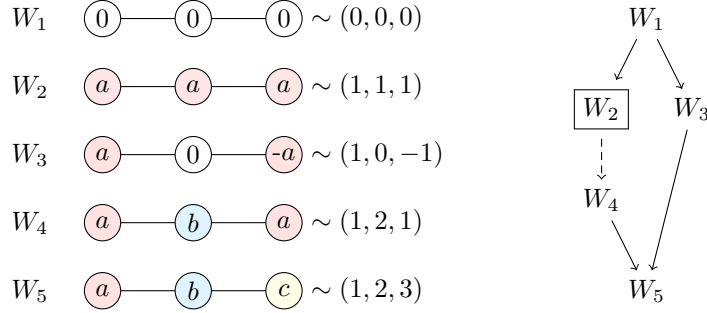


FIGURE 1. The  $L$ -invariant subspaces and the lattice of invariant subspaces for the Laplacian matrix of the graph  $P_3$ .

- Line 7 has a big effect on the code. Different graphs work best with different speeds, and it is best to experiment with this. If the speed is too small the program will run slowly. If the speed is too big then the branches will have kinks, and the algorithm might not run correctly.
- Lines 9 through 22 are hopefully self-explanatory.
- Line 24 is usually true, in which case lines 25-41 are not needed.
- Lines 9 through 22 are hopefully self-explanatory.
- Line 40 chooses the schematic function, the  $y$  in the  $y$  vs.  $x$  bifurcation diagram. Note the the default is to label the axis with  $u$  and not  $x$ . Comments describe how to change that. You can add more schematic functions, as long as the new  $y$  variable is added in two case statements.
- Line 87 chooses the internal dynamics  $f(u, s)$ . More cases can be added.

### 3. INPUT FILES

This section describes the files required as input to our MATLAB program. These files are put in a subdirectory that must be in the same directory that contains the MATLAB code `BLIS2023b.m`. For example, the directories `diamond` and `P3` on gitHub each have 4 files, `wam.txt`, `aut.txt`, `inv.txt`, and `bif.txt`, that are automatically read into the program if line 2 in the code listing above is `graphName = 'P3'`; or `graphName = 'diamond'`;

We give two examples.

**Example 3.1.** For simplicity, we present the example of  $P_3$ , the path graph with 3 vertices. The graph Laplacian is

$$L = \begin{bmatrix} 1 & -1 & 0 \\ -1 & 2 & -1 \\ 0 & -1 & 1 \end{bmatrix}.$$

We assume  $M = L$  in Equation (1). The weighted adjacency matrix  $M$ , which need not be symmetric, is input using the file `wam.txt` in sparse format with rows of the form  $i, j, M_{i,j}$ . The automorphism group  $\text{Aut}(P_3)$  is the two-element group generated by the permutation (13). The `aut.txt` file lists the elements of  $\text{Aut}(P_3)$  in one-line form:  $\{(1, 2, 3), (3, 2, 1)\}$ . The invariant subspaces are input with the `inv.txt` file using coloring vectors with integer entries, as indicated in Figure 1. The  $i$ th row of `inv.txt` gives the coloring vector for  $W_i$ . The ordering of the invariant subspaces must satisfy  $i \leq j$  if  $W_i \subseteq W_j$ . The lattice of invariant subspaces is supplied to MATLAB with the `bif.txt` file. The  $i$ th row of `bif.txt` lists all the  $j$  such that  $W_i \subseteq W_j$ .

wam.txt	aut.txt	inv.txt	bif.txt
<pre> 1 1 1 1 2 -1 2 1 -1 2 2 2 2 3 -1 3 2 -1 3 3 1 </pre>	<pre> 1 2 3 3 2 1 </pre>	<pre> 0 0 0 1 1 1 1 0 -1 1 2 1 1 2 3 </pre>	<pre> 1 2 3 4 5 2 4 5 3 5 4 5 5 </pre>

Note that the trivial subspace is  $W_1$  to accommodate MATLAB, not  $W_0$  which makes more sense to humans.

**Example 3.2.** Consider the diamond graph example in the BLIS paper. The four files for the diamond graph follow.

wam.txt	aut.txt	inv.txt	bif.txt
1 1 2	1 2 3 4	0 0 0 0	1 2 3 4 5 6 7 8 9 10 11
1 2 -1	1 4 3 2	1 1 1 1	2 6 7 9 10 11
1 4 -1	3 2 1 4	1 -1 1 -1	3 7 9 10 11
2 1 -1	3 4 1 2	0 1 0 -1	4 8 9 11
2 2 3		1 0 -1 0	5 8 10 11
2 3 -1		1 2 1 1	6 9 11
2 4 -1		1 2 1 2	7 9 10 11
3 2 -1		1 2 -1 -2	8 11
3 3 2		1 2 1 3	9 11
3 4 -1		1 2 3 2	10 11
4 1 -1		1 2 3 4	11
4 2 -1			
4 3 -1			
4 4 3			

Note that the numbering of the `bif.txt` file is shifted from the numbering in Figure 5 of the BLIS paper.

*Email address:* John.Neuberger@nau.edu, Nandor.Sieben@nau.edu, Jim.Swift@nau.edu

DEPARTMENT OF MATHEMATICS AND STATISTICS, NORTHERN ARIZONA UNIVERSITY PO Box 5717, FLAGSTAFF, AZ 86011-5717, USA