


POSTMAN Collection for testing

- 1) For all auth routes use : <http://localhost:5000/api/auth/{route}>
 - a. signup(POST)
`{ "name": "xyz", "email": "xyz@example.com", "password": "pass123" }`
 - b. login(GET)
`{ "email": "xyz@example.com", "password": "pass123" }`
 - c. profile (GET)

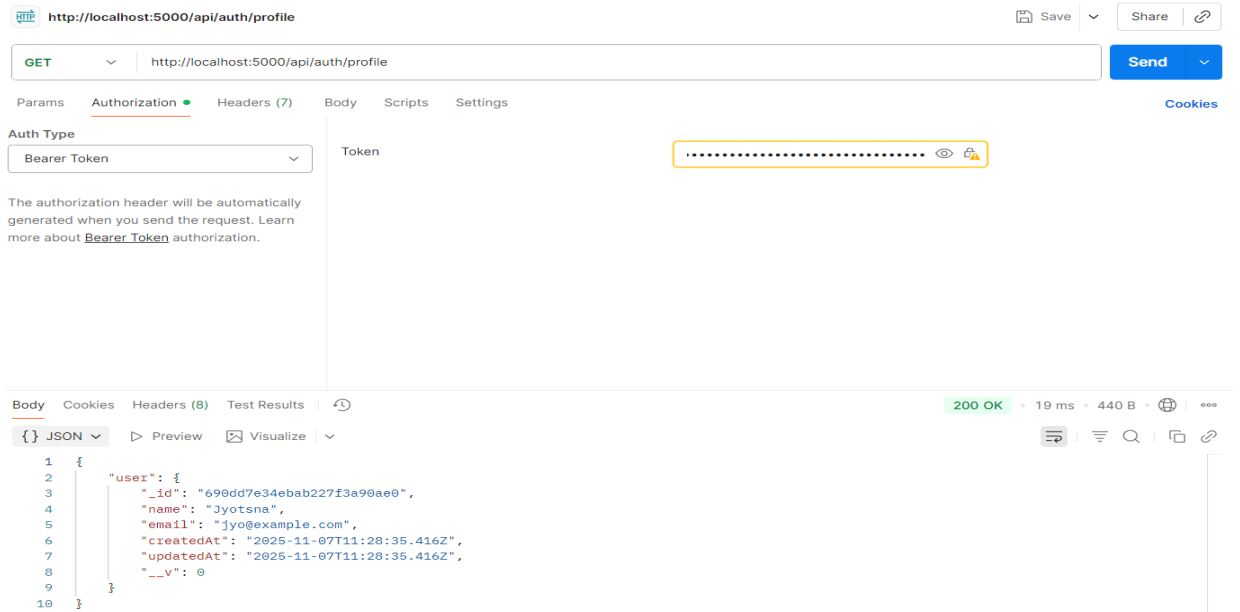

Token :

eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6IjY5MGRkN2UzNGViYWlyMjdmM2E5MGRlMCI6ImVtYWlsIjoianlvQGV4YW1wbGUuY29tIiwiaWF0IjoxNzYyNTE1NjM0LCJleHAiOiJlE3NjMxMjA0MzR9.irPF_ZhseF4EDY7qR1RV6GDyGLxy3ZZjko7Ftk8JDTw

- 2) For all Coins routes use : <http://localhost:5000/api/coins/{symbol}>
GET request
Symbols = BTC ,ETH, SON etc.

To get all coins: <http://localhost:5000/api/coins/>
- 3) For all transactions use : <http://localhost:5000/api/transactions/{buy/sell}>
{
 "name": "Transactions / Sell (protected)",
 "request": {
 "method": "POST",
 "header": [
 { "key": "Authorization", "value": "Bearer {{token}}" },
 { "key": "Content-Type", "value": "application/json" }
],
 }

```
"body": {  
  "mode": "raw",  
  "raw": "{\n  \"symbol\": \"BTC\", \n  \"amount\": 0.005, \n  \"price\": 73000 \n}"  
}
```