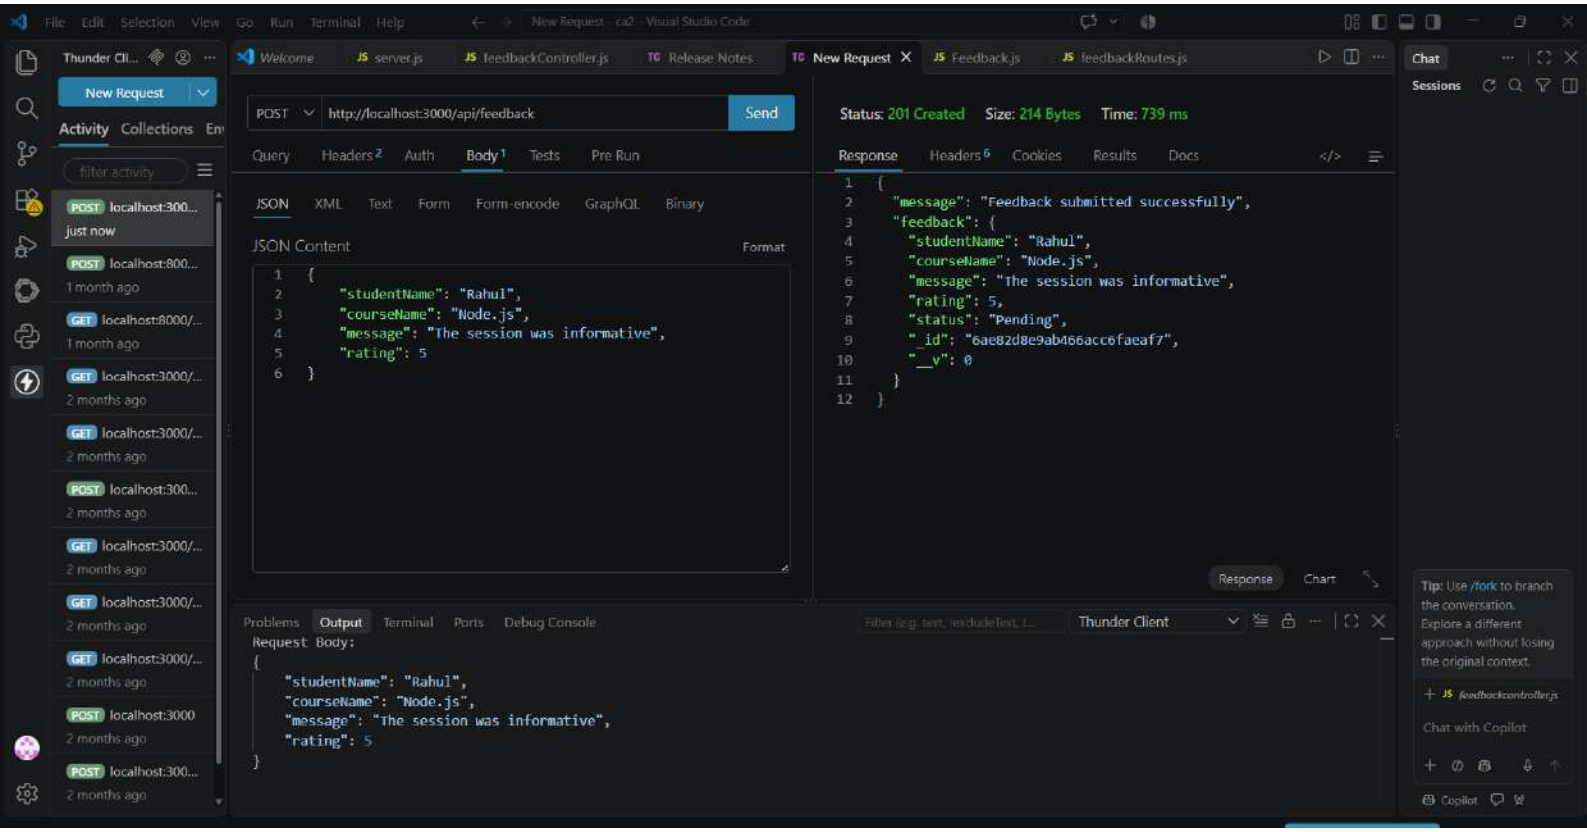
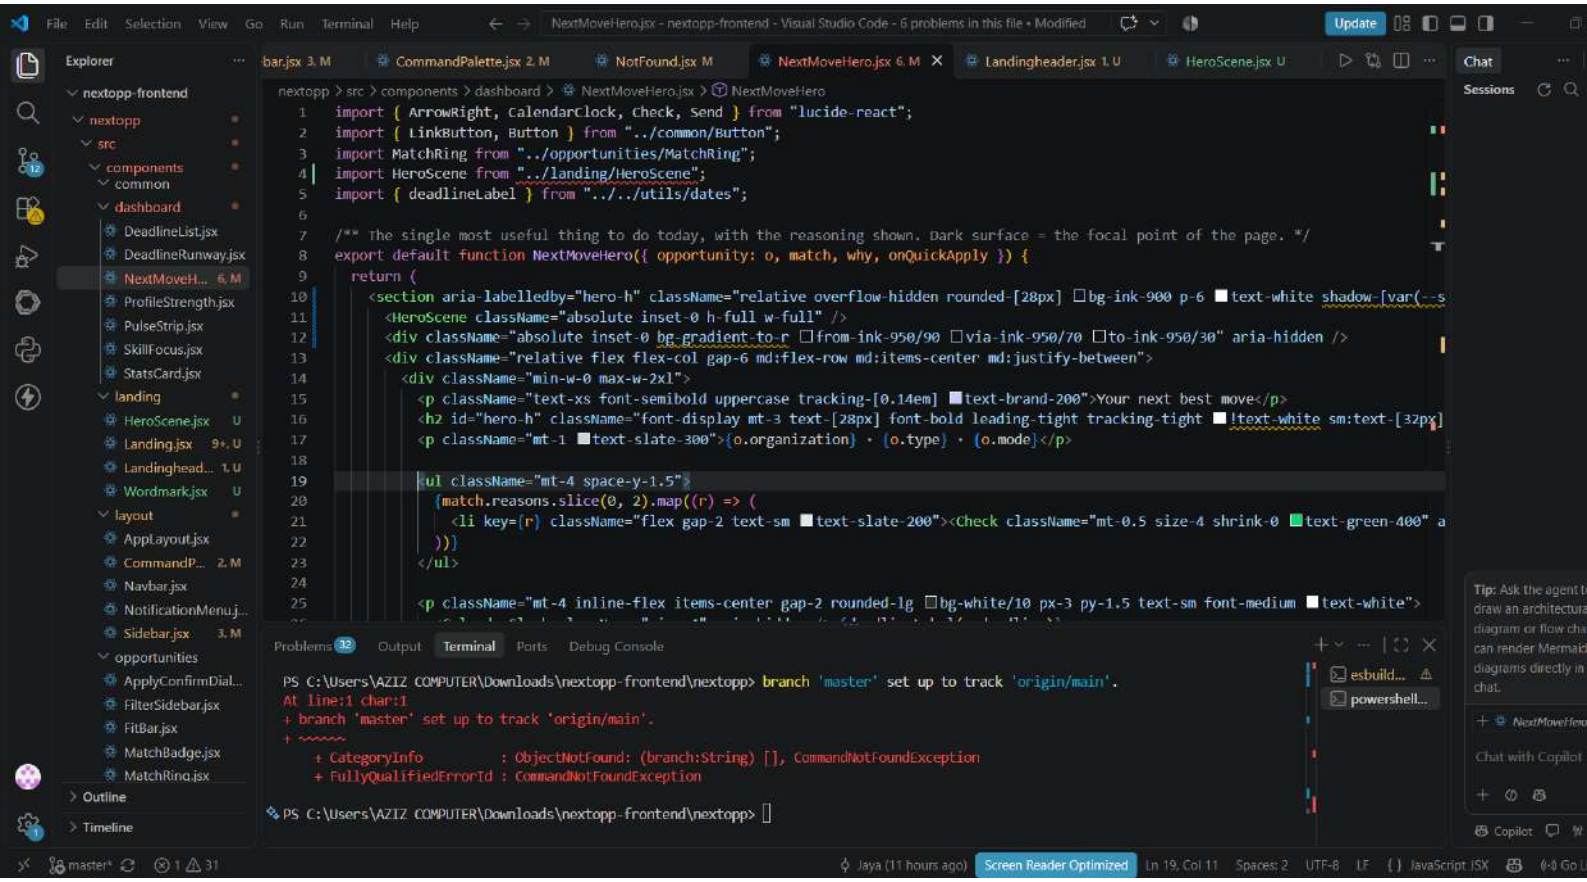
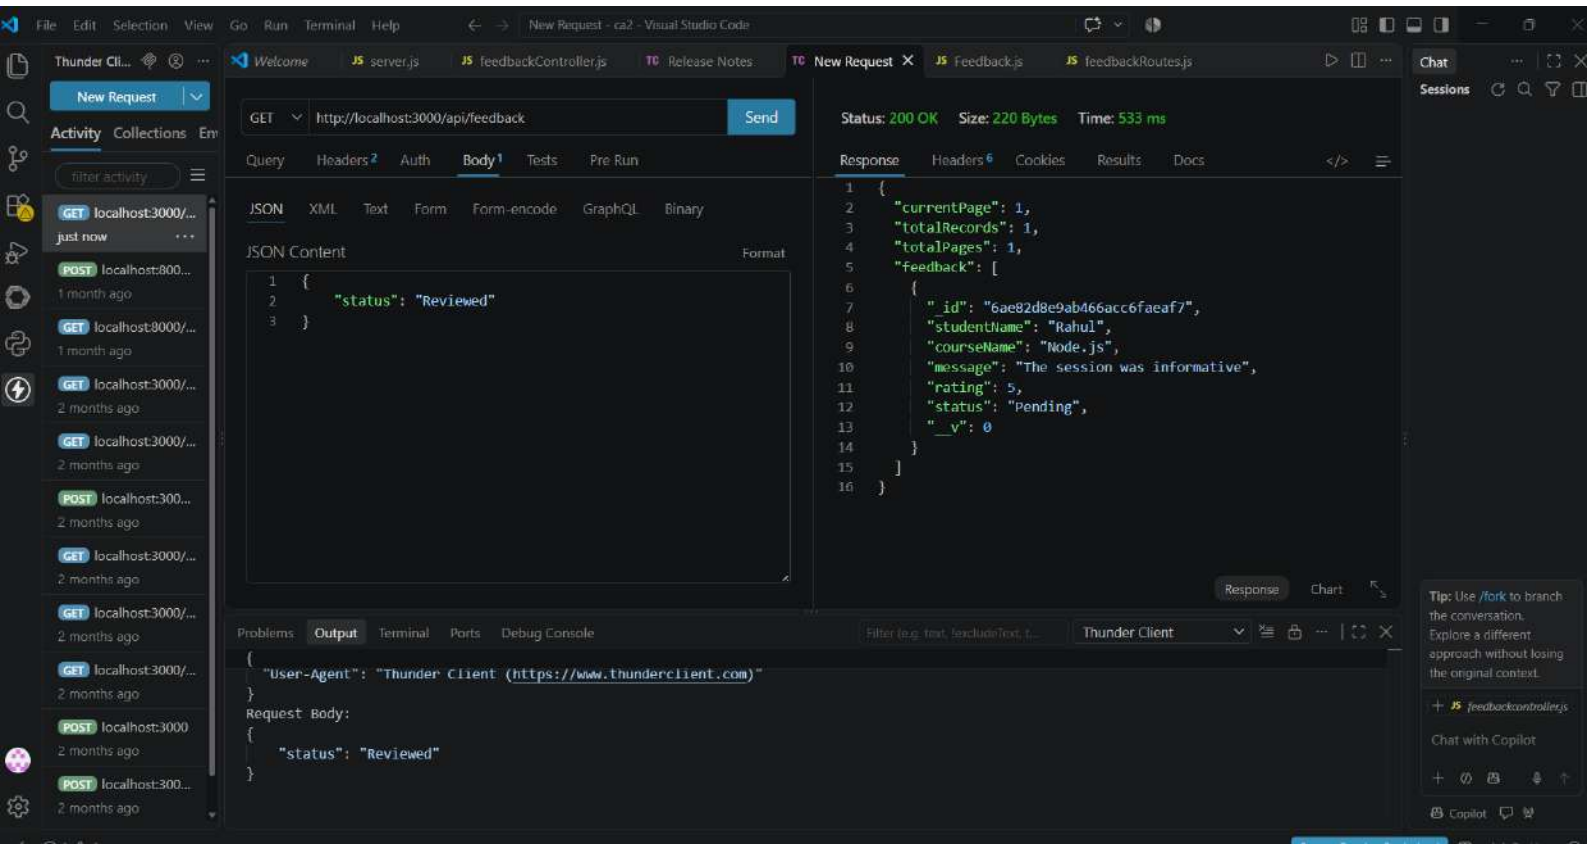

File Edit Selection View Go Run Terminal Help
New Request - ca2 - Visual Studio Code
Thunder Cli...
New Request
Activity Collections Env
filter activity
POST localhost:300...
just now
POST localhost:800...
1 month ago
GET localhost:8000/...
1 month ago
GET localhost:3000/...
2 months ago
GET localhost:3000/...
2 months ago
POST localhost:300...
2 months ago
GET localhost:3000/...
2 months ago
GET localhost:3000/...
2 months ago
GET localhost:3000/...
2 months ago
POST localhost:3000
2 months ago
POST localhost:300...
2 months ago
Welcome
server.js
feedbackController.js
Release Notes
New Request
Feedback.js
feedbackRoutes.js
POST
http://localhost:3000/api/feedback
Send
Query
Headers 2
Auth
Body 1
Tests
Pre Run
JSON
XML
Text
Form
Form-encode
GraphQL
Binary
JSON Content
Format
{
"studentName": "Rahul",
"courseName": "Node.js",
"message": "The session was informative",
"rating": 5
}
Status: 201 Created
Size: 214 Bytes
Time: 739 ms
Response
Headers 5
Cookies
Results
Docs
{
"message": "Feedback submitted successfully",
"feedback": {
"studentName": "Rahul",
"courseName": "Node.js",
"message": "The session was informative",
"rating": 5,
"status": "Pending",
"_id": "6ae82d8e9ab466acc6faeaf7",
"__v": 0
}
}
Response
Chart
Problems
Output
Terminal
Ports
Debug Console
Thunder Client
Request Body:
{
"studentName": "Rahul",
"courseName": "Node.js",
"message": "The session was informative",
"rating": 5
}
Chat
Sessions
Tip: Use /fork to branch the conversation. Explore a different approach without losing the original context.
feedbackcontroller.js
Chat with Copilot
Copilot


File Edit Selection View Go Run Terminal Help
NextMoveHero.jsx - nextopp-frontend - Visual Studio Code - 6 problems in this file • Modified
Update
Explorer
bar.jsx 3, M
CommandPalette.jsx 2, M
NotFound.jsx M
NextMoveHero.jsx 6, M
Landingheader.jsx 1, U
HeroScene.jsx U
Chat
Sessions
nextopp > src > components > dashboard > NextMoveHero.jsx > NextMoveHero
nextopp-frontend
nextopp
src
components
common
dashboard
DeadlineList.jsx
DeadlineRunway.jsx
NextMoveH... 6, M
ProfileStrength.jsx
PulseStrip.jsx
SkillFocus.jsx
StatsCard.jsx
landing
HeroScene.jsx U
Landing.jsx 9+, U
Landinghead... 1, U
Wordmark.jsx U
layout
AppLayout.jsx
CommandP... 2, M
Navbar.jsx
NotificationMenu.j...
Sidebar.jsx 3, M
opportunities
ApplyConfirmDial...
FilterSidebar.jsx
FitBar.jsx
MatchBadge.jsx
MatchRing.jsx
Outline
Timeline
import { ArrowRight, CalendarClock, Check, Send } from "lucide-react";
import { LinkButton, Button } from "../common/Button";
import MatchRing from "../opportunities/MatchRing";
import HeroScene from "../landing/HeroScene";
import { deadlineLabel } from "../../utils/dates";
/** The single most useful thing to do today, with the reasoning shown. Dark surface = the focal point of the page. */
export default function NextMoveHero({ opportunity: o, match, why, onQuickApply }) {
return (
<section aria-labelledby="hero-h" className="relative overflow-hidden rounded-[28px] bg-ink-900 p-6 text-white shadow-[var(--s
<HeroScene className="absolute inset-0 h-full w-full" />
<div className="absolute inset-0 bg-gradient-to-r from-ink-950/90 via-ink-950/70 to-ink-950/30" aria-hidden />

Your next best move
<h2 id="hero-h" className="font-display mt-3 text-[28px] font-bold leading-tight tracking-tight !text-white sm:text-[32px]
{o.organization} · {o.type} · {o.mode}
<ul className="mt-4 space-y-1.5">
{match.reasons.slice(0, 2).map((r) => (
<li key={r} className="flex gap-2 text-sm text-slate-200"><Check className="mt-0.5 size-4 shrink-0 text-green-400" a
))}

Problems 32
Output
Terminal
Ports
Debug Console
PS C:\Users\AZIZ COMPUTER\Downloads\nextopp-frontend\nextopp> branch 'master' set up to track 'origin/main'.
At line:1 char:1
+ branch 'master' set up to track 'origin/main'.
+ ~~~~~~
+ CategoryInfo : ObjectNotFound: (branch:String) [], CommandNotFoundException
+ FullyQualifiedErrorId : CommandNotFoundException
PS C:\Users\AZIZ COMPUTER\Downloads\nextopp-frontend\nextopp>
esbuild...
powershell...
Tip: Ask the agent t
draw an architectura
diagram or flow cha
can render Mermaid
diagrams directly in
chat.
Chat with Copilot
Copilot
master*
Ln 19, Col 11
Spaces: 2
UTF-8
LF
JavaScript JSX
Screen Reader Optimized


File Edit Selection View Go Run Terminal Help
New Request - ca2 - Visual Studio Code
Thunder Cli...
New Request
Activity Collections Env
filter activity
GET localhost:3000/...
just now
POST localhost:800...
1 month ago
GET localhost:8000/...
1 month ago
GET localhost:3000/...
2 months ago
GET localhost:3000/...
2 months ago
POST localhost:300...
2 months ago
GET localhost:3000/...
2 months ago
GET localhost:3000/...
2 months ago
GET localhost:3000/...
2 months ago
POST localhost:3000
2 months ago
POST localhost:300...
2 months ago
Welcome
server.js
feedbackController.js
Release Notes
New Request
Feedback.js
feedbackRoutes.js
GET
http://localhost:3000/api/feedback
Send
Query Headers 2 Auth Body 1 Tests Pre Run
JSON XML Text Form Form-encode GraphQL Binary
JSON Content
Format
{
"status": "Reviewed"
}
Status: 200 OK Size: 220 Bytes Time: 533 ms
Response Headers 6 Cookies Results Docs
{
"currentPage": 1,
"totalRecords": 1,
"totalPages": 1,
"feedback": [
{
"_id": "6ae82d8e9ab466acc6faeaf7",
"studentName": "Rahul",
"courseName": "Node.js",
"message": "The session was informative",
"rating": 5,
"status": "Pending",
"__v": 0
}
]
}
Response Chart
Problems Output Terminal Ports Debug Console
Thunder Client
{
"User-Agent": "Thunder Client (https://www.thunderclient.com)"
}
Request Body:
{
"status": "Reviewed"
}
Chat
Sessions
Tip: Use /fork to branch the conversation. Explore a different approach without losing the original context.
feedbackcontroller.js
Chat with Copilot
Copilot


Type a query: { field: 'value' } or Generate query
Explain
Reset
Find
Options
ADD DATA
BULK
EXPORT DATA
EXPORT CODE
25
1 - 1 of 1
_id: ObjectId('6ae833d0123ff5ed607ad935')
message: "Feedback submitted successfully"
feedback: Object (7)
studentName: "Rahul"
courseName: "Node.js"
message: "The session was informative"
rating: 5
status: "Pending"
_id: "6ae832ef9ab466acc6faeaf8"
__v: 0