


## LAB-5 [Inheritance and Polymorphism]

1. Inheritance
2. Polymorphism (method overriding and method overloading , Overriding the toString())
3. Abstract Class


In OOP, we often organize classes in *hierarchy* to *avoid duplication and reduce redundancy*. The classes in the lower hierarchy inherit all the state variables and methods from the higher hierarchies. A class in the lower hierarchy is called a *subclass* (or *derived, child, extended class*). A class in the upper hierarchy is called a *superclass* (or *base, parent class*). For example,



```
class Cylinder extends Circle {.....}
class Goalkeeper extends SoccerPlayer {.....}
```

The diagram illustrates inheritance. A box labeled 'subclass' is positioned below a box labeled 'superclass'. An arrow points from the 'subclass' box up to the 'superclass' box, indicating that the subclass inherits from the superclass.

## 1.1 An Example on Inheritance

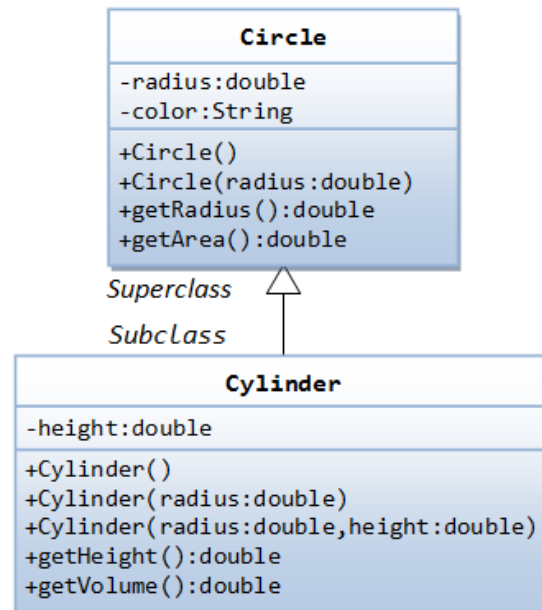

In this example, we derive a subclass called **Cylinder** from the superclass **Circle**. The class **Cylinder** inherits all the member variables (`radius` and `color`) and methods (`getRadius()`, `getArea()`, among others) from its superclass **Circle**. It further defines a variable called `height`, two public methods - `getHeight()` and `getVolume()` and its own constructors.

**The Source code as follows:**

### Circle.java

```
1 // Define the Circle class
2 public class Circle {    // Save as "Circle.java"
3 // Private variables
4     private double radius;
5     private String color;
6
7 // Constructors (overloaded)
8     public Circle() {           // 1st Constructor
9         radius = 1.0;
10        color = "red";
11    }
12    public Circle(double r) {    // 2nd Constructor
13        radius = r;
14        color = "red";
15    }
16    public Circle(double r, String c) { // 3rd Constructor
17        radius = r;
18        color = c;
19    }
20 // Public methods
```

```

21 public double getRadius() {
22     return radius;
23 }
24 public String getColor() {
25     return color;
26 }
27 public double getArea() {
28     return radius*radius*Math.PI;
29 }
30}

```

### Cylinder.java

```

1 // Define Cylinder class, which is a subclass of Circle
2 public class Cylinder extends Circle {
3     private double height;    // Private member variable
4
5     public Cylinder() {        // constructor 1
6         super();               // invoke superclass' constructor Circle()
7         height = 1.0;
8     }
9     public Cylinder(double radius, double height) { // Constructor 2
10         super(radius);         // invoke superclass' constructor Circle(radius)
11         this.height = height;
12     }
13
14     public double getHeight() {
15         return height;
16     }
17     public void setHeight(double height) {
18         this.height = height;
19     }
20     public double getVolume() {
21         return getArea()*height; // Use Circle's getArea()
22     }
23 }

```

### A Test Drive Program: TestCylinder.java

```

1 // A test driver program for Cylinder class
2 public class TestCylinder {
3     public static void main(String[] args) {
4         Cylinder cy1 = new Cylinder(); // Use constructor 1
5         System.out.println("Radius is " + cy1.getRadius()
6             + " Height is " + cy1.getHeight()
7             + " Color is " + cy1.getColor()
8             + " Base area is " + cy1.getArea()
9             + " Volume is " + cy1.getVolume());
10        Cylinder cy2 = new Cylinder(5.0, 2.0); // Use constructor 2

```

```

11     System.out.println("Radius is " + cy2.getRadius()
12         + " Height is " + cy2.getHeight()
13         + " Color is " + cy2.getColor()
14         + " Base area is " + cy2.getArea()
15         + " Volume is " + cy2.getVolume());
16 }
17}

```

Compile and run the program. The expected output is as follows:

```

Radius is 1.0 Height is 1.0 Color is red Base area is 3.141592653589793 Volume is
3.141592653589793
Radius is 5.0 Height is 2.0 Color is red Base area is 78.53981633974483 Volume is
157.07963267948966

```

## 1.2 Exercise -

Compile and Execute the following code by completing it as per commented specification given. Write the whole code in file

### Ex3Test.java

```

class A                { public int a =100;} // End of class A
class B extends A      { public int a =80; } // End of class B
class C extends B      { public int a =60; } // End of class C
class D extends C      { public int a =40; } // End of class D

```

**// NOTE : The variable named 'a' is used in above classes is the instance field of each class**

```

class E extends D
{
    public int a =10;
    public void show()
    {
        int a =0;
        // Write Java statements to display the values of
        // all a's used in this file on System.out
    } // End of show() Method
} // End of class E
class Test {
    public static void main(String args[]){
        new E().show(); // This is an example of anonymous object
        A a1 = new E();
        D d1 = (D) a1;
    } // End of main()
} // End of class EX3Test

```

## 2. Polymorphism

Polymorphism means—One name many form.

**Two ways by which java implements Polymorphism :**

- ✓ **Compile time: Overloading.**
- ✓ **Run time: Overriding.**

### 2.1 Method Overloading:

In same class, if name of the method remains common but the number and type of parameters are different, then it is called method overloading in Java.

**Overloaded methods:**

- ✓ appear in the same class or a subclass
- ✓ have the **same name** but,
- ✓ have different **parameter lists**, and,
- ✓ can have different **return types**

**Constructor Overloading:**

- ✓ Constructor overloading is a technique in Java in which a class can have any number of constructors that differ in parameter lists.
- ✓ The compiler differentiates these constructors by taking into account the number of parameters in the list and their type.

#### 2.1.1 Example for Method Overloading:

```
class Room {
    double length,breadth,height;

    Room(){//default construcor for class Room
        length=-1;
        breadth=-1;
        height=-1;
    }

    //overloading the constructor
    //3 Parameterised constructor for the class Room
    Room(double l,double b,double h) {
        length=l;
        breadth=b;
        height=h;
    }

    Room(double len) { // Single parametrised constructor
        length=breadth=height=len;
    }

    double volume() {
        return length*breadth*height;
    }
}
```

```
// Demonstrating the use of Overloaded constructors
class OverloadConstructors {
    public static void main(String args[]) {
        Room a=new Room(20,30,40);
        Room b=new Room();
        Room c=new Room(10);
        double vol;
        vol=a.volume();
        System.out.println("Volume of room a is " + vol);


        vol=b.volume();
        System.out.println("Volume of room b is " + vol);

        vol=c.volume();
        System.out.println("Volume of room c is " + vol);
    }
}
```

## 2.2 Method Overriding:

- ✓ applies **ONLY** to inherited methods is related to polymorphism
- ✓ object type (**NOT** reference variable type) determines which overridden method will be used at runtime
- ✓ overriding method **MUST** have the same argument list (if not, it might be a case of overloading)
- ✓ overriding method **MUST** have the same return type; the exception is *covariant return* (used as of Java 5) which returns a type that is a subclass of what is returned by the overridden method
- ✓ overriding method **MUST NOT** have more restrictive access modifier, but **MAY** have less restrictive one
- ✓ overriding method **MUST NOT** throw new or broader checked exceptions, but **MAY** throw fewer or narrower checked exceptions or any unchecked exceptions
- ✓ abstract methods **MUST** be overridden
- ✓ final methods **CANNOT** be overridden
- ✓ static methods **CANNOT** be overridden
- ✓ constructors **CANNOT** be overridden

### 2.2.1 Example for Method Overriding :

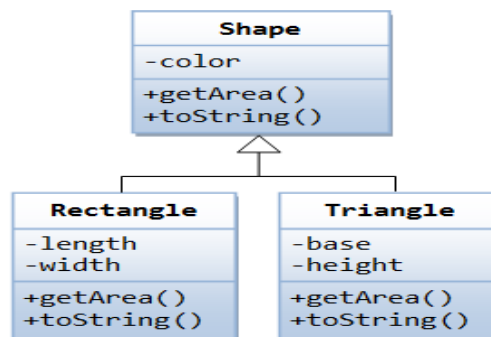

Suppose that our program uses many kinds of shapes, such as triangle, rectangle and so on. We should design a superclass called Shape, which defines the public interface (or behaviors) of all the shapes. For example, we would like all the shapes to have a method called `getArea()`, which returns the area of that particular shape. The Shape class can be written as follow.

## Shape.java

```
// Define superclass Shape
public class Shape {
    // Private member variable
    private String color;

    // Constructor
    public Shape (String color) {
        this.color = color;
    }

    public String toString() {
        return "Shape of color=\"" + color + "\"";
    }

    // All shapes must has a method called getArea()
    public double getArea() {
        System.err.println("Shape unknown! Cannot compute area!");
        return 0;    // Need a return to compile the program
    }
}
```

We can then derive subclasses, such as Triangle and Rectangle, from the superclass Shape.

## Rectangle.java

```
// Define Rectangle, subclass of Shape
public class Rectangle extends Shape {
    // Private member variables
    private int length;
    private int width;

    // Constructor
    public Rectangle(String color, int length, int width) {
        super(color);
        this.length = length;
        this.width = width;
    }

    public String toString() {
        return "Rectangle of length=" + length + " and width=" + width + ", subclass of "
            + super.toString(); }

    public double getArea() { return length*width; }
}
```

## Triangle.java

```
// Define Triangle, subclass of Shape
public class Triangle extends Shape {
    // Private member variables
    private int base;
    private int height;

    // Constructor
    public Triangle(String color, int base, int height) {
        super(color);
        this.base = base;
        this.height = height;
    }

    public String toString() {
        return "Triangle of base=" + base + " and height=" + height + ", subclass of "
            + super.toString();
    }

    public double getArea() { return 0.5*base*height; }
}
```

The subclasses override the `getArea()` method inherited from the superclass, and provide the proper implementations for `getArea()`.

## TestShape.java

In our application, we could create references of `Shape`, and assigned them instances of subclasses, as follows:

```
// A test driver program for Shape and its subclasses
public class TestShape {
    public static void main(String[] args) {
        Shape s1 = new Rectangle("red", 4, 5);
        System.out.println(s1);
        System.out.println("Area is " + s1.getArea());
        Shape s2 = new Triangle("blue", 4, 5);
        System.out.println(s2);
        System.out.println("Area is " + s2.getArea());
    }
}
```



## 2.3 Overriding the toString():

```
/**
 * Java program to demonstrate How to override toString() method in Java.
 * This Java program shows How can you use IDE like Netbeans or Eclipse
 * override toString in Java.
 */

public class Country{
    private String name;
    private String capital;
    private long population;

    public Country(String name){
        this.name = name;
    }

    public String getName(){ return name; }
    public void setName(String name) {this.name = name;}

    public String getCapital() {return capital;}
    public void setCapital(String capital) {this.capital = capital;}

    public long getPopulation() { return population; }
    public void setPopulation(long population) {this.population = population; }

    public String toString() {
        return "Country [name="+name + "capital=" + capital + ",
            population=" + population + "]\n";
    }

    public static void main(String args[]){
        Country India = new Country("India");
        India.setCapital("New Delhi");
        India.setPopulation(1200000000);
        System.out.println(India);
    }
}
```

## 2.4 Exercise –

Make a class *Employee* with attributes

– *name:String*


– *salary: double*.

This class supplies

- (i) A parameterized constructor
- (ii) Accessor and Mutator method(s) for every instance field and
- (iii) toString() method which returns the values of instance fields by adding proper heading labels and spaces.

Make a class **Manager** that inherits from **Employee** and add an instance field named – **department:String**. This class also supplies parameterized constructor, accessor and mutator methods and a toString() method that returns the manager's name, department, and salary by adding proper labels and spaces.

The complete UML class diagram representation for these classes is shown below:

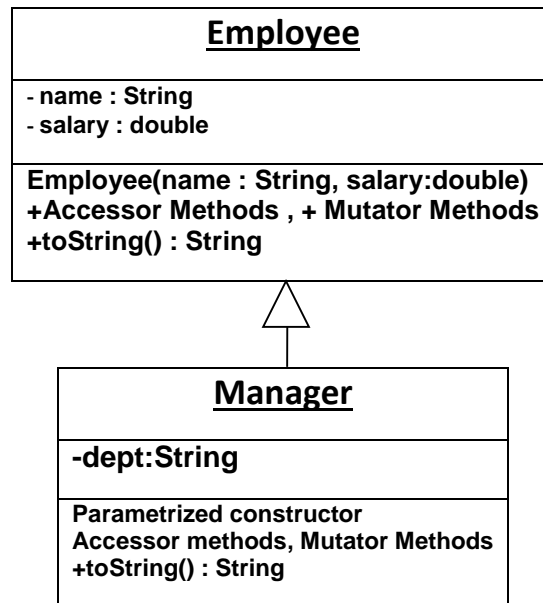

You have to write the code as per following description:

1. Write java implementations for classes Employee and Manager.
2. Write a Driver code which creates two Employee and Manager instances each and display their attribute values on standard output using polymorphism.

### 3. Abstract Class :

- ✓ An abstract method is a method with only signature (i.e., the method name, the list of arguments and the return type) without implementation (i.e., the method's body).
- ✓ You use the keyword abstract to declare an abstract method.
- ✓ A class containing one or more abstract methods is called an abstract class.
- ✓ An abstract class must be declared with a class-modifier abstract.

#### 3.1 Example for Abstract Class :

Rewrite the Shape class as an abstract class, containing an abstract method getArea() as follows:

## Shape.java

```
abstract public class Shape {
    // Private member variable
    private String color;

    // Constructor
    public Shape (String color) {
        this.color = color;
    }

    public String toString() {
        return "Shape of color=\"" + color + "\"";
    }

    // All Shape subclasses must implement a method called getArea()
    abstract public double getArea();
}
```

Now create instances of the subclasses such as Triangle and Rectangle (Classes which we used previously), and upcast them to Shape , (you cannot create instance of Shape).

```
public class TestShape {
    public static void main(String[] args) {
        Shape s1 = new Rectangle("red", 4, 5);
        System.out.println(s1);
        System.out.println("Area is " + s1.getArea());

        Shape s2 = new Triangle("blue", 4, 5);
        System.out.println(s2);
        System.out.println("Area is " + s2.getArea());

        // Cannot create instance of an abstract class
        Shape s3 = new Shape("green");// Compilation Error!!
    }
}
```

## 3.2 Exercise –

Define an abstract class **Worker** that has a abstract method **public double computePay()**. Every worker has a **name** and a **salary\_rate**. Define two concrete classes **FullTimeWorker**, and **HourlyWorker**. A full time worker gets paid the hourly wage for a maximum of 240 hours in a month at the rate of Rs. 100/hour. An hourly worker gets paid the hourly wage for the actual number of hours he has worked at the rate of Rs. 50/hour, he is not allowed to work for more than 60 hours in a month. The complete UML class diagram is shown in Figure 1.

You have to write the code as per following specification:

1. Write the java implementations for classes ***Worker***, ***HourlyWorker*** and ***FullTimeWorker***
2. Write a Driver code in the same file ***TestWorker.java*** which demonstrates late binding.

