


Spring Core – Load Country from Spring Configuration XML


HelloController.java

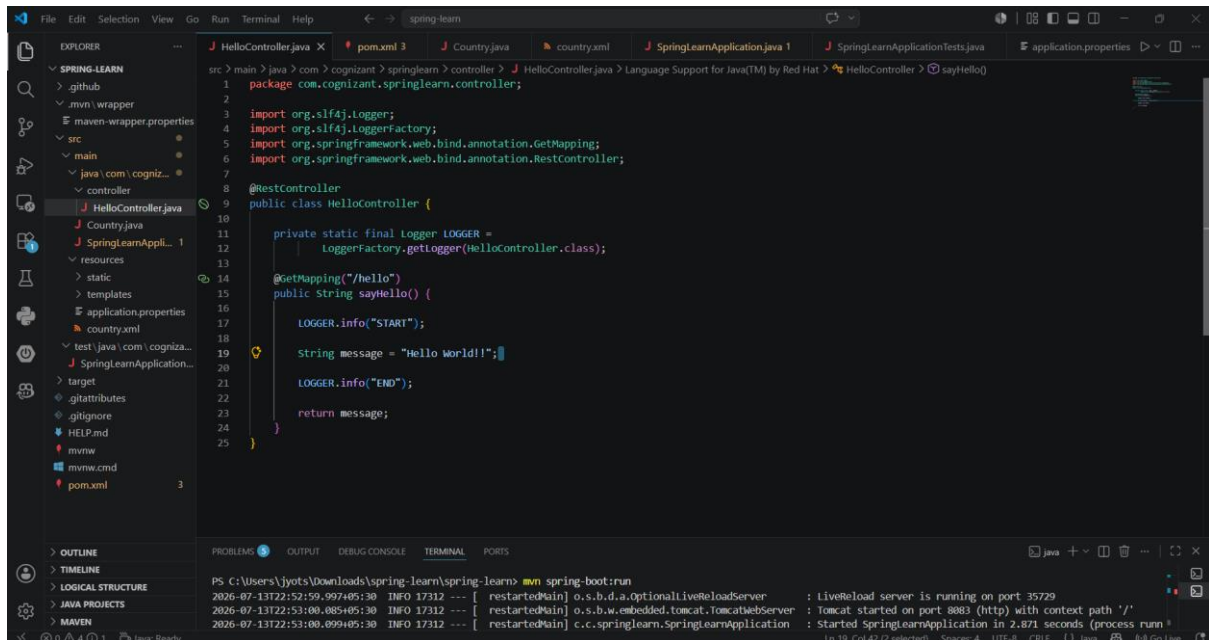

The screenshot shows an IDE with the following components:


- EXPLORER:** A file tree on the left showing the project structure. The file `src/main/java/com/cognizant/springlearn/controller/HelloController.java` is selected.
- EDITOR:** The main area displays the code for `HelloController.java`. The code includes imports for `org.slf4j.Logger`, `org.slf4j.LoggerFactory`, `org.springframework.web.bind.annotation.GetMapping`, and `org.springframework.web.bind.annotation.RestController`. It defines a `@RestController` with a `sayHello()` method that logs "START", returns "Hello world!!", and logs "END".
- TERMINAL:** The bottom panel shows the output of running `mvn spring-boot:run`. It displays logs from the `o.s.b.d.a.OptionalLiveReloadServer` and `o.s.b.w.embedded.tomcat.TomcatWebServer`, indicating that the application started successfully on port 8083.

Pom.xml

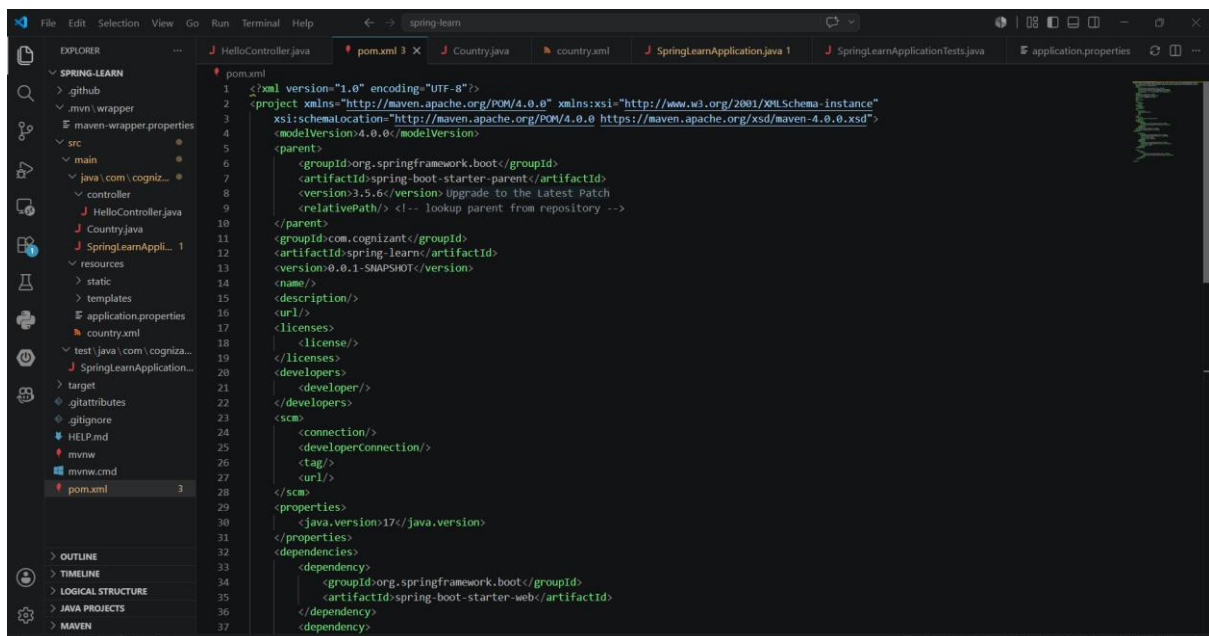


The screenshot shows an IDE with the following components:


- EXPLORER:** A file tree on the left showing the project structure. The file `src/main/pom.xml` is selected.
- EDITOR:** The main area displays the content of `pom.xml`. It is a Maven POM file for a Spring Boot application. It includes the `spring-boot-starter-parent` as the parent, sets the `groupId` to `com.cognizant` and `artifactId` to `spring-learn`, and defines a `spring-boot-starter-web` dependency.

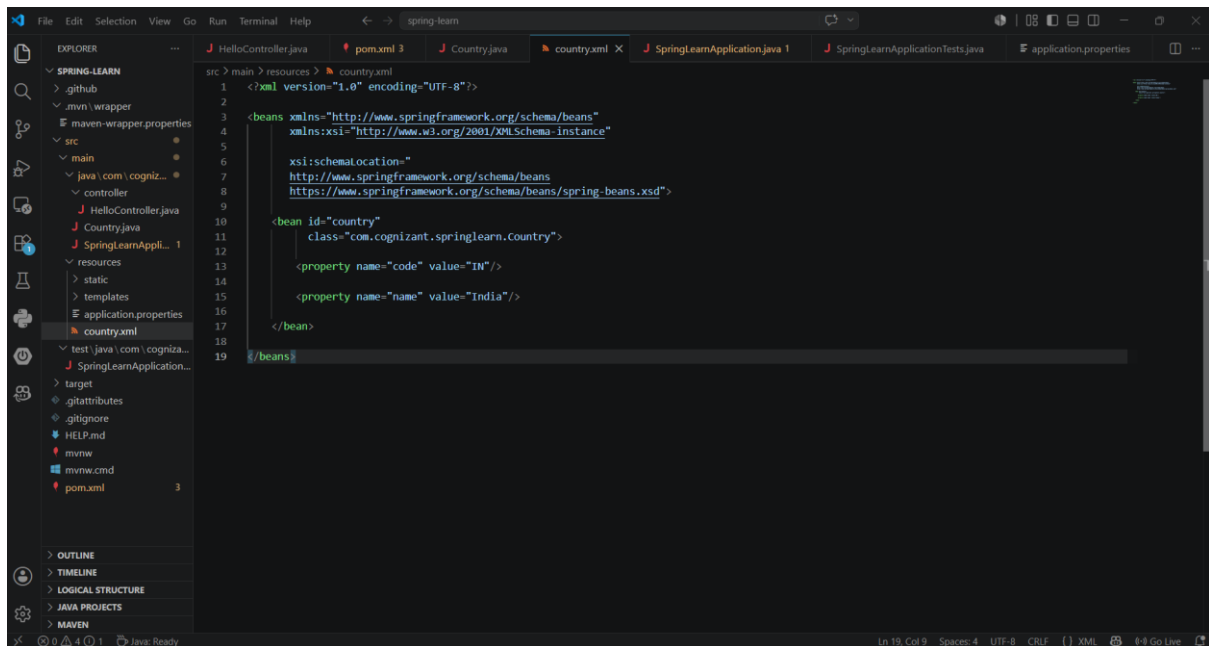

springApplication.java

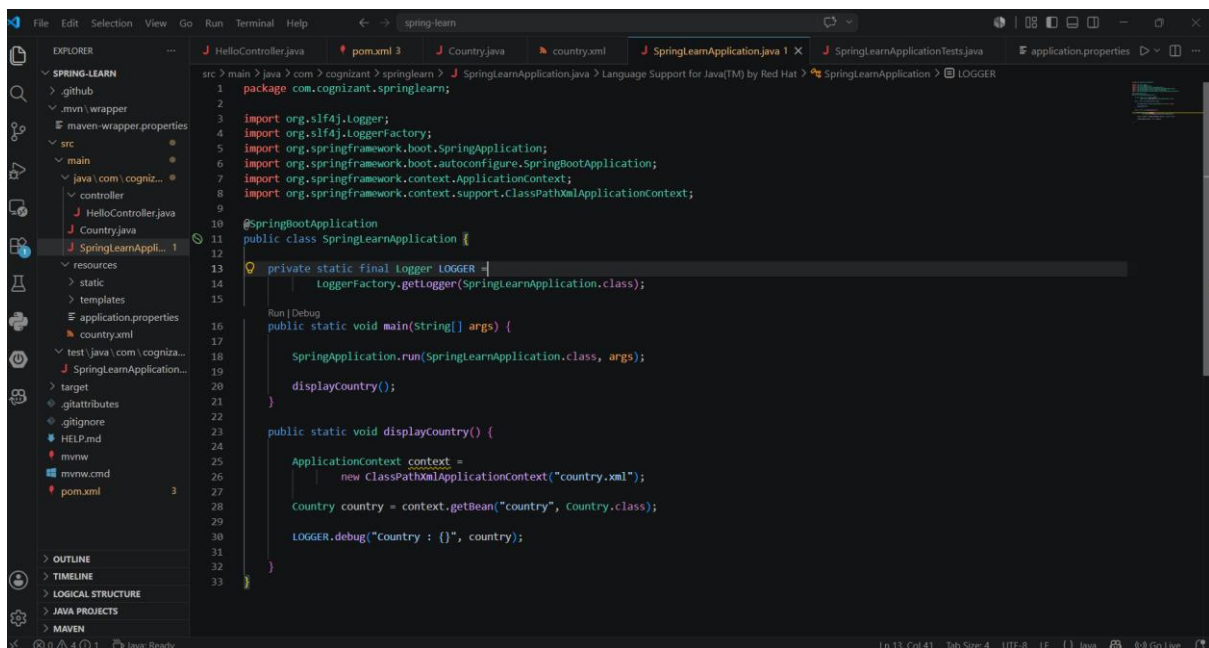

SpringLearnApplicationTests.java

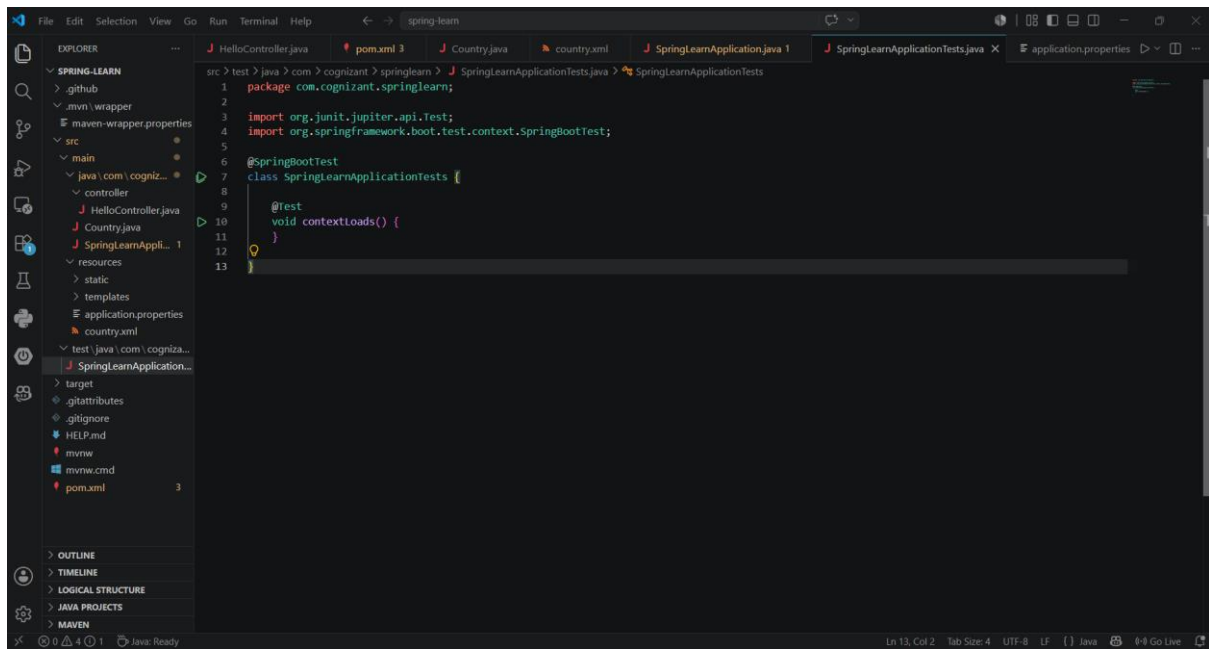

Output

