


1. spring-data-jpa-handson

Spring Data JPA - Quick Example

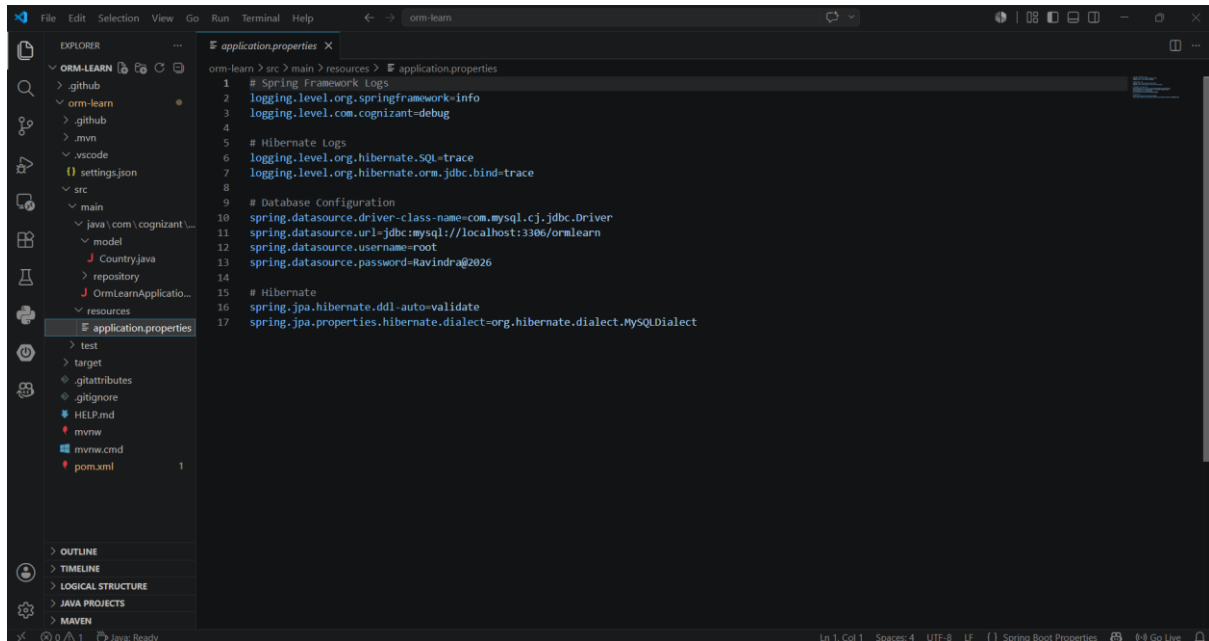

The screenshot shows an IDE window with the Explorer on the left and the application.properties file open in the editor. The Explorer shows a project structure with folders like .github, .mvn, .vscode, settings.json, src, main, java, model, Country.java, repository, resources, test, target, .gitattributes, .gitignore, HELP.md, mvnw, mvnw.cmd, and pom.xml. The application.properties file contains the following configuration:

```
1 # Spring Framework Logs
2 logging.level.org.springframework=info
3 logging.level.com.cognizant=debug
4
5 # Hibernate Logs
6 logging.level.org.hibernate.SQL=trace
7 logging.level.org.hibernate.orm.jdbc.bind=trace
8
9 # Database Configuration
10 spring.datasource.driver-class-name=com.mysql.cj.jdbc.Driver
11 spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn
12 spring.datasource.username=root
13 spring.datasource.password=Ravindra@2026
14
15 # Hibernate
16 spring.jpa.hibernate.ddl-auto=validate
17 spring.jpa.properties.hibernate.dialect=org.hibernate.dialect.MySQLDialect
```

The screenshot shows the VS Code editor with the `Country.java` file open. The Explorer sidebar on the left shows the project structure: `ORM-LEARN` > `src` > `main` > `com.cognizant.ormlearn.model`. The file `Country.java` is selected under the `model` package. The code in the editor is as follows:

```
1 package com.cognizant.ormlearn.model;
2
3 import jakarta.persistence.Column;
4 import jakarta.persistence.Entity;
5 import jakarta.persistence.Id;
6 import jakarta.persistence.Table;
7
8 @Entity
9 @Table(name = "country")
10 public class Country {
11
12     @Id
13     @Column(name = "code")
14     private String code;
15
16     @Column(name = "name")
17     private String name;
18
19     public Country() {
20     }
21
22     public String getCode() {
23         return code;
24     }
25
26     public void setCode(String code) {
27         this.code = code;
28     }
29
30     public String getName() {
31         return name;
32     }
33
34     public void setName(String name) {
35         this.name = name;
36     }
37 }
```

The screenshot shows the VS Code editor with the `OrmLearnApplication.java` file open. The Explorer sidebar on the left shows the project structure: `ORM-LEARN` > `src` > `main` > `com.cognizant.ormlearn`. The file `OrmLearnApplication.java` is selected under the `ormlearn` package. The code in the editor is as follows:

```
1 package com.cognizant.ormlearn;
2
3 import org.springframework.boot.SpringApplication;
4 import org.springframework.boot.autoconfigure.SpringBootApplication;
5
6 @SpringBootApplication
7 public class OrmLearnApplication {
8
9     Run | Debug
10     public static void main(String[] args) {
11         SpringApplication.run(OrmLearnApplication.class, args);
12     }
13 }
14
```

On the right side of the editor, there is a "SESSIONS" panel with a tip: "Tip: Try the Plan agent to research and plan before implementing changes." Below the tip, there is a search bar and a list of sessions, including `OrmLearnApplication.java`.