

5. ReactJS-HOL


Objectives

- Understanding the need for styling react component
- Working with CSS Module and inline styles

In this hands-on lab, you will learn how to:

- Style a react component
- Define styles using the CSS Module
- Apply styles to components using className and style properties

Post.js

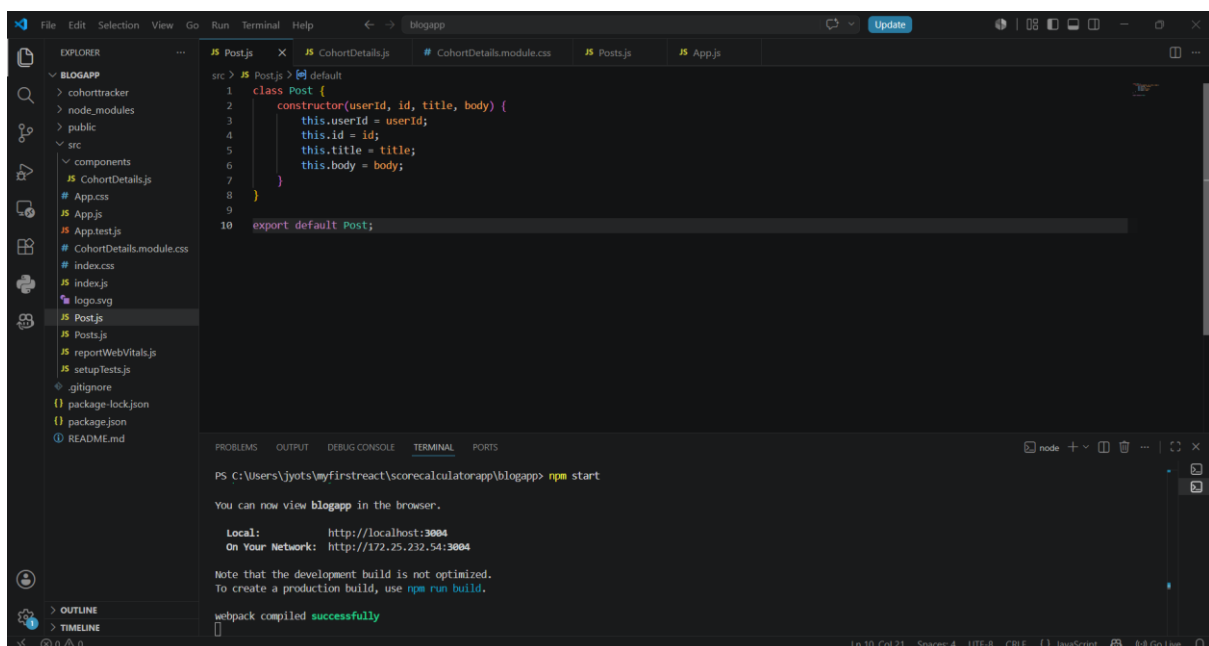

The screenshot shows the VS Code editor with the `Post.js` file open. The file contains a `Post` class with a constructor and an `export default` statement. The terminal at the bottom shows the command `npm start` and the output indicating the application is running on `http://localhost:3004`.

```
src > JS Post.js > default
1 class Post {
2   constructor(userId, id, title, body) {
3     this.userId = userId;
4     this.id = id;
5     this.title = title;
6     this.body = body;
7   }
8 }
9
10 export default Post;
```


PS C:\Users\jyots\myfirstreact\scorecalculatorapp\blogapp> npm start

You can now view **blogapp** in the browser.

Local: <http://localhost:3004>
On Your Network: <http://172.25.232.54:3004>


Note that the development build is not optimized.
To create a production build, use `npm run build`.

webpack compiled successfully

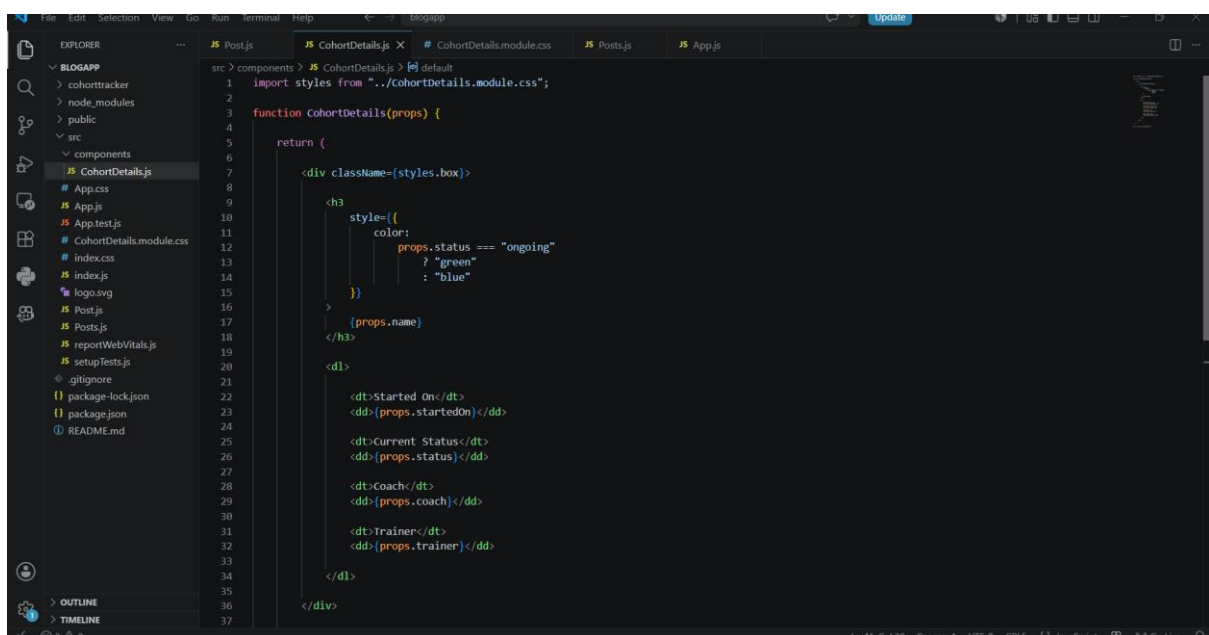

The screenshot shows the VS Code editor with the `CohortDetails.js` file open. The file contains an `import` statement for `styles` from `../CohortDetails.module.css` and a `CohortDetails` function that returns a JSX element. The JSX element uses `className` and `style` props to render a `div` containing a `h3` and a `dl`.


```
src > components > JS CohortDetails.js > default
1 import styles from "../CohortDetails.module.css";
2
3 function CohortDetails(props) {
4
5   return (
6     <div className={styles.box}>
7
8       <h3
9         style={{
10           color:
11             props.status === "ongoing"
12               ? "green"
13               : "blue"
14         }}
15       > {props.name}
16     </h3>
17
18     <dl>
19
20       <dt>Started On</dt>
21       <dd>{props.startedOn}</dd>
22
23       <dt>Current Status</dt>
24       <dd>{props.status}</dd>
25
26       <dt>Coach</dt>
27       <dd>{props.coach}</dd>
28
29       <dt>Trainer</dt>
30       <dd>{props.trainer}</dd>
31
32     </dl>
33
34   </div>
35
36 )
37 }
```

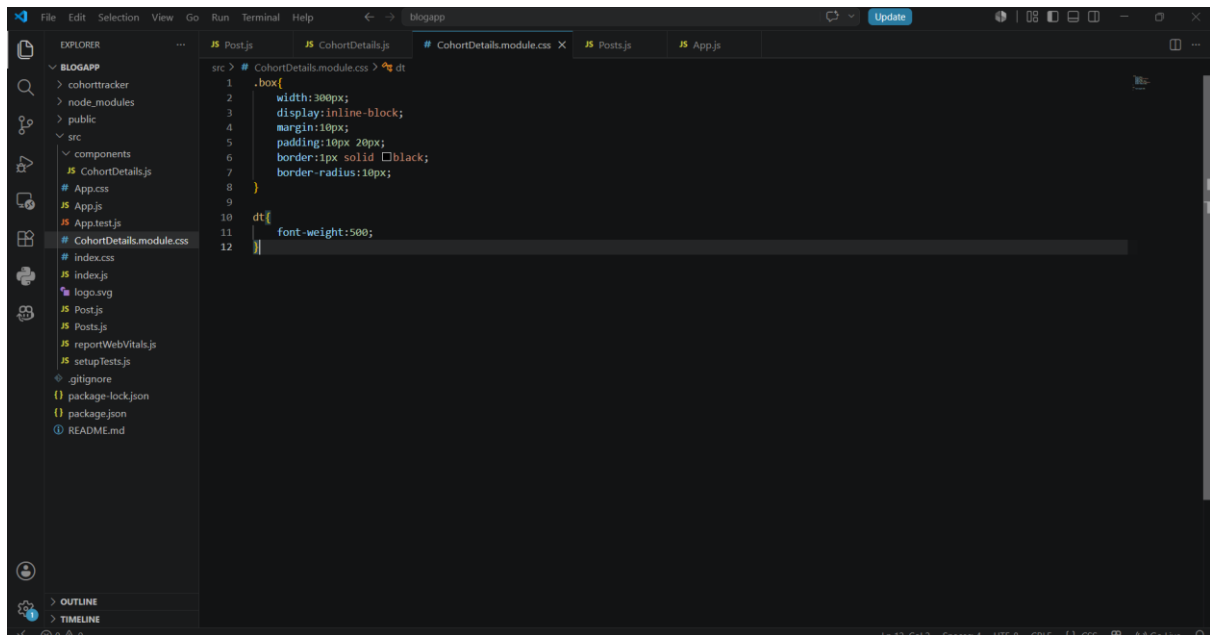

A screenshot of the Visual Studio Code editor interface. The Explorer sidebar on the left shows a project structure for 'blogapp' with folders like 'cohorttracker', 'node_modules', 'public', and 'src'. The 'src' folder is expanded, showing files like 'App.css', 'App.js', 'App.test.js', 'CohortDetails.module.css', 'index.css', 'index.js', 'logo.svg', 'Post.js', 'Post.test.js', 'reportWebVitals.js', and 'setupTests.js'. The main editor area displays the 'CohortDetails.module.css' file with the following CSS code:

```
src > # CohortDetails.module.css > dt
1  .box{
2    width:300px;
3    display:inline-block;
4    margin:10px;
5    padding:10px 20px;
6    border:1px solid black;
7    border-radius:10px;
8  }
9
10
11  dt{
12    font-weight:500;
13  }
```

Posts.js

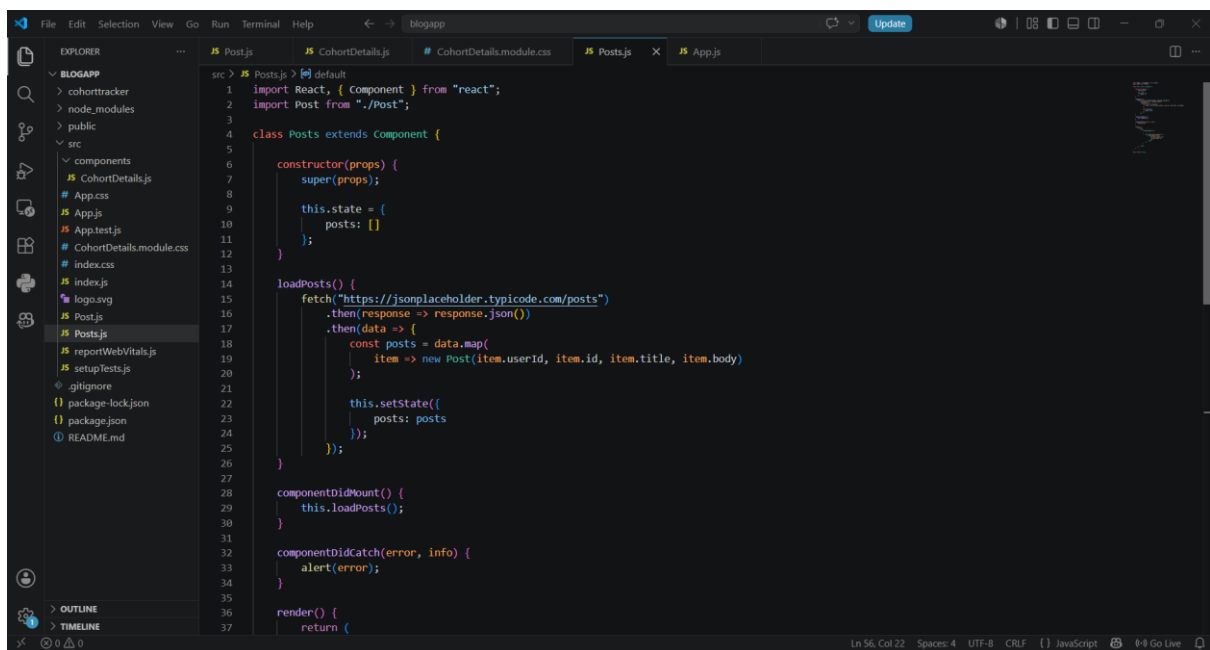

A screenshot of the Visual Studio Code editor interface, similar to the one above. The Explorer sidebar shows the same project structure, but the 'Posts.js' file is now selected in the main editor. The code in 'Posts.js' is as follows:

```
src > # Posts.js > default
1  import React, { Component } from "react";
2  import Post from "../Post";
3
4  class Posts extends Component {
5
6    constructor(props) {
7      super(props);
8
9      this.state = {
10        posts: []
11      };
12    }
13
14    loadPosts() {
15      fetch("https://jsonplaceholder.typicode.com/posts")
16        .then(response => response.json())
17        .then(data => {
18          const posts = data.map(
19            item => new Post(item.userId, item.id, item.title, item.body)
20          );
21          this.setState({
22            posts: posts
23          });
24        });
25    }
26
27    componentDidMount() {
28      this.loadPosts();
29    }
30
31    componentDidCatch(error, info) {
32      alert(error);
33    }
34
35    render() {
36      return (
37
```

```
src > JS Posts.js > default
4  class Posts extends Component {
28  componentDidMount() {
30  }
31
32  componentDidCatch(error, info) {
33    alert(error);
34  }
35
36  render() {
37    return (
38      <div>
39        <h1>Blog Posts</h1>
40        {
41          this.state.posts.map(post => (
42            <div key={post.id}>
43              <h2>{post.title}</h2>
44              <p>{post.body}</p>
45            </div>
46          ))
47        }
48      </div>
49    );
50  }
51
52  }
53
54  export default Posts;
55
56
```

```
src > # CohortDetails.module.css > dt
1  .box{
2    width:300px;
3    display:inline-block;
4    margin:10px;
5    padding:10px 20px;
6    border:1px solid black;
7    border-radius:10px;
8  }
9
10 dt{
11   font-weight:500;
12 }
```

```
1 import styles from '../cohortDetails.module.css';
2
3 function CohortDetails(props) {
4
5   return (
6
7     <div className={styles.box}>
8
9       <h3
10         style={{
11           color:
12             props.status === "ongoing"
13               ? "green"
14               : "blue"
15         }}>
16         {props.name}
17       </h3>
18
19       <dl>
20
21         <dt>Started On</dt>
22         <dd>{props.startedOn}</dd>
23
24         <dt>Current Status</dt>
25         <dd>{props.status}</dd>
26
27         <dt>Coach</dt>
28         <dd>{props.coach}</dd>
29
30         <dt>Trainer</dt>
31         <dd>{props.trainer}</dd>
32
33       </dl>
34
35     </div>
36
37   );
38 }
```

Output

