


REST - Get country based on country code


Write a REST service that returns a specific country based on country code. The country code should be case insensitive.

CountryService.java

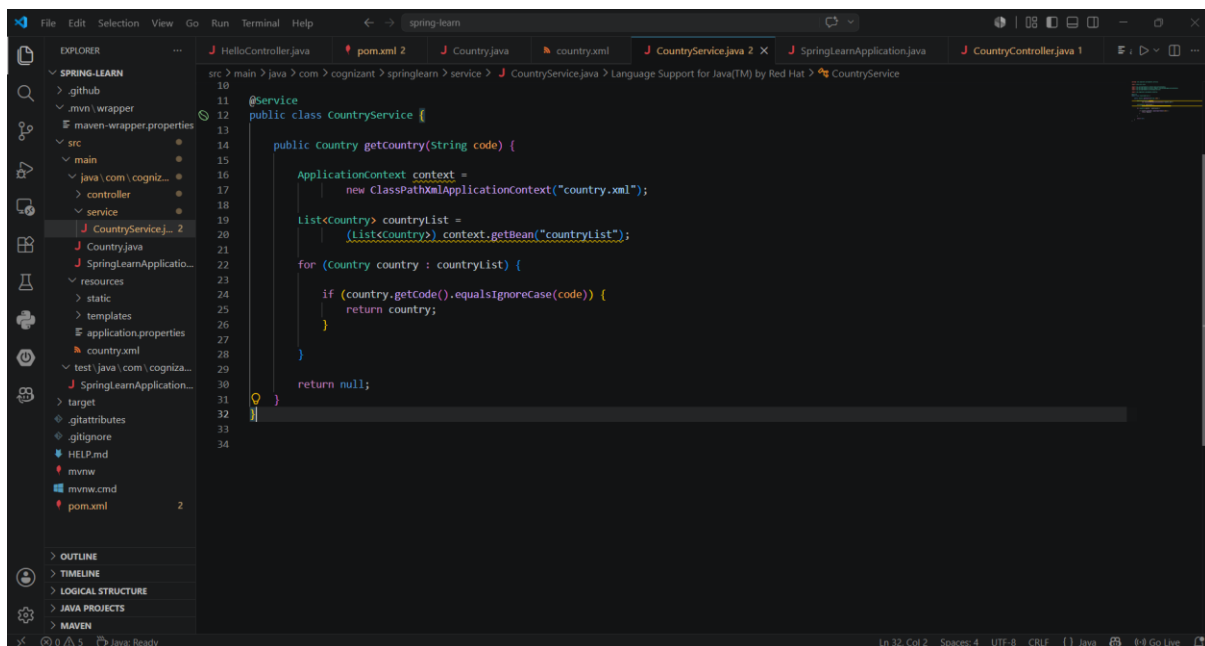


```
11 @service
12 public class CountryService {
13
14     public Country getCountry(String code) {
15
16         ApplicationContext context =
17             new ClassPathXmlApplicationContext("country.xml");
18
19         List<Country> countryList =
20             (List<Country>) context.getBean("countryList");
21
22         for (Country country : countryList) {
23
24             if (country.getCode().equalsIgnoreCase(code)) {
25                 return country;
26             }
27
28         }
29
30         return null;
31     }
32 }
33
34
```

Country.xml

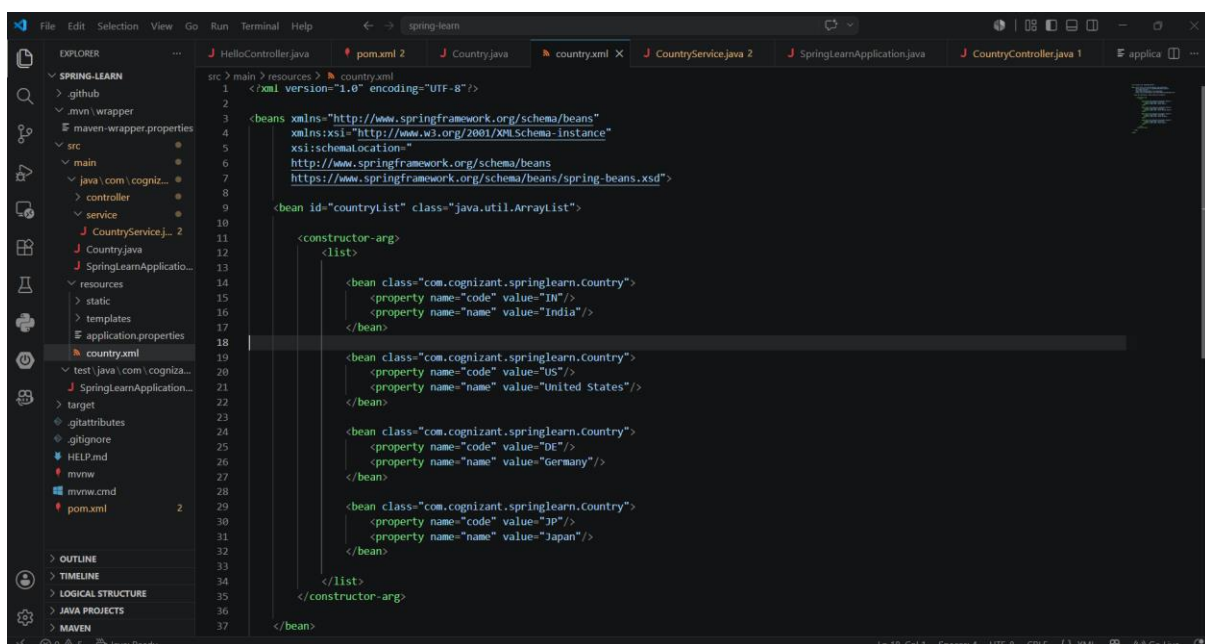

```
1 <?xml version="1.0" encoding="UTF-8"?>
2
3 <beans xmlns="http://www.springframework.org/schema/beans"
4       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
5       xsi:schemaLocation="
6         http://www.springframework.org/schema/beans
7         http://www.springframework.org/schema/beans/spring-beans.xsd">
8
9     <bean id="countryList" class="java.util.ArrayList">
10
11         <constructor-arg>
12             <list>
13
14                 <bean class="com.cognizant.springlearn.Country">
15                     <property name="code" value="IN"/>
16                     <property name="name" value="India"/>
17                 </bean>
18
19                 <bean class="com.cognizant.springlearn.Country">
20                     <property name="code" value="US"/>
21                     <property name="name" value="United States"/>
22                 </bean>
23
24                 <bean class="com.cognizant.springlearn.Country">
25                     <property name="code" value="DE"/>
26                     <property name="name" value="Germany"/>
27                 </bean>
28
29                 <bean class="com.cognizant.springlearn.Country">
30                     <property name="code" value="JP"/>
31                     <property name="name" value="Japan"/>
32                 </bean>
33             </list>
34         </constructor-arg>
35     </bean>
36
37
```

SpringLearnApplication.java

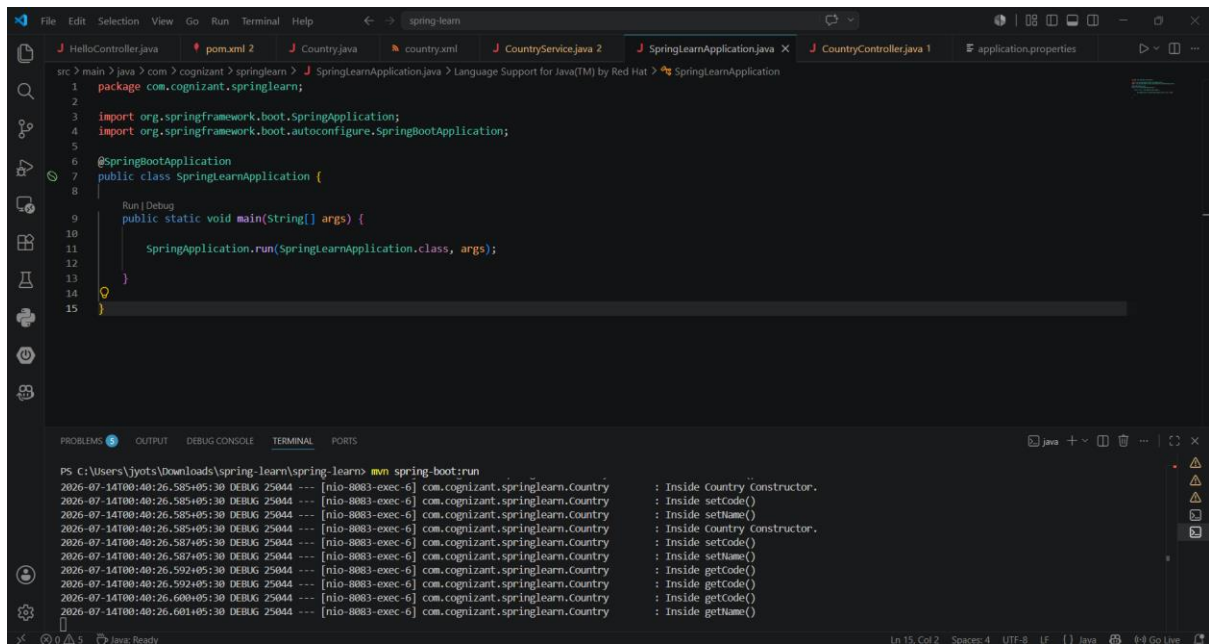


```
src > main > java > com > cognizant > springlearn > SpringLearnApplication.java > Language Support for Java(TM) by Red Hat > SpringLearnApplication
1 package com.cognizant.springlearn;
2
3 import org.springframework.boot.SpringApplication;
4 import org.springframework.boot.autoconfigure.SpringBootApplication;
5
6 @SpringBootApplication
7 public class SpringLearnApplication {
8
9     Run | Debug
10     public static void main(String[] args) {
11
12         SpringApplication.run(SpringLearnApplication.class, args);
13     }
14 }
15 }
```

```
PS C:\Users\jyots\Downloads\spring_learn\spring_learn> mvn spring-boot:run
2026-07-14T00:40:26.585+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside Country Constructor.
2026-07-14T00:40:26.585+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside setCode()
2026-07-14T00:40:26.585+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside setName()
2026-07-14T00:40:26.585+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside Country Constructor.
2026-07-14T00:40:26.587+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside setCode()
2026-07-14T00:40:26.587+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside setName()
2026-07-14T00:40:26.592+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside getCode()
2026-07-14T00:40:26.592+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside getCode()
2026-07-14T00:40:26.600+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside getCode()
2026-07-14T00:40:26.601+05:30 DEBUG 25044 --- [nio-8083-exec-6] com.cognizant.springlearn.Country : Inside getName()
```

Output

For <http://localhost:8083/country/in>

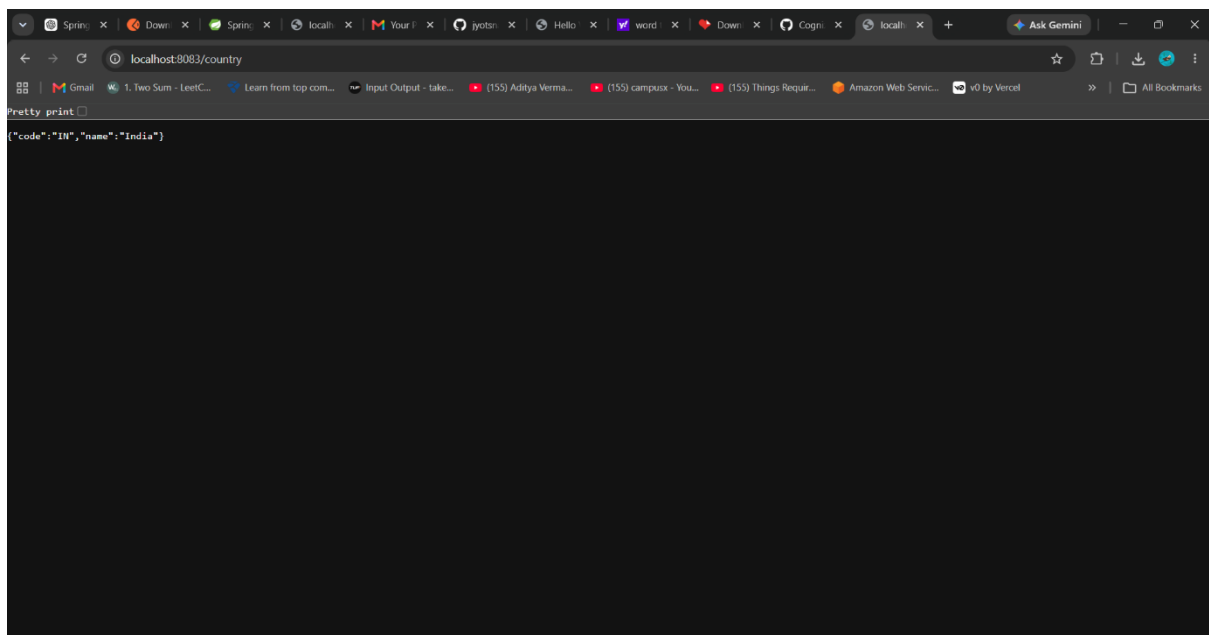

```
localhost:8083/country
Pretty print
{"code":"IN","name":"India"}
```

For <http://localhost:8083/country/us>

