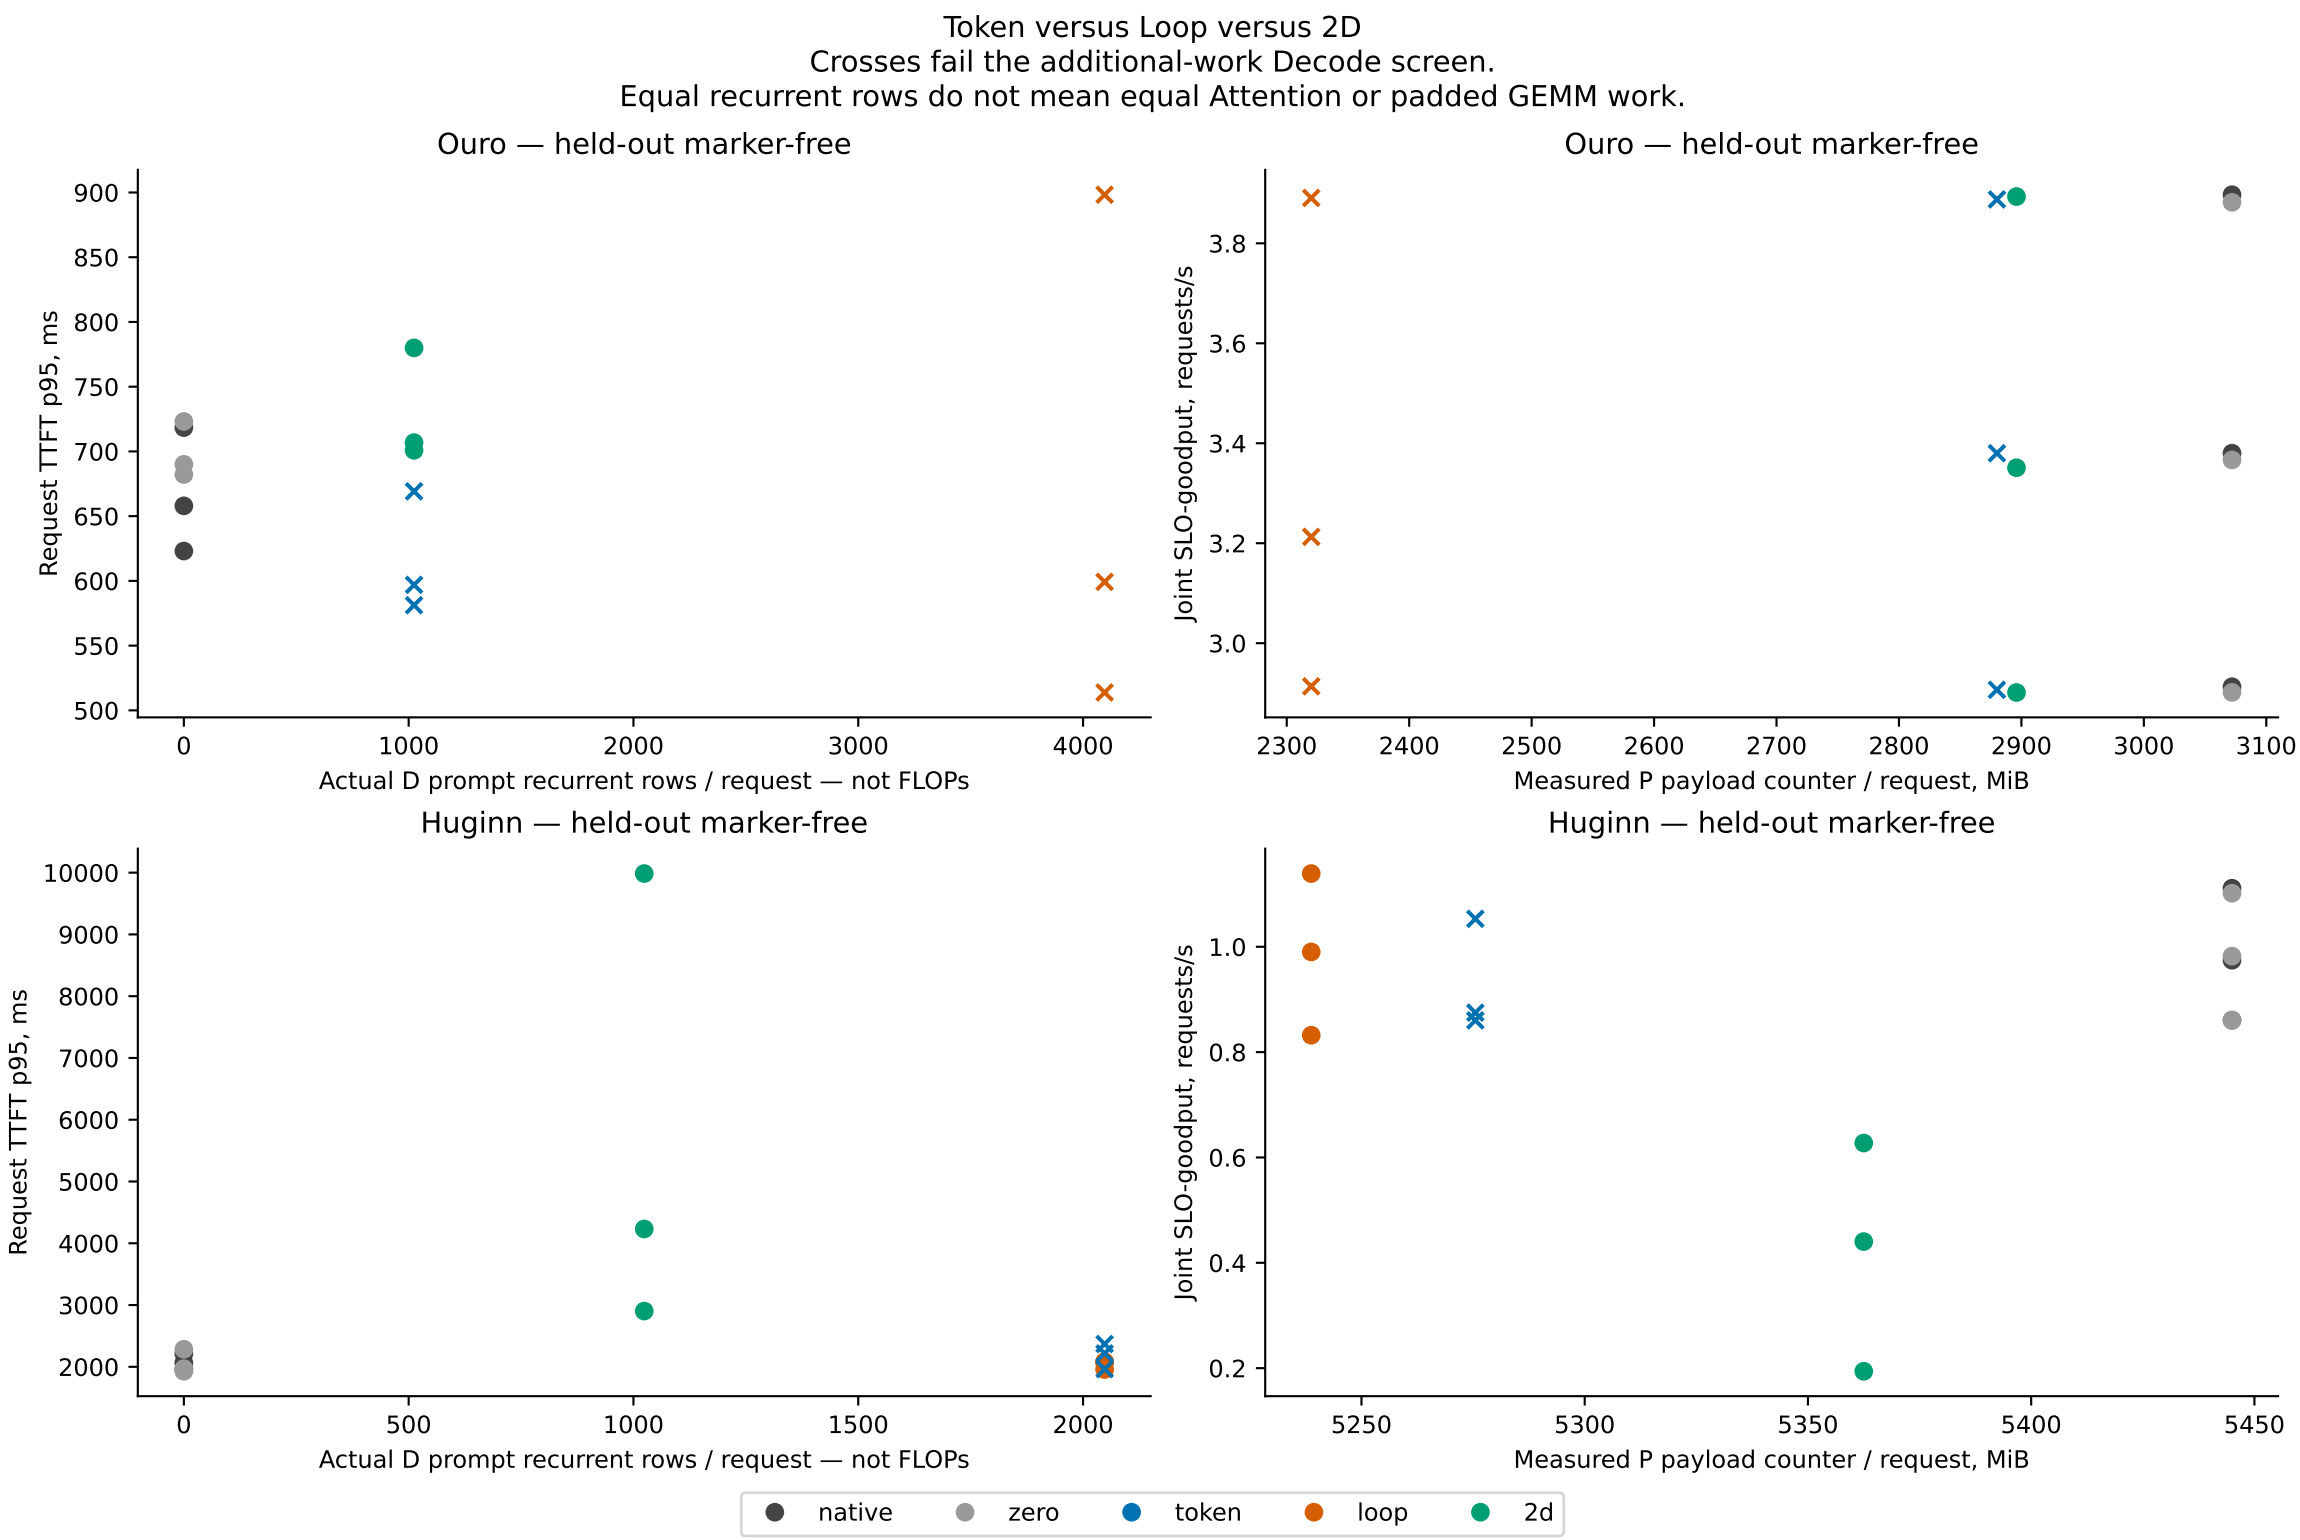
Token versus Loop versus 2D
Crosses fail the additional-work Decode screen.
Equal recurrent rows do not mean equal Attention or padded GEMM work.
Ouro — held-out marker-free
Request TTFT p95, ms
Actual D prompt recurrent rows / request — not FLOPs
Ouro — held-out marker-free
Joint SLO-goodput, requests/s
Measured P payload counter / request, MiB
Huginn — held-out marker-free
Request TTFT p95, ms
Actual D prompt recurrent rows / request — not FLOPs
Huginn — held-out marker-free
Joint SLO-goodput, requests/s
Measured P payload counter / request, MiB
native
zero
token
loop
2d