









Z a m y 1 a

Z a m y l a


Z	a	m	Y	1	a	

Z	a	m	Y	1	a	\0	

Z	a	m	Y	1	a	\0	Н
a	n	n	a	h	\0		

Z	a	m	Y	1	a	\0	Н
a	n	n	a	h	\0	A	n
d	i	\0	M	a	r	i	a
\0							

#### arrays

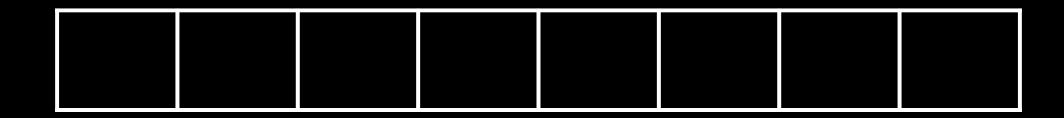

#### arrays

```
type name[size];
```

# command-line arguments

int main(int argc, string argv[])

# cd pset1


#### make hello

#### mv mario.c.

#### clang -o hello hello.c

# problem set 2

## secret-key crypto

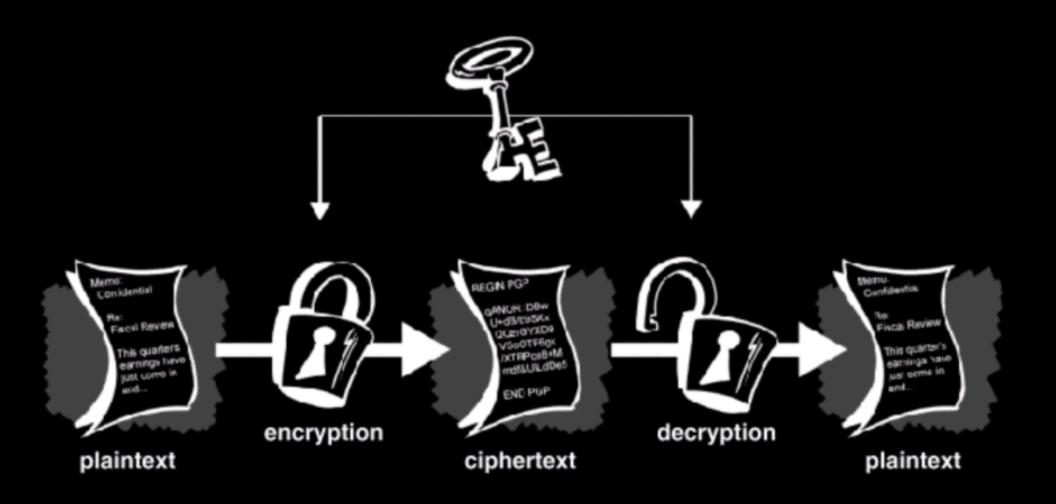

{crypt}\$I\$LIBcWwQn\$pxTB3yAjbVS/HTD2xuXFI0

# or fher gb qevax Ibhe Binygvar

#### uggcf://lbhgh.or/bUt5FWLEUN0

#### The End