# FINAL

JERRY ZHAO

### **GOALS FROM MIDTERM**

- 1. Fill out and style pages
- 2. Turn the header menu into a hamburger menu for mobile

#### **REVISED GOALS**

- 1. Portfolio design for all my multimedia works
- 2. Mobile-first design
- 3. Include the right amount of animation, nothing overly flashy
- 4. Better file organization

















































# ORIGINAL








### AUTOMATIC REUSABLE FOOTER & UPDATE DATE (JS)

```
<img src="assets/icons/linkedin-logo.svg" alt="LinkedIn" />
      <img src="assets/icons/envelope.svg" alt="Email" />
document.addEventListener('DOMContentLoaded', function() {
 document.body.insertAdjacentHTML('beforeend', footerHTML);
 updateCurrentDate();
 updateCopyrightYear();
function updateCurrentDate() {
 const lastModified = new Date(document.lastModified);
 const formattedDate = lastModified.toLocaleDateString('en-US', options);
 const dateElement = document.getElementById('current-date');
function updateCopyrightYear()
 const currentYear = new Date().getFullYear();
 const copyrightElement = document.getElementById('copyright-year');
   copyrightElement.textContent = currentYear;
```



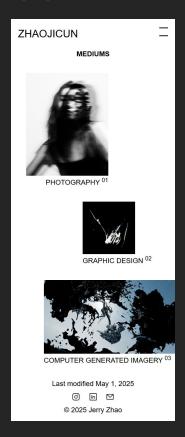


<base href="/" />

## FROSTED HAMBURGER MENU (CS)

```
header {
 display: flex;
 flex-direction: row;
 justify-content: space-between;
 align-items: center;
 padding: 1rem;
 position: relative;
 z-index: 100; /* Keep header above everything */
.hamburger {
 display: block;
 width: 20px;
 height: 30px;
 position: relative;
 z-index: 20; /* Higher than the menu to stay clickable */
 cursor: pointer;
.hamburger span {
 display: block;
 position: absolute;
 height: 2px:
 width: 100%;
 background: □black;
 opacity: 1;
 left: 0;
 transform: rotate(0deg);
 transition: .25s ease-in-out;
.hamburger span:nth-child(1) {
 top: 0px;
.hamburger span:nth-child(2) {
 top: 18px;
.hamburger.active span:nth-child(1) {
 transform: rotate(135deg);
.hamburger.active span:nth-child(2) {
 top: 9px;
 transform: rotate(-135deg);
```

```
position: fixed:
left: 0;
width: 100%;
height: 100%:
backdrop-filter: blur(15px); /* Heavy blur effect */
transition: all 0.4s ease:
display: flex:
align-items: center;
padding: 0;
text-align: center;
transform: translateY(20px);
transition: transform 0.3s ease;
transform: translateY(0);
padding: 15px 20px;
margin-bottom: 10px;
transition: transform 0.3s ease, color 0.3s ease;
font-weight: 600;
transform: scale(1.1);
color: Irgba(255, 255, 255, 0.8);
```



COMPUTER GENERATED IMAGERY 03

Last modified May 1, 2025


(in M

© 2025 Jerry Zhao

## LOAD IN ANIMATIONS (CSS & GSAP ANIMATIONS - DEMO)





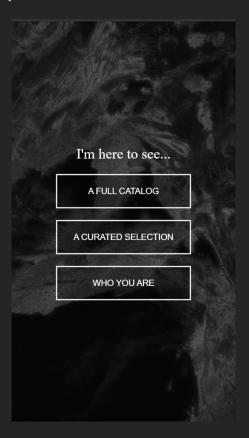

#### **ISSUES**

- Creating a "one-time load" landing page condition
- 2. Mobile only hamburger menu with pure css
- 3. Actually making my files manageable
- 4. Making the footer automatic and modular per page

#### FOR THE FUTURE

- 1. Fill out more pages with content and animation
- 2. Clear out redundancies in code by making it more "efficient"
- 3. Have a clearer creative bible

# THANK YOU